
Betboom

How we built our own data source for Dota 2 widget


Presented by Egor Kolovertnykh

A Widget That Fell Behind


In game

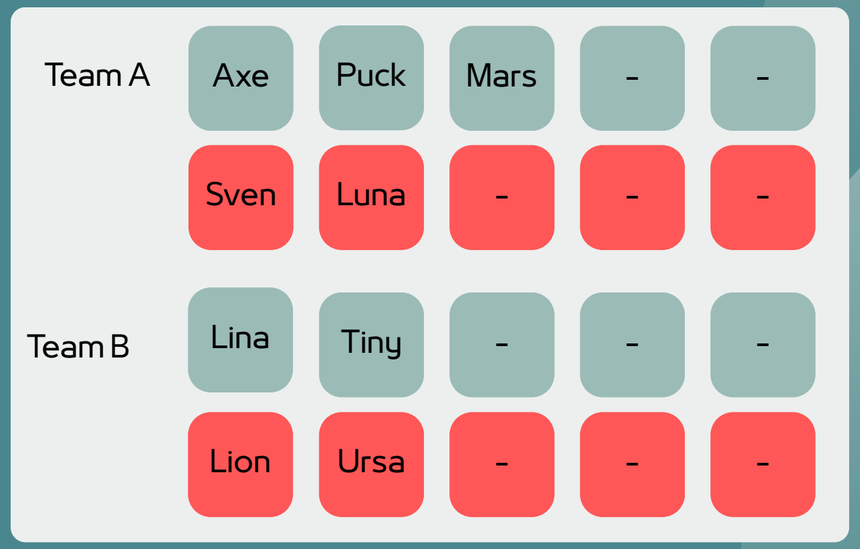

On website

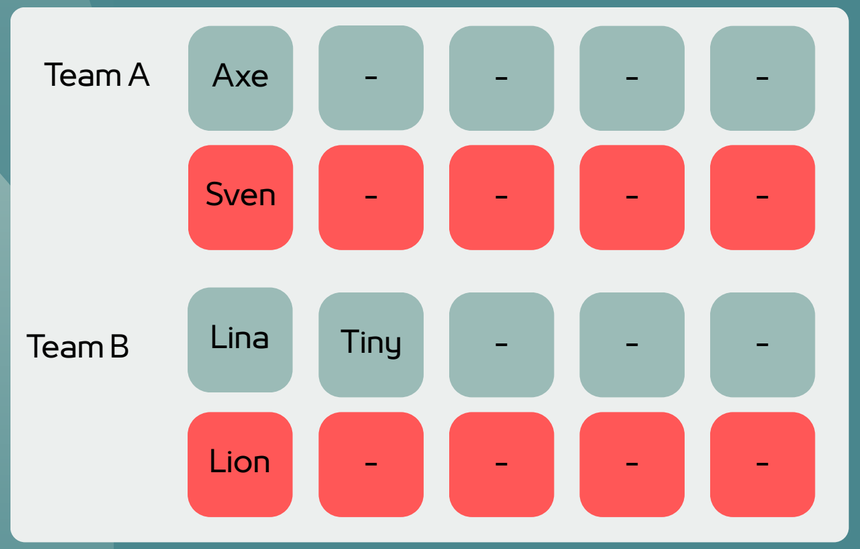

How the system works

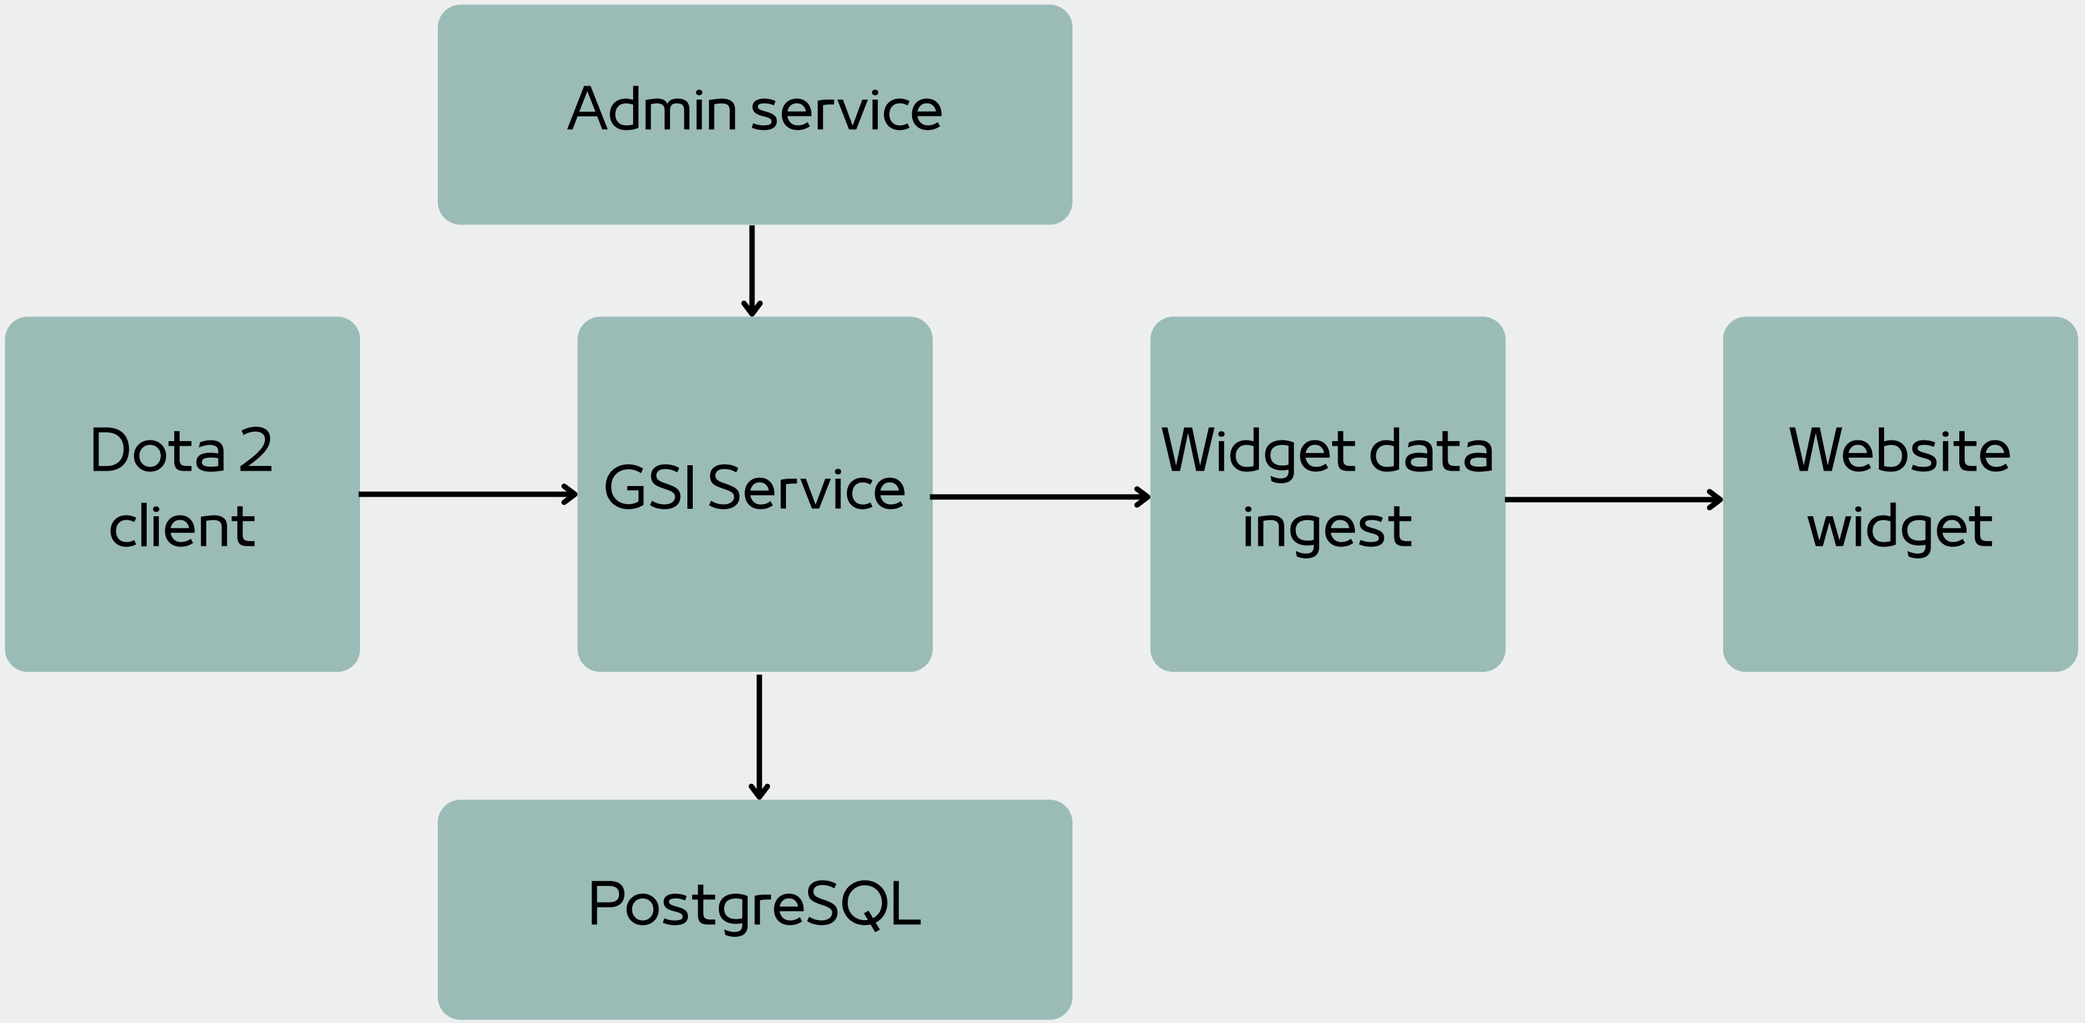

What Is in a Snapshot?

An operator watches the match. A config sets the HTTP endpoint.
The Dota 2 client sends state as JSON through GSI.

Snapshot 1

Team A	Pick: Axe Ban: Lina
Team B	Pick: — Ban: —


Snapshot 2

Team A	Pick: Axe Ban: Lina
Team B	Pick: Puck Ban: —

Filled slots repeat. The widget needs one ordered action list.

Building the Draft in Order

Draft rules + starting team = correct sequence

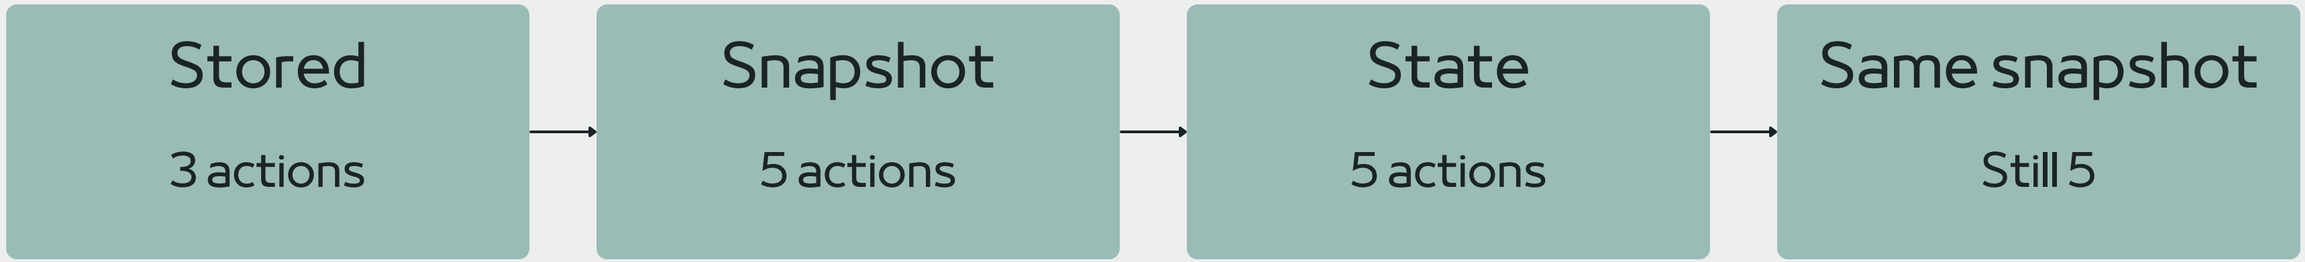

Service keeps current state in memory: map + mutex

A Second Draft Mode

Captains Mode

Ban | Ban | Pick | Pick | ...


Captains Draft

Ban | Pick | Ban | ...


Simplified sequences

We found the difference during a production match.

Linking Game and Website IDs

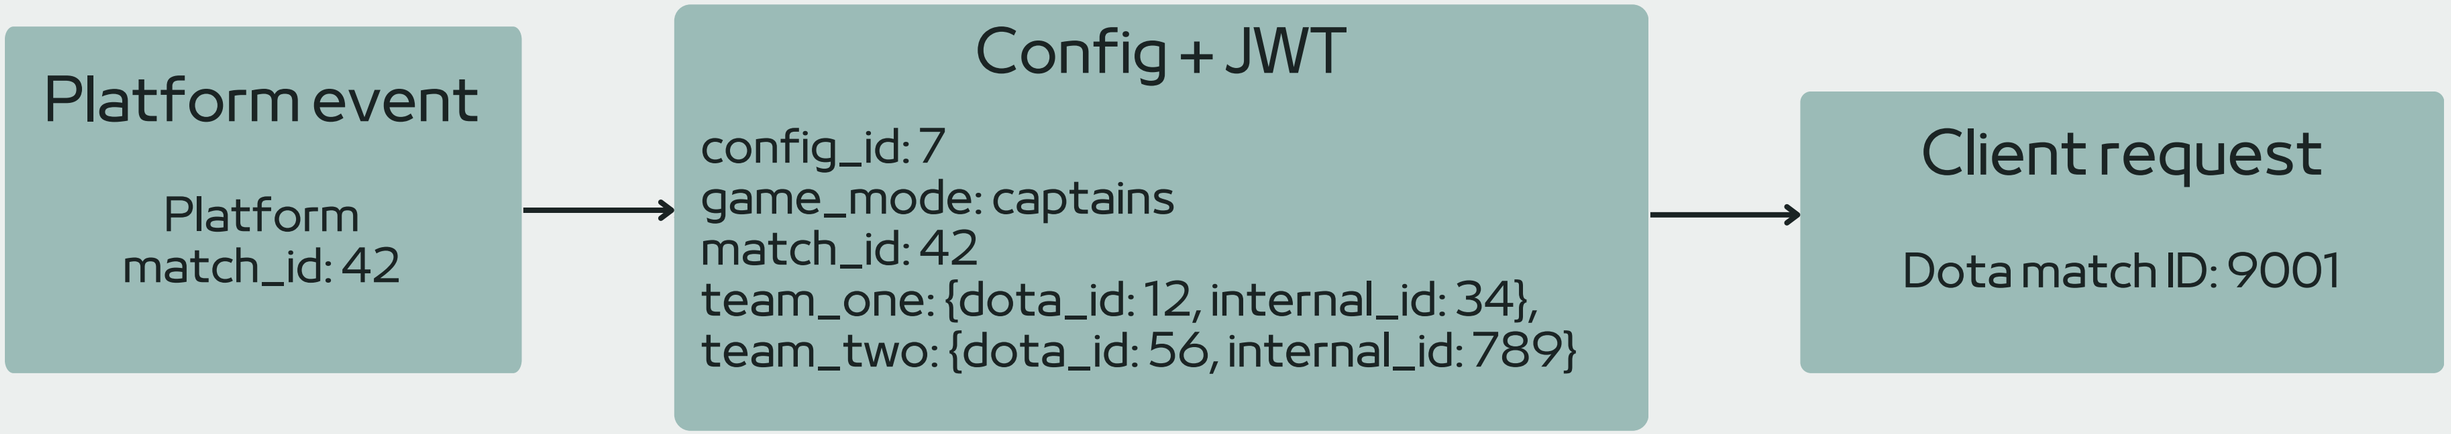

One Config for the Whole Series

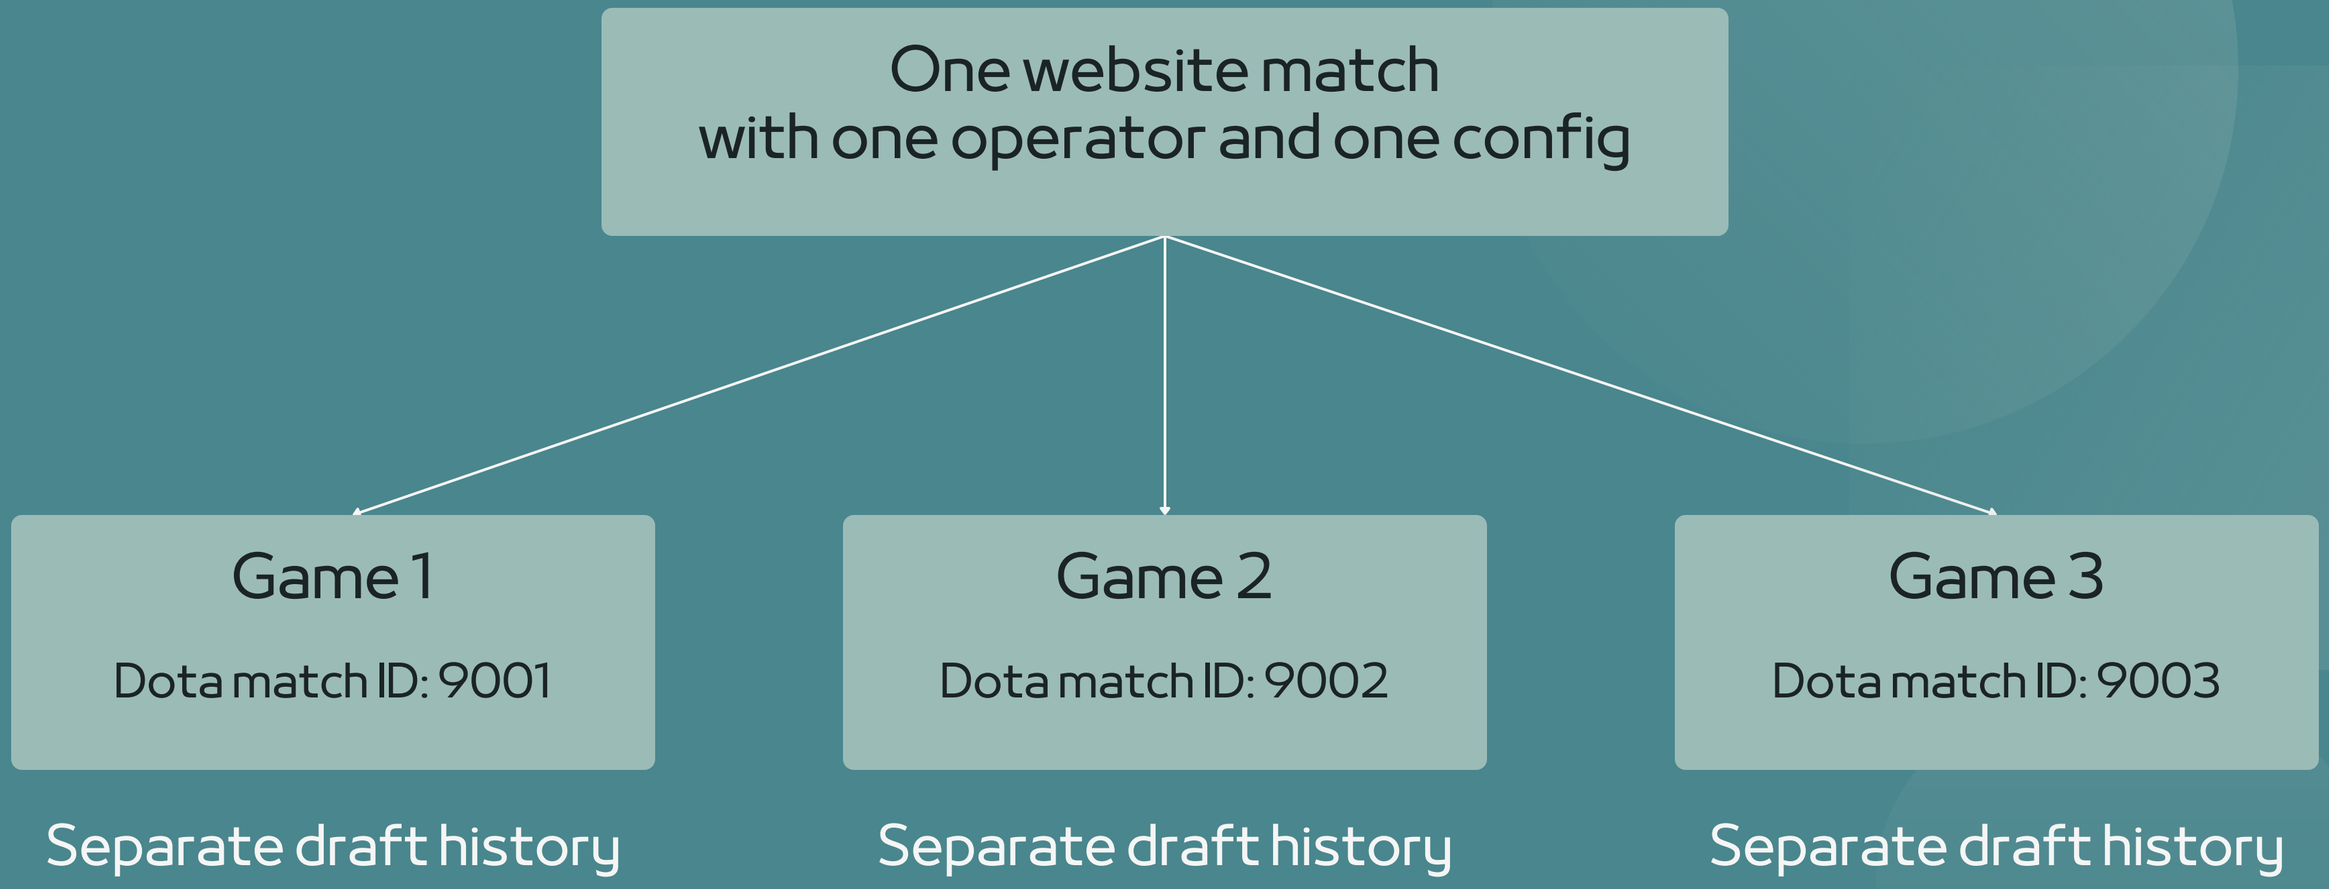


Checking the Source

Create config → **Install config**


Test mode	Live mode
Start replay	Watch the current match
Receive picks and bans	Same operator config

The test Dota match ID stays excluded from live processing.

When to Show the Widget

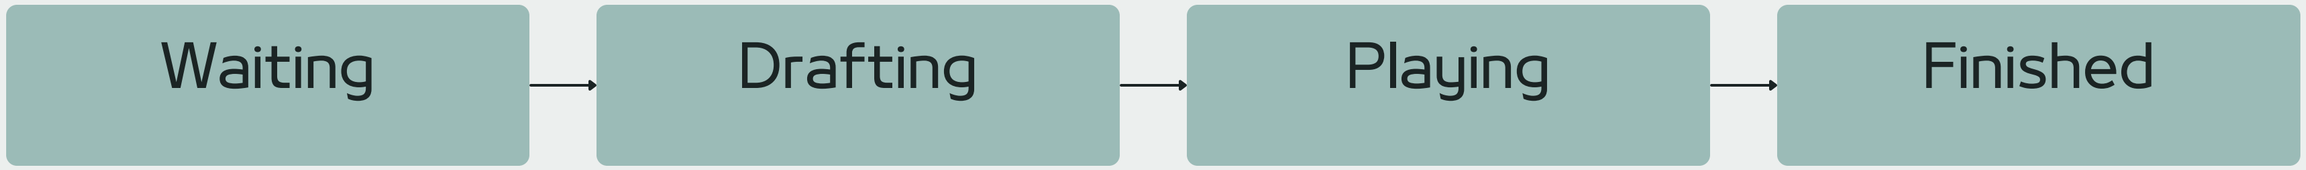

Hidden | Open + live updates | Hidden | Hidden

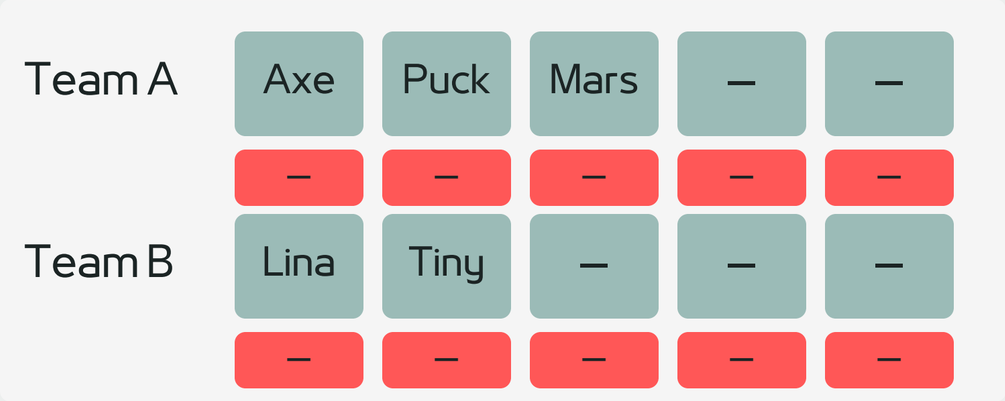


The widget closes when the game starts.

Connecting to the Existing Platform




Testing What the User Sees


Replay moment

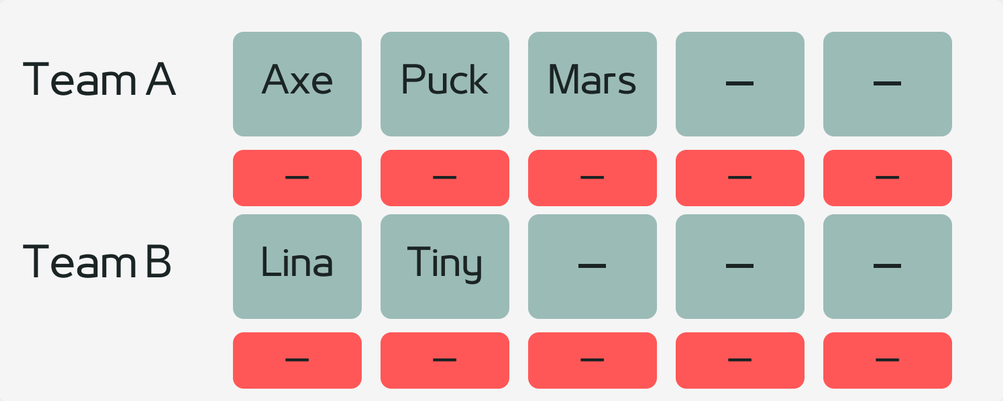

Matching widget state

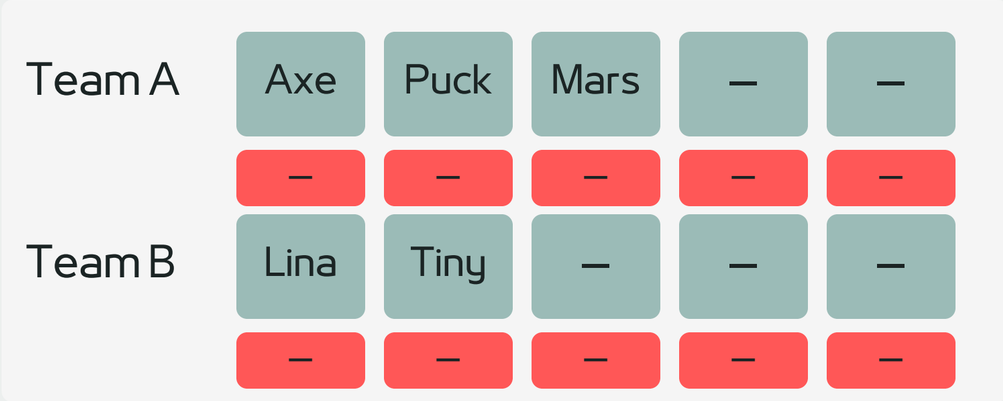

Heroes Teams Order Images Draft-to-game transition

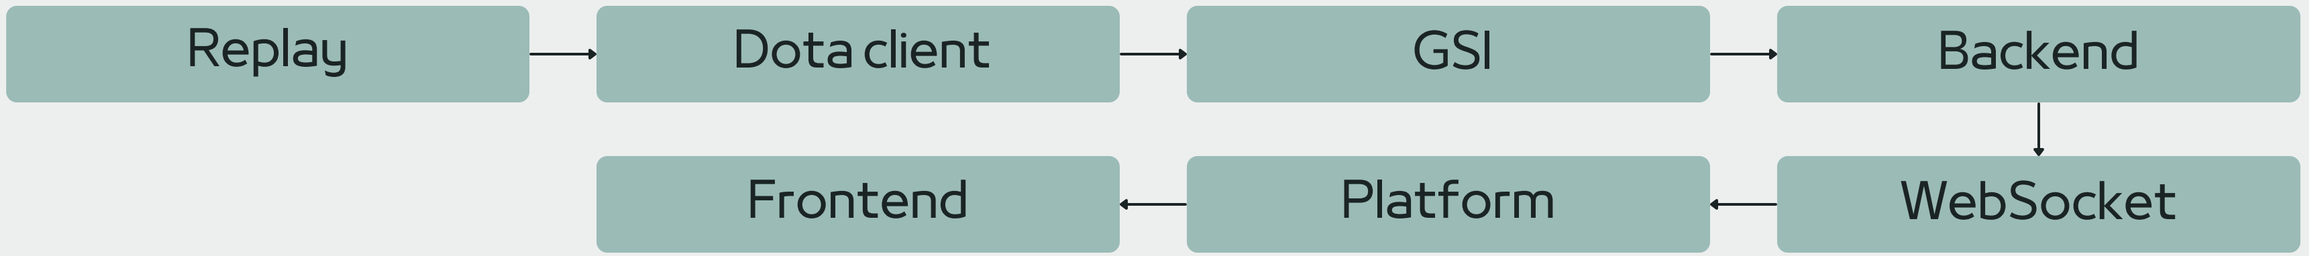

Schematic matching state

Results in 2024

Conversion by source

Our widget

Up to 31.2%



Partner widget

8.4%




5M+

widget views in 2024

Thank You!

Egor Kolovertnykh

linkedin.com/in/ekolovertnykh

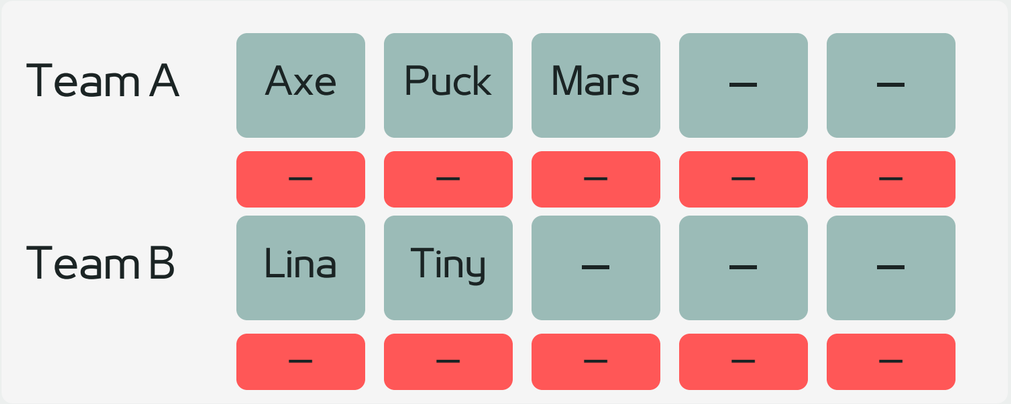

From GSI to a working widget

