


Implementing HTTP Servers and RESTful APIs with Node.js

1 Introduction


During the 90s, the World Wide Web adoption grew exponentially. Various commercial ventures explored a plethora of use cases that revolutionized how companies interacted with their customers and with other companies. The figure on the right illustrates several integration points between businesses, sometimes referred to as **business to business** or **B2B**. Interactions between businesses and their customers is often referred to as **business to consumer** or **B2C**. Companies have largely automated interactions with their customers by implementing online storefronts where customers can browse through products, order them, review them, and even return them. Interacting with users demands creating visually pleasing user interfaces that grab their attention, entice them to buy products with marketing ads, and establish a long term relation with their customers through incentives such as discounts and loyalty programs.

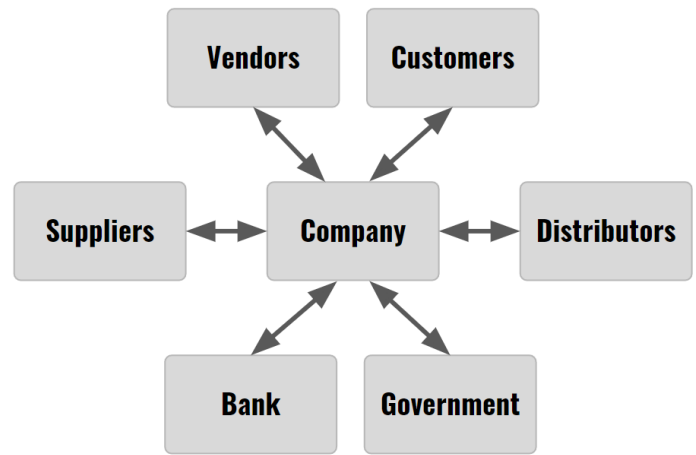

Thus far we've been focusing on implementing **user interfaces** which, as the name suggests, focus on the aspects of an application that interact with users through visually pleasing representations of some data set. The data rendered by these user interfaces has been, up to this point, hard coded JSON files, e.g., **courses.json**, **modules.json**. We learned how to create user interfaces that render and manipulate the data, and then update the screen to reflect the changes. Unfortunately the updates were not permanent, that is, if the browser window was refreshed, all the changes were lost and the state of the application was reset. In general JavaScript applications running on clients such as browsers, game consoles, or TV boxes, have limited options on how to retrieve and store data permanently. The next couple of chapter tackle the challenges of retrieving, storing, updating, and deleting data permanently on remote servers and databases from React.js applications.


2 Installing and configuring an HTTP Web server

The Kanbas React Web application built so far is the **client** in a **client/server architecture**. Users interact with client applications that implement user interfaces relying on servers to store data and execute complex logic that would be impractical on the client. Clients and servers interact through a sequence of **requests** and **responses**. Clients send requests to servers, servers execute some logic, fulfill the request, and then respond back to the client with results. This section discusses implementing HTTP servers using Node.js.

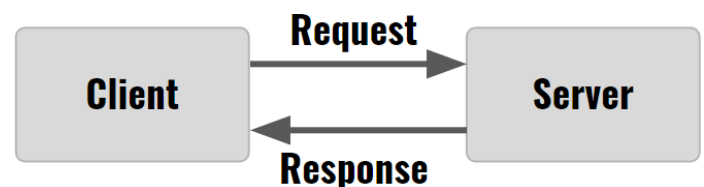

2.1 Introduction to Node.js

JavaScript is generally associated with as a programming language designed to execute in browsers, but Node.js has rescued it from its browser confines. Node.js is a JavaScript runtime that can interpret and execute applications written in JavaScript outside browsers, such as executing JavaScript from

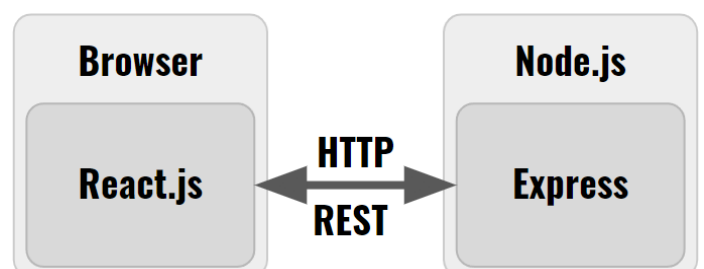

a desktop console or terminal. This is important because JavaScript applications written for the desktop can compensate many of the limitations of JavaScript applications written for the browser. For instance JavaScript running on a browser doesn't have access to the filesystem, databases, and have restricted network access. On the other hand, JavaScript running on a desktop has unfettered access to the filesystem, databases, and full network access. Conversely desktop JavaScript applications don't generally have a user interface, and have limited user interaction whereas browser JavaScript applications can interact with users with rich sophisticated interfaces.

2.2 Installing Node.js

Node.js is a JavaScript runtime that can execute JavaScript on a desktop, allowing JavaScript programs to breakout from the confines and limitations of a browser. Node.js should already have been installed in your computer as you worked through the demonstrations and exercises in previous chapters, implementing the React.js Web application. Nevertheless it's useful to review and confirm you have a working Node.js installation so using your computer terminal or console application, type the following to check the version of Node installed in your machine.

```
$ node -v  
v18.14.0
```

If there's a Node installation then its version will display on the console, otherwise there'll be an error message and you'll need to download and install Node.js from the URL below. As of this writing Node.js 18.14.0 was the latest version, but feel free to install whatever version is recommended on Node's Website.

```
https://nodejs.org/en
```

Once downloaded, double click on the downloaded file to execute the installer, give the operating system all the permissions it requests, accept all the defaults, let the installer complete, and restart the computer. Once the computer is up and running again, confirm Node.js installed properly by running the command **node -v** again from the command line.

2.3 Creating a Node.js project

Another tool installed along with Node.js is **npm** or **Node Package Manager**. We've been using **npm** to run React applications in previous assignments. The **npm** command can be used to accomplish many more tasks, but like the name suggests, its main purpose is to install packages or executable code that **npm** can download and install in the local computer. Another important purpose of **npm** is to create brand new Node.js projects. To create a Node.js project create a directory with the name of the desired project and then change into that directory as shown below. Choose a directory name that does not contain any spaces, is all lowercase, and uses dashes between words.

```
$ mkdir kanbas-node-server-app  
$ cd kanbas-node-server-app
```

Once in the directory, use **npm init** to create a new Node.js project as shown below. This will kickoff an interactive session asking details about the project such as the name of the project and the author. The following is a sample interaction with sample answers. Each question provides a default answer which can be accepted or skipped by just pressing enter. It is fine to initially keep all the default values since they can be configured at a later time – not hugely important.

```
$ npm init  
package name: (kanbas-node-server-app)  
version: (1.0.0)  
description: Node.js HTTP Web server for the Kanbas application  
entry point: (index.js)
```

```
test command:
git repository: https://github.com/jannunzi/kanbas-node-server-app
keywords: Node, REST, Server, HTTP
author: Jose Annunziato
license: (ISC)
```

The configuration will be written into a new file called **package.json** in the JSON format and it's distinctive of Node.js projects, like **pom.xml** files might be distinctive for Java projects.

2.4 Creating a simple Hello World Node.js program

Open the project created earlier with the IDE of your choice, e.g, [IntelliJ](#) or [Visual Studio Code](#), and at the root of the project, create a JavaScript file called **hello.js** with the content shown below. The script uses the **console.log()** function to print the string **'Hello World!'** to the console and it is a common first program to write when learning a new language or infrastructure.

```
hello.js

console.log("Hello World!");
```


At the command line, run the **hello.js** application by using the **node** command and confirm the application prints **Hello World!** to the console as shown below.

```
$ node hello.js
Hello World!
```

Node.js programs consist of JavaScript files that are executed with the node command line interpreter. The following sections will describe writing JavaScript applications that implement HTTP Web servers and RESTful APIs to integrate with React.js user interfaces. Upcoming chapters will describe writing JavaScript applications that store and retrieve data from NoSQL databases such as MongoDB.

2.5 Creating a Node.js HTTP Web server

Express is one of the most popular Node.js libraries simplifying creating HTTP servers. We'll use express to implement HTTP servers that can respond to HTTP requests from any HTTP client, but our React.js client in particular. From the root directory of the Node.js project, install the **express** library from the terminal as shown below.

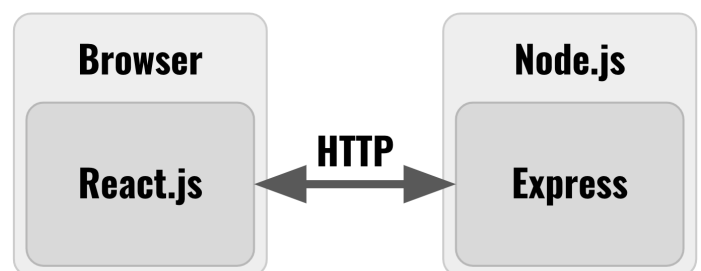

```
$ npm install express
```

A new entry should appear in **package.json** in the **dependencies** property. It is important these dependencies are listed in **package.json** so that they can be re-installed by other colleagues or when deploying to remote servers and cloud platforms such as **AWS**, **Heroku**, or **Render.js**. New libraries are installed in a new folder called **node_modules**. More Node.js packages can be found at [npmjs.com](#). The following **app.js** implements an HTTP server that responds **Hello World!** when the server receives an HTTP request at the URL <http://localhost:4000/hello>. You can copy and paste the URL in a browser to send the HTTP request and the browser will render the response from the server. The **require** function is equivalent to the **import** keyword and loads a library into the local source. The **express()** function call creates an instance of the express library and assigns it to local constant **app**. Developers use the **app** instance to configure the server on

what to do when various types of requests are received. For instance the example below uses the **app.get()** function to configure an **HTTP handler** by mapping the URL pattern **/hello** to a function that handles the HTTP request.

app.js

```
const express = require('express')
const app = express()
app.get('/hello', (req, res) => {res.send('Hello World!')})
app.listen(4000)
```

// equivalent to import
// create new express instance
// create a route that responds 'hello'
// listen to http://localhost:4000

A request to URL **http://localhost:4000/hello** triggers the function implemented in the second argument of **app.get()**. The handler function receives parameters **req** and **res** which allows the function to participate in the **request/response** interaction, common in **client/server** applications. The **res.send()** function responds to the request with the text **Hello World!** Use **node** to run the server from the root of the project as shown below.

```
$ node app.js
```

The application will run, start the server, and wait at port **4000** for incoming HTTP requests. Point your browser to **http://localhost:4000/hello** and confirm the server responds with **Hello World!** Stop the server by pressing **Ctrl+C**. From the point of view of browsers, **http://localhost:4000/hello** is referred to as a **URL (Uniform Resource Locator)**. From the point of view of the server we often use the term **HTTP endpoint** or just **endpoint**.

2.6 Configuring Nodemon

React Web applications automatically transpile and restart every time code changes. Node.js can be configured to behave the same way by installing a tool called **nodemon** which monitors file changes and automatically restarts the Node application. Install nodemon globally (**-g**) as follows.

```
$ npm install nodemon -g
```

On macOS you might need to run the command as a super user as follows. Type your password when prompted.

```
$ sudo npm install nodemon -g
```

Now instead of using the node command to start the server, use **nodemon** as follows:

```
$ nodemon app.js
```

Confirm the server is still responding **Hello World!**. Change the response string to **Life is good!** and without stopping and restarting the server, refresh the browser and confirm that the server now responds with the new string. To practice, create another endpoint mapped to the root of the application, e.g., **/**. Navigate to **http://localhost:4000/** with your browser and confirm the server responds with the message below.

app.js

```
const express = require('express')
const app = express()
app.get('/hello', (req, res) => {res.send('Life is good!')})
app.get('/', (req, res) => {res.send('Welcome to Full Stack Development!')})
app.listen(4000)
```

// http://localhost:4000/hello responds "Life is good"
// http://localhost:4000 responds "Welcome to Full Stack"

2.7 Configuring Node.js to use ES6

So far we've been using the keyword **import** to load ES6 modules in our React Web applications, but in **app.js** we used **require** instead to accomplish the same thing. Since Node version 12, ES6 syntax is supported by configuring the **package.json** file and adding a new **"type"** property with value **"module"** as shown below in the highlighted text

package.json

```
{
  "type": "module",
  "name": "kanbas-node-server-app",
  ...
  "scripts": {
    "test": "echo \"Error: no test specified\" && exit 1",
    "start": "node app.js"
  },
}
```

// type module turns on ES6

// use npm start to start server

Now, instead of using **require()** to load libraries, the familiar **import** statement can be used instead. Here's the **app.js** refactored to use **import** instead of **require**. Refresh the browser and confirm that the server responds as expected.

app.js

```
import express from 'express';
const app = express();
app.get('/hello', (req, res) => {res.send('Life is good!')})
app.get('/', (req, res) => {res.send('Welcome to Full Stack
Development!')})
app.listen(4000);
```

// now we can use import syntax instead of require

2.8 Creating HTTP Routes

The **app.js** file creates and configures an HTTP server listening for incoming HTTP requests. So far we've created a simple **hello** HTTP **route** that responds with a simple string. Throughout this and later chapters we're going to create quite a few other HTTP routes, too many to define them all in **app.js**. Let's move both HTTP routes to the **hello.js** file created earlier as shown bellow.

app.js

```
import express from 'express';
const app = express();
app.get('/hello', (req, res) => {
  res.send('Life is good!')
});
app.get('/', (req, res) => {
  res.send('Welcome to Full Stack Development!')
});
app.listen(4000);
```

// move this to hello.js

Copy the routes to **hello.js** as shown below.

hello.js

```
console.log('Hello World!');
app.get('/hello', (req, res) => {
  res.send('Life is good!')
});
app.get('/', (req, res) => {
  res.send('Welcome to Full Stack Development!')
});
```

// don't need anymore
// moved here from app.js

In our case **hello.js** handles HTTP requests for a **hello** greeting and responds with a friendly reply. We're not done though. Notice that **hello.js** references **app** which is undefined in the file. Let's pass **app** as a parameter in a function we can import and invoke from **app.js** as shown below. Test **<http://localhost:4000/hello>** from the browser and confirm the reply is still friendly.

hello.js

<pre>const Hello = (app) => { app.get('/hello', (req, res) => { res.send('Life is good!') }) app.get('/', (req, res) => { res.send('Welcome to Full Stack Development!') }) } export default Hello;</pre>	<pre>// function accepts app reference to express module // to create routes here</pre>
--	---

Import **hello.js** and pass **app** to the function as shown below.

app.js

<pre>import express from 'express' import Hello from './hello.js' const app = express() Hello(app) app.listen(4000)</pre>	<pre>// import Hello from hello.js // pass app reference to Hello</pre>
---	---

2.9 Exercises

1. Create the Node.js project as described in this section
2. Implement the **hello.js** as described in this section
3. Implement the HTTP server described in **app.js**
4. Configure **nodemon** as described in this section
5. Configure Node.js project to use **ES6** as described in this section
6. Create the **Hello** routes

3 Labs

The following are a set of exercises to practice interacting with an HTTP server from a React.js Web application. Create Import file **lab5.js** where we will be implementing several server side exercises. Create a route that welcomes users to Assignment 5.

Lab5.js

<pre>const Lab5 = (app) => { app.get("/a5/welcome", (req, res) => { res.send("Welcome to Assignment 5"); }); }; export default Lab5;</pre>	<pre>// accept app reference to express module // create route to welcome users to assignment 5</pre>
--	---

Import **Lab5** into the server **app.js** and pass it a reference to **express** as shown below. Restart the server and confirm that **<http://localhost:4000/a5/welcome>** responds with the expected response.

app.js

<pre>import express from "express"; import Hello from "./hello.js"; import Lab5 from "./lab5.js"; const app = express(); app.use(express.json());</pre>	<pre>// import Lab5</pre>
---	---------------------------

```
Lab5(app);
Hello(app);
app.listen(4000);
```

```
// pass reference to express module
```

Now let's create an **Assignment5** React.js component to test the Node HTTP server. Import the new component into your existing set of labs so that you can navigate to it by selecting the corresponding tab or link as shown below. The example below creates a hyperlink that navigates to the <http://localhost:4000/a5/welcome> URL. Confirm that link navigates to the expected response.

Labs

[Assignment 3](#)[Assignment 4](#)[Assignment 5](#)

Assignment 5

Welcome

src/Labs/a5/index.js

```
function Assignment5() {
  return (
    <div>
      <h1>Assignment 5</h1>
      <div className="list-group">
        <a href="http://localhost:4000/a5/welcome"
          className="list-group-item">
          Welcome
        </a>
      </div>
      <SimpleAPIExamples />
    </div>
  );
}
export default Assignment5;
```

```
// hyperLink navigates to
// http://localhost:4000/a5/welcome
```

3.1 Sending Data to a Server via HTTP Requests

Let's explore how we can send information to the server from the browser. There are three ways to send information to the server:

1. **Path parameters** - parameters are encoded as segments of the path itself, e.g., <http://localhost:4000/a5/add/2/5>.
2. **Query parameters** - parameters are encoded as name value pairs in the query string after the ? character at the end of a URL, e.g., <http://localhost:4000/a5/add?a=2&b=5>.
3. **Request body** - data is sent as a string representation of data encoded in some format such as XML or JSON containing properties and their values, e.g., `{a:2, b: 5}` or `<params a=2 b=5/>`.

We'll explore the first two in this section, but address the last one towards the end of the labs.

3.1.1 Path Parameters

React.js applications can pass data to servers by embedding it as **path parameters** part of the a URL. For instance the last two integers -- 2 and 4 -- at the end of the following URL can be parsed by a corresponding matching route on the server that can add the two integers, and respond with the result of 6.

<http://localhost:4000/a5/add/2/4>

The following route declarations can parse path parameters a and b encoded in paths `/a5/add/:a/:b` and `/a5/subtract/:a/:b`. Implement the routes in **Lab5.js** in your Node application and confirm that <http://localhost:4000/a5/add/6/4> responds with 10 and <http://localhost:4000/a5/subtract/6/4> responds with 2.

Lab5.js

```
const Lab5 = (app) => {
  app.get("/a5/welcome", (req, res) => {
    res.send("Welcome to Assignment 5");
  });
  app.get("/a5/add/:a/:b", (req, res) => {
    const { a, b } = req.params;
    const sum = parseInt(a) + parseInt(b);
    res.send(sum.toString());
  });
  app.get("/a5/subtract/:a/:b", (req, res) => {
    const { a, b } = req.params;
    const sum = parseInt(a) - parseInt(b);
    res.send(sum.toString());
  });
};
export default Lab5;
```

```
// route expects 2 path parameters after /a5/add
// retrieve path parameters as strings
// parse as integers and adds
// sum as string sent back as response
// don't send integers since can be interpreted as status
// route expects 2 path parameters after /a5/subtract
// retrieve path parameters as strings
// parse as integers and subtracts
// subtraction as string sent back as response
```

Let's create a React.js component to test the new routes from our Web application. Web applications that interact with server applications are often referred to as **client applications** since they are the **client** in an application built using a **client server architecture**. Create the component below that declares state variables **a** and **b**, encodes the values in hyperlinks, and when you click them, server responds with the addition or subtraction of the parameters.

EncodingParametersInURLs.js

```
import React, { useState } from "react";
function EncodingParametersInURLs() {
  const [a, setA] = useState(34);
  const [b, setB] = useState(23);
  return (
    <div>
      <h3>Encoding Parameters In URLs</h3>
      <h4>Calculator</h4>
      <input
        onChange={(e) => setA(e.target.value)}
        className="form-control" type="number" value={a}/>
      <input
        onChange={(e) => setB(e.target.value)}
        className="form-control" type="number" value={b}/>
      <h3>Path Parameters</h3>
      <a
        href={`http://localhost:4000/a5/add/${a}/${b}`}
        className="btn btn-primary">
        Add {a} + {b}
      </a>
      <a
        href={`http://localhost:4000/a5/subtract/${a}/${b}`}
        className="btn btn-danger">
        Subtract {a} - {b}
      </a>
    </div>
  );
}
export default EncodingParametersInURLs;
```

Assignment 5

Welcome

Simple API Examples

Encoding Parameters In URLs

Calculator

34

23

Path Parameters

Add 34 + 23

Subtract 34 + 23

Include the new component in your **Assignment5** component and confirm that clicking the links generates the expected response.

3.1.2 Query Parameters

React.js applications can also send data to servers by encoding it as a query string after the question mark character (?) at the end of a URL. A query string consists of a list of name value pairs separated by the ampersand character (&) as shown below.

<http://localhost:4000/a5/add?a=2&b=4>

In **Lab5.js**, create a route that can parse an **operation** and its parameters a and b as shown below. If the **operation** is **add** the route responds with the addition of the parameters. If the **operation** is **subtract**, the route responds with the subtraction of the parameters.

Lab5.js

```
...
app.get("/a5/calculator", (req, res) => {
  const { a, b, operation } = req.query;
  let result = 0;
  switch (operation) {
    case "add":
      result = parseInt(a) + parseInt(b);
      break;
    case "subtract":
      result = parseInt(a) - parseInt(b);
      break;
    default:
      result = "Invalid operation";
  }
  res.send(result.toString());
});
...
```

```
// e.g., a5/calculator?a=5&b=2&operation=add
// retrieve a, b, and operation parameters in query

// parse as integers since parameters are strings

// convert to string otherwise browser interprets
// as a status code
```

In the **EncodingParametersInURLs** component, create two additional hyperlinks to test the new route as shown below. Confirm the following hyperlinks work as expected.

Query Parameters

Add 34 + 23

Substract 34 + 23

Test Hyperlinks	Confirm Response
http://localhost:4000/a5/calculator?operation=add&a=34&b=23	57
http://localhost:4000/a5/calculator?operation=subtract&a=34&b=23	11

EncodingParametersInURLs.js

```
...
<h3>Query Parameters</h3>
<a
  href={`http://localhost:4000/a5/calculator?operation=add&a=${a}&b=${b}`}
  className="btn btn-primary">
  Add {a} + {b}
</a>
<a
  href={`http://localhost:4000/a5/calculator?operation=subtract&a=${a}&b=${b}`}
  className="btn btn-danger">
  Substract {a} - {b}
</a>
...
```

//

3.1.3 Exercises

Implement the server routes and user interface that accomplish the following tasks as described in this section

1. In the user interface, encode path parameters in a URL

2. In the server, parse path parameters from a URL
3. In the user interface, encode query parameters in a URL

4. In the server, parse query parameters from a URL

3.2 Working with Objects

The examples so far have demonstrated working with integers and strings, but all primitive datatypes work as well, including objects and arrays. The example below declares an **assignment** object accessible at the route **/a5/assignment**.

Lab5.js

```
const assignment = {
  id: 1,
  title: "NodeJS Assignment",
  description: "Create a NodeJS server with ExpressJS",
  due: "2021-10-10",
  completed: false,
  score: 0,
};

const Lab5 = (app) => {
  app.get("/a5/assignment", (req, res) => {
    res.json(assignment);
  });
  ...
};
export default Lab5;
```

// object state persists as long
// as server is running
// changes to the object persist
// rebooting server
// resets the object

// use .json() instead of .send() if you know
// the response is formatted as JSON

3.2.1 Retrieving Objects from a Server

Create **WorkingWithObjects** component to test the new route as shown below. Include in **Assignment5** and confirm that <http://localhost:4000/a5/assignment> responds with **assignment** object.

WorkingWithObjects.js

```
import React, { useState } from "react";
function WorkingWithObjects() {
  return (
    <div>
      <h3>Working With Objects</h3>
      <h4>Retrieving Objects</h4>
      <a href="http://localhost:4000/a5/assignment"
        className="btn btn-primary me-2">
        Get Assignment
      </a>
    </div>
  );
}
export default WorkingWithObjects;
```

Working With Objects

Retrieving Objects

Get Assignment

3.2.2 Retrieving Object Properties from a Server

We can retrieve individual properties in an object such as the **title** shown below.

Lab5.js

```
...
const Lab5 = (app) => {
  app.get("/a5/assignment", (req, res) => {
    res.json(assignment);
  });
  app.get("/a5/assignment/title", (req, res) => {
    res.json(assignment.title);
  });
  ...
};
export default Lab5;
```

// respond with string property
// can do the same with other properties

Confirm that the <http://localhost:4000/a5/assignment/title> hyperlink below retrieves the assignment's title. In **WorkingWithObjects**, add a link that retrieves the title as shown below. Confirm that clicking the link retrieves the assignment's title.

WorkingWithObjects.js

```
...
<h4>Retrieving Objects</h4>
<a href="http://localhost:4000/a5/assignment"
  className="btn btn-primary me-2">
  Get Assignment
</a>
<h4>Retrieving Properties</h4>
<a
  href="http://localhost:4000/a5/assignment/title"
  className="btn btn-primary me-2">
  Get Title
</a>
...
```

Retrieving Properties

Get Title

3.2.3 Modifying Objects in a Server

We can also use routes to modify objects or individual properties as shown below.

Lab5.js

```
...
app.get("/a5/assignment/title/:newTitle", (req, res) => {
  const { newTitle } = req.params;
  assignment.title = newTitle;
  res.json(assignment);
});
...
// changes to objects in the server
// persist as long as the server is running
// rebooting the server resets the object state
```

In **WorkingWithObjects**, create an **assignment** state variable to test editing the **assignment** object on the server. Create an input field where we can type the new assignment title, and a link that invokes the route that updates the title. Confirm that you can change the assignment's title.

Modifying Properties

NodeJS Assignment

Update Title

WorkingWithObjects.js

```
import React, { useState } from "react";
function WorkingWithObjects() {
  const [assignment, setAssignment] = useState({
    id: 1,
    title: "NodeJS Assignment",
    description: "Create a NodeJS server with ExpressJS",
    due: "2021-10-10",
    completed: false,
    score: 0,
  });
  const URL = http://localhost:4000/a5/assignment
  return (
    <div>
      <h3>Working With Objects</h3>
      <h4>Modifying Properties</h4>
      <a
        href={` ${URL}/title/${assignment.title}`}
        className="btn btn-primary me-2 float-end"
      >
        Update Title
      </a>
      <input
        onChange={(e) => setAssignment({ ...assignment,
          title: e.target.value })}
        value={assignment.title}
      />
    </div>
  );
}
```

// create a state variable that holds
// default values for the form below.
// eventually we'll fetch this initial
// data from the server and populate
// the form with the remote data so
// we can modify it here in the UI

// encode the title in the URL that
// updates the title

// form element to edit local state variable
// used to encode in URL that updates property
// in remote object

```

      className="form-control mb-2 w-75"
      type="text" />
    ...
  </div>
  );
}
export default WorkingWithObjects;

```

3.2.4 Extra Credit

Create routes that can modify the **score** and **completed** properties of the **assignment** object. In the React application, create an input field of type **number** where you can type the new **score** and an input field of type **checkbox** where you can select the **completed** property. Create a link that updates the **score** and another link that updates the **completed** property. The routes that update the score and completed properties should be

Property	Routes	Response	Test
score	/a5/assignment/score/:newScore	assignment	score=98
completed	/a5/assignment/completed/:newCompleted	assignment	completed=true

3.2.5 Exercises

Implement the server routes and user interface that accomplish the following tasks as described in this section

1. Retrieve the assignment object
2. Retrieve individual object properties
3. Updates an object's property

3.3 Working with Arrays

Now let's work with something a little more challenging. Create an array of objects and explore how to retrieve, add, remove, and update the array. Working with a collection of objects requires a general set of operations often referred to as **CRUD** or **create, read, update, and delete**. These operations capture common interactions with any collection of data such as **creating** and adding new instances to the collection, **reading** or retrieving items in a collection, **updating** or modifying items in a collection, and **deleting** or removing items from a collection.

3.3.1 Retrieving Arrays

Let's First create the array and create the route below to retrieve the array.

Lab5.js

```

const todos = [
  { id: 1, title: "Task 1", completed: false },
  { id: 2, title: "Task 2", completed: false },
  { id: 3, title: "Task 3", completed: false },
  { id: 4, title: "Task 4", completed: false },
];
const Lab5 = (app) => {
  app.get("/a5/todos", (req, res) => {
    res.json(todos);
  });
  ...
};
export default Lab5;

```

In a new React component, create a hyperlink to test retrieving the array. Add the new component to the **Assignment5** complement and confirm clicking the link retrieves the array.

WorkingWithArrays.js

```
function WorkingWithArrays() {
  const API = "http://localhost:4000/a5/todos";
  return (
    <div>
      <h3>Working with Arrays</h3>
      <h4>Retrieving Arrays</h4>
      <a href={API} className="btn btn-primary me-2">
        Get Todos
      </a>
    </div>
  );
}
export default WorkingWithArrays;
```

Retrieving Arrays

Get Todos

3.3.2 Retrieving an Item from an Array by ID

Another common operations is to retrieve a particular item from an array by its primary key, e.g., its ID property. The convention is to encode the ID of the item of interest as a path parameter. The example below parses the ID from the path parameter, finds the corresponding item, and responds with the item.

Lab5.js

```
app.get("/a5/todos/:id", (req, res) => {
  const { id } = req.params;
  const todo = todos.find((t) => t.id === parseInt(id));
  res.json(todo);
});
```

Add a hyperlink to the React component to test retrieving an item from the array by its primary key. Confirm that you can type the ID in the UI and clicking the hyperlink retrieves the corresponding item.

WorkingWithArrays.js

```
...
<h4>Retrieving Arrays</h4>
<a href={API} className="btn btn-primary me-2">
  Get Todos
</a>
<h4>Retrieving an Item from an Array by ID</h4>
<a href={` ${API}/${todo.id}`}
  className="btn btn-primary me-2">
  Get Todo by ID
</a>
...
```

3.3.3 Filtering array items using a query string

The convention for retrieving a particular item from a collection is to encode the item's ID as a path parameter, e.g., **/todos/123**. Another convention is that if the primary key is not provided, then the interpretation is that we want the entire collection of items, e.g., **/todos**. We can also want to retrieve items by some other criteria other than the item's ID such as the item's title or completed properties. The convention in this case is to use query strings instead of path parameters when filtering items by properties other than the primary key, e.g., **/todos?completed=true**. The example below refactors the **/a5/todos** to handle the case when we want to filter the array by the **completed** query parameter.

Lab5.js

```
const todos = [
  { id: 1, title: "Task 1", completed: false },
  { id: 2, title: "Task 2", completed: true },
  { id: 3, title: "Task 3", completed: false },
  { id: 4, title: "Task 4", completed: true },
];
const Lab5 = (app) => {
  app.get("/a5/todos", (req, res) => {
    const { completed } = req.query;
    if (completed !== undefined) {
      const completedTodos = todos.filter(
        (t) => t.completed === completed);
      res.json(completedTodos);
      return;
    }
    res.json(todos);
  });
  ...
};
export default Lab5;
```

//

Add a hyperlink to the React component to test retrieving an item from the array by its primary key. Confirm that you can type the ID in the UI and clicking the hyperlink retrieves the corresponding item.

WorkingWithArrays.js

```
...
<h3>Retrieving Arrays</h3>
<a href={API}
  className="btn btn-primary me-2">
  Get All Todos
</a>
<h3>Retrieving an Item from an Array by ID</h3>
<a href={` ${API}/${todo.id}`}
  className="btn btn-primary me-2">
  Get Todo by ID
</a>
<h3>Filtering Array Items</h3>
<a href={` ${API}/${todo.id}?completed=true`}
  className="btn btn-primary me-2" >
  Get Completed Todos
</a>
...
```

Filtering Array Items

Get Completed Todos

3.3.4 Creating new Items in an Array

The examples we've seen so far have illustrated various **read** operations in our exploration of possible **CRUD** operations. Let's now take a look at the **create** operation. The example below demonstrates a route that creates a new item in the array and responds with the array now containing the new item. Note that it is implemented before the `/a5/todos/:id` route, since otherwise the `:id` path parameter would interpret the **create** in `/a5/todos/create` as an ID, which would certainly create an error trying to parse it as an integer. Also note that the **newTodo** creates default values including a unique identifier field **id** based on a timestamp. Eventually primary keys will be handled by a database later in the course. Finally note that the response consists of the entire **todos** array, which is convenient for us for now, but a more common implementation would be to respond with **newTodo**.

```
...
app.get("/a5/todos/create", (req, res) => {
  const newTodo = {
    id: new Date().getTime(),
    title: "New Task",
  };
  todos.push(newTodo);
  res.json(todos);
});
```

//

```

    completed: false,
  };
  todos.push(newTodo);
  res.json(todos);
});
app.get("/a5/todos/:id", (req, res) => {
  const { id } = req.params;
  const todo = todos.find((t) => t.id === parseInt(id));
  res.json(todo);
});
...

```

Add a **Create Todo** hyperlink to the **WorkingWithArrays** component to test the new route. Confirm that clicking the link creates the new item in the array.

WorkingWithArrays.js

```

...
<h4>Creating new Items in an Array</h4>
<a href={`${API}/create`}
  className="btn btn-primary me-2">
  Create Todo
</a>
...

```

Creating new Items in an Array

Create Todo

3.3.5 Deleting an Item from an Array

Next let's consider the **delete** operation in the **CRUD** family of operations. The convention is to encode the ID of the item to delete as a path parameter as shown below. We search for the item in the set of items and remove it. Typically we would respond with a status of success or failure, but for now we're responding with all the todos for now.

```

...
app.get("/a5/todos/:id/delete", (req, res) => {
  const { id } = req.params;
  const todo = todos.find((t) => t.id === parseInt(id));
  todos.splice(todos.indexOf(todo), 1);
  res.json(todos);
});
...

```

//

To test the new route, create a link that encodes the todo's ID in a hyperlink to delete the corresponding item. Add a **todo** state variable representing an item in the array including a primary key. Use an input field so we can type the ID of the item we want to remove. Confirm that you can type the ID of an item, click the hyperlink and that the corresponding item is removed from the array.

WorkingWithArrays.js

```

import React, { useState } from "react";
function WorkingWithArrays() {
  const [todo, setTodo] = useState({
    id: 1,
    title: "NodeJS Assignment",
    description: "Create a NodeJS server with ExpressJS",
    due: "2021-09-09",
    completed: false,
  });
  const API = "http://localhost:4000/a5/todos";
  return (
    <div>
      <h2>Working with Arrays</h2>
      <input

```

Working with Arrays

1

Deleting from an Array

Delete Todo with ID = 1

```

      value={todo.id}
      onChange={(e) => setTodo({
        ...todo, id: e.target.value })}
      className="form-control mb-2"
      type="number"
    />
    <h3>Deleting from an Array</h3>
    <a href={` ${API}/${todo.id}/delete`}
      className="btn btn-primary me-2">
      Delete Todo with ID = {todo.id}
    </a>
    ...
  </div>
);
}
export default WorkingWithArrays;

```

3.3.6 Updating an Item in an Array

Finally let's consider the **update** operation in the **CRUD** family of operations. The convention is to encode the ID of the item to update as a path parameter as shown below. We search for the item in the set of items and update it. Typically we would respond with a status of success or failure, but for now we're responding with all the todos for now.

Lab5.js

```

app.get("/a5/todos/:id", (req, res) => {
  const { id } = req.params;
  const todo = todos.find((t) => t.id === parseInt(id));
  res.json(todo);
});
app.get("/a5/todos/:id/title/:title", (req, res) => {
  const { id, title } = req.params;
  const todo = todos.find((t) => t.id === parseInt(id));
  todo.title = title;
  res.json(todos);
});

```

//

To test the new route, add an input field to edit the **title** property and a link that encodes both the ID of the item and the new value of the **title** property as shown below

WorkingWithArrays.js

```

<h2>Working with Arrays</h2>
<input
  value={todo.id}
  onChange={(e) => setTodo({
    ...todo, id: e.target.value })}
  className="form-control mb-2"
  type="number"
/>
<input
  value={todo.title}
  onChange={(e) => setTodo({
    ...todo, title: e.target.value })}
  className="form-control mb-2"
  type="text"
/>
<h3>Updating an Item in an Array</h3>
<a
  href={` ${API}/${todo.id}/title/${todo.title}`}
  className="btn btn-primary me-2">
  Update Title to {todo.title}
</a>

```

Working with Arrays

Updating an Item in an Array

3.3.7 Extra Credit

Using the exercises so far, implement routes and accompanying UI that allows editing the completed and description properties of todo item identified by its ID. Create the routes below in **Lab5.js** in the Node.js HTTP server project. In WorkingWithArrays component, add a text input field to edit the **description** and a checkbox input field to edit the **completed** property. Create a link that updates the **description** of the todo item whose **id** is encoded in the URL and another link that updates the **completed** property of the todo item whose **id** is encoded in the URL.

Property	Routes	Response	Test
completed	<code>/a5/todos/:id/completed/:completed</code>	todos	Complete Todo ID = 1
description	<code>/a5/todos/:id/description/:description</code>	todos	Describe Todo ID = 1

3.3.8 Exercises

Implement the server routes and user interface that accomplish the following tasks as described in this section

1. Retrieve all the items in an array
2. Retrieve an item from an array by its primary key
3. Retrieve some items from an array that meet some criteria
3. Create new items in an array
4. Delete a particular item from an array by its primary key
5. Update a property of an object in an array

3.4 Receiving Data from Servers as HTTP Responses

The exercises explored so far sent data encoded in the URL of hyperlinks. The links navigated to a separate browser window that displayed the server response. Even though we were able to send data to the server and affect changes to the server data, we have not considered how those changes can affect the user interface. Let's consider how to fully integrate the user interface with the server by sending HTTP requests and handling the HTTP responses.


3.4.1 Asynchronous JavaScript and XML

JavaScript Web applications, such as React.js applications, use communication techniques generally referred to as **AJAX** or **Asynchronous JavaScript and XML**. These consist of sending and retrieving HTTP requests and response asynchronously from client JavaScript application to remote HTTP server. Although **XML** was the original data format in **AJAX**, **JSON** has overtaken as the dominant data format in modern Web applications, but the **AJAX** label still applies nevertheless.

A popular JavaScript library that implements the **AJAX** set of techniques is **axios**. Install the library at the root of the React.js Web application project as shown below.

```
$ npm install axios
```

Create **IntegratingReactWithAPIs** component to practice using the **axios** library. Let's use the same routes implemented in earlier exercises, but instead of clicking on hyperlinks, **axios** will programmatically invoke the URLs giving us a chance to capture and handle the responses from the server. The **useEffect** hook configures a function to call when the component first loads. It invokes the **fetchWelcome**

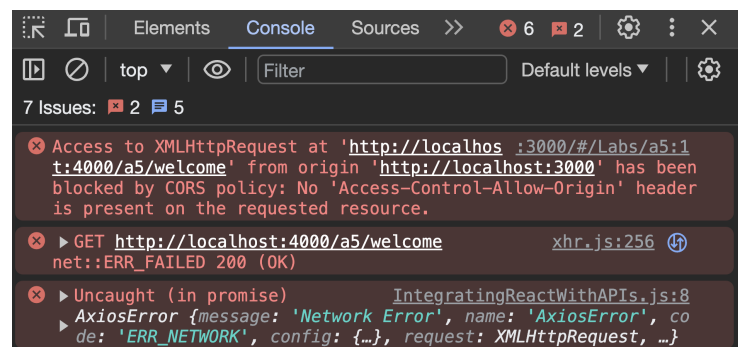

asynchronous function where **axios** sends a **GET** request to **/a5/welcome** and returns the **response** from the server. The data from the server is available in **response.data** which we store in state variable **welcome**. Copy the code below into **EncodingParametersInURLs.js** and refresh the browser. Open the console and confirm you get a CORS error similar to the one here on the right. We'll fix this error in the next section.

EncodingParametersInURLs.js

```
import React, { useEffect, useState } from "react";
import axios from "axios";
function EncodingParametersInURLs() {
  const [a, setA] = useState(34);
  const [b, setB] = useState(23);
  const [welcome, setWelcome] = useState("");
  const fetchWelcome = async () => {
    const response = await axios.get("http://localhost:4000/a5/welcome");
    setWelcome(response.data);
  };
  useEffect(() => {
    fetchWelcome();
  }, []);
  return (
    <div>
      <h3>Encoding Parameters In URLs</h3>
      <h4>Integrating React with APIs</h4>
      <h5>Fetching Welcome</h5>
      <h6>{welcome}</h6>
      ...
    </div>
  );
}
export default EncodingParametersInURLs;
```

3.4.2 Configuring Cross Origin Request Sharing (CORS)

In the early history of the Web, JavaScript got a bad rap and was considered a security risk. To address these concerns, servers and browsers agreed to limit JavaScript programs to only be able to communicate with the servers from where they had been downloaded from. Since our React.js application is running locally from **localhost:3000**, then they would only be able to communicate back to a server running on **localhost:3000**, but our server is running on **localhost:4000**, so when our JavaScript components try to communicate with **localhost:4000**, the browser considers a different domain and stops the communication and throws a **CORS** exception. **CORS** stands for **Cross Origin Request Sharing**, which governs the policies and mechanisms of how various resources can be shared across different domains or **origins**. Browsers enforce **CORS** policies by first checking with the server if they are ok with receiving requests from different domains. If the server responds affirmatively, then browsers let the requests go through, otherwise they'll consider the attempt as a violation of **CORS** security policy, abort the request, and throw the exception. We can configure the **CORS** security policies by installing the **cors** Node.js library as shown below.

Integrating React with APIs From Server:

Welcome to Assignment 5

```
$ npm install cors
```

In **app.js**, import the **cors** library and configure it as shown below. Restart the server and refresh the React.js application. Confirm that the user interface is able to retrieve the **Welcome to Assignment 5** message from the server without errors.

app.js

```
import express from "express";
import Lab5 from "./lab5.js";
import cors from "cors";
const app = express();
app.use(cors());
Lab5(app);
app.listen(4000);
```

3.4.3 Sending and fetching data to and from an HTTP server

Let's revisit some of the same exercises we worked on earlier, but this time using **axios.get** to send the same requests and capturing the responses so we can update the user interface. Add a **result** state variable where we can grab the responses to the **add** and **subtract** requests as shown below. Add buttons to invoke the new fetch functions that calculate the addition and subtraction of the input fields for **a** and **b**. Confirm that clicking the two new buttons calculates the result correctly.

EncodingParametersInURLs.js

```
import axios from "axios";
function EncodingParametersInURLs() {
  const [a, setA] = useState(34);
  const [b, setB] = useState(23);
  const [result, setResult] = useState(0);
  const fetchSum = async (a, b) => {
    const response = await
      axios.get(`http://localhost:4000/a5/add/${a}/${b}`);
    setResult(response.data);
  };
  const fetchSubtraction = async (a, b) => {
    const response = await axios.get(
      `http://localhost:4000/a5/subtract/${a}/${b}`);
    setResult(response.data);
  };
  useEffect(() => { ... }, []);
  return (
    <div>
      ...
      <h4>Calculator</h4>
      <input ... value={a} ... />
      <input ... value={b} ... />
      <input value={result}
        className="form-control mb-2" type="number" readOnly
      />
      <h3>Fetch Result</h3>
      <button onClick={() => fetchSum(a, b)}
        className="btn btn-primary mb-2 w-100" >
        Fetch Sum of {a} + {b}
      </button>
      <button onClick={() => fetchSubtraction(a, b)}
        className="btn btn-danger me-2 w-100" >
        Fetch Subtraction of {a} - {b}
      </button>
      ...
    </div>
  );
}
export default EncodingParametersInURLs;
```

Encoding Parameters In URLs Calculator

Fetch Result

Fetch Sum of 34 + 23Fetch Subtraction of 34 - 23

3.4.4 Fetching and updating objects

Let's now revisit the APIs that worked with the **assignment** object in **WorkingWithObjects**. Add functions that fetch the assignment object and update its title, and update the state variable with the response as shown below.

```
import axios from "axios";
function WorkingWithObjects() {
  const [assignment, setAssignment] = useState({
    title: "NodeJS Assignment", ... });
  const URL = "http://localhost:4000/a5/assignment";
  const fetchAssignment = async () => {
    const response = await axios.get(`${URL}`);
    setAssignment(response.data);
  };
}
```

```
//
```

```

const updateTitle = async () => {
  const response = await axios
    .get(`${URL}/title/${assignment.title}`);
  setAssignment(response.data);
};
useEffect(() => {
  fetchAssignment();
}, []);
return (
  <div>
    <h2>Working With Objects</h2>
    <h3>Modifying Properties</h3>
    <input onChange={(e) => setAssignment({
      ...assignment, title: e.target.value })}
      value={assignment.title}
      className="form-control mb-2" type="text" />
    <button onClick={updateTitle}
      className="w-100 btn btn-primary mb-2">
      Update Title to: {assignment.title}
    </button>
    <button onClick={fetchAssignment}
      className="w-100 btn btn-danger mb-2">
      Fetch Assignment
    </button>
  </div>
);
}
export default WorkingWithObjects;

```

3.4.5 Fetching Arrays

The examples that worked with arrays can also be enhanced with **axios**. The exercise below fetches the **todos** from the server and populate **todos** state variable which we can then render as a list of todos when the component loads. Confirm that the todos render when the component first loads.

WorkingWithArrays.js

```

import React, { useState, useEffect } from "react";
import axios from "axios";
function WorkingWithArrays() {
  const API = "http://localhost:4000/a5/todos";
  const [todo, setTodo] = useState({
    id: 1, title: "NodeJS Assignment",
    description: "Create a NodeJS server with ExpressJS",
    due: "2021-09-09", completed: false,
  });
  const [todos, setTodos] = useState([]);
  const fetchTodos = async () => {
    const response = await axios.get(API);
    setTodos(response.data);
  };
  useEffect(() => {
    fetchTodos();
  }, []);
  return (
    <div>
      <h2>Working with Arrays</h2>
      <input value={todo.id}
        onChange={(e) => setTodo({ ... })} />
      <input value={todo.title}
        onChange={(e) => setTodo({ ... })} />
      <ul className="list-group">
        {todos.map((todo) => (
          <li key={todo.id}
            className="list-group-item">
              {todo.title}
            </li>
          ))}
      </ul>
    </div>
  );
}

```

Task 1

Task 2

Task 3

Task 4

```

);
}
export default WorkingWithArrays;

```

3.4.6 Deleting items from an array

Add **Remove** buttons to the todos that invoke a new **removeTodo** function that sends an asynchronous delete request to the server and updates the **todos** state variable with the surviving todos. Confirm that clicking on the new **Remove** buttons actually removes the corresponding todo.

WorkingWithArrays.js

```

...
const fetchTodos = async () => {
  const response = await axios.get(API);
  setTodos(response.data);
};
const removeTodo = async (todo) => {
  const response = await axios
    .get(`${API}/${todo.id}/delete`);
  setTodos(response.data);
};
...
<ul className="list-group">
  {todos.map((todo) => (
    <li key={todo.id}
      className="list-group-item">
        <button
          onClick={() => removeTodo(todo)}
          className="btn btn-danger float-end" >
            Remove
        </button>
        {todo.title}
      </li>
    )
  )}
</ul>
...

```

Task 1	Remove
Task 2	Remove
Task 3	Remove
Task 4	Remove

3.4.7 Create new array elements

Add a new **Create Todo** button that invokes a new **createTodo** function that sends an asynchronous create request to the server and updates the **todos** state variable with the new todo. Confirm that clicking the new **Create Todo** buttons actually adds a new todo item.

WorkingWithArrays.js

```

...
const createTodo = async () => {
  const response = await axios.get(`${API}/create`);
  setTodos(response.data);
};
...
return (
  <div>
    <h2>Working with Arrays</h2>
    ...
    <button onClick={createTodo}
      className="btn btn-primary mb-2 w-100">
      Create Todo
    </button>
    ...
  </div>
);
}

```

Create Todo

Task 1	Remove
Task 2	Remove
Task 3	Remove
Task 4	Remove
New Task	Remove

```
export default WorkingWithArrays;
```

3.4.8 Fetching an item by its primary key ID

Add **Edit** buttons to the todos that invoke a new **fetchTodoById** function that sends an asynchronous request to the server for the todo item with the matching ID and updates the **todo** state variable. Confirm that clicking on the new **Edit** buttons actually fetches the corresponding todo and displays it in the form elements above.

WorkingWithArrays.js

```
...
const [todo, setTodo] = useState({ ... });
...
const deleteTodo = async (todo) => { ... }
const fetchTodoById = async (id) => {
  const response = await axios.get(`${API}/${id}`);
  setTodo(response.data);
};
...

  {todos.map((todo) => (
    <li key={todo.id} className="list-group-item">
      <button
        onClick={() => fetchTodoById(todo.id)}
        className="btn btn-warning me-2 float-end" >
        Edit
      </button>
      <button ... >
        Remove
      </button>
      {todo.title}
    </li>
  ))}
</ul>
...

```

Create Todo

Task 1	Remove	Edit
Task 2	Remove	Edit
Task 3	Remove	Edit
Task 4	Remove	Edit
New Task	Remove	Edit

3.4.9 Update array elements

Add a new **Update Title** button that invokes a new **updateTitle** function that sends an asynchronous request that updates the title of the currently selected todo in the UI. Then the todos are updated in the **todos** state variable and they rerender on the screen. Confirm that clicking the new **Update Title** buttons actually updates the title of the currently selected todo.

WorkingWithArrays.js

```
...
const updateTitle = async () => {
  const response = await axios.get(
    `${API}/${todo.id}/title/${todo.title}`);
  setTodos(response.data);
};
...
return (
  <div>
    <h2>Working with Arrays</h2>
    <button onClick={createTodo} >
      Create Todo
    </button>
    <input value={todo.id}
      onChange={(e) => setTodo({ ...todo,

```

Create TodoUpdate Title

Task 1	Remove	Edit
Task 2	Remove	Edit
Task 3	Remove	Edit
Task 4	Remove	Edit
Learn Node.js	Remove	Edit

```

        id: e.target.value }}} />
<input value={todo.title}
  onChange={(e) => setTodo({ ...todo,
    title: e.target.value }}} />
<button onClick={updateTitle}
  className="btn btn-success mb-2 w-100">
  Update Title
</button>
...
</div>
);
}
export default WorkingWithArrays;

```

3.4.10 Exercises

Implement the server routes and user interface that accomplish the following tasks as described in this section

1. Configure CORS
2. Send and fetch data to and from a server and display results in a UI
3. Fetch and update an object and display it in a UI
4. Fetch and display arrays from a server and display it in a UI
5. Delete array items in a server and display in a UI
6. Post and add new items to an array in a server and display in a UI
7. Fetch array items by their ID from a server and display in a UI
8. Update array items by their ID in a server and display in a UI

3.5 Passing JSON data to a Server in an HTTP Body

The exercises so far have sent data to the server as path and query parameters. This approach is limited to the maximum length of the URL string, and only string data types. Another concern is that data in the URL is sent over a network in clear text, so anyone snooping around between the client and server can see the data as plain text which is not a good option for exchanging sensitive information such as personal data. A better approach is to encode the data as JSON in the HTTP's body which allows for arbitrarily large amounts of data as well as secure data encryption. Configure the Node.js server to parse JSON from the body of incoming HTTP requests as shown below.

app.js

```

import Lab5 from "../lab5.js";
import cors from "cors";
const app = express();
app.use(cors());
app.use(express.json());
Lab5(app);
app.listen(4000);

```

//

The hyperlinks and **axios.get()** in the exercises so far have sent data to the server using the **HTTP GET method** or **verb**. This approach is limited to the maximum length of the URL string, and only string data types. Another concern is that data in the URL is sent over a network in clear text, so anyone snooping around between the client and server can see the data as plain text which is not a good option for exchanging sensitive information such as personal data. A better approach is to encode the data as JSON in the HTTP's body which allows for arbitrarily large amounts of data as well as secure data encryption. Configure the Node.js server to parse JSON from the body of incoming HTTP requests as shown below.

HTTP defines several other **HTTP methods** or **verbs** including:

- **GET** - for retrieving data, but we've been also misusing it for creating, modifying and deleting data on the server. We'll start using it properly only for retrieving data
- **POST** - for creating new data typically embedded in the HTTP body
- **PUT** - for modifying existing data where updates are typically embedded in the HTTP body

- **DELETE** - for removing existing data
- **OPTIONS** - for retrieving allowed operations. Used to figure out if CORS policy allows communication with the other methods such as GET, POST, PUT and DELETE

The **GET** method, as the name suggests, is meant for only getting data from the server. We've been misusing it to implement routes that also creates, updates, and deletes data on the server. We did this mostly for academic purposes since it's the easiest HTTP method to work with. From now on we'll use the proper HTTP method for the right purpose.

3.5.1 Posting data in an HTTP Body

To illustrate using the HTTP POST method, let's re-implement the route that creates new todos as shown below. The convention is that URL paths should only include nouns and no verbs. The HTTP method POST takes the role of the verb meaning "create". Add the new **app.post** implementation highlighted in green below. Don't remove the old version highlighted in red so we don't break the other lab exercises. Note how the new implementation grabs the posted JSON data from **req.body** and uses it to define **newTodo**. Also note that this version does not respond with the entire array and instead only responds with the newly created todo object instance. This is more reasonable since arrays can potentially be large and it would be expensive to transfer such large data structures over a network, especially if the client UI already has most of this data already displayed.

Lab5.js

```
const todos = [ ... ];
const Lab5 = (app) => {
  app.post("/a5/todos", (req, res) => {
    const newTodo = {
      ...req.body,
      id: new Date().getTime(),
    };
    todos.push(newTodo);
    res.json(newTodo);
  });
  app.get("/a5/todos/create", (req, res) => {
    const newTodo = {
      id: new Date().getTime(),
      title: "New Task",
      completed: false,
    };
    todos.push(newTodo);
    res.json(todos);
  });
  app.get("/a5/todos", (req, res) => {
    res.json(todos);
  });
  ...
};
export default Lab5;
```

Learn React

React is a JavaScript library for creating SPAs

11/04/2023

☒ Completed

Post Todo

Create Todo

Update Title

Task 1

Remove

Edit

Task 2

Remove

Edit

Task 3

Remove

Edit

Task 4

Remove

Edit

Learn Node.js

Remove

Edit

Learn React

Remove

Edit

Back in the user interface, let's add a new **postTodo** function that posts new objects to the server as shown below. Note the second argument in the **axios.post()** method containing the new **todo** object instance sent to the server. The response this time contains the todo instance added to the array instead of all the todos on the server. Instead we reuse the todos already in the **todos** state variable to append the new **todo** from the server response at the end of the **todos** state variable. Confirm that you can add new items to the array when you click on the new **Post Todo** button.

WorkingWithArrays.js

```
import React, { useState, useEffect } from "react";
import axios from "axios";
```

//


```

function WorkingWithArrays() {
  const API = "http://localhost:4000/a5/todos";
  const [todo, setTodo] = useState({
    id: 1, title: "Learn NodeJS", due: "2021-09-09",
    description: "Create a NodeJS server with ExpressJS
    and various RESTful APIs", completed: false,
  });
  const [todos, setTodos] = useState([]);
  const postTodo = async () => {
    const response = await axios.post(API, todo);
    setTodos([...todos, response.data]);
  };
  useEffect(() => {
    fetchTodos();
  }, []);
  return (
    <div>
      <h2>Working with Arrays</h2>
      <input value={todo.id} readOnly />
      <input
        onChange={(e) => setTodo({
          ...todo, title: e.target.value })}
        value={todo.title} type="text"
      />
      <textarea
        onChange={(e) => setTodo({ ...todo,
          description: e.target.value })}
        value={todo.description} type="text"
      />
      <input
        onChange={(e) => setTodo({
          ...todo, due: e.target.value })}
        value={todo.due} type="date"
      />
      <label>
        <input
          onChange={(e) => setTodo({
            ...todo, completed: e.target.checked })}
          value={todo.completed} type="checkbox"
        />
        Completed
      </label>
      <button onClick={postTodo} >
        Post Todo
      </button>
      <ul className="list-group">
        {todos.map((todo) => (
          <li key={todo.id} className="list-group-item">
            <button onClick={() => fetchTodoById(todo.id)} >
              Edit
            </button>
            <button onClick={() => removeTodo(todo)} >
              Remove
            </button>
            <input
              checked={todo.completed}
              type="checkbox" readOnly
            />
            {todo.title}
            <p>{todo.description}</p>
            <p>{todo.due}</p>
          </li>
        ))}
      </ul>
    </div>
  );
}
export default WorkingWithArrays;

```

3.5.2 Deleting Data

Following the convention that URL paths should include only nouns and no verbs, let's reimplement the route that deletes items from the array as shown below. Instead of having the **delete** verb in the previous route, the new implementation uses the HTTP delete verb to handle removing the item by its ID. Note that this new implementation does not respond with the **todos** array, but instead responds with a simple OK status code of 200. This is more reasonable since there is no need to respond with an entire array since the user interface already has the array cached in the browser and it can just filter the item from the state variable.

<input type="checkbox"/> Task 1	Delete	Edit
<input checked="" type="checkbox"/> Task 2	Delete	Edit
<input type="checkbox"/> Task 3	Delete	Edit
<input checked="" type="checkbox"/> Task 4	Delete	Edit

Lab5.js

```
...
app.delete("/a5/todos/:id", (req, res) => {
  const { id } = req.params;
  const todo = todos.find((t) => t.id === parseInt(id));
  todos.splice(todos.indexOf(todo), 1);
  res.sendStatus(200);
});
app.get("/a5/todos/:id/delete", (req, res) => {
  const { id } = req.params;
  const todo = todos.find((t) => t.id === parseInt(id));
  todos.splice(todos.indexOf(todo), 1);
  res.json(todos);
});
...
```

//

Back in the user interface, create a new **deleteTodo** asynchronous function that invokes **axios.delete** passing the ID of the item to be removed from the server array. Then it filters out the item from the local **todos** state variable. Add a new **Delete** button to each of the todo items that invokes the new **deleteTodo** function passing the **todo** instance to be removed. Confirm that clicking this new **Delete** button actually removes the item from the server array.

WorkingWithArrays.js

```
...
const deleteTodo = async (todo) => {
  const response = await axios.delete(`${API}/${todo.id}`);
  setTodos(todos.filter((t) => t.id !== todo.id));
};
...
<button
  onClick={() => deleteTodo(todo)}
  className="btn btn-danger float-end ms-2">
  Delete
</button>
...
```

//

3.5.3 Updating Todo

Following the convention that URL paths should include only nouns and no verbs, let's reimplement the route that updates an item in an array as shown below. Instead of having the specific property we are modifying such as **title**, **completed**, or **due**, like in previous routes, the new implementation uses a single **HTTP put** verb to implement updating the item by its ID. The updates are embedded in the HTTP body from which we copy the new values onto the old todo. Note that this new implementation does not respond with the **todos** array, but instead responds with a simple OK status code of 200. This is more reasonable since there is no need to respond with an entire array since the user interface already has the array cached in the browser and it can just update the item in the **todos** state variable.

Lab5.js

```

app.put("/a5/todos/:id", (req, res) => {
  const { id } = req.params;
  const todo = todos.find((t) => t.id === parseInt(id));
  todo.title = req.body.title;
  todo.description = req.body.description;
  todo.due = req.body.due;
  todo.completed = req.body.completed;
  res.sendStatus(200);
});

```

Back in the user interface, let's add a new **updateTodo** function that puts updates to the server as shown below. Note the second argument in the **axios.put()** method containing the updated **todo** object instance sent to the server. The response this time contains a status instead of all the todos on the server. Instead we reuse the todos already in the **todos** state variable to replace the corresponding todo with the new **todo**. Confirm that you can update items to the array when you click on the new **Update Todo** button.

WorkingWithArrays.js

```

import axios from "axios";
function WorkingWithArrays() {
  const API = "http://localhost:4000/a5/todos";
  ...
  const updateTodo = async () => {
    const response = await axios.put(
      `${API}/${todo.id}`, todo);
    setTodos(todos.map((t) => (
      t.id === todo.id ? todo : t)));
    setTodo({});
  };
  ...
  return (
    <div>
      ...
      <button onClick={postTodo}>
        Post Todo
      </button>
      <button onClick={updateTodo}>
        Update Todo
      </button>
      ...
    </div>
  );
}
export default WorkingWithArrays;

```

3.5.4 Extra Credit - Handling Errors

The exercises so far have been very optimistic when interacting with the server, but it is good practice to handle edge cases and the unforeseen. In this section we're going to add error handling to some of the routes and user interface. For instance, the exercise below through exceptions if the items being deleted or updated don't actually exist. Errors are reported by the server as status codes, where 404 is the famous NOT FOUND error. Additionally a JSON object can be sent back as part of the response that can be used by user interfaces to better inform the user of what went wrong.

Lab5.js

```

app.delete("/a5/todos/:id", (req, res) => {
  const { id } = req.params;
  const todo = todos.find((t) => t.id === parseInt(id));
  if (!todo) {
    res.res
      .status(404)
      .json({ message:
        `Unable to delete Todo with ID ${id}` });
    return;
  }
}

```

```

    todos.splice(todos.indexOf(todo), 1);
    res.sendStatus(200);
  });
  app.put("/a5/todos/:id", (req, res) => {
    const { id } = req.params;
    const todo = todos.find((t) => t.id === parseInt(id));
    if (!todo) {
      res.res
        .status(404)
        .json({ message:
          `Unable to update Todo with ID ${id}` });
      return;
    }
    todo.title = req.body.title;
    todo.description = req.body.description;
    todo.due = req.body.due;
    todo.completed = req.body.completed;
    res.sendStatus(200);
  });

```

In the user interface we can **catch** the errors by wrapping the request in a **try/catch** clause as shown below. If the request fails with a HTTP error response, then the body of the **try** block is aborted and the body of the **catch** clause executes instead. The exercise below declares a **errorMessage** state variable that we populate with the error from the server if an error occurs. The error is rendered as an alert box as shown here on the right. To test, remove an item using the <http://localhost:4000/a5/todos/:id/delete> route and then try to update or delete the same item using the user interface.

WorkingWithArrays.js

```

function WorkingWithArrays() {
  const [errorMessage, setErrorMessage] = useState(null);
  const deleteTodo = async (todo) => {
    try {
      const response = await axios.delete(
        `${API}/${todo.id}`);
      setTodos(todos.filter((t) => t.id !== todo.id));
    } catch (error) {
      console.log(error);
      setErrorMessage(error.response.data.message);
    }
  };
  const updateTodo = async () => {
    try {
      const response = await axios.put(
        `${API}/${todo.id}`, todo);
      setTodos(todos.map((t) => (
        t.id === todo.id ? todo : t)));
      setTodo({});
    } catch (error) {
      console.log(error);
      setErrorMessage(error.response.data.message);
    }
  };
  ...
};
return (
  <div>
    ...
    {errorMessage && (
      <div className="alert alert-danger mb-2 mt-2">
        {errorMessage}
      </div>
    )}
    ...
  </div>
);
}
export default WorkingWithArrays;

```

Unable to delete Todo with ID 1698549813434

☐ Buy milk

Delete

Edit

☐ Make dinner

Delete

Edit

☐ Wash dishes

Delete

Edit

3.5.6 Exercises

Implement the server routes and user interface that accomplish the following tasks as described in this section

1. Post JSON data to a server in an HTTP Body using a RESTful API
2. Delete data to a server using a RESTful API
3. Update data in a server using a RESTful API


4 Implementing the Kanbas Node.js HTTP Server

4.1 Create a Database

In previous assignments we created a **Database** component that collected all the data files into a single access point. The data should actually live on the server side and/or the database. We'll first move the data to the server in this assignment, and then into a database in the next assignment. Create a folder called **Database** at the root of your Node.js project and copy all the JSON files from your React.js project

/Database/index.js

```
import courses from "../courses.json" assert { type: "json" };
import modules from "../modules.json" assert { type: "json" };
import assignments from "../assignments.json" assert { type: "json" };
import users from "../users.json" assert { type: "json" };
import grades from "../grades.json" assert { type: "json" };
import enrollments from "../enrollments.json" assert { type: "json" };
export default {
  courses,
  modules,
  assignments,
  users,
  grades,
  enrollments,
};
```

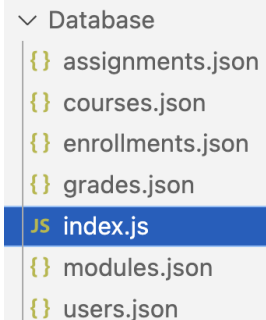

A file explorer view showing the contents of a folder named 'Database'. The files listed are: assignments.json, courses.json, enrollments.json, grades.json, index.js (highlighted in blue), modules.json, and users.json.

Feel free to use the following data

- [courses.json](#) [modules.json](#)
- [assignments.json](#) [users.json](#)
- [grades.json](#) [enrollment.json](#)

4.2 Implementing Routes for Courses

4.2.1 Retrieving Courses

Now that we moved the **Database** to the server, we have to make it available to the client through a Web API. The exercise below makes the courses available at **<http://localhost:4000/api/courses>**.

courses/routes.js

```
import Database from "../Database/index.js";
function CourseRoutes(app) {
  app.get("/api/courses", (req, res) => {
    const courses = Database.courses;
    res.send(courses);
  });
}
```

//

```
}  
export default CourseRoutes;
```

In **app.js** import the new routes and pass a reference to the express module to the routes.

app.js

```
import express from "express";  
import Lab5 from "../lab5.js";  
import CourseRoutes from "../courses/routes.js";  
import cors from "cors";  
const app = express();  
app.use(cors());  
CourseRoutes(app);  
Lab5(app);  
app.listen(4000);
```

//

Dashboard

New Course

Add

Update

Rocket Propulsion

Edit

Delete

Aerodynamics

Edit

Delete

Spacecraft Design

Edit

Delete

Organic Chemistry

Edit

Delete

Inorganic Chemistry

Edit

Delete

Physical Chemistry

Edit

Delete

Back in the Kanbas component, a **useEffect** can fetch all the courses from the server and update the **courses** state variable that populates the **Dashboard**. Confirm that the **Dashboard** successfully retrieves the courses from the server and updates in the user interface.

Kanbas/index.js

```
...  
import axios from "axios";  
function Kanbas() {  
  const [courses, setCourses] = useState([]);  
  const URL = "http://localhost:4000/api/courses";  
  const findAllCourses = async () => {  
    const response = await axios.get(URL);  
    setCourses(response.data);  
  };  
  useEffect(() => {  
    findAllCourses();  
  }, []);  
  ...  
  return ( ... );  
}  
export default Kanbas;
```

//

4.2.2 Create New Course

Now add a route that creates a new course and adds it to the **Database**. The new course is passed in the HTTP body from the client and is appended to the end of the courses array in the **Dashboard**. The new course is given a new unique identifier and sent back to the client in the response.

courses/routes.js

```
import Database from "../Database/index.js";  
function CourseRoutes(app) {  
  app.post("/api/courses", (req, res) => {  
    const course = { ...req.body,  
      _id: new Date().getTime().toString() };  
    Database.courses.push(course);  
    res.send(course);  
  });  
  app.get("/api/courses", (req, res) => {...});  
}  
export default CourseRoutes;
```

//

Dashboard

New Course

Add

Update

Rocket Propulsion

Edit

Delete

Aerodynamics

Edit

Delete

Spacecraft Design

Edit

Delete

Organic Chemistry

Edit

Delete

Inorganic Chemistry

Edit

Delete

Physical Chemistry

Edit

Delete

Back in the **Kanbas** component, refactor the **addCourse** function so that it **posts** the new course to the server and appends the new course in the response is appended to the beginning of the **courses** state variable. Confirm that creating a new course updates the user interface with the added course.

src/Kanbas/index.js

```
import axios from "axios";
function Kanbas() {
  ...
  const addCourse = async () => {
    const response = await axios.post(URL, course);
    setCourses([
      ...response.data,
      ...courses,
    ]);
    setCourse({ name: "" });
  };
  const findAllCourses = async () => {...};
  useEffect(() => {...}, []);
  return ( ... );
}
export default Kanbas;
```

//

4.2.3 Delete course

The exercise below implements a **delete** route that parses the **id** of course as a path parameter and removes the corresponding course from the **Database's courses** array. Status 204 is sent back as the response.

courses/routes.js

```
import Database from "../Database/index.js";
function CourseRoutes(app) {
  app.delete("/api/courses/:id", (req, res) => {
    const { id } = req.params;
    Database.courses = Database.courses
      .filter((c) => c._id !== id);
    res.sendStatus(204);
  });
  app.post("/api/courses", (req, res) => {...});
  app.get("/api/courses", (req, res) => {...});
}
export default CourseRoutes;
```

//

Back in the **Kanbas** component, refactor the **deleteCourse** function so that it **deletes** the course to the server and then filters out the course from the local **courses** state variable. Confirm that clicking the **Delete** button of the course actually removes from the **Dashboard**.

src/Kanbas/index.js

```
import axios from "axios";
function Kanbas() {
  const deleteCourse = async (course) => {
    const response = await axios.delete(
      `${URL}/${course._id}`
    );
    setCourses(courses.filter(
      (c) => c._id !== course._id));
  };
  const addCourse = async () => {...};
  const findAllCourses = async () => {...};
  useEffect(() => {...}, []);
  return ( ... );
}
export default Kanbas;
```

//

4.2.4 Update Course

The exercise below implements a **put** route that parses the **id** of course as a path parameter and updates the corresponding course with the updates in HTTP request body. The **Database's courses** array is updated with a new version of the corresponding course. Successful status 204 is sent back as the response.

courses/routes.js

```
import Database from "../Database/index.js";
function CourseRoutes(app) {
  app.put("/api/courses/:id", (req, res) => {
    const { id } = req.params;
    const course = req.body;
    Database.courses = Database.courses.map((c) =>
      c._id === id ? { c, ...course } : c
    );
    res.sendStatus(204);
  });
  app.delete("/api/courses/:id", (req, res) => {...});
  app.post("/api/courses", (req, res) => {...});
  app.get("/api/courses", (req, res) => {...});
}
export default CourseRoutes;
```

Back in the **Kanbas** component, refactor the **updateCourse** function so that it **puts** the updated course to the server and then swaps out the old corresponding course with the new version in the **course** state variable. Confirm that clicking the **Update** button actually updates the course in the **Dashboard**.

src/Kanbas/index.js

```
import axios from "axios";
function Kanbas() {
  const updateCourse = async (course) => {
    const response = await axios.put(
      `${URL}/${course._id}`,
      course
    );
    setCourses(
      courses.map((c) => {
        if (c._id === course._id) {
          return response.data;
        }
        return c;
      })
    );
    setCourse({ name: "" });
  };
  const deleteCourse = async (course) => {...};
  const addCourse = async () => {...};
  const findAllCourses = async () => {...};
  useEffect(() => {...}, []);
  return ( ... );
}
export default Kanbas;
```

4.2.5 Retrieve a Course by their ID

The exercise below implements a **get** route that parses the **id** of course as a path parameter and responds with the corresponding course in the **Database's courses** array. If the course is not a status code of 404 is sent back along with a short message in the response. If the course is found it is sent in the response.

courses/routes.js

```
import Database from "../Database/index.js";
function CourseRoutes(app) {
```



```

app.get("/api/courses/:id", (req, res) => {
  const { id } = req.params;
  const course = Database.courses
    .find((c) => c._id === id);
  if (!course) {
    res.status(404).send("Course not found");
    return;
  }
  res.send(course);
});
app.put("/api/courses/:id", (req, res) => {...});
app.delete("/api/courses/:id", (req, res) => {...});
app.post("/api/courses", (req, res) => {...});
app.get("/api/courses", (req, res) => {...});
}
export default CourseRoutes;

```

When the user clicks on a course in the **Dashboard**, the user interface navigates to the **Courses** component that displays the course selected in the **Dashboard**. The **Courses** component parses the **courseId** from the path and used to retrieve the course from the local **courses** property passed in from the **Kanbas** component. Let's refactor the **Courses** component so that it retrieves the selected course from the server route implemented above. To do this, declare **course** state variable that we can populate with the course from the server. On load, **useEffect** invokes the asynchronous function **findCourseById** which retrieves the course from the server by it's ID and then populates the **course** state variable with the response. Confirm that selecting a course in the **Dashboard** navigates to the **Courses** screen and that it displays the correct course.

src/Kanbas/Courses/index.js

```

import { useState, useEffect } from "react";
import axios from "axios";
function Courses({ courses }) {
  const { courseId } = useParams();
  const [course, setCourse] = useState({});
  const findCourseById = async (courseId) => {
    const response = await axios.get(
      `${URL}/${courseId}`
    );
    setCourse(response.data);
  };
  const course = courses
    .find((course) => course._id === courseId);
  useEffect(() => {
    findCourseById(courseId);
  }, [courseId]);
  return ( ... );
}
export default Courses;

```

//

4.3 Modules

Now let's do the same thing we did for the courses, but for the modules. We'll need routes that deal with the modules similar to the operations we implemented for the courses. We'll need to implement all the basic CRUD operations: create modules, read/retrieve modules, update modules and delete modules. The main difference will be that modules exist with the context of a particular course. Each course has different set of modules, so the routes will need to take into account the course ID for which the modules we are operating on.

Retrieving Modules for Course

Let's first implement retrieving (reading) the modules for a given course. The following route retrieves the modules for the course ID encoded in the path (cid). The course ID is parsed from the path and then used to filter the modules for that course.

modules/routes.js

```
import db from "../Database/index.js";  
function ModuleRoutes(app) {  
  app.get("/api/courses/:cid/modules", (req, res) => {  
    const { cid } = req.params;  
    const modules = db.modules  
      .filter((m) => m.course === cid);  
    res.send(modules);  
  });  
}  
export default ModuleRoutes;
```

Import the new routes in **app.js** as shown below.

app.js

```
import express from "express";  
import Lab5 from "../lab5.js";  
import CourseRoutes from "../Courses/routes.js";  
import ModuleRoutes from "../Modules/routes.js";  
import cors from "cors";  
const app = express();  
app.use(cors());  
app.use(express.json());  
ModuleRoutes(app);  
CourseRoutes(app);  
Lab5(app);  
app.listen(4000);
```

When we worked on the courses, we implemented all the axios operations within the components themselves, e.g., **Kanbas/index.js** and **Courses/index.js**. This is, in general, a bad practice and is instead a better to implement all communication related logic in a separate file such as the **client.js** file below. Implement **findModulesForCourse** function shown below which retrieves the modules for a given course.

modules/client.js

```
import axios from "axios";  
const COURSES_URL = "http://localhost:4000/api/courses";  
export const findModulesForCourse = async (courseId) => {  
  const response = await axios  
    .get(`${COURSES_URL}/${courseId}/modules`);  
  return response.data;  
};
```

Update the modules reducer implemented in earlier assignments as shown below. Remove dependencies from the **Database** since we've moved it to the server. Empty the **modules** state variable since we'll be populating with the modules we retrieve from the server using the **findModulesForCourse** function. Add a **setModules** reducer function so we can populate the **modules** state variable when we retrieve the modules from the server.

modules/reducer.js

```
import db from "../Database";  
const initialState = {  
  modules: [],  
  module: { name: "New Module 234",  
    description: "New Description" },  
};  
const modulesSlice = createSlice({  
  name: "modules",  
  initialState,  
  reducers: {  
    setModules: (state, action) => {  
      state.modules = action.payload;  
    },  
  },  
});
```

```

    addModule: (state, action) => {...},
    deleteModule: (state, action) => {...},
    updateModule: (state, action) => {...},
    setModule: (state, action) => {...},
  },
});
export const { addModule, deleteModule,
  updateModule, setModule, setModules } =
  modulesSlice.actions;
export default modulesSlice.reducer;

```

In the **modules/list.js** component, import the new **setModules** reducer function and the new **findModulesForCourse** service function. Use a **useEffect** function to invoke the service function and dispatch the modules from the service to the reducer with the **setModules** function as shown below. Confirm that navigating to a course populates the corresponding modules.

modules/List.js

```

import { useParams } from "react-router-dom";
import { useSelector, useDispatch } from "react-redux";
import React, { useEffect, useState } from "react";
import {
  addModule, deleteModule, updateModule, setModule,
  setModules,
} from "../modulesReducer";
import { findModulesForCourse } from "../client";
function ModuleList() {
  const { courseId } = useParams();
  useEffect(() => {
    findModulesForCourse(courseId)
      .then((modules) =>
        dispatch(setModules(modules))
      );
  }, [courseId]);
  ...
  return (...);
}
export default ModuleList;

```

//

Creating Modules for a Course

Now let's implement the **create** in **CRUD**. In the **modules/routes.js**, implement a route that receives a new module posted from the React.js client application embedded in the Request body. Create a new module object setting its **course** property to the **cid** path parameter and push it to the **db.modules** array. Reply to the client with the newly created module as shown below.

modules/routes.js

```

import db from "../Database/index.js";
function ModuleRoutes(app) {
  app.post("/api/courses/:cid/modules", (req, res) => {
    const { cid } = req.params;
    const newModule = {
      ...req.body,
      course: cid,
      id: new Date().getTime().toString(),
    };
    db.modules.push(newModule);
    res.send(newModule);
  });
  app.get("/api/courses/:cid/modules", (req, res) => {...});
}
export default ModuleRoutes;

```

//

Add **createModule** client function in **client.js** as shown below. It should post a new **module** object in the body and encode the **courseId** in the path. The response's **data** contains the newly created module from the server. We'll append the new module to the cached modules in the module reducer.

modules/client.js

```
import axios from "axios";
const COURSES_URL = "http://localhost:4000/api/courses";
export const createModule = async (courseId, module) => {
  const response = await axios.post(
    `${COURSES_URL}/${courseId}/modules`,
    module
  );
  return response.data;
};
export const findModulesForCourse = async (courseId) => {...};
```

//

In the module's **list** component, import the new **createModule** client function and invoke it with the **courseId** and **module** object. Dispatch the new **module** from the server to the **addModule** reducer function which will add it to the reducer's **modules** state variable. Confirm that you can create new modules for the current course.

modules/List.js

```
import {
  addModule, deleteModule, updateModule,
  setModule, setModules,
} from "../modulesReducer";
import { findModulesForCourse, createModule } from
"./client";
function ModuleList() {
  ...
  const handleAddModule = () => {
    createModule(courseId, module).then((module) => {
      dispatch(addModule(module));
    });
  };
  ...
  return (
    <ul className="list-group">
      <li className="list-group-item">
        <button
          onClick={handleAddModule}>
          Add
        </button>
      </li>
    </ul>
  );
}
export default ModuleList;
```

//

If not already implemented, create an **addModule** reducer function that appends a new modules at the beginning of **modules** state variable as shown below.

modules/reducer.js

```
const initialState = {
  modules: [],
  module: { name: "New Module 234",
    description: "New Description" },
};
const modulesSlice = createSlice({
  name: "modules",
  initialState,
  reducers: {
    addModule: (state, action) => {
      state.modules = [action.payload, ...state.modules];
    },
    deleteModule: (state, action) => {...},
  },
});
```

//

```

    updateModule: (state, action) => {...},
    setModule: (state, action) => {...},
    setModules: (state, action) => {...},
  },
});
export const { addModule, deleteModule,
  updateModule, setModule, setModules } =
  modulesSlice.actions;
export default modulesSlice.reducer;

```

Deleting a Module

Now let's implement the **delete** in **CRUD**. In the **modules/routes.js** add a route that handles an **HTTP DELETE** method with the module's ID embedded in the URL as shown below. The **mid** request parameter is used to filter out the module from the **modules** array in the database. Respond with a 200 (or 204) status signifying success. Optionally return a 404 if the module is not found.

modules/routes.js

```

import db from "../Database/index.js";
function ModuleRoutes(app) {
  app.delete("/api/modules/:mid", (req, res) => {
    const { mid } = req.params;
    db.modules = db.modules.filter((m) => m._id !== mid);
    res.sendStatus(200);
  });
  app.post("/api/courses/:cid/modules", (req, res) => {...});
  app.get("/api/courses/:cid/modules", (req, res) => {...});
}
export default ModuleRoutes;

```

//

In the **modules service** file, implement the **deleteModule** service function that sends an **HTTP DELETE** request to the server encoding the module's ID in the path as shown below. The response's data contains a status code.

modules/service.js

```

import axios from "axios";
const COURSES_URL = "http://localhost:4000/api/courses";
const MODULES_URL = "http://localhost:4000/api/modules";
export const deleteModule = async (moduleId) => {
  const response = await axios
    .delete(`${MODULES_URL}/${moduleId}`);
  return response.data;
};
export const createModule = async (courseId, module) => {...};
export const findModulesForCourse = async (courseId) => {...};

```

//

In the **module list** component, import the **deleteModule** reducer function and all the service functions as **client**. We need to do this because some of the event handlers in the component have the same name as the service functions and so we can distinguish them by prepending the service functions with **client**. Implement **handleDeleteModule** even handler that invokes the **deleteModule** service function passing it the **moduleId** of the module we want to remove. On response from the server, dispatch the module's ID to the reducer's **deleteModule** function to remove the object from the **modules** state variable and update the user interface.

modules/List.js

```

import {
  addModule,
  deleteModule,
  updateModule,
  setModule,
  setModules,

```

//

```

} from "../modulesReducer";
import * as client from "../client";
function ModuleList() {
  const handleDeleteModule = (moduleId) => {
    client.deleteModule(moduleId).then((status) => {
      dispatch(deleteModule(moduleId));
    });
  };
  return (
    <ul className="list-group">
      {modules
        .filter((module) => module.course === courseId)
        .map((module, index) => (
          <li key={index} className="list-group-item">
            <button
              onClick={() => handleDeleteModule(module._id)}
            >
              Delete
            </button>
            <h3>{module.name}</h3>
          </li>
        ))}
    </ul>
  );
}
export default ModuleList;

```

Update Module

Finally let's implement the **update** in **CRUD**. In the **modules routes**, implement a route that handles an **HTTP PUT** request with the module's ID embedded in the path and the updates in the **HTTP body** as shown below. The route should parse the **module's** ID from the request parameters, find the module in the database, and then update the corresponding module with the values in the request body.

modules/routes.js

```

...
app.put("/api/modules/:mid", (req, res) => {
  const { mid } = req.params;
  const moduleIndex = db.modules.findIndex(
    (m) => m._id === mid);
  db.modules[moduleIndex] = {
    ...db.modules[moduleIndex],
    ...req.body
  };
  res.sendStatus(204);
});
...

```

//

In the **service** file in the React.js client, implement an **updateModule** service function that sends an **HTTP PUT** request to the server embedding the module's ID in the path and the updates in the **HTTP body** as shown below. The response's data will be a status code.

modules/service.js

```

...
export const updateModule = async (module) => {
  const response = await axios.
    put(`${MODULES_URL}/${module._id}`, module);
  return response.data;
};
...

```

//

In the user interface, implement **async** function **handleUpdateModule** invoked when the user clicks the **Update** or **Save** button as shown below. The function should invoke the service function **updateModule** passing the module updates as a parameter. When the response is done, dispatch the new module to the **updateModule** reducer function which will replace the module in the **modules** state variable and update the user interface. Confirm you can update the module and that the changes persist if you refresh the user interface.

modules/List.js

```
...
const handleUpdateModule = async () => {
  const status = await client.updateModule(module);
  dispatch(updateModule(module));
};
...
```

```
//
```

Extra Credit

In your Node.js server application, implement routes for **creating**, **retrieving**, **updating**, and **deleting** assignments. In the React.js Web application, create an **assignment service** file that uses **axios** to send **POST**, **GET**, **PUT**, and **DELETE HTTP** requests to integrate the React.js application with the server application. Refactor your **Assignments** and **AssignmentEditor** screens implement in earlier assignments to use the new **service** file to **CRUD** assignments. New assignments, updates to assignments, and deleted assignments should persist if the screens are refreshed as long as the server is running.

9 Deploying RESTful Web service APIs on a public remote server

Up to this point you should have a working two tiered application with the first tier consisting of a front end React application and the second tier consisting of a Node HTTP server application. In this section we're going to learn how to replicate this setup so that it can execute on remote servers. All development should be done in the local development environment on your personal development machine, and only when we're satisfied that all works fine locally, then we can make an effort at deploying the application on remote servers.

9.1 Configuring Node applications to run in a remote server

To host our Node HTTP server on a remote server we need to make a few tweaks. For instance we can't use port 4000 and instead use the port declared in an environment variable called **PORT** available from Node using **process.env.PORT**. Additionally we need to configure the session so it works behind proxy servers. Refactor **app.js** so that it uses the **PORT** environment variable if available, or uses 4000 otherwise when running locally on our machines.

app.js

```
app.listen(process.env.PORT || 4000);
```

Install the **dotenv** library so we can read configurations in local environment variable

```
$ npm install dotenv
```

In a new **.env** file at the root of your project, declare environment variable **NODE_ENV** and set it to **development** as shown below.

.env

```
NODE_ENV=development
FRONTEND_URL=http://localhost:3000
```

Then in **app.js**, import the **dotenv** library so we can determine whether we are running in our development environment and configure session accordingly.

app.js

```
import "dotenv/config";
import session from "express-session";
const app = express();
app.use(
  cors({
    credentials: true,
    origin: process.env.FRONTEND_URL
  })
);
// import the new dotenv library to read .env file
// use different front end URL in dev and in production
```

9.2 Pushing Node server source to Github

Next let's make sure we have a proper Git repository by typing **git init** at the command line. It's ok if the repository was already initialized.

```
$ git init
```

Make sure we don't include unnecessary files in the repository by listing them in **.gitignore**. Create the new file **.gitignore** if it does not already exist noting the period (.) in front of the file name. The file should contain at least **node_modules**, but should also contain any IDE specific files or directories. If using IntelliJ, include the **.idea** folder as shown below.

.gitignore

```
.idea
node_modules
```

Use **git add** to add all our work into the repository and commit with a simple comment

```
$ git add .
$ git commit -m "first commit"
```

Head over to **github.com** and create a repository named **kanbas-node-server-app**. Add this repository as the origin target using the git remote command. **NOTE:** make sure to use your github username instead of mine.

```
$ git remote add origin https://github.com/jannunzi/kanbas-node-server-app.git
```

Push the code in your local repository to the remote origin repository. Note that your branch might be called **main** or something else. Refresh the remote github repository and confirm the code is now available online.

```
$ git push -u origin master
```



9.3 Deploying a Node server application to Render.js from Github

If you don't already have an account at **render.com**, create a new account so we can deploy the Node server remotely. From the dashboard on the top right, select **New** and then **Web Service**. In the **Create a new Web Service** window type the name of the repository in the **Connect a repository** field, e.g., **kanbas-node-server-app**. Click **Connect** on the correct repository from the list that appears. In the **You are deploying a web service** window, in the **Name** field, type the name of the application, e.g., use the same name as the github repository **kanbas-node-server-app**. In the **Build Command** field type **npm install**. In the **Start Command** field type **npm start**. Under the **Instance Type** select **Free**. Click **Create Web Service** to deploy the server. In the deploy screen take a look at the logs. You can click on **Maximize** to see the logs better. Look for

a **Build successful** message. You can click on **Minimize** to minimize the logs. If the deployment succeeds a URL appears at the top of the screen. Navigate to the URL listing the users and the modules and confirm that both arrays display correctly, e.g., **<https://kanbas-node-server-app-cs1234-sp23.onrender.com/api/modules>**. **NOTE:** the actual URL might be different based on the actual name you chose for the application.

9.4 Deploying a Node server application to Heroku from Github

If you don't already have an account at **heroku.com**, create a new account so we can deploy the Node server remotely. From the dashboard on the top right, select **New** and then **Create new app**. In the **app-name** field type the name of the application, e.g., use the same name as the github repository **kanbas-node-server-app**, and click **Create app**. If the name of the application is already taken, you'll need to try different variations. In the application dashboard select the **Deploy** tab and then the **GitHub Deployment method**. In the **Connect to GitHub** section, select the repository you wish to deploy from and then type the name of the repository in the **repo-name** field, e.g., **kanbas-node-server-app**. Click **Search** and then **Connect** on the correct repository from the list that appears. Under the **Automatic deploys** section, choose **master** or **main** under **Choose a branch to deploy** and then click **Enable Automatic Deploys** so that the server will automatically deploy whenever you push new code to the GitHub repository. You might not want to enable this feature and instead choose to deploy the server manually in the **Manual deploy** section, selecting the branch and then clicking **Deploy Branch**. If you click **Deploy Branch**, logs will scroll below displaying the process. If the deployment succeeds the message **Your app was successfully deployed** will appear. Click on **View** at the bottom of the page or on **Open App** at the top right and confirm the server responds with a welcoming message. Navigate to the URL listing the modules and confirm that they display correctly, e.g., **<https://kanbas-node-server-app.herokuapp.com/api/modules>**. **NOTE:** the actual URL might be different based on the actual name you chose for the application.

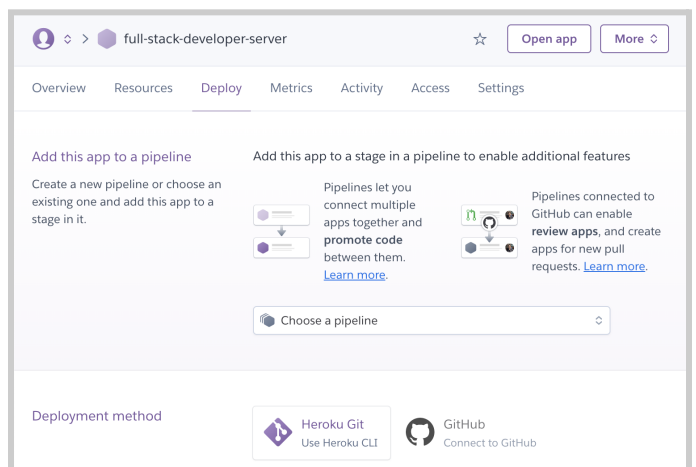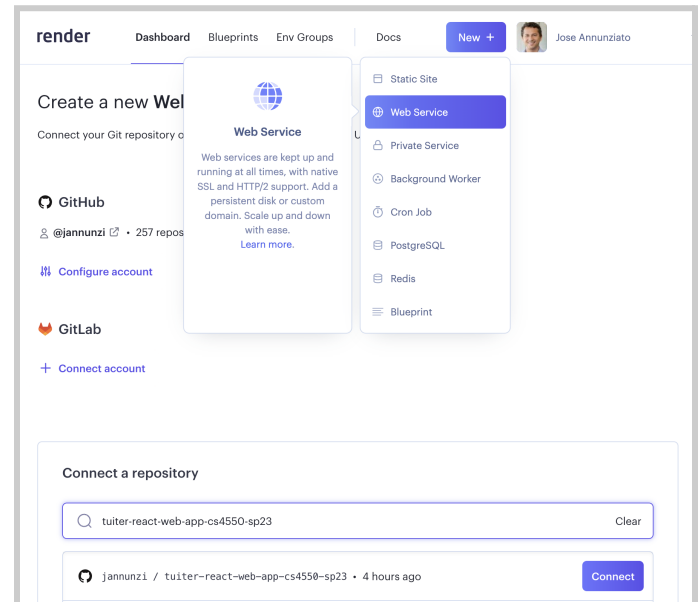

9.5 Integrating Netlify React applications with remote Node servers

Let's now deploy our React client application to a remote server on Netlify. Currently our client application connects to a local Node server, which is fine when it's running locally, but it should use the remote server deployed to Render or Heroku when it's also running remotely on Netlify. To test the remote connection works, refactor **modules/service.js** so that it uses the remote server instead.

modules/service.js

```
import axios from "axios";  
const MODULES_URL = 'http://localhost:4000/api/modules';  
const MODULES_URL = 'https://kanbas-node-server-app-cs1234-sp23.onrender.com/api/modules';
```

Reload the **ModuleList** component and confirm that it now renders the modules from the server instead of the ones from the local server. This is all and good and would work if we deploy the React application as is, but we would like the URL to point to the local Node server when developing locally, and use the remote server when deployed remotely without having to change the URLs manually ourselves. To automate which URL to use in what environment we can use environment variables to define application wide constants based on the environment the application is running in. Environment variables must start with **REACT_APP_** and can be accessed from the React code using **process.env** as shown below retrieving environment variable **REACT_APP_API_BASE**. Locally **REACT_APP_API_BASE** can be set to **http://localhost:4000/api**, but when the application runs remotely it can instead be set to **https://kanbas-node-server-app-cs1234-sp23.onrender.com/api**. This way the local React application will connect to the local Node server, but use the remote Node server when running remotely in Netlify. **NOTE:** use the actual remote server URL based on the actual application name.

modules/service.js

```
import axios from "axios";  
const MODULES_URL = 'http://localhost:4000/api/modules';  
const MODULES_URL = 'https://kanbas-node-server-app-cs1234-sp23.onrender.com/api/modules';  
const API_BASE = process.env.REACT_APP_API_BASE;  
const MODULES_URL = `${API_BASE}/modules`;
```

Setting local environment variables varies depending on the operating system. On **macOS** and other **Unix** based operating systems you can declare environment variables in **~/.bash_profile** as shown below.

.bash_profile

```
export REACT_APP_API_BASE=http://localhost:4000/api
```

On Windows you can declare environment variables using the **Environment Variables** dialog. Press the **Window** key and search for **Environment Variables**. Once in the **Environment Variables** dialog, add an environment variable named **REACT_APP_API_BASE** set to **http://localhost:4000/api**. On any operating system, you might need to restart your machine for changes to take effect. Add, commit, and push your local React code to the remote GitHub repository. Visit the Netlify application dashboard and click on the **Site settings** tab, then **Build & deploy**, and then **Environment**. In the **Environment variables** screen on the right click the **Edit variables** button and enter **REACT_APP_API_BASE** in the **VARIABLE_NAME** field and type the remote Node server URL for the value, e.g., **https://kanbas-node-server-app-cs1234-sp23.onrender.com/api**, and click **Save**. Redeploy the React application, preview the Web site, and confirm **ModuleList** renders the same list of modules as when it runs locally.

9.6 Exercises

1. Deploy the **Node.js** server to **Render.js** or **Heroku** as described in this section
2. Integrate the React application running on **Netlify** with the **Node.js** server running on the remote server as described in this section

10 Conclusion

In this chapter we learned how to create HTTP servers using the Node.js JavaScript framework. We implemented RESTful services with the Express library and practiced sending, retrieving, modifying, and updating data using HTTP requests and responses. We then learned how to integrate React.js Web applications to HTTP servers implementing a client server architecture. In the next chapter we will add database support to the HTTP server so we can store data permanently.

11 Deliverables

As a deliverable, make sure you complete all the exercises in this chapter. For both the React and Node repositories, all your work should be done in a branch called **a5**. When done, add, commit and push both branches to their respective GitHub repositories. Deploy the new branches to Netlify and Render.js (or Heroku) and confirm they integrate. Submit links to both your GitHub repositories as well as the Netlify and remote Node URLs where the branches deployed. Here's an example on the steps:

Create a branch called a5

```
git checkout -b a5  
  
# do all your work
```

Once you've completed all your work, add, commit and push your work to the remote repositories.

Add, commit and push the new branch

```
git add .  
git commit -am "a5 REST fa23"  
git push
```

If you have **Netlify** configured to auto deploy, then confirm it auto deployed. If not, then deploy the branch manually. In Canvas, submit the following

1. The new URLs where your **a5** branches deployed to on Netlify and Render.js (or Heroku)
2. The link to your new branches in GitHub for the React and Node.js projects