



4.1.1 Data Exploration

By: Claire Susanto and Conner Glover

The Challenge

We had to flip a coin and roll two dice 50 times and collect the data.




Coin Results


The results of the coin flip were slightly different then expected because more of the flips landed on tails rather than them being completely even.

A	B	C	D
1	H	Heads #:	Tails #:
2	T		24
3	T		48%
4	H	Mode	Tails
5	H		
6	T		
7	T		
8	T		
9	T		
10	H		
11	T		
12	T		
13	H		
14	H		
15	T		
16	T		
17	H		
18	H		
19	H		
20	H		
21	T		
22	T		
23	T		
24	H		
25	H		
26	H		
27	T		
28	T		
29	H		
30	T		
31	H		
32	H		
33	H		
34	H		
35	T		
36	T		
37	T		
38	T		
39	T		
40	T		
41	H		
42	T		
43	T		
44	T		
45	H		
46	H		
47	H		
48	T		
49	H		
50	H		

Dice Results

We were supposed to get the highest amount of sevens but instead we rolled ten the most often.

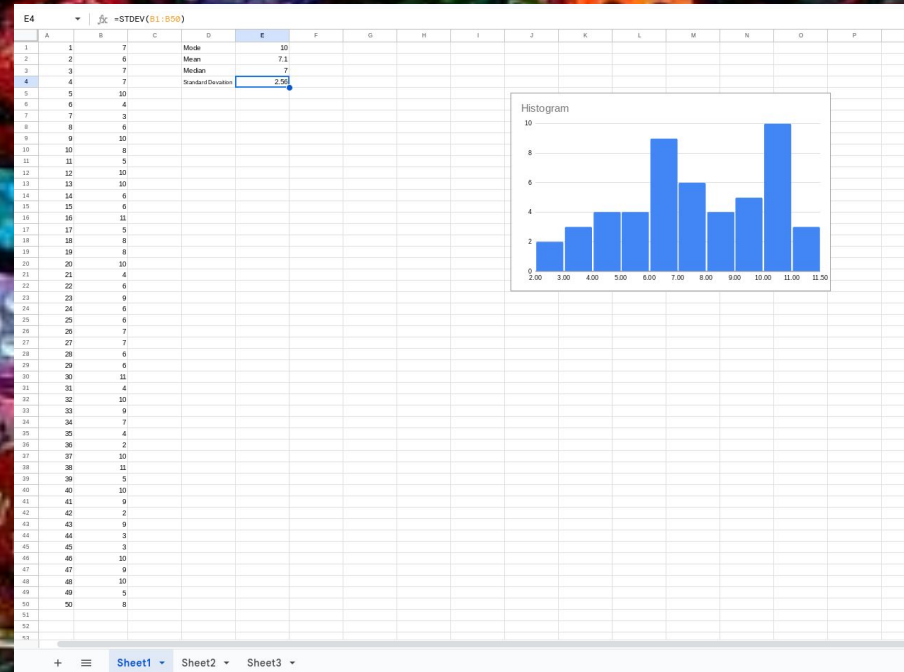

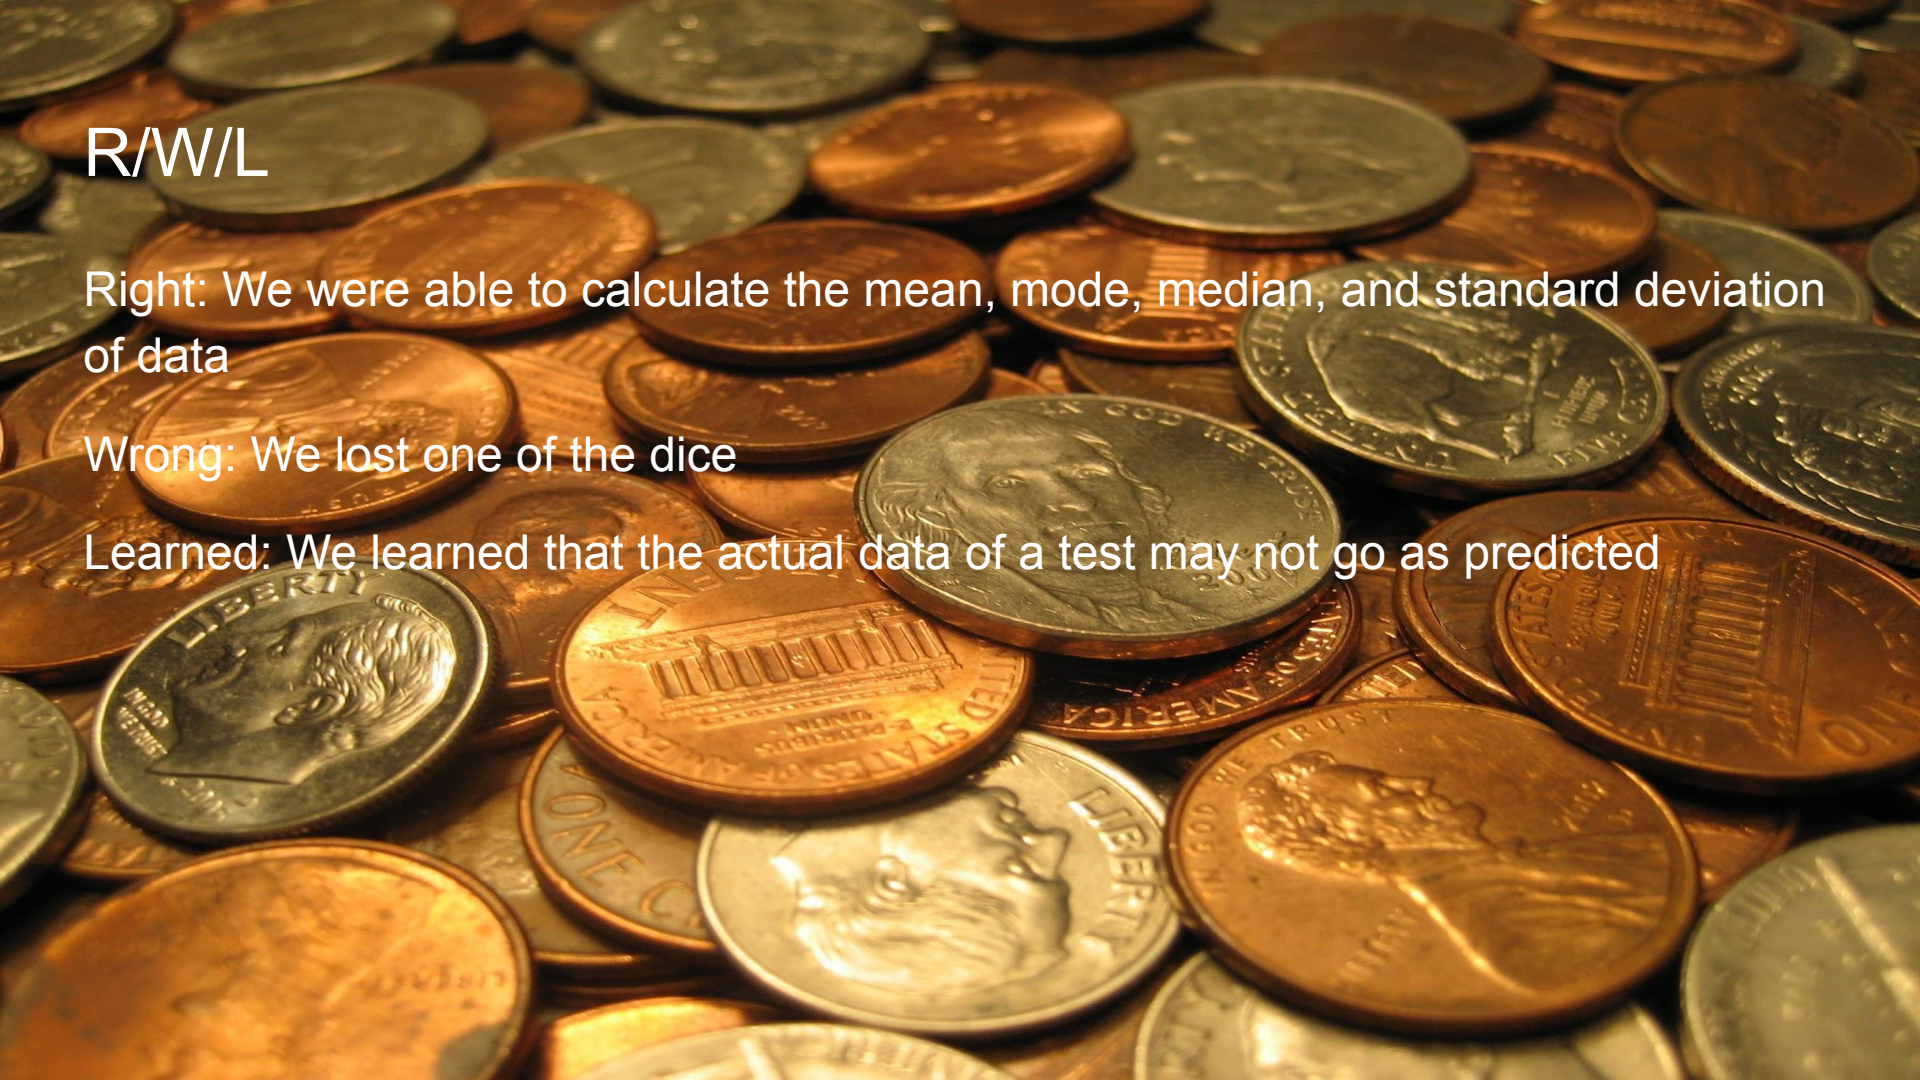

R/W/L

Right: We were able to calculate the mean, mode, median, and standard deviation of data

Wrong: We lost one of the dice

Learned: We learned that the actual data of a test may not go as predicted