

Payzone Integrated Payments - Integration Guide

Introduction

Payzone Integrated Payments allows retailers to accept payment cards and fuel cards in a retail environment using EMV and PCI certified hardware. PIP keeps your till system out of scope of PCI DSS audits by encrypting sensitive card data and sending it direct to your acquirer and not passing it through the till system. PIP leverages the knowledge and experience we garnered from processing over 20 million online transactions a year and a network of over 5,000 terminals in Ireland handling card payments, bill payments, phone top-ups and more.

PIP consists of three components:

- The Till system handles all the interactions with the retailer, receipt printing and the recording of payments for reporting & reconciliation.
- Payzone handles the integration with the PED hardware, hiding the technical details of the PED types from the till system and also performing error handling to ensure the transactions are reliably processed.
- The PED handles the interaction with the customer and their payment or fuel card. It also protects PCI sensitive data, keeping it away from the till system and keeping that system out of PCI DSS scope.

In a PIP installation, both the till system and the PED are independently connected to Payzone over the internet. There is no direct connection between them, like in legacy installations so no need for serial or USB connections, no terminal drivers and no complex PED integration. The integrator only needs to make a few simple Web service calls and the rest is handled by PIP.

Benefits for the Till Integrator	Benefits for the Retailer
• Simpler integration/development. • Simpler connectivity to the PED hardware. • Support additional hardware types in the future with no development work. • Simpler deployment in the shop/forecourt. • Software upgrades can happen remotely. • Enhanced support from Payzone during integration and operation.	• Access to the Payzone Merchant Portal to get a real-time view of transactions across multiple PEDs and multiple shops. • More reliable transactions / better error handling.

Table of Contents

[Introduction](#)

[Table of Contents](#)

[Change Log](#)

[Transaction Flow](#)

[Web Service messages](#)

[Communications](#)
[Authenticate](#)
[Sale](#)
[Sale \(Fuel Variant\)](#)
[Fuel Product List](#)
[Status](#)
[More Information Request](#)
[Cancel](#)
[Status Codes](#)
[Refund](#)
[Reconciliation](#)
[Testing](#)
[Test Conditions](#)
[Fuel Card Transaction Test Cases](#)
[References](#)
[Transaction Status](#)
[Receipts](#)
[Go Live](#)
[Frequently Asked Questions](#)

Change Log


Date	Changes
19-02-2025	First version.
06-03-2025	Added More Information request with support for cashback query and fuel card transactions.
10-04-2025	Added Reconciliation API Change to the MoreInfo response sample.
07-05-2025	Updated the MoreInfo section.
08-12-2025	Added Fuel Card Test Details

Transaction Flow

1. Before installation, each POS is assigned a Payzone POS ID and password. When the PED is installed, it will be linked to a POS using the Payzone POS ID.
2. When making a payment, the first step is to authenticate the POS with Payzone.
3. You then send a Sale request which contains the transaction amount and optional chargeback and tip amounts. You will receive a transaction reference in response.
4. You periodically poll the PIP server, sending in the transaction reference.
 - a. If the transaction is still ongoing (waiting for the customers card, waiting for PIN, waiting for authorisation, etc), a message will be sent to explain that.
 - b. If additional information is needed, for example to support a specific card type like DCI Fuel), the transaction will be paused until the POS adds the extra data.

- c. When the transaction has completed, the response will contain the outcome, auth code, card details, and receipt text.
5. If the payments needs to be refunded, the till can send a refund request containing the refund amount. The till then polls for the outcome, just like the sale transaction.

This diagram shows all possible flows for a successful transaction:

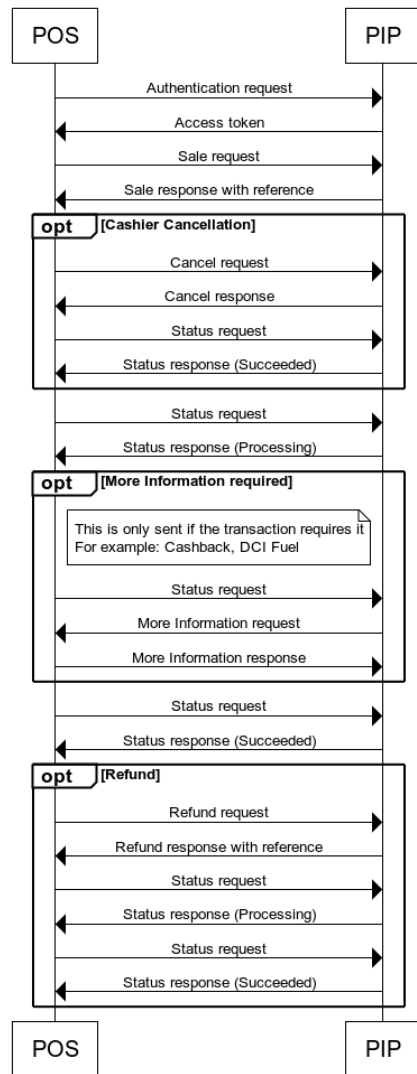

www.websequencediagrams.com

Web Service messages

Communications

Swagger documentation is available at <https://retail-services-uat.payzone.ie/swagger>. When viewing these documents, you need to select Gateway and EFT API in the definition drop-down in the top right corner.

All communications with Payzone uses JSON over HTTPS to a public endpoint on the internet. All POST requests must have the Content-Type header set to application/json.

You can use the HTTP Status Code to determine the outcome of the request.

Authenticate

This call is made before you can perform a card payment transaction. You will pass in the POS ID and password and receive an access key in the HTTP header field: X-ACCESS-KEY. This key must be supplied in all subsequent messages. **The refresh token is currently unused.**

Request

```
1 POST https://retail-services.payzone.ie/authenticate/ieft HTTP/1.1
2 Content-Length: 56
3 Content-Type: application/json
4
5 {
6   "PosId": 19304509,
7   "Password": "12345678"
8 }
```

Response

```
1 HTTP/1.1 200 OK
2 Content-Type: application/json; charset=utf-8
3 X-ACCESS-KEY: e3ad8bd84faa4630942fde9b2a3ad8fe
4
5 {
6   "refreshToken": "c1d9a66f7d33430cad603292aad9463",
7   "expiryTime": 15
8 }
```

Status Codes

Status Code	Meaning
200	Successful
401	Unauthorised

Sale

This request is used when you want to tell a PED to start a card payment.

- baseAmount is the transaction value, i.e. the amount of goods or services the customer is paying for
- tipAmount is an additional amount to be paid as a discretionary tip.
- totalAmount is the total of baseAmount + tipAmount.

Request

```
1 POST https://retail-services.payzone.ie/eft/payments/sales HTTP/1.1
2 X-ACCESS-KEY: e3ad8bd84faa4630942fde9b2a3ad8fe
3 Content-Type: application/json
4 Content-Length: 101
5
6 {
7   "baseAmount": 17.99,
8   "tipAmount": 1.09,
9   "totalAmount": 19.08
10 }
```

Response

If the request is successful (HTTP 202 Accepted), the response will have a transactionStatus of Processing which indicates it has been accepted. The payzoneUniqueTransactionReference will be used in subsequent calls to find out the ongoing and final status of the transaction. Any other fields which is sent should be ignored.

```

1 {
2   "data": {
3     "payzoneUniqueTransactionReference": "c26e9c13-c7b8-4fcf-be26-
    0f75bec4601e",
4     "transactionStatus": "Processing"
5   }
6 }


```

Status Codes

Status Code	Meaning
202	Accepted
401	Unauthorised
400	Bad request
406	PED not connected

Sale (Fuel Variant)

Transaction Flow:

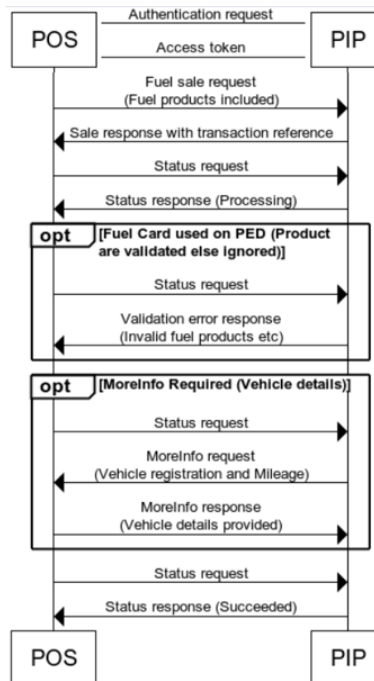

This request is used when you want to tell a PED to start a **fuel card payment**, including the fuel products being purchased.

- `baseAmount` – Total value of the fuel products (sum of `unitPrice × quantity`)
- `tipAmount` – Optional discretionary tip (can be 0)
- `totalAmount` – Sum of `baseAmount + tipAmount`
- `fuelProducts` – Array of fuel product items
 - `productCode` – Code for the product (e.g., "001")
 - `unitPrice` – Price per unit of the product

- **quantity** – Number of units purchased

Request

```
1 POST https://retail-services.payzone.ie/eft/payments/sales HTTP/1.1
2 X-ACCESS-KEY: e3ad8bd84faa4630942fde9b2a3ad8fe
3 Content-Type: application/json
4 Content-Length: 158
5
6 {
7   "baseAmount": 1.1101,
8   "tipAmount": 0,
9   "totalAmount": 1.1101,
10  "fuelProducts": [
11    {
12      "productCode": "001",
13      "unitPrice": 1.1101,
14      "quantity": 1
15    }
16  ]
17 }
18
```

Response

If the request is successful (HTTP 202 Accepted), the response will have a transactionStatus of Processing which indicates it has been accepted. The payzoneUniqueTransactionReference will be used in subsequent calls to find out the ongoing and final status of the transaction. Any other fields which is sent should be ignored.

```
1 {
2   "data": {
3     "payzoneUniqueTransactionReference": "c26e9c13-c7b8-4fcf-be26-
4     0f75bec4601e",
5     "transactionStatus": "Processing"
6   }
7 }
```

Fuel Product List

Request

```
1 GET https://retail-services.payzone.ie/fuelcards/products HTTP/1.1
2 X-ACCESS-KEY: e3ad8bd84faa4630942fde9b2a3ad8fe
3 Content-Type: application/json
```

Response

```
1 {
2   "data": [
3     {
4       "productCode": "000",
5       "productName": "Lube Oil",
6       "productType": "Non-Fuel",
7       "taxCode": 1,
8       "unitOfMeasure": "N"
9     },
10    ...
11    {
12      "productCode": "097",
13      "productName": "Ad Blue pack",
14      "productType": "Non-Fuel",
15      "taxCode": 1,
16      "unitOfMeasure": "N"
17    }
18  ]
19 }
```

Status Codes

Status Code	Meaning
202	Accepted
401	Unauthorised
400	Bad request
406	PED not connected

Status

Use this request to find out the current status of the transaction. Pass in the `payzoneUniqueTransactionReference` that you received in the Sale Response or Refund Response.

Call this periodically until the transaction completes. The delay between checks depends on your requirements. A value of at least 250ms is recommended.

At the early stages of the transaction, only the `transactionStatus` and `realTimeTransactionStatus` will have values, the rest will be empty. They will be populated when the transaction has completed.

Request

```
1 GET https://retail-services.payzone.ie/eft/transactions/status?
  payzoneUniqueTransactionReference=27c0bb67-ca9b-4535-9d7a-3aba6285d40
2 X-ACCESS-KEY: e3ad8bd84faa4630942fde9b2a3ad8fe
```

Response

The transaction is ongoing:

```
1 {
2   "data": {
3     "payzoneUniqueTransactionReference": "c26e9c13-c7b8-4fcf-be26-
4     0f75bec4601e",
5     "transactionStatus": "Processing"
6   }
7 }
```

The transaction has finished successfully:

```
1 {
2   "data": {
3     "payzoneUniqueTransactionReference": "35d503f1-f965-4da0-ac2e-
4     630ebc3f954e",
5     "transactionStatus": "Success",
6     "realTimeTransactionStatus": null,
7     "maskedCardNumber": "*****5542",
8     "authCode": "10974",
9     "paymentHostMessage": null,
10    "amountTotal": 0.2,
11    "amountBase": 0.1,
12    "amountTip": 0,
13    "amountCashBack": 0.9,
14    "cardBrand": "VISA",
15    "customerReceiptText": "See below.",
16    "merchantReceiptText": "See below."
17  }
18 }
```

The transaction failed with an error:

```
1 {
2   "data": {
```

```

3      "payzoneUniqueTransactionReference": "8e1554f2-faf0-4b2a-badf-
    90789ebcda25",
4      "transactionStatus": "Timeout",
5      "realTimeTransactionStatus": null
6    }
7  }

```

Status Codes

Status Code	Meaning
200	OK
401	Unauthorised
404	Unknown transaction reference

More Information Request

During a transaction, the cashier may need to ask the customer for more information. This could be a cashback amount (if it's enabled for the merchant and supported by the card) or it could be the mileage, vehicle registration for a DCI Fuel card payment or voice referral authorisation details.

When this happens, the Status response will have a transactionStatus of MoreInfo and a list of questions to ask the customer. The number of questions can also change so you must accommodate this.

These fields can change without notice so you should display the questions exactly as they are requested and **not** hard-code any of the names. The only exceptions are for fields which should be supplied by the EPOS itself, i.e. DCI fuel fields coming from the fuel pump. These are indicated with a *target* attribute of POS.

Each field will have these attributes:

- Name: String
- Type: String, Integer, Decimal, Display, Option.
- Value: String. This is only used where the Type is Display
- Required: True or False
- Target: Customer or POS. Default to Customer if not present

Type	Description
String, Integer, Decimal and Option	These indicate that the customer or EPOS should supply data in those formats.
Display	The message specified in the Value field must be displayed to the cashier before the transaction can continue. No data is required back but the cashier must confirm that they have

	seen the message before continuing.
--	-------------------------------------

If the customer chooses not to supply a value for an optional field, you can return it a default value based upon Type. If none of the fields are mandatory, you must display a button that allows the cashier to quickly skip this step.

Samples

Response from PIP		Response to PIP
<pre> 1 "name": "Fuel - Confirm Allowed Products", 2 "value": "The DCI card is authorised for: Petrol, Diesel, AdBlue and Carwash", 3 "type": "Display", 4 "required": false </pre>	The EPOS must display the message to the cashier. The cashier must accept the message before continuing.	N/A
<pre> 1 "name": "Fuel - Vehicle Registration", 2 "type": "String", 3 "required": false </pre>	The EPOS must prompt the customer to supply a string value for 'Fuel - Vehicle Registration'. The customer may choose not to supply a value for this.	<pre> 1 "name": "Fuel - Vehicle Registration", 2 "value": "" 3 </pre> <pre> 1 "name": "Fuel - Vehicle Registration", 2 "value": "181D1" </pre>
<pre> 1 "name": "Fuel - Service Level", 2 "type": "Option", 3 "options": [4 "Self Serve", 5 "Attendant" 6], 7 "required": true, 8 "target": "POS" </pre>	This message indicates that the POS must return a value indicating if the Fuel transaction was performed at self-service pump or an attended pump. This does not need to be displayed to the cashier/customer.	<pre> 1 "name": "Fuel - Service Level", 2 "value": "Attendant" </pre>
<pre> 1 { 2 "name": "Authorise transaction through voice referral process", 3 "type": "Display", 4 "required": false, 5 "value": "Please call the acquirer at [Phone Number] to complete voice referral." </pre>	The EPOS must display the message to the cashier. Acquirer's Phone Number is returned in the requested MoreInfo. Cashier rings to the phone number,	Decline Response <pre> 1 { 2 "name": "Is Transaction Authorised?", 3 "value": "No" 4 }, 5 { 6 "name": "Auth Code", 7 "value": "" 8 } </pre>

<pre> 6 }, 7 { 8 "name": "Is Transaction Authorised?", 9 "description": "Select 'Yes' if approved, 'No' if declined", 10 "type": "Option", 11 "required": true, 12 "options": [13 "Yes", 14 "No" 15] 16 }, 17 { 18 "name": "Auth Code", 19 "description": "Authorisation code provided by the acquirer, if approved", 20 "type": "String", 21 "required": false 22 }</pre>	provides transaction details and gets an auth code. Auth Code is sent in the response.	Approved Response <pre> 1 { 2 "name": "Is Transaction Authorised?", 3 "value": "Yes" 4 }, 5 { 6 "name": "Auth Code", 7 "value": "[Auth Code]" 8 }</pre>
--	---	--

Sample Status Response

<pre> 1 "moreInfoRequired": [2 { 3 "name": "Fuel - Vehicle Registration", 4 "type": "String", 5 "required": false 6 }, 7 { 8 "name": "Fuel - Vehicle Mileage", 9 "type": "Integer", 10 "required": false 11 } 12]</pre>
--

When you have collected the answers from the customer, you then return to them to PIP as shown below. The values in the *Name* field should match what you received in the Status Response. Do not hard-code these names.

<pre> 1 PUT https://retail-services.payzone.ie/eft/payments/sales HTTP/1.1 2 Content-Length: 100 3 Content-Type: application/json 4 5 { 6 "payzoneUniqueTransactionReference": "3c83d4d1-f3ca-475c-b1c9- c58e33fdd100", 7 "moreInfoResponse": [8 { 9 "name": "Cashback - Amount", 10 "value": "20.00" 11 } 12] 13 }</pre>

If the customer has opted not to supply a value, it should be returned like this:

<pre> 1 PUT https://retail-services.payzone.ie/eft/payments/sales HTTP/1.1 2 Content-Length: 169</pre>
--

```

3 Content-Type: application/json
4
5 {
6   "payzoneUniqueTransactionReference": "aff4d477-e8f0-495b-aaab-
ea6de9fefe27",
7   "moreInfoResponse": [
8     {
9       "name": "Fuel - Vehicle Registration",
10      "value": "AB12CDE"
11    },
12    {
13      "name": "Fuel - Vehicle Mileage",
14      "value": 45210
15    }
16  ]
17

```

Status Codes

Status Code	Meaning
200	OK
401	Unauthorised
404	Unknown transaction reference

Cancel

You can use this when you have initiated a transaction but no longer want to proceed, e.g., if the customer no longer wants to pay by card or if you need to change the amount. Pass in the paymentUniqueTransactionReference from the Sale Response or Refund Response.

You must use the Status request message to confirm that this has completed successfully.

Request

```

1 POST https://retail-services.payzone.ie/eft/payments/cancellations
2 X-ACCESS-KEY: e3ad8bd84faa4630942fde9b2a3ad8fe
3 {
4   "payzoneUniqueTransactionReference": "27c0bb67-ca9b-4535-9d7a-
3aba6285d40a"
5 }

```

Response

```

1 {
2   "data": {
3     "payzoneUniqueTransactionReference": "79aa3b5c-d10d-4067-b16b-
f5c63b504b47",
4     "transactionStatus": "Processing"
5   }
6 }

```

```

1 {
2   "data": {
3     "payzoneUniqueTransactionReference": "79aa3b5c-d10d-4067-b16b-
f5c63b504b47",
4     "transactionStatus": "Success"
5   }
6 }

```

Status Codes

Status Code	Meaning
202	Accepted
401	Unauthorised
400	Bad request
404	Unknown transaction reference

Refund

Use this to return money to a customer's card. You must not use this to payout a cash transfer or winnings to a customer, only to refund a previously completed transaction.

Request

```
1 POST https://retail-services.payzone.ie/eft/payments/refunds
2 X-ACCESS-KEY: e3ad8bd84faa4630942fde9b2a3ad8fe
3 {
4   "totalAmount": 2.34
5 }
```

Response

```
1 {
2   "data": {
3     "payzoneUniqueTransactionReference": "f97165d3-92ac-4656-98d0-
d7de2dc529f8",
4     "transactionStatus": "Processing"
5   }
6 }
```

You can use the Status and Cancel messages, just like a Sale.

Status Codes

Status Code	Meaning
202	Accepted
401	Unauthorised
400	Bad request
406	PED not connected

Reconciliation

At any time, the EPOS can request a list of transactions that were performed on it's terminal. This list will allow for automatic reconciliation between EPOS and PIP.

Request

The request takes two optional parameters, *startDateTime* and *endDateTime*. These must be supplied in ISO8601 format and URL encoded. If neither is supplied, yesterday's transactions will be returned.

Date & Time	ISO 8601 Format	URL Encoded
21st August 2025 08:00 (DST)	2025-08- 21T08:00.00+01:00	2025-08- 21T08%3A00.00%2B0 1%3A00
3rd March 2024 16:34 (Winter time)	2024-03- 03T16:34.00+00:00	2024-03- 03T16%3A34.00%2B0 0%3A00

You can achieve this format as follows:

For C#:

```
DateTime.ToString("yyyy-MM-ddTHH:mm:ssK")
```

For Java:

```
1 ZonedDateTime dateTime = ZonedDateTime.now();
2 System.out.println(dateTime.format(DateTimeFormatter.ISO_OFFSET_DATE_TIME));
```

You can also use the Accept header to indicate if you want the transaction list in JSON or CSV (text/csv). If the header is not supplied, it will default to JSON.

```
1 GET https://retail-service.payzone.ie/eft/Transactions/Terminal?
  startDateTime=2025-03-26T14%3A47%3A35%2B00%3A00&endDateTime=2025-03-
  28T08%3A47%3A35%2B00%3A00
2 Accept: text/csv
```

Response

JSON-format

```
1 {
2   "Transactions": [
3     {
4       "DateTime": "2025-03-26T17:07:14.027+00:00",
5       "PayzoneUniqueTransactionReference": "eea65541-30c4-40b3-
6       9e64-b3d825f96d42",
7       "TransactionType": "Refund",
8       "CardScheme": null,
9       "Amount": 1.00,
10      "Outcome": "Success"
11    },
12    {
13      "DateTime": "2025-03-27T05:49:12.37+00:00",
14      "PayzoneUniqueTransactionReference": "53222c7e-4870-4c45-
15      84da-d53b0e8709d3",
16      "TransactionType": "Sale",
17      "CardScheme": "VISA",
18      "Amount": 1.05,
19      "Outcome": "Voided"
20    }
21  ]
22 }
```

CSV-format

1	DateTime, PayzoneUniqueTransactionReference, TransactionType, CardScheme, Amount, Outcome
2	26-03-2025 17:07:14 +00:00, eea65541-30c4-40b3-9e64-b3d825f96d42, Refund, MasterCard, 100.00, Success
3	27-03-2025 05:49:12 +00:00, 53222c7e-4870-4c45-84da-d53b0e8709d3, Sale, VISA, 100.05, Voided

Testing

You can use the configuration below to access the test environment:

URL	https://retail-services-dev.payzone.ie
POS ID	19304509
POS Password	12345678

Fuel Card Transaction Reserved Amount

1.ABCD - Amount 1.xxxx is reserved for Fuel Card Transactions where 4 decimal value ABCD is interpreted as below,

Position	Meaning	Description
A	Card Index	Selects which test card to use. Range: 1-5.
B	Entry Mode	1 = Swiped, 2 = Keyed
CD	Test Case Number	Two-digit Test Case number

Fuel Transaction Test Cards

Card Index	Card
1	7896*****0952
2	7005*****9380
3	7897*****1507
4	7005*****9394
5	7005*****9408

So, use 1.1101 to run fuel transaction for Card Number - 1, Entry Code - Swipe and Test Case Number - 01.

Note: Since every card is having daily and weekly transaction amount limit so we don't send actual transaction amount to Radius. We send small amount 01-23 cents to Radius.

Test Conditions

Amount	Outcome
--------	---------

100.00	Success.
100.01	Declined.
100.02	Timeout without card presented.
100.03	Timeout during authorisation.
100.04	User Cancel.
100.05	Card doesn't support cashback.
100.06	PED goes away mid-transaction. Timeout case.
100.07	Device Busy.
100.08	No immediate response from PED. Timeout case.
100.09	Signature validation required
100.10	Voice referral authorisation required
100.11	Void referral authorisation required without cashback
100.12	Sales transaction is voided by PED.
1.xxxx	Fuel card transactions

Fuel Card Transaction Test Cases

Test Case Number	Test Description
01	Authorisation Request
02	Reversal Advice after Authorisation
03	Authorisation Request – Expired Card
04	Authorisation Request – No Card Record
05	Authorisation Request – Invalid Product
06	Authorisation Request – Exceeds Withdrawal Amount Limit
07	Authorisation Request – Exceeds Withdrawal Frequency Limit
08	Authorisation Request – Transaction not Permitted to Cardholder
09	Authorisation Request – No Connection to Host (Offline Not Supported)

10	PIN TRIES EXCEEDED (ONLINE PIN)
11	Pre-Authorisation Request
12	Completion Advice
13	Reversal Advice after Pre-Authorisation
14	Pre-Authorisation Request – Expired Card
15	Pre-Authorisation Request – No Card Record
16	Pre-Authorisation Request – Invalid Product
17	Partial Pre-Authorisation – Exceeds Withdrawal Amount Limit
18	Pre-Authorisation Request – Exceeds Withdrawal Amount Limit
19	Pre-Authorisation Request – Exceeds Withdrawal Frequency Limit
20	Pre-Authorisation Request – Transaction not Permitted to Cardholder
21	Pre-Authorisation Request – No Connection to Host (Offline Not Supported)
22	PIN TRIES EXCEEDED (ONLINE PIN)
23	Settlement File Submission & Processing

References

Transaction Status

During a transaction, the two fields below will tell you how it is progressing. TransactionStatus provides high level information about the current state of the transaction. This is the one that your application can use for deciding when to take action and to find out the outcome of a transaction.

The RealTime field contains more granular information. It can either be displayed to the cashier or safely ignored, at your discretion.

transactionStatus	realTimeTransactionStatus	Notes
Processing	CARD_ENTRY_REQUESTED	
Processing	CARD_INSERTED CARD_TAPPED	
Processing	CARD_SWIPED MANUAL_INPUT	

MoreInfo	N/A	The cashier needs to ask the customer for more information before the transaction can continue.
Processing	TIP_REQUESTED	
Processing	TIP_ACCEPTED	
Processing	TIP_DECLINED	
Processing	LOYALTY_IN_PROGRESS	
Processing	PIN_REQUESTED PIN_ENTRY_FAIL	
Processing	PIN_ENTRY_SUCCESS	
Processing	COMMUNICATE_WITH_HOST	
Success	N/A	The sale/refund transaction was successfully authorised.
Failed	N/A	The sale/refund transaction was declined or cancelled by PED.
Timeout	N/A	The transaction could not be completed and timed out.
Voided	N/A	When Signature verification is rejected by POS or transaction is voided by POS or a successful transaction is not confirmed by POS.
Cancelled	N/A	The transaction was cancelled by the EPOS before a sale/refund was send to the bank.

Receipts

When a transaction completes, the Status Response will contain two receipt fields: customer and merchant. They use a mark-up language that you will need to convert into the appropriate format for your EPOS printer.

Example

```
1      <p>MERCHANT NAME : <b>Test Merchant</b></p>\r\n
2      <p s="n">MERCHANT ID~~~~~: 1000009</p>\r\n
3      <p s="n">AID~~~~~: 1234567</p>\r\n
4      <p s="n">SEQUENCE NUMBER~: 000101</p>\r\n
5      <p s="n">PAN~~~~~: *****5542</p>\r\n
6      <p s="n">CARD BRAND~~~~~: VISA</p>\r\n
7      <p s="n">DATA SOURCE~~~~~: Manual</p>\r\n
8      <p s="n">TRANSACTION TYPE~: Sale</p>\r\n
9      <p s="n">AMOUNT~~~~~: €1.99</p>\r\n
10     <p s="n">TOTAL AMOUNT~~~~~: €1.99</p>\r\n
11     <p s="n">MESSAGE~~~~~: oetcl</p>\r\n
12     <p s="n">COURTESY MESSAGE~: Thank you></p>\r\n
13     <p s="n">DATE/TIME~~~~~: 20250214071349</p>\r\n
14     <hr/>\r\n
15     <br/>\r\n
16     <p><b>CUSTOMER COPY </b></p>\r\n
17     <p><b>PLEASE RETAIN RECEIPT</b></p>
```

Tags

Tag	Action
 	New Line
<p a="c">...</p>	New paragraph with centre alignment.
...	Bold
...	New paragraph
<p s="n">...</p>	Print the paragraph with a narrow font.
	Print a horozontal line

Go Live

Before go live:

- Complete all test cases against the PED simulator
- Complete all applicable test cases with a physical PED. This work can be scheduled via your project manager or account manager.

Frequently Asked Questions

How are Card Not Present / Keyed transactions handled?	There is no difference from the EPOS. You can start the transaction as normal and the screen on the PED that prompts the customer to
--	--

	tap or insert their card will also include an option to key in the card details.
How can the POS recover from a technical failure during a transaction?	If the POS retained the Payzone Unique Transaction reference, it can send the Status request to find out the final result. If the POS doesn't perform this action within a few minutes, the transaction will be automatically voided.