

Chapter 2: outline

- 2.1 principles of network applications
- 2.2 Web and HTTP
- 2.3 FTP
- 2.4 electronic mail
 - SMTP, POP3, IMAP
- 2.5 DNS
- 2.6 P2P applications
- 2.7 socket programming with UDP and TCP

Application Layer 2-2

Chapter 2: application layer

our goals:

- ❖ conceptual, implementation aspects of network application protocols
 - transport-layer service models
 - client-server paradigm
 - peer-to-peer paradigm
- ❖ learn about protocols by examining popular application-level protocols
 - HTTP
 - FTP
 - SMTP / POP3 / IMAP
 - DNS
- ❖ creating network applications
 - socket API

Application Layer 2-3

Some network apps

- ❖ e-mail
- ❖ web
- ❖ text messaging
- ❖ remote login
- ❖ P2P file sharing
- ❖ multi-user network games
- ❖ streaming stored video (YouTube, Hulu, Netflix)
- ❖ voice over IP (e.g., Skype)
- ❖ real-time video conferencing
- ❖ social networking
- ❖ search
- ❖ ...
- ❖ ...

Application Layer 2-4


Creating a network app

write programs that:

- ❖ run on (different) *end systems*
- ❖ communicate over network
- ❖ e.g., web server software communicates with browser software

no need to write software for network-core devices

- ❖ network-core devices do not run user applications
- ❖ applications on end systems allows for rapid app development, propagation

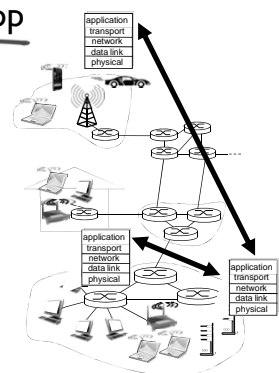

Application Layer 2-5


Application architectures

possible structure of applications:

- ❖ client-server
- ❖ peer-to-peer (P2P)

Application Layer 2-6

Client-server architecture



server:

- ❖ always-on host
- ❖ permanent IP address
- ❖ data centers for scaling


clients:

- ❖ communicate with server
- ❖ may be intermittently connected
- ❖ may have dynamic IP addresses
- ❖ do not communicate directly with each other

Application Layer 2-7

P2P architecture

- ❖ no always-on server
- ❖ arbitrary end systems directly communicate
- ❖ peers request service from other peers, provide service in return to other peers
 - self scalability – new peers bring new service capacity, as well as new service demands
- ❖ peers are intermittently connected and change IP addresses
 - complex management



Application Layer 2-8

Processes communicating

process: program running within a host

- ❖ within same host, two processes communicate using inter-process communication (defined by OS)
- ❖ processes in different hosts communicate by exchanging messages

clients, servers

client process: process that initiates communication


server process: process that waits to be contacted

- ❖ aside: applications with P2P architectures have client processes & server processes

Application Layer 2-9

Sockets

- ❖ process sends/receives messages to/from its socket
- ❖ socket analogous to door
 - sending process shoves message out door
 - sending process relies on transport infrastructure on other side of door to deliver message to socket at receiving process

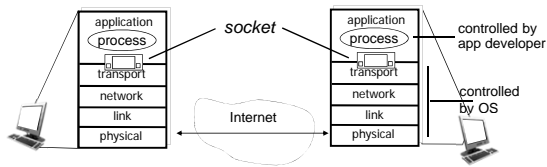

Application Layer 2-10

Addressing processes

- ❖ to receive messages, process must have *identifier*
- ❖ host device has unique 32-bit IP address
- ❖ Q: does IP address of host on which process runs suffice for identifying the process?
 - A: no, many processes can be running on same host
- ❖ *identifier* includes both IP address and port numbers associated with process on host.
- ❖ example port numbers:
 - HTTP server: 80
 - mail server: 25
- ❖ to send HTTP message to `gaia.cs.umass.edu` web server:
 - IP address: 128.119.245.12
 - port number: 80
- ❖ more shortly...

Application Layer 2-11

App-layer protocol defines

- ❖ types of messages exchanged,
 - e.g., request, response
 - ❖ message syntax:
 - what fields in messages & how fields are delineated
 - ❖ message semantics
 - meaning of information in fields
 - ❖ rules for when and how processes send & respond to messages
- open protocols:
- ❖ defined in RFCs
 - ❖ allows for interoperability
 - ❖ e.g., HTTP, SMTP
- proprietary protocols:
- ❖ e.g., Skype

Application Layer 2-12

What transport service does an app need?

- data integrity
- ❖ some apps (e.g., file transfer, web transactions) require 100% reliable data transfer
 - ❖ other apps (e.g., audio) can tolerate some loss
- timing
- ❖ some apps (e.g., Internet telephony, interactive games) require low delay to be "effective"
- throughput
- ❖ some apps (e.g., multimedia) require minimum amount of throughput to be "effective"
 - ❖ other apps ("elastic apps") make use of whatever throughput they get
- security
- ❖ encryption, data integrity, ...

Application Layer 2-13

Transport service requirements: common apps

application	data loss	throughput	time sensitive
file transfer	no loss	elastic	no
e-mail	no loss	elastic	no
Web documents	no loss	elastic	no
real-time audio/video	loss-tolerant	audio: 5kbps-1Mbps video: 10kbps-5Mbps	yes, 100's msec
stored audio/video	loss-tolerant	same as above	
interactive games	loss-tolerant	few kbps up	yes, few secs
text messaging	no loss	elastic	yes, 100's msec
			yes and no

Application Layer 2-14

Internet transport protocols services

TCP service:

- ❖ *reliable transport* between sending and receiving process
- ❖ *flow control*: sender won't overwhelm receiver
- ❖ *congestion control*: throttle sender when network overloaded
- ❖ *does not provide*: timing, minimum throughput guarantee, security
- ❖ *connection-oriented*: setup required between client and server processes

UDP service:

- ❖ *unreliable data transfer* between sending and receiving process
- ❖ *does not provide*: reliability, flow control, congestion control, timing, throughput guarantee, security, or connection setup,

Q: why bother? Why is there a UDP?

Application Layer 2-15

Internet apps: application, transport protocols

application	application layer protocol	underlying transport protocol
e-mail	SMTP [RFC 2821]	TCP
remote terminal access	Telnet [RFC 854]	TCP
Web	HTTP [RFC 2616]	TCP
file transfer	FTP [RFC 959]	TCP
streaming multimedia	HTTP (e.g., YouTube), RTP [RFC 1889]	TCP or UDP
Internet telephony	SIP, RTP, proprietary (e.g., Skype)	TCP or UDP

Application Layer 2-16

Chapter 2: outline

2.1 principles of network applications

- app architectures
- app requirements

2.2 Web and HTTP

2.3 FTP

2.4 electronic mail

- SMTP, POP3, IMAP

2.5 DNS

2.6 P2P applications

2.7 socket programming with UDP and TCP

Application Layer 2-18

Web and HTTP

First, a review...

- ❖ web page consists of *objects*
- ❖ object can be HTML file, JPEG image, Java applet, audio file,...
- ❖ web page consists of *base HTML-file* which includes *several referenced objects*
- ❖ each object is addressable by a *URL*, e.g.,

www.someschool.edu / someDept/pic.gif


host name path name

Application Layer 2-19

HTTP overview

HTTP: hypertext transfer protocol

- ❖ Web's application layer protocol
- ❖ client/server model
 - *client*: browser that requests, receives, (using HTTP protocol) and "displays" Web objects
 - *server*: Web server sends (using HTTP protocol) objects in response to requests

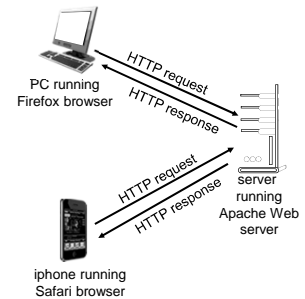

Application Layer 2-20

HTTP overview (continued)

uses TCP:

- ❖ client initiates TCP connection (creates socket) to server, port 80
- ❖ server accepts TCP connection from client
- ❖ HTTP messages (application-layer protocol messages) exchanged between browser (HTTP client) and Web server (HTTP server)
- ❖ TCP connection closed

HTTP is "stateless"

- ❖ server maintains no information about past client requests

aside

protocols that maintain "state" are complex!

- ❖ past history (state) must be maintained
- ❖ if server/client crashes, their views of "state" may be inconsistent, must be reconciled

Application Layer 2-21

HTTP connections

non-persistent HTTP


- ❖ at most one object sent over TCP connection
 - connection then closed
- ❖ downloading multiple objects required multiple connections

persistent HTTP

- ❖ multiple objects can be sent over single TCP connection between client, server


Application Layer 2-22

Non-persistent HTTP

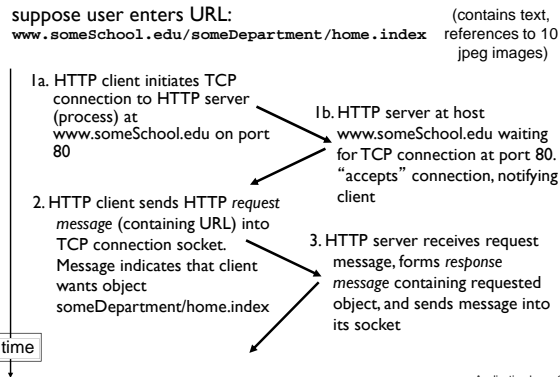

Application Layer 2-23

Non-persistent HTTP (cont.)

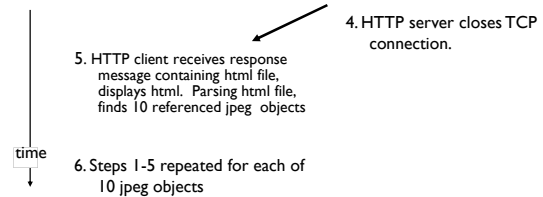


Application Layer 2-24

Non-persistent HTTP: response time

RTT (definition): time for a small packet to travel from client to server and back

HTTP response time:

- ❖ one RTT to initiate TCP connection
- ❖ one RTT for HTTP request and first few bytes of HTTP response to return
- ❖ file transmission time
- ❖ non-persistent HTTP response time = $2RTT + \text{file transmission time}$



Application Layer 2-25

Persistent HTTP

non-persistent HTTP issues:

- ❖ requires 2 RTTs per object
- ❖ OS overhead for each TCP connection
- ❖ browsers often open parallel TCP connections to fetch referenced objects

persistent HTTP:

- ❖ server leaves connection open after sending response
- ❖ subsequent HTTP messages between same client/server sent over open connection
- ❖ client sends requests as soon as it encounters a referenced object

Application Layer 2-26

HTTP request message

- ❖ two types of HTTP messages: *request*, *response*
- ❖ HTTP request message:
 - ASCII (human-readable format)

request line
(GET, POST,
HEAD commands)

header
lines

carriage return,
line feed at start
of line indicates
end of header lines


```
GET /index.html HTTP/1.1\r\n
Host: www-net.cs.umass.edu\r\n
User-Agent: Firefox/3.6.10\r\n
Accept: text/html,application/xhtml+xml\r\n
Accept-Language: en-us,en;q=0.5\r\n
Accept-Encoding: gzip,deflate\r\n
Accept-Charset: ISO-8859-1,utf-8;q=0.7\r\n
Keep-Alive: 115\r\n
Connection: keep-alive\r\n
```

carriage return character
line-feed character

\r\n

Application Layer 2-27

HTTP request message: general format

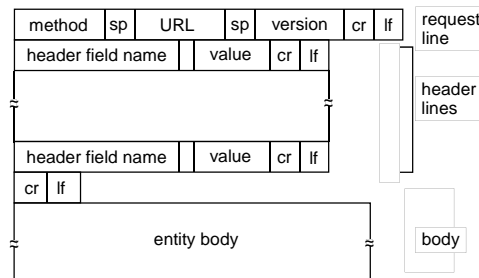

Application Layer 2-28

Uploading form input

POST method:

- ❖ web page often includes form input
- ❖ input is uploaded to server in entity body

URL method:

- ❖ uses GET method
- ❖ input is uploaded in URL field of request line:

www.somesite.com/animalsearch?monkeys&banana

Application Layer 2-29

Method types

HTTP/1.0:

- ❖ GET
- ❖ POST
- ❖ HEAD
 - asks server to leave requested object out of response

HTTP/1.1:

- ❖ GET, POST, HEAD
- ❖ PUT
 - uploads file in entity body to path specified in URL field
- ❖ DELETE
 - deletes file specified in the URL field

Application Layer 2-30

HTTP response message

status line
(protocol
status code
status phrase)

header
lines

data, e.g.,
requested
HTML file

```
HTTP/1.1 200 OK\r\n
Date: Sun, 26 Sep 2010 20:09:20 GMT\r\n
Server: Apache/2.0.52 (CentOS)\r\n
Last-Modified: Tue, 30 Oct 2007 17:00:02
GMT\r\n
ETag: "17dc6-a5c-bf716880"\r\n
Accept-Ranges: bytes\r\n
Content-Length: 2652\r\n
Keep-Alive: timeout=10, max=100\r\n
Connection: Keep-Alive\r\n
Content-Type: text/html; charset=ISO-8859-
1\r\n
\r\n
data data data data data ...
```

Application Layer 2-31

HTTP response status codes

❖ status code appears in 1st line in server-to-client response message.

❖ some sample codes:

- 200 OK**
 - request succeeded, requested object later in this msg
- 301 Moved Permanently**
 - requested object moved, new location specified later in this msg (Location:)
- 400 Bad Request**
 - request msg not understood by server
- 404 Not Found**
 - requested document not found on this server
- 505 HTTP Version Not Supported**

Application Layer 2-32

Trying out HTTP (client side) for yourself

1. Telnet to your favorite Web server:

```
telnet cis.poly.edu 80
```

opens TCP connection to port 80
(default HTTP server port) at cis.poly.edu.
anything typed in sent
to port 80 at cis.poly.edu

2. type in a GET HTTP request:

```
GET /-ross/ HTTP/1.1
Host: cis.poly.edu
```

by typing this in (hit carriage
return twice), you send
this minimal (but complete)
GET request to HTTP server

3. look at response message sent by HTTP server!

(or use Wireshark to look at captured HTTP request/response)

Application Layer 2-33

User-server state: cookies

many Web sites use cookies
four components:


- 1) cookie header line of HTTP response message
- 2) cookie header line in next HTTP request message
- 3) cookie file kept on user's host, managed by user's browser
- 4) back-end database at Web site

example:

- ❖ Susan always access Internet from PC
- ❖ visits specific e-commerce site for first time
- ❖ when initial HTTP requests arrives at site, site creates:
 - unique ID
 - entry in backend database for ID

Application Layer 2-34

Cookies: keeping “state” (cont.)

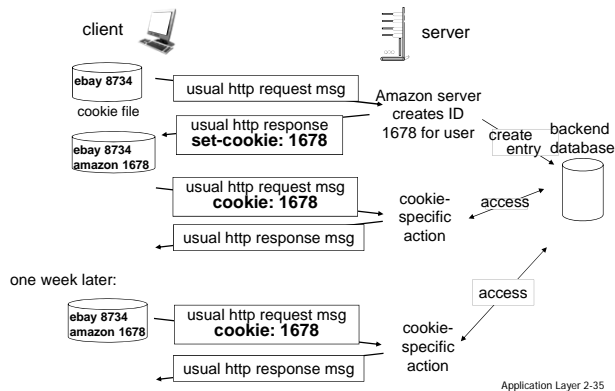

Cookies (continued)

what cookies can be used for:

- ❖ authorization
- ❖ shopping carts
- ❖ recommendations
- ❖ user session state (Web e-mail)

cookies and privacy: aside

- ❖ cookies permit sites to learn a lot about you
- ❖ you may supply name and e-mail to sites

how to keep “state”:


- ❖ protocol endpoints: maintain state at sender/receiver over multiple transactions
- ❖ cookies: http messages carry state

Application Layer 2-36

Web caches (proxy server)

goal: satisfy client request without involving origin server

- ❖ user sets browser: Web accesses via cache
- ❖ browser sends all HTTP requests to cache
 - object in cache: cache returns object
 - else cache requests object from origin server, then returns object to client



More about Web caching

- ❖ cache acts as both client and server
 - server for original requesting client
 - client to origin server
- ❖ typically cache is installed by ISP (university, company, residential ISP)

why Web caching?

- ❖ reduce response time for client request
- ❖ reduce traffic on an institution's access link
- ❖ Internet dense with caches: enables “poor” content providers to effectively deliver content (so too does P2P file sharing)

Application Layer 2-38


Caching example:

assumptions:

- ❖ avg object size: 100K bits
- ❖ avg request rate from browsers to origin servers: 15/sec
- ❖ avg data rate to browsers: 1.50 Mbps
- ❖ RTT from the router to any origin server: 2 sec
- ❖ access link rate: 1.54 Mbps

consequences:

- ❖ LAN utilization: 0.15%
- ❖ access link utilization = 99% *problem!*
- ❖ total delay = Internet delay + access delay + LAN delay
= 2 sec + minutes + usecs



Application Layer 2-39

Caching example: fatter access link


assumptions:

- ❖ avg object size: 100K bits
- ❖ avg request rate from browsers to origin servers: 15/sec
- ❖ avg data rate to browsers: 1.50 Mbps
- ❖ RTT from institutional router to any origin server: 2 sec
- ❖ access link rate: 15.4 Mbps

consequences:

- ❖ LAN utilization: 0.15%
- ❖ access link utilization = 9.9%
- ❖ total delay = Internet delay + access delay + LAN delay
= 2 sec + minutes + usecs
msecs

Cost: increased access link speed (not cheap!)



Application Layer 2-40

Caching example: install local cache

assumptions:


- ❖ avg object size: 100K bits
- ❖ avg request rate from browsers to origin servers: 15/sec
- ❖ avg data rate to browsers: 1.50 Mbps
- ❖ RTT from institutional router to any origin server: 2 sec
- ❖ access link rate: 1.54 Mbps

consequences:

- ❖ LAN utilization: 0.15%
- ❖ access link utilization = ?
- ❖ total delay = ?

How to compute link utilization, delay?

Cost: web cache (cheap!)




Application Layer 2-41

Caching example: install local cache

Calculating access link utilization, delay with cache:

- ❖ suppose cache hit rate is 0.4
 - 40% requests satisfied at cache, 60% requests satisfied at origin
- ❖ access link utilization:
 - 60% of requests use access link
- ❖ data rate to browsers over access link = $0.6 * 1.50 \text{ Mbps} = .9 \text{ Mbps}$
 - utilization = $0.9 / 1.54 = .58$
- ❖ total delay
 - = $0.6 * (\text{delay from origin servers}) + 0.4 * (\text{delay when satisfied at cache})$
 - = $0.6 (2.01) + 0.4 (\sim \text{msecs})$
 - = $\sim 1.2 \text{ secs}$
 - less than with 15.4 Mbps link (and cheaper too!)



Application Layer 2-42

Conditional GET

- ❖ *Goal*: don't send object if cache has up-to-date cached version
 - no object transmission delay
 - lower link utilization
- ❖ *cache*: specify date of cached copy in HTTP request
 - If-modified-since:**
<date>
- ❖ *server*: response contains no object if cached copy is up-to-date:
 - HTTP/1.0 304 Not Modified**

