COOCHILLA

TECHNICAL RIDER | European Tour - Summer 2027

Five musicians / three vocal positions. Both guitarists sing backing vocals; the central singer handles lead vocals. Bass and drums do not sing.

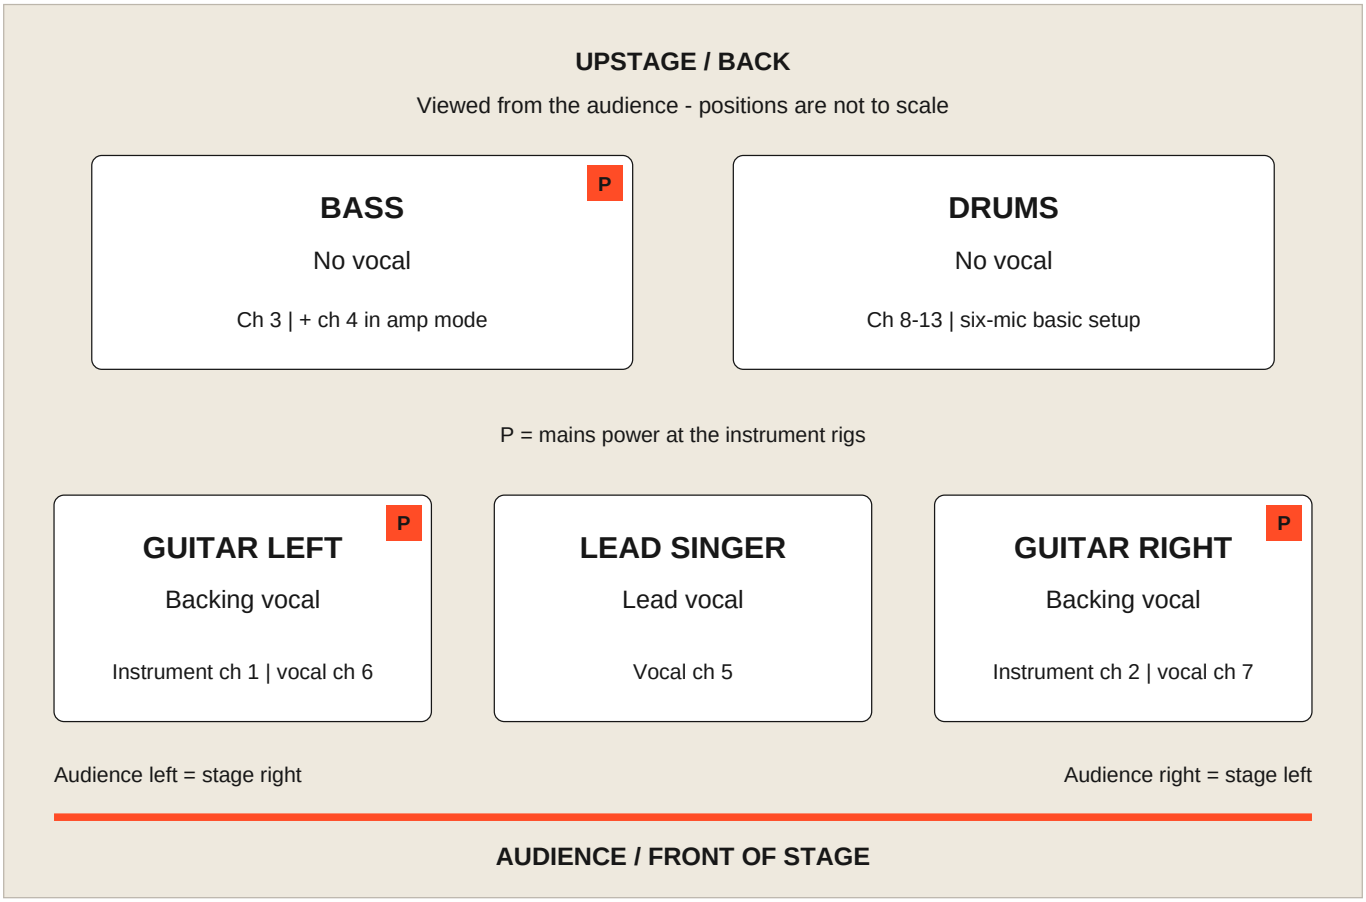

Choose one instrument setup

A / IR direct to PA - 3 instrument channels. One mono DI / IR feed each from guitar left, guitar right and bass. No cabinet microphones and no additional bass channel in this mode.

B / Amps and cabinets - 4 instrument channels. One microphone per cabinet: guitar left, guitar right and bass. Bass also supplies one separate mono IR feed, giving two bass channels in total. No additional guitar DI / IR channels are required.

House PA, monitoring and power

Please provide a suitable PA and FOH engineer, three vocal microphones with stands, and monitoring for the three front vocal positions, bass and drums. Provide mains power at both guitar rigs and the bass rig. Confirm monitor mixes and any shared feeds in advance.

COOCHILLA

INPUT LIST & VENUE ADVANCE | Summer 2027

A / IR: 12 active inputs (3 instruments + 3 vocals + 6 drums). **B / amps:** 13 active inputs (4 instruments + 3 vocals + 6 drums). Channel 4 is unused in IR mode; remaining channel numbers stay the same.

Ch	Source / position	A / IR direct to PA	B / Amps and cabinets
1	Guitar - audience left	Mono DI / IR	One guitar cabinet mic
2	Guitar - audience right	Mono DI / IR	One guitar cabinet mic
3	Bass - back-left	Mono DI / IR	One bass cabinet mic
4	Bass - additional feed	Not used	Mono DI / IR
5	Lead vocal - center	Vocal mic + stand	Vocal mic + stand
6	Backing vocal - guitar left	Vocal mic + boom	Vocal mic + boom
7	Backing vocal - guitar right	Vocal mic + boom	Vocal mic + boom
8	Kick drum	Kick dynamic mic	Kick dynamic mic
9	Snare top	Dynamic mic	Dynamic mic
10	Rack tom	Dynamic / clip mic	Dynamic / clip mic
11	Floor tom	Dynamic / clip mic	Dynamic / clip mic
12	Overhead - audience left	Condenser mic	Condenser mic
13	Overhead - audience right	Condenser mic	Condenser mic

Basic drum microphone package

Six microphones, with suitable stands or clips and cabling: kick, snare top, one rack tom, one floor tom and two overheads. Phantom power for overhead condensers as required by the microphones. This is the baseline mic plan; confirm the actual kit and any extra toms before the show.

Confirm before the show

Agree IR or amp mode, cabinet and compatible amplifier supply, drum kit/backline supply, connector types and levels, DI boxes, monitor allocation, stage footprint, load-in, soundcheck and set length. In amp mode, keep cabinet simulation off conventional cabinet feeds and on the separate bass IR feed to FOH.