

Behavioral analysis of the preserved process record

Statistics mined by scripts/analyze_process_behavior.py from the read-only historical batch folders (42 primary installation folders). Revision tags are a lower bound: revisions not frozen under an r-tagged name (e.g. D38.1 → D38.2) are invisible to this scan.

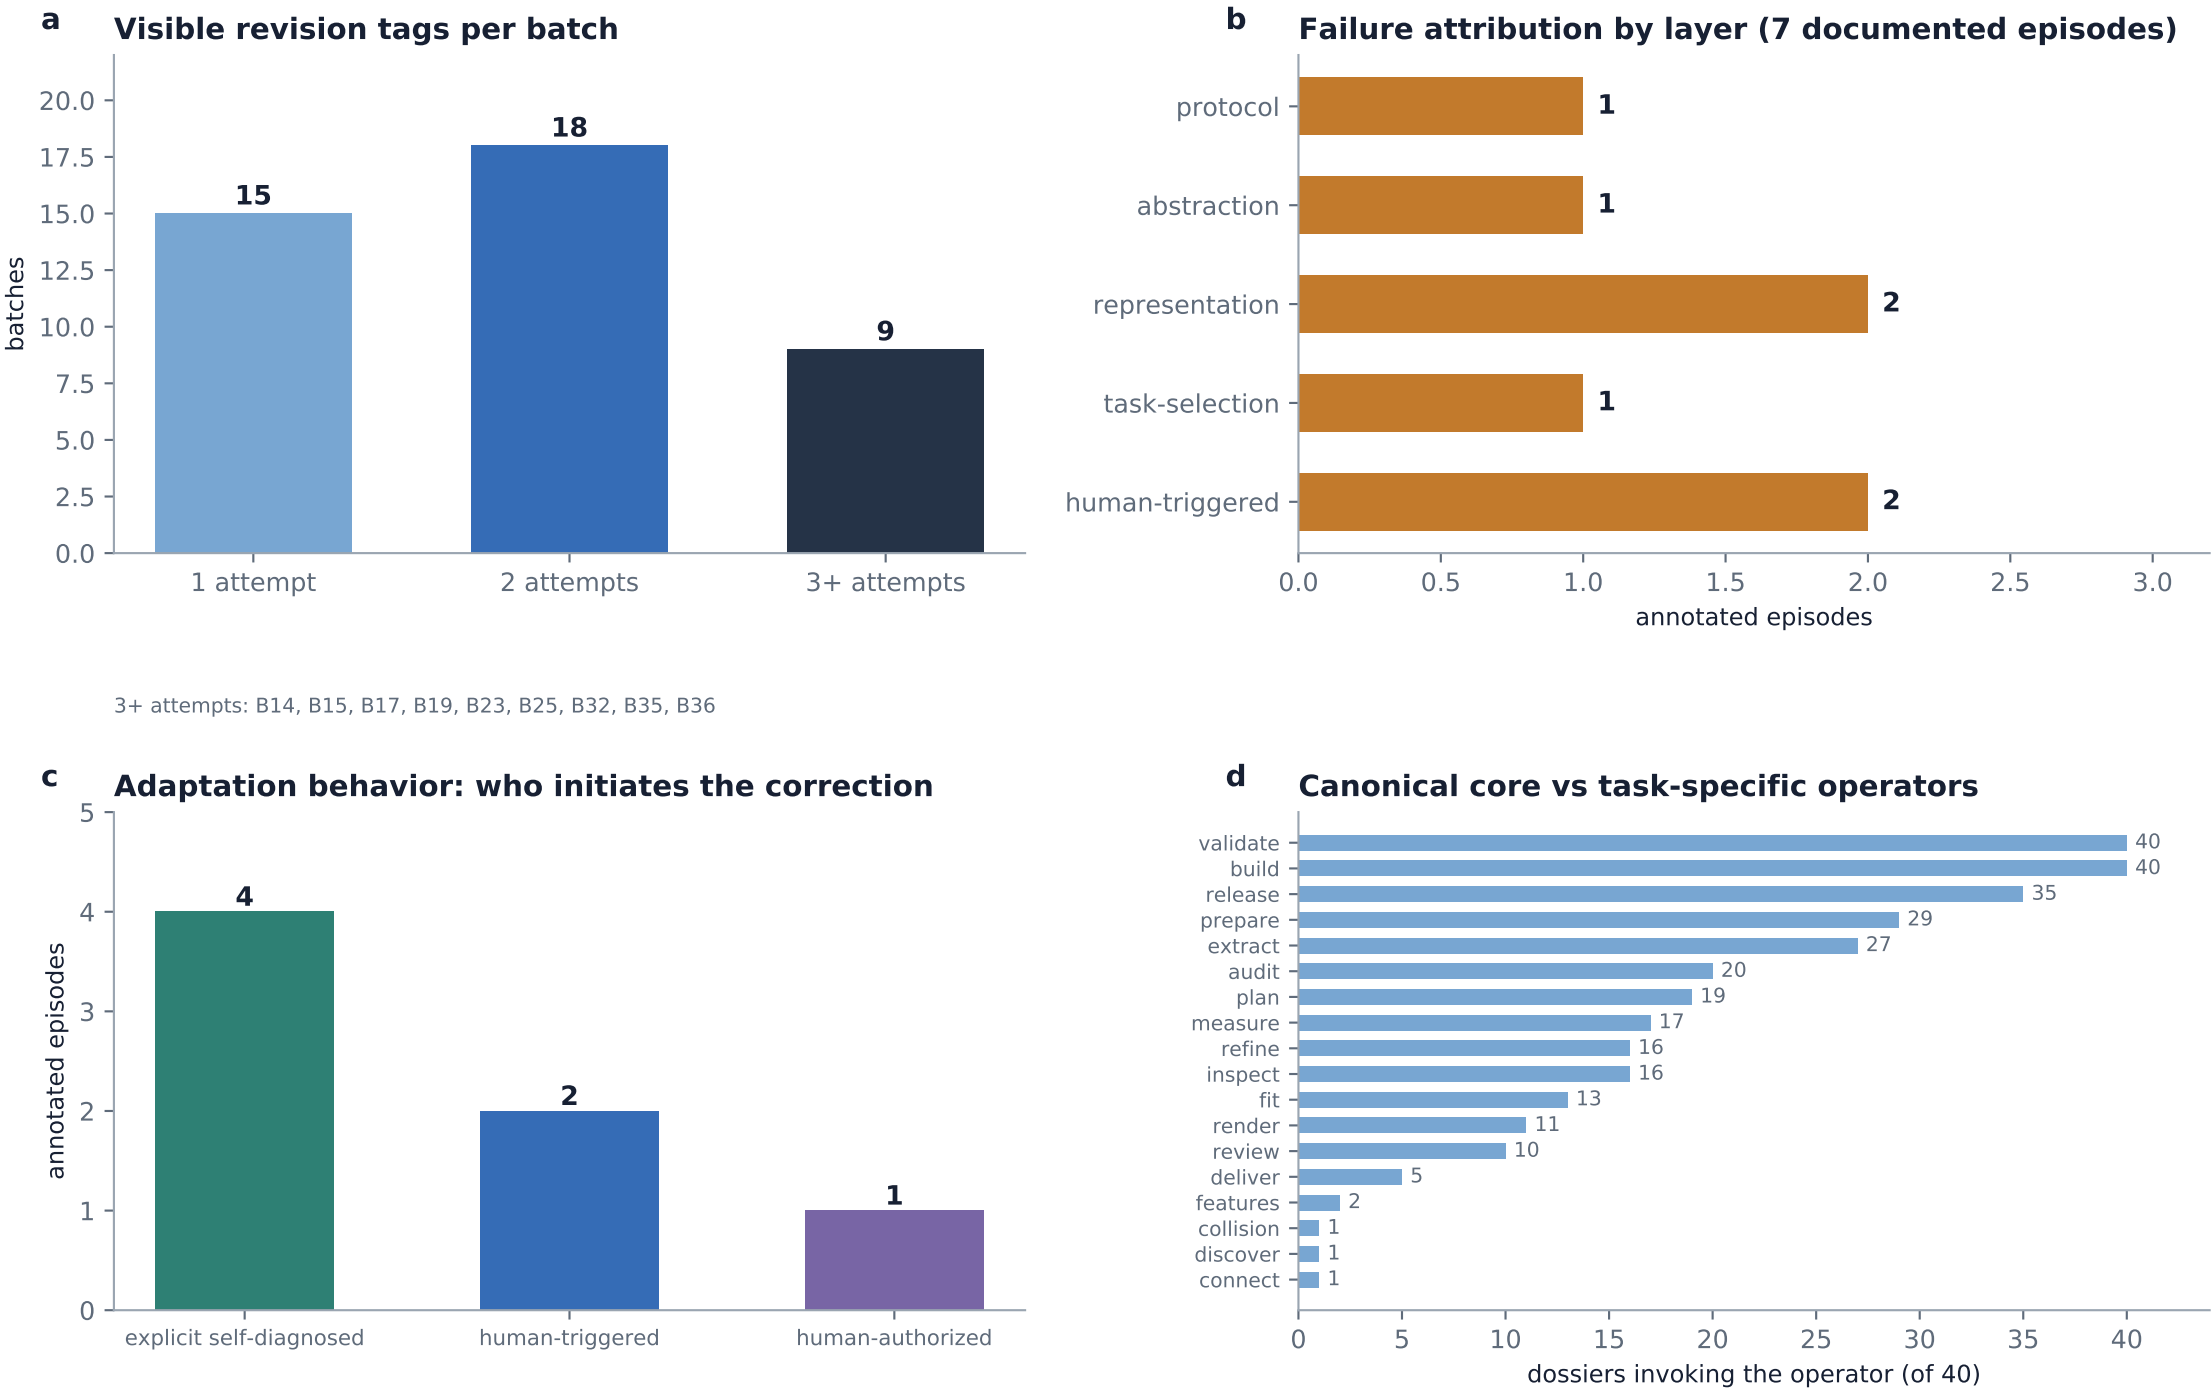


Figure 14 · Panels a–c describe behavior of the reconstruction process (revision, failure attribution, adaptation initiation); panel d shows that build/validate/release form a stable core while measure/inspect/refine/coverage operators activate only on the tasks that need them.