
## copy-on-modify assignment vs in-situ assignment

Assign N/2 values at the start of a vector of length N

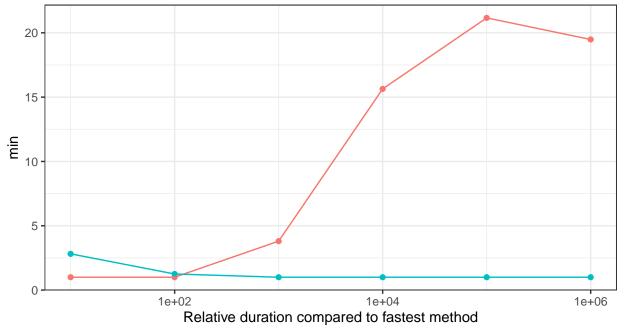

as.character(expression) - '[<-'(x, idx, ins) insitu\_assign(x, 1, ins)