

# SBS 170327

## Problem

SBS 뉴스에서는 다음과 같은 도표의 후보지지도 여론조사 결과를 보도.



SBS 뉴스 2017. 3월

막대의 높이에 의구심을 표한 시청자들의 항의에 직면함.

제대로 된 막대그래프를 그리면서 R Base plot과 ggplot에 대하여 학습.

## Data Setup

```
library(extrafont)
```

```
## Registering fonts with R
```

```
candidates <- c("문재인", "안철수", "안화정", "이재명", "홍준표", "김진태", "심상정", "유승민")
rates <- c(35.2, 17.4, 12.0, 9.5, 7.7, 5.3, 3.4, 2.6)
party <- c("더불어민주당", "자유한국당", "국민의당", "정의당", "바른정당")
colour.party <- c("blue", "lightgrey", "darkgreen", "purple", "darkblue")
candidates.party <- c("더불어민주당", "국민의당", "더불어민주당", "더불어민주당", "자유한국당", "자유한국당", "정의당", "바른정당")
match(candidates.party, party)
```

```
## [1] 1 3 1 1 2 2 4 5
```

```
candidates.colour <- colour.party[match(candidates.party, party)]
```

## strsplit


```
c.rates <- format(rates, nsmall = 1, justify = "right")
a <- sapply(strsplit(c.rates, "[.]"), `[`, 1)
b <- sapply(strsplit(c.rates, "[.]"), `[`, 2)
b.perc <- paste(".", b, "%", sep = "")
```

## Colours for rates

```
col.rates <- c("red", "orange", rep("darkblue", 6))
```

## Barplot (R Base)

```
barplot(rates)
```

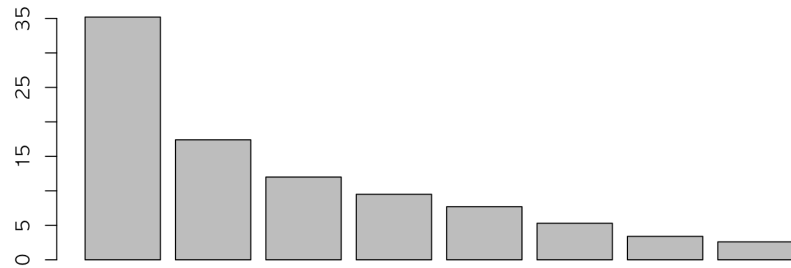


## Font Specification

```
par(family = "HCR Dotum LVT")
```


## Names under Bars

```
par(family = "HCR Dotum LVT")
b1 <- barplot(rates,
  axes = FALSE,
  col = "dodgerblue",
  names.arg = candidates,
  cex.names = 1.2,
  ylim = c(0, 38))
```

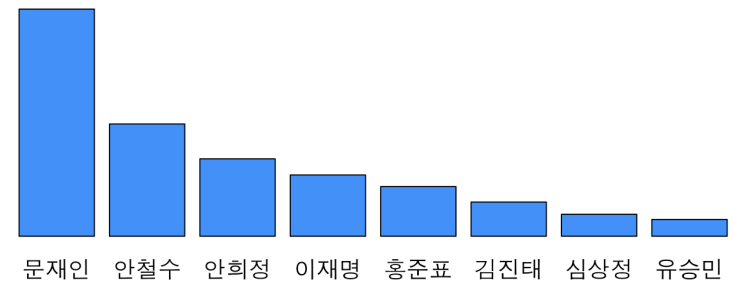


## Names closer to Bars using mtext

```
par(family = "HCR Dotum LVT")
b1 <- barplot(rates,
             axes = FALSE,
             col = "dodgerblue",
             names.arg = NULL,
             cex.names = 1.2,
             ylim = c(0, 38))
mtext(side = 1, at = b1, line = 0, text = candidates)
## Rates written on top of the Bars with different Colours
text(x = b1, y = rates + rep(1.5, 8),
     labels = paste(rates, "%", sep = ""),
     col = col.rates,
     cex = 1.2)
main.title <- "대선주자 지지도"
note.text <- "조사기관:리얼미터, 총응답자:전국 성인 1,525명, 응답률:9.5%, 표준오차:95%신뢰수준 2.5%,
조사방법:유선 ARS 10%, 무선 ARS 71%, 무선전화면접 19%, 조사기간:2017년 3월27일(월)~29일(수)"
## Main title inside the plot region
title(main = main.title, cex.main = 1.5, line = -2)
```

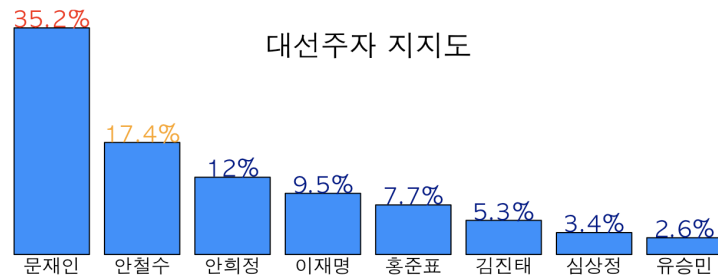

## Rates with different font size for digits

```
par(family = "HCR Dotum LVT")
b1 <- barplot(rates,
             axes = FALSE,
             col = "dodgerblue",
             names.arg = NULL,
             cex.names = 1.2,
             ylim = c(0, 38))
mtext(side = 1, at = b1, line = 0, text = candidates)
## text for integer part
text(x = b1 - c(rep(0.4, 3), rep(0.3, 5)), y = rates + rep(1.5, 8),
     labels = a,
     col = col.rates,
     cex = 1.6)
## text for digits
text(x = b1 + 0.2, y = rates + rep(1.5, 8),
     labels = b.perc,
     col = col.rates,
     cex = 1.2)
## Rectangle for main title
rect(xleft = mean(b1) - 2, ybottom = max(rates) - 6, xright = mean(b1) + 2,
     ytop = max(rates), col = "dodgerblue4")
## Main title
text(x = mean(b1), y = max(rates) - 3, labels = main.title, col = "white", cex = 1.5)
## Text for notes
text(x = mean(b1) - 2, y = max(rates) - 8, labels = note.text, cex = 0.5, adj = 0)
```

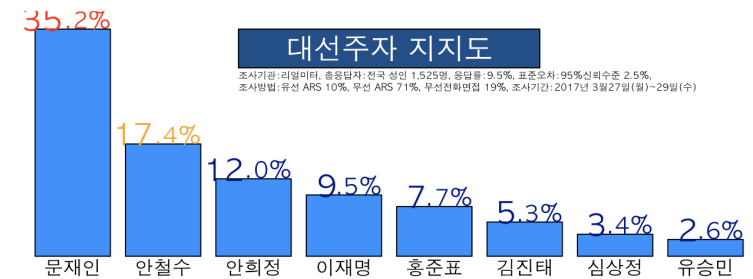

# ggplot

## Data for ggplot


```
library(ggplot2)
candidates.f <- factor(candidates, levels = candidates)
rates.df <- data.frame(후보 = candidates.f,
  정당 = candidates.party,
  색깔 = candidates.colour,
  지지도 = rates)
```

## data and mapping

```
g0 <- ggplot(data = rates.df,
  mapping = aes(x = 후보, y = 지지도))
```


## geom\_bar with single colour for the bars

```
(g1 <- g0 +
  geom_bar(stat = "identity", fill = "dodgerblue"))
```

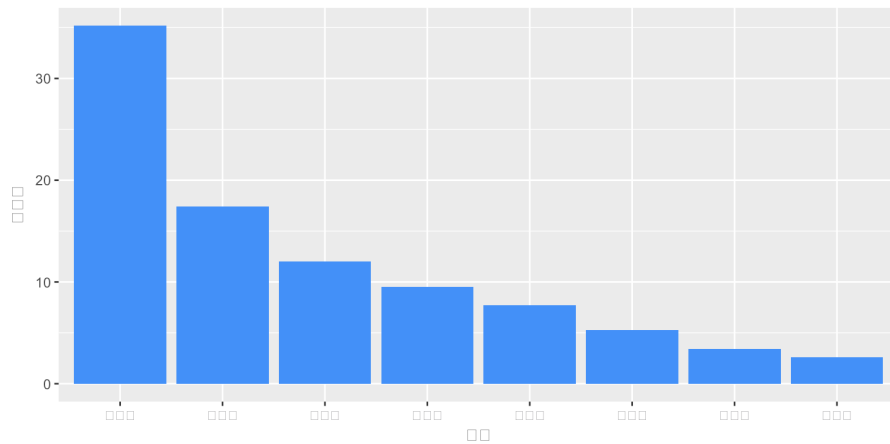


## Fill the bars with party colours

```
(g1.1 <- g0 +
  geom_bar(stat = "identity",
    fill = candidates.colour))
```

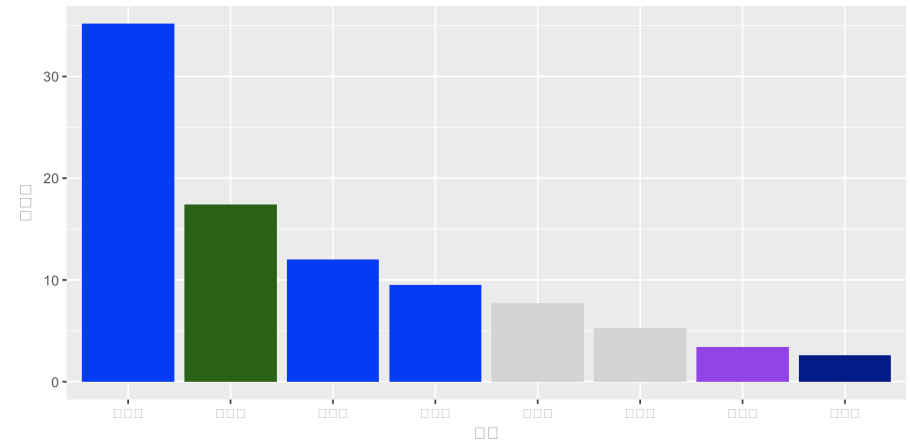


## Font family setting with g1

```
(g2 <- g1 +
  theme_bw(base_family = "HCR Dotum LVT"))
```

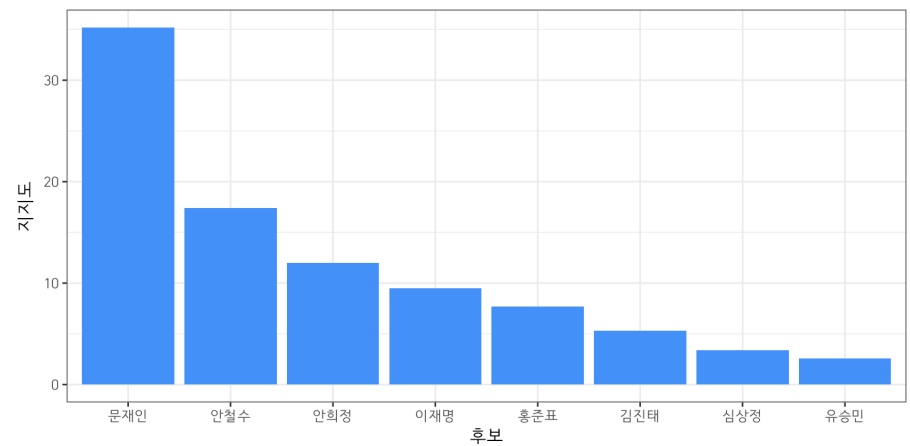


## Add rates on top of the bars

```
(g3.0 <- g2 +
  geom_text(mapping = aes(x = 후보,
    y = 지지도 + rep(1, 8),
    label = paste(지지도, "%", sep = ""),
    size = 6))
```

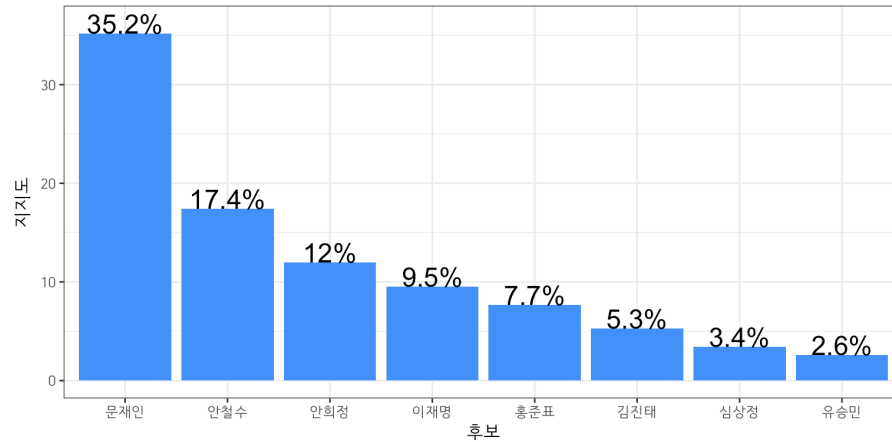


## Different font size for digits

```
(g3 <- g2 +
  geom_text(mapping = aes(x = 후보,
    y = 지지도 + rep(1, 8),
    label = a),
    hjust = 1,
    size = 8,
    colour = col.rates) +
  geom_text(mapping = aes(x = 후보,
    y = 지지도 + rep(1, 8),
    label = b.perc),
    hjust = 0,
    size = 5,
    colour = col.rates))
```

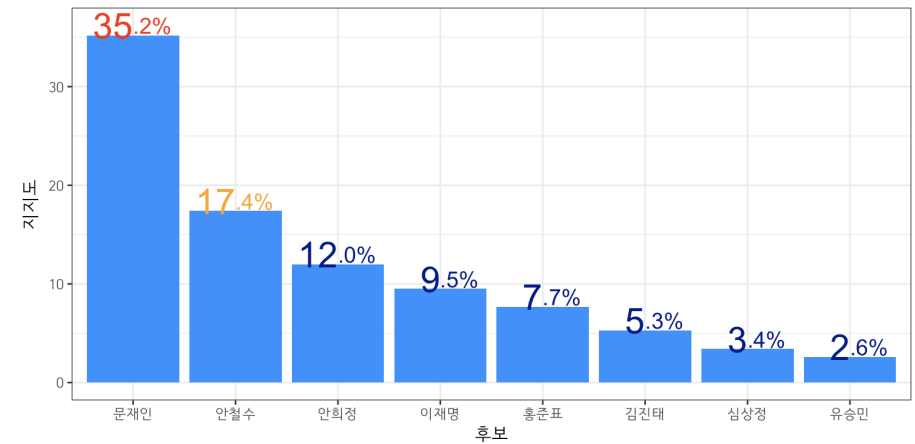


## Main title (left-justified)

```
(g4 <- g3 +
  labs(title = main.title))
```

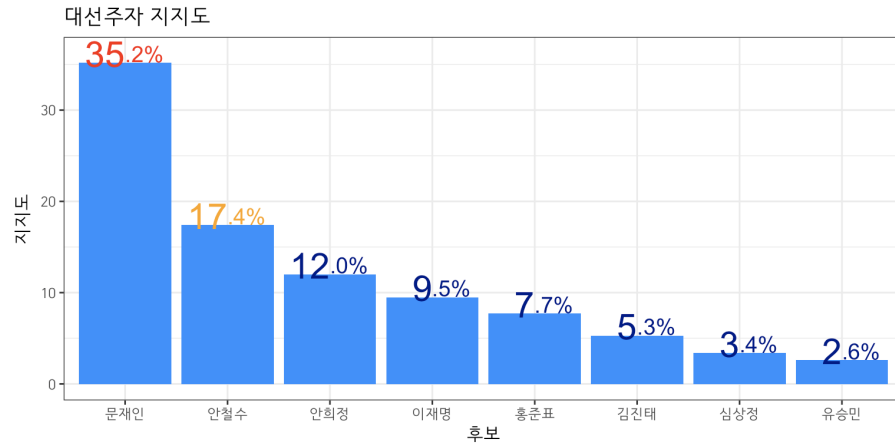


## Rates at y-axis

```
(g6 <- g5 +
  scale_y_continuous(breaks = rates, labels = rates))
```

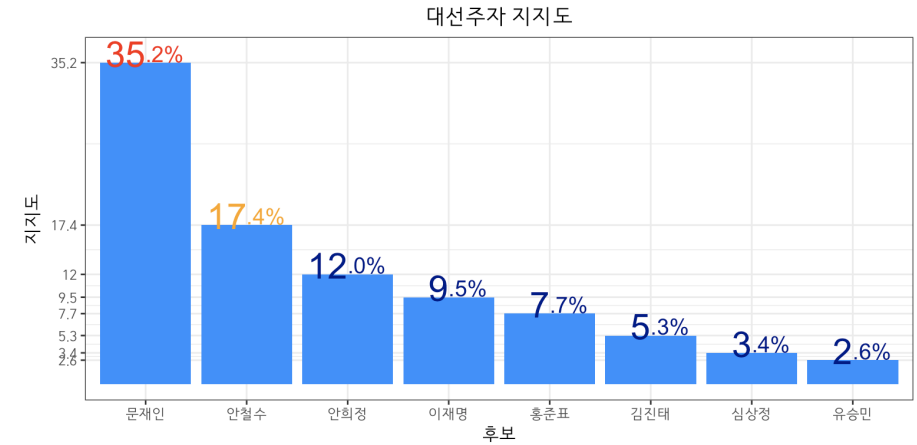


## Main title at the center

```
(g5 <- g4 +
  theme(plot.title = element_text(hjust = 0.5)))
```

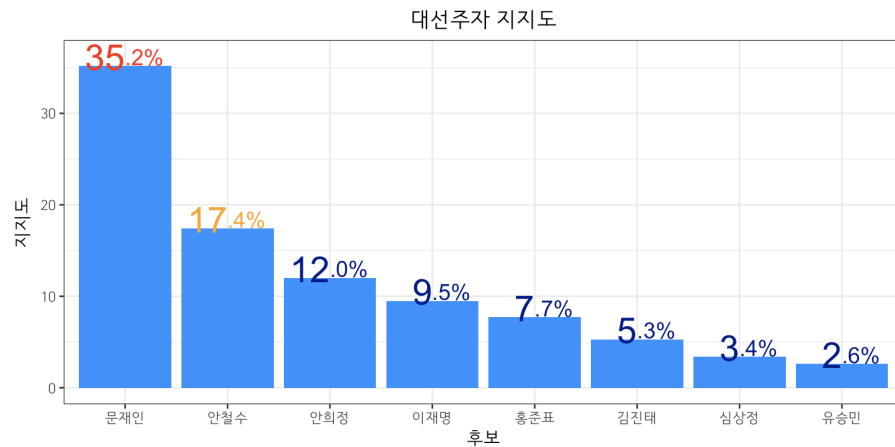


## Clear axes

```
(g7 <- g6 +  
  theme(panel.border = element_blank(),  
        axis.title.x = element_blank(),  
        axis.title.y = element_blank(),  
        axis.text.x = element_blank(),  
        axis.ticks = element_blank(),  
        axis.text.y = element_blank()))
```

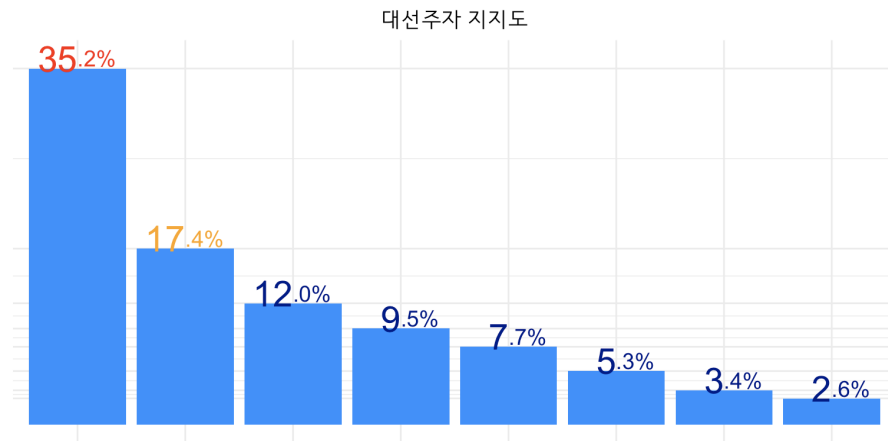


## Names closer to the bars

```
(g8 <- g7 +  
  geom_text(mapping = aes(x = 후보,  
                          y = -1,  
                          label = 후보),  
            size = 5,  
            family = "HCR Dotum LVT"))
```

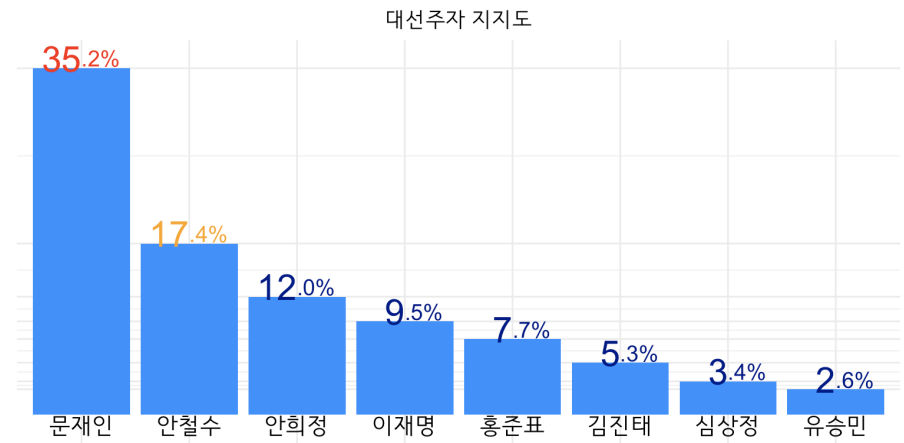


## Main title inside the plot region

```
(g9 <- g8 +  
  ggtitle("") +  
  annotate("text",  
    x = mean(b1),  
    y = max(rates) - 3,  
    label = main.title,  
    vjust = 0,  
    size = 10,  
    family = "HCR Dotum LVT"))
```

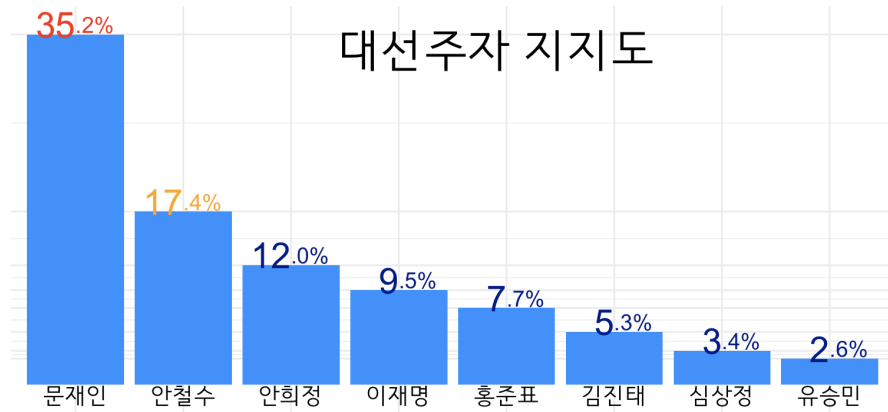

## geom\_label to enclose the main title in bounding box

```
(g9.1 <- g8 +  
  ggtitle("") +  
  geom_label(mapping = aes(x = mean(b1),  
    y = max(rates) - 3,  
    label = main.title),  
    label.padding = unit(0.9, "lines"),  
    size = 10,  
    fill = "dodgerblue4",  
    colour = "white",  
    family = "HCR Dotum LVT"))
```

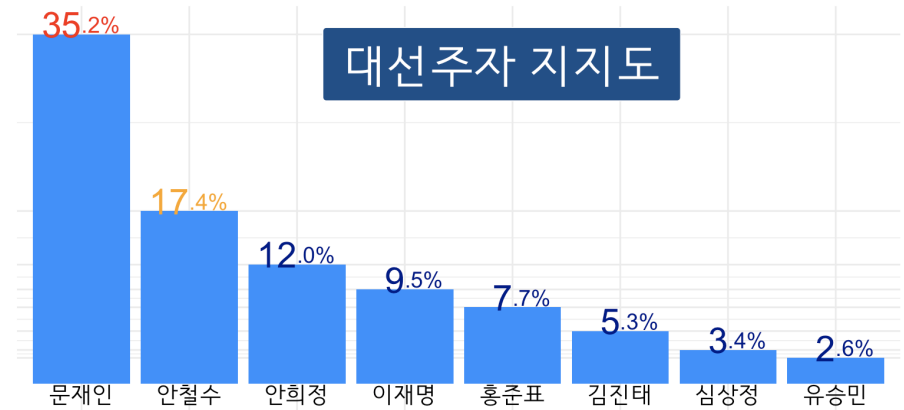



Notes

```
(g9.2 <- g9.1 +  
  annotate("text", x = mean(b1) - 1, y = max(rates) - 8,  
    label = note.text,  
    size = 2,  
    hjust = 0,  
    family = "HCR Dotum LVT"))
```

