SBS 1703

Problem

SBS 뉴스에서는 다음과 같은 도표의 후보지지도 여론조사 결과를 보도.



SBS 뉴스 2017. 3월

막대의 높이에 의구심을 표한 시청자들의 항의에 직면함.

제대로 된 막대그래프를 그리면서 R Base plot과 ggplot에 대하여 학습.

Data Setup

```
library(extrafont)
```

Registering fonts with R

```
candidates <- c("문재인", "안철수", "안희정", "이재명", "홍준표", "김진태", "심상정", "유승민")
rates <- c(35.2, 17.4, 12.0, 9.5, 7.7, 5.3, 3.4, 2.6)
party <- c("더불어민주당", "자유한국당", "국민의당", "정의당", "바른정당")
colour.party <- c("blue", "lightgrey", "darkgreen", "purple", "darkblue")
candidates.party <- c("더불어민주당", "국민의당", "더불어민주당", "대불어민주당", "자유한국당", "자유한국당", "정의당", "바른정당")
match(candidates.party, party)
```

[1] 1 3 1 1 2 2 4 5

candidates.colour <- colour.party[match(candidates.party, party)]</pre>

strsplit


```
c.rates <- format(rates, nsmall = 1, justify = "right")
a <- sapply(strsplit(c.rates, "[.]"), `[`, 1)
b <- sapply(strsplit(c.rates, "[.]"), `[`, 2)
b.perc <- paste(".", b, "%", sep = "")</pre>
```

Colours for rates

```
col.rates <- c("red", "orange", rep("darkblue", 6))
```

Barplot (R Base)

barplot(rates)



Font Specification

par(family = "Malgun Gothic")

Names under Bars

```
b1 <- barplot(rates,


axes = FALSE,

col = "dodgerblue",

names.arg = candidates,

cex.names = 1.2,

ylim = c(0, 38))
```

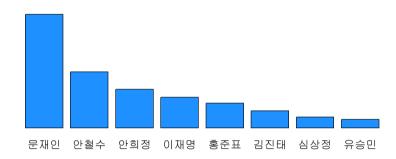

Names closer to Bars using mtext

```
b1 <- barplot(rates.</pre>
            axes = FALSE.
            col = "dodgerblue".
            names.arg = NULL.
            cex.names = 1.2.
            ylim = c(0, 38)
mtext(side = 1, at = b1, line = 0, text = candidates)
## Rates written on top of the Bars with different Colours
text(x = b1, v = rates + rep(1.5, 8),
   labels = paste(rates, "%", sep = ""),
   col = col.rates,
   cex = 1.2)
main.title <- "대선주자 지지도"
note.text <- "조사기관:리얼미터, 총응답자:전국 성인 1,525명, 응답률:9.5%, 표준오차:95%신뢰수준 2.5%,
조사방법:유선 ARS 10%, 무선 ARS 71%, 무선전화면접 19%, 조사기간:2017년 3월27일(월)~29일(수)"
## Main title inside the plot region
title(main = main.title, cex.main = 1.5, line = -2)
```



Rates with different font size for digits

```
b1 <- barplot(rates.</pre>
              axes = FALSE.
             col = "dodgerblue",
             names.arg = NULL,
              cex.names = 1.2,
             ylim = c(0, 38)
mtext(side = 1, at = b1, line = 0, text = candidates)
## text for integer part
text(x = b1 - c(rep(0.4, 3), rep(0.3, 5)), y = rates + rep(1.5, 8),
    labels = a.
    col = col.rates.
    cex = 1.6)
## text for digits
text(x = b1 + 0.2, y = rates + rep(1.5, 8),
    labels = b.perc,
    col = col.rates.
    cex = 1.2)
## Rectagle for main title
rect(xleft = mean(b1) - 2, ybottom = max(rates) - 6, xright = mean(b1) + 2,
     ytop = max(rates), col = "dodgerblue4")
## Main title
text(x = mean(b1), y = max(rates) - 3, labels = main.title, col = "white", cex = 1.5)
## Text for notes
text(x = mean(b1) - 2, y = max(rates) - 8, labels = note.text, cex = 0.5, adj = 0)
```



ggplot

Data for ggplot


```
library(ggplot2)
candidates.f <- factor(candidates, levels = candidates)
rates.df <- data.frame(후보 = candidates.f,
  정당 = candidates.party,
  색깔 = candidates.colour,
  지지도 = rates)
```

data and mapping


```
g0 <- ggplot(data = rates.df,
mapping = aes(x = 후보, y = 지지도))
```

geom_bar with single colour for the bars

```
(g1 <- g0 +
  geom_bar(stat = "identity", fill = "dodgerblue"))</pre>
```

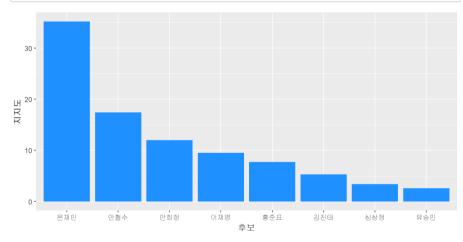


Fill the bars with party colours

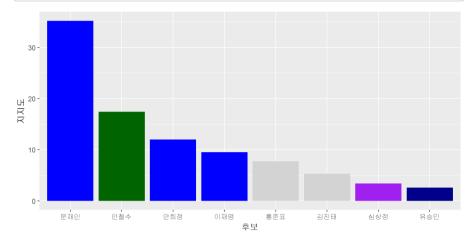


Font family setting with g1

```
(g2 <- g1 + theme_bw(base_family = "Malgun Gothic"))
```

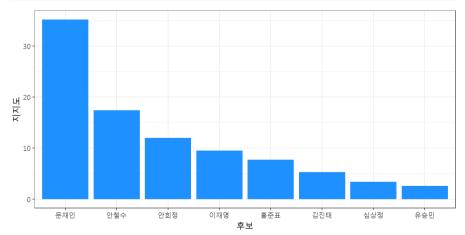


Add rates on top of the bars

```
(g3.0 <- g2 + geom_text(mapping = aes(x = 亭보, y = 지지도 + rep(1, 8), label = paste(지지도, "%", sep = "")), size = 6))
```

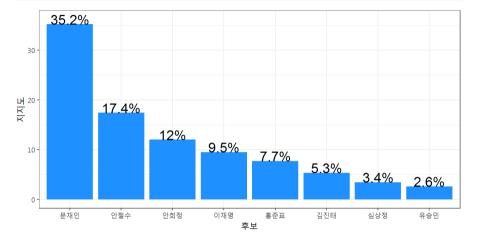


Different font size for digits

```
(g3 <- g2 + geom_text(mapping = aes(x = 亭보, y = 지지도 + rep(1, 8), label = a), hjust = 1, size = 8, colour = col.rates) + geom_text(mapping = aes(x = 亭보, y = 지지도 + rep(1, 8), label = b.perc), hjust = 0, size = 5, colour = col.rates))
```

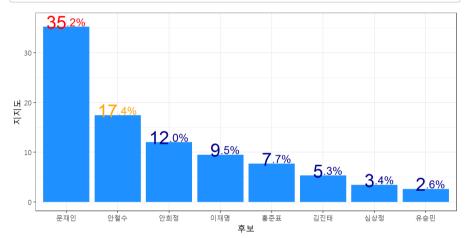

Main title (left-justified)

```
(g4 <- g3 + labs(title = main.title))
```

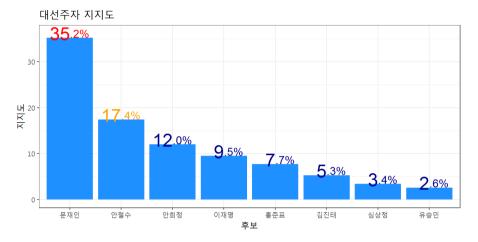


Main title at the center

```
(g5 <- g4 +
  theme(plot.title = element_text(hjust = 0.5)))</pre>
```




Rates at y-axis

```
(g6 <- g5 + scale_y_continuous(breaks = rates, labels = rates))
```

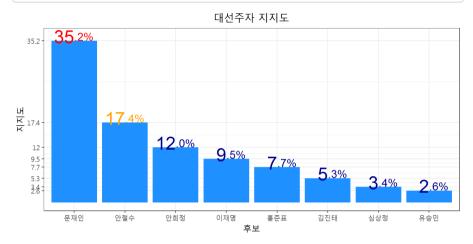

Clear axes


```
(g7 <- g6 +
    theme(panel.border = element_blank(),
        axis.title.x = element_blank(),
        axis.title.y = element_blank(),
        axis.text.x = element_blank(),
        axis.ticks = element_blank(),
        axis.ticks = element_blank())</pre>
```

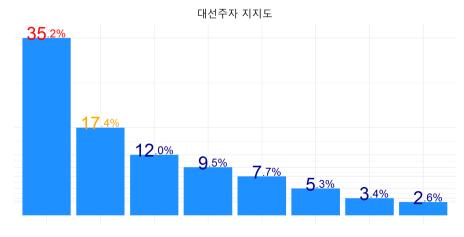


Names closer to the bars



Main title inside the plot region

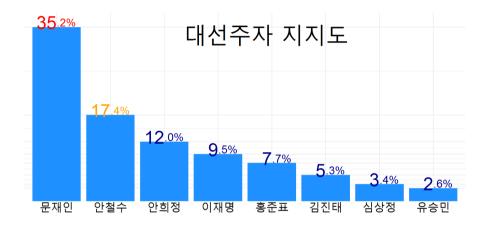

geom_label to enclose the main title in bounding box

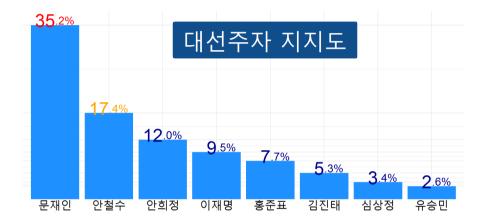

Notes

