Danish Travel Card(Rejsekort) Proposal

Jorge Y. Castillo Rodriguez Hussein Salem Aku Nour Shirazi Valta Faisal Jarkass Dhiraj Bikram Malla

IT University Copenhagen

http://jycr753.github.io/SSEQ-Report/

November 4, 2013

Collaboration Protocol

Purpose: Shared agreements on overall forms of team collaboration.

Team members:

Hussein Salem

Faisal Jarkass

Aku Nour Shirazi Valta

Dhiraj Bikram Malla

Xiaolong Tang

Jorge Castillo RodrÃguez

- 1. What are the time slots that you can set aside for the team work? Wednesday: after lectures till 14:00 [12:30-14:30] At a later point we might change the time We could work longer time in the future if we need to.
- 2. If you disagree with each other or think that the solutions/products of some of the others is not satisfactory, what is the tone of communication? Group discussion / democracy
- 3. What is the maximum length of postings? 500 words
- 4. **What do you do if a team member remains silent?** One of the team members will talk with that individual. And we might talk about it with the TA
- 5. Do you expect that team members ask for help if they recognize, they do not manage their tasks? Yes. We should have an open dialog where our problems and concern can be discussed
- 6. Which team conflicts might arise and how do you imagine dealing with them? Deadline issues, help the one that couldn't do it or perhaps give him more time.
- 7. How and where do you share files? You might consider google docs, dropbox, or the BSCW. Google drive File Sharing Google docs Document editor Github Latex Repository share
- 8. Which tools for communication will you use for what purpose? The main communication tool in our group will be Skype, since it is a free services that provides live chat, video and file transfer protocol if needed.
- 9. **how are you going to communicate asynchronously?** We decided to communicate through Skype and emails.

Prioritised List Of Software Qualities

| Software Qualities | Points | Meaning |
|--------------------|--------|---|
| Safety | 82 | N/A |
| Security | 590 | Strong code structure in case hacking into system(F.x SQL injection) - Unit test -Errors report from users |
| Reliability | 560 | Computer programâs ability to perform its intended functions and operations in a system's environment, without experiencing failure (system crash). IEEE-Std-729-1991: âSoftware reliability is defined as the probability of failure-free operation for a specified period of time in a specified environmentâ -Random testing -Redeveloping - Testing in different environments |
| Resilience | 37 | N/A |
| Robustness | 210 | N/A |
| Under-stability | 210 | N/A |
| Testability | 270 | N/A |
| Adaptability | 310 | N/A |
| Modularity | 85 | N/A |
| Complexity | 120 | N/A |
| Portability | 50 | N/A |
| Usability | 580 | The quality of user experience across websites, software, products, and environments. It is easy for users to understand and using the system. -Usability Design(UI) -Feedback from users |
| Reusability | 82 | N/A |
| Efficiency | 150 | N/A |
| Learnability | 280 | N/A |

Development Model

In this section we will arguments the points for the chosen development methodology and how it can use to implement to develop the *Danish Travel Card*'s software while developing its software.

There is many developing software methodologies which describes the development life cycles and each its own importance in software development.

Waterfall Methodology

The *Waterfall Method* is one of the oldest and basic developments methodologies which still has a great influence in modern day software development and is follow by many software developments companies around the globe to organize their projects.

The Waterfall Method is a linear process where a sequential methodology is followed, progress is monitored and measured according to the completion of each phase.




Figure 1: Waterfall Method

Waterfall Phases:

- —**Requirements:** The first step in this methodology to start with requirement analysis and revise in the project is actually feasible with this methodology.
- •Design: With the requirements and analysis acquire in the preview step, them a proper implementation strategy can be formulated according to the software environment. Further the design phase is divided in two sections. system design and component design. The system design contains details and specifications of the whole system and explains how each component of the system will interact with others. The component design contains specifications as to how each component will work separately.
- •Implementation: In this phase is where actually some components start being created. The information collected in previews phases are applied in this step to create a functional software.
- •**Testing:** This step is where the software developed in the preview phase is tested for any errors or discrepancies. In the Waterfall method the testing normally starts when the code is finished.
- •Installation: After the software is tested, it can follow to the next phase where it gets installed in the computer or devices that it is build for.
- •Maintenance: This final phase it could be stretched it for a few month or some years. With this follow up software bugs are fixed and adding/changing additional requirements or functionality to the software.

Advantages and Disadvantages

Advantages:

Since the waterfall method is the oldest and most widely used among software development companies there some advantages to this model:

- 1. Since it is a linear model, is very simple to implement.
- 2. The amount of resources to implement it are minimal.
- 3. Each stage is assigned to separate teams, this approach ensure project deadlines control.
- 4. Since the documentation is produced at every stage of the software development, this makes its understandably simpler.
- 5. After every major phase of software programming, testing is done to the correct runtime.
- 6. Defined start and end points for each phase of the process, making it more easy to measured.

Disadvantages:

- 1. Fixed requirements difficult to change.
- 2. No final user visibility of the software until the development phase has been completed.
- 3. Clients are not very clear of what they want exactly from the software, when changes are mention in between it may cause a lot confusion.
- 4. Small changes or errors that may come up in the final software could cause a lot problems.

The waterfall works really well for commercial arrangements, but when working for internal customers its more difficult to implement.

Usage

TO BE DONE HERE

Risk Analysis

| ID | Description | Probability | Effects | Strategy |
|----|------------------------------|-------------|--|--|
| 1 | A student leaves the group | High | Documents and responsibilities is left undone, and leads to delays in the project | The reminding students has to develop more, which means the responsibilities for each group member gets wider. |
| 2 | Debugging change | High | More work have to be done | Discuss the case in details and use the supervisor |
| 3 | Document delays | High | That the specific group member canât take new tasks | Project manager has to follow up more regularly |
| 4 | Planning & Estimating | High | The plans and estimating document has to done again | Use the supervisor to acknowledge the un- derstanding and dis- cuss in detail in the group |
| 5 | Misunderstanding of the task | Moderate | The developed tasks is done wrong | Discuss every tasks in the group and/or use the coffee hours to un- derstand |
| 6 | A student becomes ill | Moderate | Canât participate in supervisor meeting or canât help developing some documents | Work in groups of two at least or help him come back on track with his work |
| 7 | Size underestimate | Low | More work have to be done | Discuss the case in details and use the supervisor |
| 8 | Tools for debugging | Low | Product delays and project delays | Use the supervisor and make a lot of research about the tools |
| 9 | Hardware failure | Very low | Losing some documents | Backup more frequently and all group member has a copy |
| 10 | Inexperienced | Very low | The documents and/or debugging of the system isnât done properly | Use the supervisor, teacher and make a lot of research |

Probability:

Very low < 10%

Low 10% - 25%

Moderate 25% - 50%

High 50% - 75%

Very high > 75%

Project And Product Risks

| Risk | Affects | Description |
|----------------------------------|------------------------|--|
| Staff turnover | Project | A student gets sick or leaves the group |
| Management change | Project | The role project manager is going to rotate, could lead to changes in priorities |
| Hardware failure | Project | Hardware fails before taking backup |
| Debugging change | Project and Product | There will be a larger number of bugs found than first anticipated |
| Size underesti- mate | Project and Product | The product to debug is bigger than first anticipated |
| Planning and Estimating | Project and Product | Some tasks take longer time than first anticipated |
| Document delays | Project | Some group members does- nât deliver a document at specific deadline |
| Tools for debugging | Product | Tools to debug doesnât seems to be good as the provider says |
| Inexperienced | Project and Product | A group member canât de- liver a high quality of doc- ument or misunderstand the task |
| Inexperienced Project manager | Project and Product | A group member as a Project manager doesnât priorities correct |
| Poor Project plan- ning | Project | Dependencies of other documents/tasks leads to delays |

| Term | Definition |
|----------------------------|---|
| Casual user | A person that uses the rejsekort 1-4 times a week. |
| Laggers (user) | Persons that are slowly to adapt to new technologies. |
| GPS | Global Positioning System. |
| Use Case | A list of steps that defines the interaction between the user and the system. |
| Roles and Responsibilities | A group members role and the responsibilities in the project for the specified date. |
| Software Qualities | The qualities that are important and agreed upon in the group, which is the cornerstone of the development model. |
| Work Breakdown Structure | A way to structure the complete project work. |
| Risk Analysis | Analyze the risks in the project. |
| Use Context | The context in which the software is deployed. |
| Rich Pictures | Represent relevant aspects of the problem and application domain as rich pictures. |
| Interface design | The design of the interface that the user sees. |
| Mock-Up | Is a scale or full-size model of a design or device, used for teaching, demonstration, de- sign evaluation and promo- tion. |

Interviews Summary

Interview to ticket controller

26. sep. 2013 15:05 at DR Byen station

Have the Rejsekort system made your work easier? âIn the start there were many problems, but it have become better over time, which makes by work a bit easierâ

Which problems do you see the passengers face? âThe passengers using travel card(Rejsekort) forget to check in again when they change transport means under their commute. This entitles them to a fine, which we (controllers in the metro) have stopped to hand out, as there have been much confusion since the travel card cameâ

Interview to IT professionals

Observation 26/9-2013 15:00-15:20 at DR Byen station A guy is coming up to the station. He uses his clips card and walk away. A metro just comes in to the station. Around 8 passengers come out. And 2 people get into the train. A little girl comes and check out with a Rejsekort. Then a guy is coming up to the station. He uses his clipe card and wait for the metro. Two guys are coming to station and use their clipe card. After that they are waiting for the train. Then a man put his wallet close to check in machine. Then a man and a woman are coming up to DR station. The man check in with his clipe card. the woman put her wallet close to the check in machine. A guy comes up with his Rejsekort. He checks in and wait for the metro. Then a train is coming into station. A woman is very hurry up to use her clipe card. But her card is bended. So she tries many times and finally she check in with her clipe card. But she missed the trains.

Another train is coming in to station. Many passengers are coming out. Passengers who use rejsekort are standing around the check out machine. Because they are waiting for the passengers who are in front them to check out. Two little girls, they are coming up to the station. They both check in with rejsekort. And they are waiting in the train station. A guy is checking out, but have problems seeing the display on the machine because the sun is reflecting on it. Another woman is checking several people in, but seems a bit confused.

27/9-2013 8:30-8:45 DR Byen station A guy who take a cup of coffee is coming up to the train station. He puts his rejsekort from his pocket. And he puts close to check in machine. The trains are coming every 4 minutes. There are a lot of people are waiting in the train station. There are crowd of people are standing in front of check out machines. Then a train is coming to station. there are around 12 people getting off from that train. A girl takes rejsekort. She press the machine. She checks in not only for her but also for her friend. There are still a crowd of people in the station. There are 3 people standing in front of check out machine.

A train is coming in to station. Most of people go inside. And two little girls are coming out of train. Two men are coming up to station. They both check in with rejsekort.

Interview Questions

There will be 3 participants

- 1. passagers(structured)
 - (a) Rejse Kort users
 - i. How old are you?

Range:15 - 25 26- 35 older

- **B**. How often do you use Rejse Kort?
 - A. Every day
 - B. 1-3 times a week
 - C. 1-3 times a month
 - D. twice a year
 - E. or less
- iii. Which type of Rejse kort are you using?
 - A. Personal card (Rejsekort personligt)
 - B. Anonymous card (Rejsekort anonymt)
 - C. Flex card (Rejsekort flex)
- iv. How did you order your Rejse Kort?
 - A. Online
 - B. Ticket office
- v. How do you charge your Rejse Kort?
 - A. Dankort agreement / automatic recharge
 - B. Online
 - C. Machine
 - D. Ticket office
- vi. Which transportation do you use very often?
 - A. Metro
 - B. regular train
 - C. S train
 - D. bus
 - E. boat
- vii. Why do you choose Rejse kort at the beginning?
 - A. price
 - B. new technology
 - C. convenient(easy, cover all Denmark etc.)
 - D. others...
- viii. What the problems are you facing when you use Rejse Kort?
 - A. Checking in
 - B. Checking out
 - C. Loading credit/balance
 - D. No, I donât have yet
 - E. If yes, Please explain
 - F. Other problems?
- ix. Which improvement do you expect from Rejse Kort?
 - A. Open answer
- (b) non user passengers

- i. How old are you?
 - Range15 25 26- 35 older
- **A**. How often do you use public transportation?
 - A. Every day
 - B. 1-3 times a week
 - C. 1-3 times a month
 - D. twice a year
 - E. or less
- iii. Which type of tickets are you using?
 - A. single ticket
 - B. period card
 - C. youth card
 - D. clipe card
 - E. app ticket
 - F. pension card
 - G. other
- iv. Why are you not using Rejse Kort?
 - A. Price
 - B. New technology
 - C. Difficult
 - D. Not convenient
 - E. other
- v. Which improvement would you suggest Rejser Kort then you can use it in the future?
 - A. Open answer
 - B. I would never use it
- 2. company IT professionals(semi-structured)
 - (a) How do you think about rejse kort system?
 - (b) Which kind of problems do you face with the Rejse Kort system?
 - (c) What could be improved? and how?
 - (d) How many percent of users in Denmark do your company expectful?
- 3. ticket controllers(semi-structured)
 - (a) Which kind of problems do you face working with the Rejse Kort system?
 - (b) What could be improved?
 - (c) How does this card help you work? F.x make easy for your work?
 - (d) Which of the transportation ticket you prefer? why?

Waterfall

Advantages

Every phase has a defined start and end point. Progress can be conclusively identified (through the use of milestones) by both vendor and client.

Disadvantages

If there are many errors in the results, developers need to go back all the processes. No user interaction. Its major problem is the inflexible partitioning of the project into distinct stages

Characteristic

The waterfall model is an example of a plan-driven processâin principle, you must plan and schedule all of the process activities before starting work on them

In principle, the waterfall model should only be used when the requirements are well understood and unlikely to change radically during system development.

Agile

Advantages

Saving time for the developing team. Customer satisfaction by rapid, continuous delivery of useful software. People and interactions are emphasized rather than process and tools. Customers, developers and testers constantly interact with each other. Working software is delivered frequently (weeks rather than months). Close, daily cooperation between business people and developers. Regular adaptation to changing circumstances. Even late changes in requirements are welcomed. Constant Learning, Knowledge Creation and Knowledge Sharing

Disadvantages

In case of some software deliverables, especially the large ones, it is difficult to assess the effort required at the beginning of the software development life cycle.

There is lack of emphasis on necessary designing and documentation.

Characteristic

Individuals and interactions over processes and tools.

Working software over comprehensive documentation.

Customer collaboration over contract negotiation.

Responding to change over following a plan.

Rational Unified Process (RUP)

Advantages

Full of the documents describing for the project. It is good for large project. There are iterations in the different phases.

Disadvantages

The team members need to be expert in their field to develop a software under this methodology.

The development process is too complex and disorganized. It is wasting time to make many documents for a small project.

Characteristic

RUP provides a full lifecycle approach covering a series of product lifecycle phases called inception, elaboration, construction, and transition.

RUP provides a software development method and a set of software engineering practices that cover the majority of software development disciplines.

RUP is incremental: Each iteration builds on the functionality of the prior iteration; the software application evolves in this fashion with the benefit of regular and continuous feedback.

Spiral

Advantages

Risk management as inbuilt feature. Changes can be done later without spending much time.

Disadvantages

High cost involved in this model. Expertise needed as product has to review and redone time to time.

Characteristic

The main difference between the spiral model and other software process models is its explicit recognition of risk. A cycle of the spiral begins by elaborating objectives such as performance and functionality.

Prototyping

Advantages

User is involved throughout the development process, which increases the likelihood of user acceptance of the final implementation.

Small-scale mock-ups of the system are developed following an iterative modification process until the prototype evolves to meet the usersâ requirements.

While most prototypes are developed with the expectation that they will be discarded, it is possible in some cases to evolve from prototype to working system.

Since in this methodology a working model of the system is provided, the users get a better understanding of the system being developed.

Errors can be detected much earlier.

Quicker user feedback is available leading to better solutions.

Missing functionality can be identified easily

Disadvantages

Leads to implementing and then repairing way of building systems.

Practically, this methodology may increase the complexity of the system as scope of the system may expand beyond original plans.

Incomplete application may cause application not to be used as the full system was designed.

Too much involvement of client, is not always preferred by the developer.

Too many changes can disturb the rhythm of the development team.

Characteristic

A basic understanding of the fundamental business problem is necessary to avoid solving the wrong problem.

Prototype model should be used when the desired system needs to have a lot of interaction with the end users.

Extreme Programming

Advantages

Developers write test code first. It is test driven development. The aim is using test code to design the structures of system. It is good for developers to consider the risks that could be in the structures. It is fast to develop the software products.

Disadvantages

XP is more related to the technical people. Business users cannot be part of development.

There are few documents. It is hard to use in the large project.

XP ignore the software design.

There is no specific process for developing.

Characteristic

Extreme Programming is an Agile methodology, there are characterized to be an open for adjustments running on development. User words is law, and developers should always have users priority of, which part which must be developed next time, and approval by the fact that it developed was actually what they needed.

Incremental Development

Advantages

- Generates working software quickly and early during the software life cycle. - More flexible â less costly to change scope and requirements. - Easier to test and debug during a smaller iteration. - Customer can respond to each built. - Lowers initial delivery cost. - Easier to manage risk because risky pieces are identified and handled during itâd iteration.

Disadvantages

- Needs good planning and design. - Needs a clear and complete definition of the whole system before it can be broken down and built incrementally.

Characteristic

In incremental model the whole requirement is divided into various builds. Multiple development cycles take place here, making the life cycle a âmulti-waterfallâ cycle. Cycles are divided up into smaller, more easily managed modules. Each module passes through the requirements, design, implementation and testing phases.

Rapid Application Development

Advantages

Reduced development time.

Increases reusability of components.

Quick initial reviews occur.

Encourages customer feedback.

$IT-University\ of\ Copenhagen \\ \rangle SESG-E2013 \rangle \textbf{Group:} 10-DanishTravelcard \rangle \textbf{ID:} Appendix \rangle Responsible:All$

Disadvantages

Depends on strong team and individual performances for identifying business requirements.

Only system that can be modularized can be built using RAD.

High dependency on modeling skills.

There are times when the team ignores necessary quality parameters such as consistency, reliability and standardization.

Characteristic

RAD should be used when there is a need to create a system that can be modularized in 2-3 months of time

It should be used if thereas high availability of designers for modeling and the budget is high enough to afford their cost along with the cost of automated code generating tools.

Classes Mock up

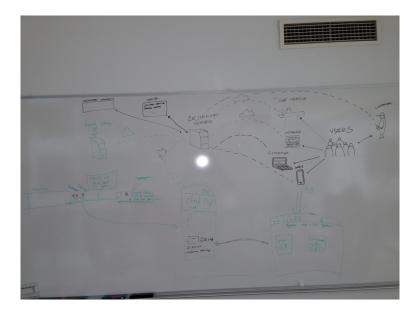


Figure 2: Class Diagram Draft

Class Diagram

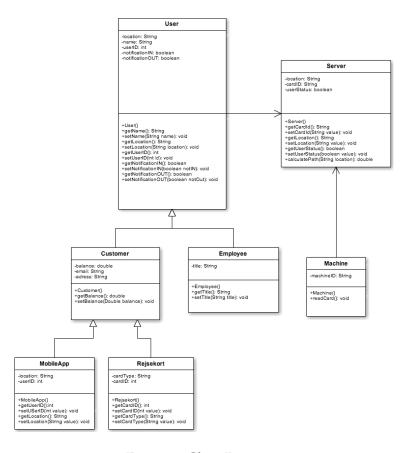


Figure 3: Class Diagram

Description

User

There are two types of users in this system. They are customers who use the system to travel. And also employee works in the public transport company. And both users can access to usersâ status(check in/out) and location (zone area).

Customer

Customers have more functions than the User class. Customer has the balance value. That means customers can check and charge their own balance accounts. The customers have two ways to use the system. One is rejsekort. Another is mobile app.

Employee

The employees who use the system are ticket controllers. They can only access to usersâ ID, status and location.

MobileApp

Mobile app can get usersâ ID, status, location(with GPS) and return all the data back to the server. Users also get balance data from server.

Rejsekort

Customers can always use the card to check in/ out and check balance through the machines in the station. The card contains customersâ ID, name and etc.

Machine

Machines are located all the stations and buses in Denmark. The machines can read rejsekort. And they can send customersâ informations and location back to server. And the machines can also get customersâ balance base on customersâ ID from the the server.

Server

The server contains all the customersâ ID, status, location, balance and customersâ information. The server can receive all the data from the mobile and the machines. The server can also calculate the price base on check in/out location and charge that price from balance account.

Use Case Description

Actors

Customer: A person who uses the Rejsekort system or buys it on behalf of another person.

Customer service: A person who works for the Rejsekort company serving the customers. A person in the customer service can do the same as the customer except for checking in and checking status.

Controller: A person who checks whether passengers with Rejsekort are commuting a valid trip. In case they are not, the controller is able to issue them a fine.

Financial institute: Withdraws money from the customers account whenever they checkout or add credit to their balance, either by them self or through the customer service.

Use cases

BlockAccount: An account can be blocked either by the customer or the customer service.

CheckBalance: The balance of a customer can be checked both by the customer and the customer service.

BlockCardAccount: A customer or the customer service can block a specific card on a customer account.

CreateAccount: A customer can create an account or request the customer service to create it.

AddBalance extends Withdraw : The customer service or the customer can add balance to his account.

CheckOut extends Withdraw: When a passenger ends his commute he is able to checkout, which also can be done by the customer service in cases it is needed

Withdraw: Depending on the customers choice, the financial institute withdraws money from the customers bank account when balance is added to the Rejsekort account or when checking out.

CheckHistory: The customer service or the customer himself can check the history of activities on the account.

CheckCustomerStatus: Its possible for the customer, the customer service and the controller to check whether the passenger traveling on Rejsekort have checked in.

SendMail: Both the customer and service can communicate by mail.

EraseFine: The customer service can erase a fine given to a customer.

CheckIn: A passenger traveling with Rejsekort can check-in when he starts his commute and if he wish he can add:

- 1. AddBicycle
- 2. AddAnimal
- 3. AddAdults
- 4. AddKids

GiveFine: The controller can give a passenger a fine.

Configuration Management Plan

Objectives and scope

Even though there is no way to manage what it is unknown, it is essential to have a detailed knowledge of the of the infrastructure in order to make the best use of it, to develop a good CM it should include among other things:

- Faster problem solution, for better quality of the software and the service, a common problem
 is the connection to the servers may be down, errors in the magnetic reader of the card/login
 machine or is not up to date with the latest software containing the latest encryptions keys.
 Having to detect this most common errors without having a optimal configuration management database can increment the solving time of the problem in a larger scale.
- Efficient change management, it is very important to know all the changes made to the system or structure of it, this way changes can be design not to produce errors of incompatibilities or problems.
- Cost reduction, detailed documentation of all the elements of the configuration allows to avoid unnecessary duplicates, for example: a) Cost of licenses by avoiding having multiple software that has the same functionality b) Illegal copies could carry viruses or any other kind of malware that could put in risk the software/hardware in risk c)Legal requirements with licenses or any other third party application legal requirements that could have a negative impact in the organization and by extension in the system.
- Security it is a big part of our software and having its configuration management database up to date allows to find and fix vulnerabilities in the software.

Terminology

To have a proper CM there is the necessity to have some pre-defined rules, which includes the follow:

- Naming conventions this agreement will be a contract to keep the same name structure for all files, folders, classes, methods, for example:
 - Classes it will always start with a package name abbreviation, capital letter for each different word describing the class for example: VYXZSomeReallyImportantClass{}
 - Method, it will have same format as it predecessor but no including the package name, but it will also include what type of method it is or what kind of value it does return or print in the software scope, for example: SomeImportantMethodBoolean(){}
 - Folders and txt files this will always need to have the *date*(*YYYYMMDD*) that was created, person initials, a location of the original file, every different values separated by a dash (–), for example: 20131023 *GD JC filename.extension*
 - Version number of the software it will go with 1.0 for the start, if there is bugs fix it will increment by 0.1 and if their major changes to the system it will increment by 1.0
 - Source control by using git to control the status of the system, by dividing the source into different branches and only margin them into the final products when all steps of debugging and cleaning the code has been done.
 - Store location to keep control of all files that are produced during project evolution, most
 of files are stored in Google Drive for backups, and the rest of âSoftwareâ related files are
 placed into a private repository to make it accessible from different locations to programmers, developers and designers of the system.

Collaborators

During this project since we are using the initials of the person to define the file that it is being created so each member should have an unique initials containing 2 - 3 character depending on availability and a git or mercurial username to being able keep control of our document changes in the central repository or own branch.

List of collaborators:

- 1. Jorge Y. Castillo (*JC*) jycr753
- 2. Xiaolong Tang (XL) xiaolongtang89
- 3. Faisal Jarkass (FJ) faisal1985
- 4. Dhiraj Bikram Malla (DB) djbik
- 5. Hussein Salem (HS) husalem
- 6. Aku Nour Shirazi Valta (ANV) nourshirazi
- 7. All members (AM) N/A

This guidelines will help to build a solid CM that it is required to have a efficient software development environment, and post software maintenance or bug fixing. Even though this rules are important and be follow, there is always exceptions for example: Initial software structure mock ups, or hardware placement mock ups.

Control of sub responsibilities and 3rd party software or hardware contractors, to control what the 3rd party software developers have access the only thing that it is available to them, is close source API with the correct list of classes that they can use and how they can extend to be able to do their job programming the required extension for the software.

Software Requirements Specification

The Structure of a ours requirement document will look as:

Introduction

Describe how requirements are handled for waterfall model and the systemâs function.

Requirements

Describe the functional system requirements and non-functional requirements.

Glossary

Define the technical terms used in this document.

Introduction

In software development, Requirements phase focuses on defining and capturing the needs and problems that a software application is to address and solve. The requirements phase is the first phase in waterfall development model, setting the stage for the rest of the phases of the software application development.

The requirements phase aims to come up with Requirement Specification document or documents. The aim is to define the requirements in as clear and as detail manner as possible. Normally in order to capture, collect and gather the requirements; a dedicated team is setup to capture the requirements.

Requirement

In our software requirement document we are going to use the graphical notation and structured specifications, in order to handle and define each requirement. The choice of the graphical notation is based primarily on the fact that it is far more readable for us as developers, the structured language notations use templates to specify system requirements.

Software description:

Requirement ID: Identification number for specific requirement **Title:** the title of the specific requirement **Description:** Specific description and details on what the requirement functions does, and how to how to proceed when an action takes place **Priority:** Define the priority of this requirement for the entire project **Risk:** Define the risk if this requirement is not meet.

Priorities:

Low: Good to have functionality but not required to make the software work. **Medium:** Some functionality that could have to implement the UI/UX while interacting inside the GUI **High:** It must have to function

Risk:

Critical (C): It must be developed to make the software work **Medium** (M): Optional functionality but not essential to make the basic software work **Low** (L): Function that will be implemented for as a complement for the software but present no risk for its functionality.

An adult is a person in the age of 16+, where a kid is a person in the age 12-16. For kids under the age of 12 the journey is free of charge, but the person has to be accomplished by an adult or he has to pay the minimum fee.

| Requirement ID | 01 |
|----------------|--|
| Title | Block Account |
| Description | User can block his account that which put a stop to any kind of travel or transactions made with the travel card or mobile application until further notice. |
| Priority | High |
| Risk | Critical |

| Requirement ID | 02 |
|----------------|--|
| Title | Check Account Balance |
| Description | This required the such account has been authenticated, and show the account current balance. |
| Priority | High |
| Risk | Critical |

| Requirement ID | 03 |
|----------------|--|
| Title | Create Account |
| Description | Open an account, which it has to include the username, last name, billing address, telephone, and credit card information. This has to be made true a secure channel (https) with their valid SSL certificate and have a two steps verification to validate users fx: SMS to verify phone. |
| Priority | High |
| Risk | Critical |

| Requirement ID | 04 |
|----------------|---|
| Title | Check History |
| Description | This required to have access to the users travel data, balance history and spending data, to be able to show a complete list or historical spending of the users. |
| Priority | High |
| Risk | Medium |

| Requirement ID | 05 |
|----------------|---|
| Title | Check Customer Status |
| Description | Make possible for: customer, customer service and controller to check whether the passenger traveling on Rejsekort have checked in. |
| Priority | High |
| Risk | Critical |

| Requirement ID | 06 |
|----------------|---|
| Title | SendMail |
| Description | Both the customer and service can communicate by mail |
| Priority | Medium |
| Risk | Medium |

| Requirement ID | 07 |
|----------------|--|
| Title | EraseFine |
| Description | The customer service can erase a fine given to a customer. |
| Priority | Medium |
| Risk | Medium |

| Requirement ID | 08 |
|----------------|---|
| Title | CheckIn |
| Description | A passenger traveling with Rejsekort can check-in when he starts his commute and if he wish he can add ad- ditional passengers such as adults and kids, bicycles or animals |
| Priority | High |
| Risk | Critical |

| Requirement ID | 09 |
|----------------|---|
| Title | GiveFine |
| Description | The controller can give a passenger a fine. |
| Priority | High |
| Risk | Critical |

| Requirement ID | 10 |
|----------------|--|
| Title | BlockCardAccount |
| Description | A customer or customer service are able to block a specific card |
| Priority | High |
| Risk | Critical |

| Requirement ID | 11 |
|----------------|--|
| Title | AddBalance |
| Description | The customer service or the customer can add balance to his account. |
| Priority | High |
| Risk | Critical |

| Requirement ID | 12 |
|----------------|--|
| Title | CheckOut |
| Description | When a passenger ends his commute he is able to check- out, which also can be done by the customer service in cases it is needed. |
| Priority | High |
| Risk | Critical |

| Requirement ID | 13 |
|----------------|--|
| Title | AddBicycle |
| Description | A passenger traveling with Rejsekort can check-in when he starts his commute and if he wish he can add an bicycle to his journey. It is permitted only with two wheel bicycle. |
| Priority | High |
| Risk | Medium |

| Requirement ID | 14 |
|----------------|--|
| Title | AddAnimal |
| Description | A passenger traveling with Rejsekort can check-in when he starts his commute and if he wish he can add an animal to his journey. For animals meant Small dogs, cats, birds and other small animals. Animals may be included for free, but must be placed in a bag or cage and remain there for the whole journey. For larger dogs mean dogs that can not be carried in a purse, a cage or similar. Each passenger may only include one large dog, and this must be on a leash and under the passenger's control. For dog paid child price. |
| Priority | High |
| Risk | Medium |

| Requirement ID | 15 |
|----------------|---|
| Title | Add Adults |
| Description | A passenger traveling with Rejsekort can check in when he starts his commute and if he wish he can add an adult to his journey. |
| Priority | High |
| Risk | Medium |

| Requirement ID | 16 |
|----------------|--|
| Title | Add Kids |
| Description | A passenger traveling with Rejsekort can check in when he starts his commute and if he wish he can add an animal to his journey. |
| Priority | High |
| Risk | Medium |

| Requirement ID | 17 |
|----------------|---|
| Title | Withdraw |
| Description | Depending on the customers choice, the financial institute withdraws money from the customers bank account when balance is added to the Rejsekort account or when checking out. |
| Priority | High |
| Risk | Critical |

Glossary

A functional requirement has the following properties:

| Requirement ID | Uniquely identifies require- |
|----------------|---|
| | ment |
| Title | Gives the requirement a symbolic name |
| Description | The definition of the requirement |
| Priority | Defines the order in which requirements should be im- plemented. Priorities are as- signed values from low to high |
| Risk | Specifies the risk if this specific requirement is not implemented. It shows how critical the requirements is to the system as a whole. The following risk levels are defined over the impact of not being implemented correctlyCritical (C) it will break the main functionality of the system. The system cannot be used if this requirement is not implementedHigh (H) It will impact the main functionality of the system. Some function of the system could be inaccessible, but the system can be generally used. |