Amirkabir University of Technology
(Tehran Polytechnic)
Department of Computer Engineering

Process Synchronization
(همگام‌سازی فرآیندها)

Hamid R. Zarandi
h_zarandi@aut.ac.ir

Motivation

- **Cooperating process/thread:**
  - the one that can affect or be affected by other processes executing in system.
  - Processes, threads
- **Processes can execute concurrently**
  - May be interrupted at any time, partially completing execution
- **Problem: Data inconsistency** (ناسازگاری داده)
  - It may occur in the case of concurrent access to shared data
- **How to solve?**
  - Orderly execution of cooperating processes that share a logical address space

One example!

- A solution to consumer-producer problem that fills *all* the buffers.
  - We can have an integer `counter` that keeps track of the number of full buffers.
  - Initially, `counter` is set to 0.
  - It is incremented by the producer after it produces a new buffer
  - It is decremented by the consumer after it consumes a buffer.

Circular buffer & producer-consumer problem

```
#define BUFFER_SIZE 10
typedef struct {
  . . .
} item;

item buffer[BUFFER_SIZE];
int in = 0;
int out = 0;
```

Producer

```
item next_produced;
while (true) {
        /* produce an item in next produced */
        while (counter == BUFFER_SIZE))
                ; /* do nothing */

        buffer[in] = next_produced;
        in = (in + 1) % BUFFER_SIZE;
        counter ++;
}
```

Consumer

```
item next_consumed;
while (true) {
        while (counter == 0)
            ;/* do nothing */

        next_consumed = buffer[out];
        out = (out + 1) % BUFFER_SIZE;
        counter --;
        /* consume the item in next consumed */
}
```

Race condition

- **counter++** could be implemented as

```
register1 = counter                MOV    AX, [100]
register1 = register1 + 1          ADD    AX, 1
counter = register1                MOV   [100], AX
```

- **counter--** could be implemented as

```
register2 = counter                MOV    BX, [100]
register2 = register2 – 1          ADD    BX, 1
counter = register2                MOV    [100], BX
```

- Consider this execution interleaving with "count = 5" initially:

S0: producer execute `register1 = counter` {register1 = 5}
S1: producer execute `register1 = register1 + 1` {register1 = 6}
S2: consumer execute `register2 = counter` {register2 = 5}
S3: consumer execute `register2 = register2 – 1` {register2 = 4}
S4: producer execute `counter = register1` {counter = 6 }
S5: consumer execute `counter = register2` {counter = 4}

Another Race condition 

- Invoking *echo()* procedure:

```
void echo()
{
  chin = getchar();
  chout = chin;
  putchar(chout);
}
```

Process P1	Process P2
•	•
chin = getchar();	•
•	chin = getchar();
chout = chin;	chout = chin;
putchar(chout);	•
•	putchar(chout);
•	•

- Same problem exists on:
  - Multiprogramming environment
  - Multiprocessing environment
  - Distributed processing environment

Other examples?

Have you ever seen other examples?

Definition

- **Race condition**
  - Several process access and manipulate the same data concurrently
  - Outcomes of the execution depends on the order in which the access take place

- **How to remove Race Condition?**
  - Serial execution

Critical Section Problem

Critical section problem

- Consider system of *n* processes $\{p_0, p_1, \ldots p_{n-1}\}$
- Each process has critical section segment of code
  - Process may be changing common variables, updating table, writing file, etc
  - When one process in critical section, no other may be in its critical section
- *Critical section problem* is to design protocol to solve this
- Each process must ask permission to enter critical section in entry section, may follow critical section with exit section, then remainder section

Critical section

- **General structure of process P_i**

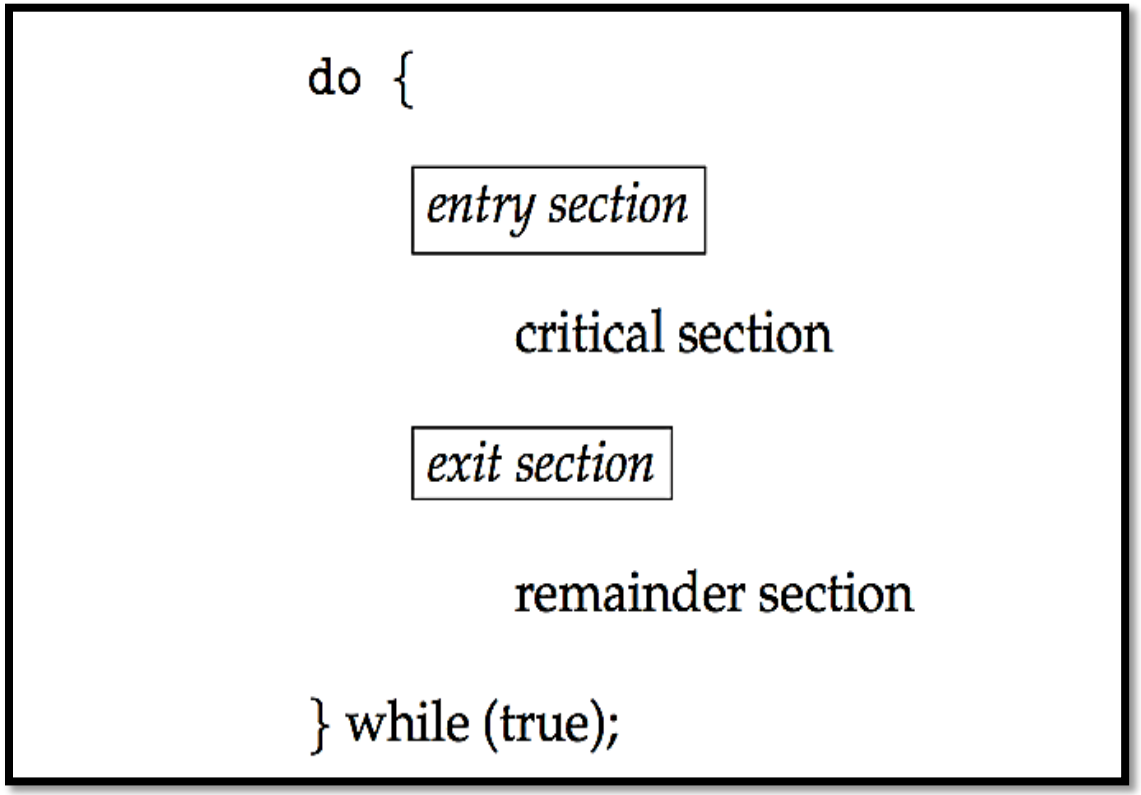

Requirements to solutions = شروط لازم و کافی

- **Mutual exclusion (انحصار متقابل)**
  - If process P_i is executing in its critical section, then no other processes can be executing in their critical sections

- **Progress (پیشرفت)**
  - If no process is executing in its critical section and there exist some processes that wish to enter their critical section, then the selection of the processes that will enter the critical section next cannot be postponed indefinitely

حداقل یکی از فرآیندها پیشرفت داشته باشد (کسی که در ناحیه بحرانی است پیشرفت دارد، کسی که بعد از ناحیه بحرانی است حق ندارد دیگران را مسدود کند. تصمیم‌گیران ورود به ناحیه بحرانی همان متقاضیان ورود هستند و تصمیم‌گیری در زمان محدود محقق شود) (بن‌بست و سرگردانی نداریم)

- **Bounded waiting (انتظار محدود)**
  - A bound must exist on the number of times that other processes are allowed to enter their critical sections after a process has made a request to enter its critical section and before that request is granted
    - Assume that each process executes at a nonzero speed
    - No assumption concerning relative speed of the *n* processes

از زمان درخواست تا اجابت، تعداد فرآیندهایی که وارد ناحیه بحرانی می‌شوند کراندار است (بالاخره نوبت می‌رسد و قحطی نداریم)

Preemption definition

- **Preemption (قبضه ای - قبضه شدنی)**
  - **The act of temporarily interrupting a task being carried out by a computer system, without requiring its cooperation, and with the intention of resuming the task at a later time [wiki]**

Handling critical-section by OS

- **Two approaches, depend on type of OS kernels**
  - **Preemptive**
    - Allows preemption of process when running in kernel mode
    - Difficult to design in SMP architectures (why?)
  - **Non-preemptive**
    - Runs until exits kernel mode, blocks, or voluntarily yields CPU
      - ✓Essentially free of race conditions in kernel mode (why?)
- **Which one**
  - is responsive?
  - is suitable for real-time programming?

1) Peterson's solution

- A classis SW solution

- No guarantees in correct working of the method
  - Correctness depends on computer architecture
  - Atomic instructions are needed (which & where?)

- Good algorithm!

- Shared variables
  - `int turn; /* whose turn is */`
  - `Boolean flag[2] /* who enters the critical-section */`

Peterson algorithm for P_i

(Pi, Pj)=(P0, P1)

```
do {
        flag[i] = true;
        turn = j;
        while (flag[j] && turn = = j);
                critical section
        flag[i] = false;
                remainder section
 } while (true);
```

How requirements are satisfied?

- Mutual exclusion (?)
- Progress (?)
- Bounded waiting (?)

2) Hardware solution

- Some hardwares support implementing the critical section code!

- All solutions are based on idea of locking
  - Protecting critical regions via locks

- Uniprocessors – could disable interrupts
  - Currently running code would execute without preemption
  - Generally too inefficient on multiprocessor systems
    - Operating systems using this not broadly scalable

- Multiprocessors – provide special atomic hardware instructions
    - Atomic = non-interruptible
  - Either
    - test memory word and set value
    - swap contents of two memory words

Hardware solution for critical section

```
do {
        acquire lock
                critical section
        release lock
                remainder section
} while (TRUE);
```

How requirements are satisfied?

- Mutual exclusion (?)
- Progress (?)
- Bounded waiting (?)

test_and_set instruction

Definition:

```
boolean test_and_set (boolean *target)
 {
      boolean rv = *target;
      *target = TRUE;
      return rv;    /* old value */
 }
```

1. Executed atomically

2. Returns the original value of passed parameter

3. Set the new value of passed parameter to "TRUE".

Hardware solution using *test_and_set()*

- Shared Boolean variable lock, initialized to FALSE

```
do {
     while (test_and_set(&lock))
          ; /* do nothing */
     /* critical section */
     lock = false;
     /* remainder section */
  } while (true);
```

compare_and_swap instruction

Definition:

```
int compare _and_swap(int *value, int expected, int new_value) {
    int temp = *value;

    if (*value == expected)
       *value = new_value;
 return temp;     /* old value */
}
```

1. Executed atomically

2. Returns the original value of passed parameter "value"

3. Set the variable "value" the value of the passed parameter "new_value" but only if "value" =="expected". That is, the swap takes place only under this condition.

Hardware solution using *compare_and_swap()*

- Shared integer "lock" initialized to 0;

```
do {
     while (compare_and_swap(&lock, 0, 1) != 0)
        ; /* do nothing */

      /* critical section */

       lock = 0;

       /* remainder section */

      } while (true);
```

How requirements are satisfied?

- Mutual exclusion (?)
- Progress (?)
- Bounded waiting (?)

Bounded-waiting mutual exclusion with test_and_set

```
do {
   waiting[i] = true;
   key = true;
   while (waiting[i] && key)
      key = test_and_set(&lock);
   waiting[i] = false;

   /* critical section */

   j = (i + 1) % n;
   while ((j != i) && !waiting[j])
      j = (j + 1) % n;
   if (j == i)
      lock = false;
   else
      waiting[j] = false;

   /* remainder section */

} while (true);
```

3) OS solution!: Mutex locks

- Previous solutions are complicated and generally inaccessible to application programmers
- OS designers build software tools to solve critical section problem
- Simplest is *mutex* lock *(mutual exclusions)*
- Protect a critical section by first `acquire()` a lock then `release()` the lock
  - Boolean variable indicating if lock is available or not
- Calls to `acquire()` and `release()` must be atomic
  - Usually implemented via hardware atomic instructions
- But this solution requires busy waiting
  - This lock therefore called a spinlock

acquire() and release()

```
acquire() {
    while (!available)
        ; /* busy wait */
    available = false;;
}
```

```
release() {
    available = true;
}
```

```
do {
    acquire lock
        critical section
    release lock
      remainder section
 } while (true);
```

How requirements are satisfied?

- Mutual exclusion (?)
- Progress (?)
- Bounded waiting (?)

What is the main problem of all mentioned methods?

Busy waiting!

4) Semaphore

- Synchronization tool that provides more sophisticated ways (than Mutex locks) for process to synchronize their activities
- Semaphore *S* – integer variable
- Can only be accessed via two indivisible (atomic) operations

`wait()` and **`signal()`**

```
wait(S)
{
    while (S <= 0)
        ; // busy wait
    S--;
}
```

```
signal(S)
{
    S++;
}
```

No busy waiting in Semaphore

- Have a FIFO queue for waiting process

```
typedef struct{
   int value;
   struct process *list;
   } semaphore;
```

```
wait(semaphore *S) {
   S->value--;
   if (S->value < 0) {
      add this process to S->list;
      block();
   }
}
```

```
signal(semaphore *S) {
   S->value++;
   if (S->value <= 0) {
      remove a process P from S->list;
      wakeup(P);
   }
}
```

Accessing shared data by Semaphore

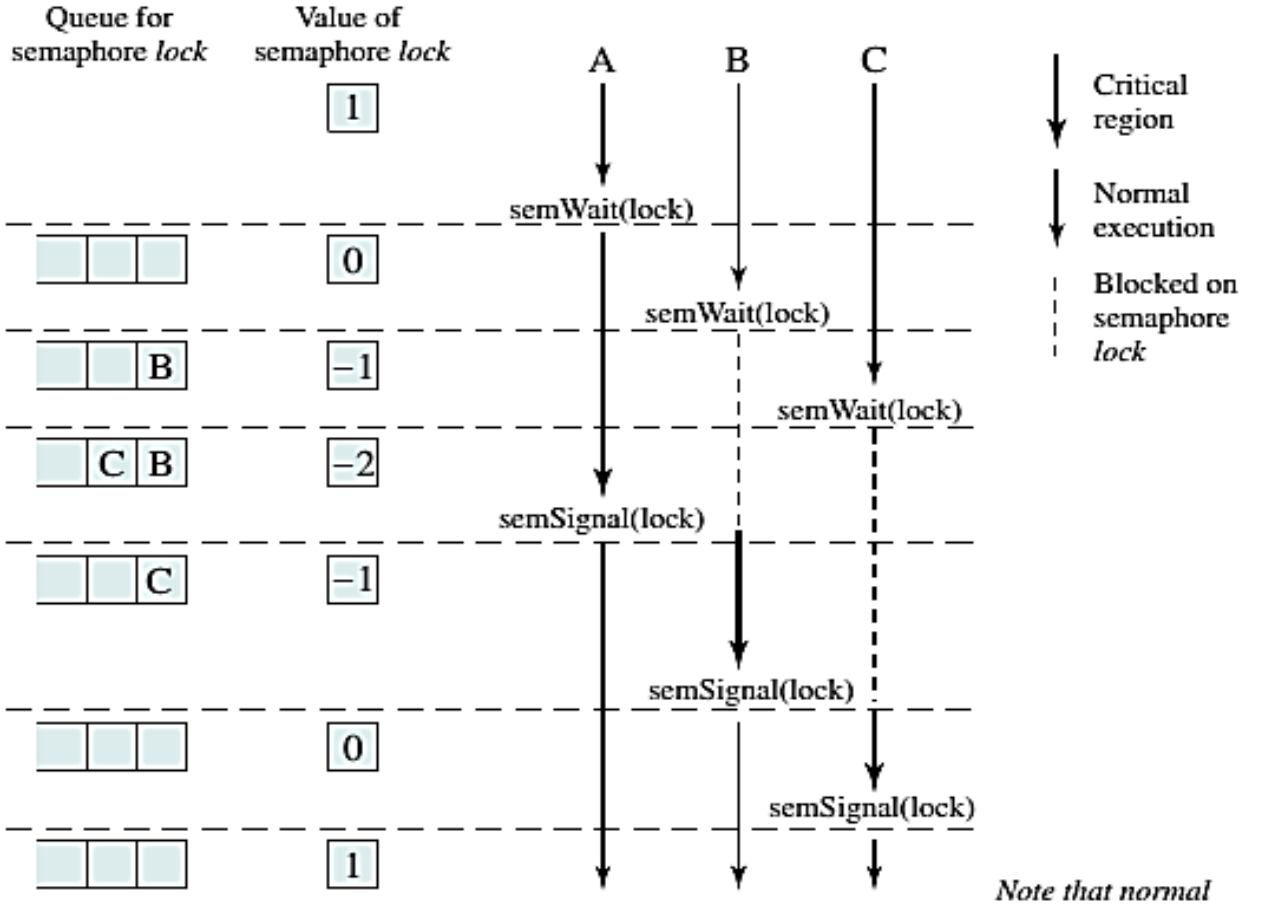

Types of semaphore

- **Types**
  - **Binary semaphore (same as mutex lock)**
  - **Counting semaphore (suitable for managing number of resources)**
- **Can solve various synchronization problems**
- **Example:**
  - **Consider P_1 and P_2 that require S_1 to happen before S_2**

Create a semaphore "**synch**" initialized to zero

```
P1:
    S1;
    signal(synch);
```

```
P2:
    wait(synch);
    S2;
```

Semaphore points

- Must guarantee that no two processes can execute the `wait()` and `signal()` on the same semaphore at the same time (why?)
  - wait() and signal() must be atomic!
  - wait() and signal() generate a Critical Section Problem!
  - How to solve?
    - Uniprocessors
      - ✓ Disabling interrupts
    - SMP (Multiprocessors)
      - ✓ Disabling interrupts (bad performance effect)
      - ✓ Other methods: compare_and_swap() and spinlock (is it good to have busy waiting?)

Two implementations of semaphores

```
semWait(s)
{
    while (compare_and_swap(s.flag, 0 , 1) == 1)
        /* do nothing */;
    s.count--;
    if (s.count < 0) {
        /* place this process in s.queue*/;
        /* block this process (must also set
s.flag to 0) */;
    }
    s.flag = 0;
}

semSignal(s)
{
    while (compare_and_swap(s.flag, 0 , 1) == 1)
        /* do nothing */;
    s.count++;
    if (s.count<= 0) {
        /* remove a process P from s.queue */;
        /* place process P on ready list */;
    }
    s.flag = 0;
}
```

(a) Compare and Swap Instruction

```
semWait(s)
{
    inhibit interrupts;
    s.count--;
    if (s.count < 0) {
        /* place this process in s.queue */;
        /* block this process and allow inter-
rupts*/;
    }
    else
        allow interrupts;
}

semSignal(s)
{
    inhibit interrupts;
    s.count++;
    if (s.count<= 0) {
        /* remove a process P from s.queue */;
        /* place process P on ready list */;
    }
    allow interrupts;
}
```

(b) Interrupts

Problems with semaphores

- Be careful in the usage
  - Deadlock, Starvation, Priority inversion

- Starvation
  - LIFO queue

P_0

```
wait(S);
wait(Q);
...
signal(S);
signal(Q);
```

P_1

```
wait(Q);
wait(S);
...
signal(Q);
signal(S);
```

- Priority Inversion – Scheduling problem when lower-priority process holds a lock needed by higher-priority process
  - Example: L (R) < M < H (R)
    - Solved via priority-inheritance protocol

Classic synchronization problems

- The bounded-buffer problem
- The readers-writers problem
- The dining-philosophers problem

How can semaphore solve these problems?

The bounded-buffer problem

```
int n;
semaphore mutext = 1;
semaphore empty = n;
semaphore full = 0;
```

Producer

```
do {
        ...
      /* produce an item in next_produced */
        ...

      wait(empty);
      wait(mutex);

        ...

      /* add next produced to the buffer */

        ...


      signal(mutex);
      signal(full);

  } while (true);
```

Consumer

```
do {
        wait(full);
        wait(mutex);
          ...

       /* remove an item from buffer to next_consumed */
          ...

        signal(mutex);
        signal(empty);

          ...

        /* consume the item in next consumed */
          ...

    } while (true);
```

The readers-writers problem

```
semaphore rw_mutex = 1;
semaphore mutex = 1;
int read_count = 0;
```

Writers

```
do {
        wait(rw_mutex);

            ...

        /* writing is performed */

            ...

        signal(rw_mutex);


    } while (true);
```

Readers

```
do {
            wait(mutex);
            read_count++;
            if (read_count == 1)
               wait(rw_mutex);
            signal(mutex);
                ...

            /* reading is performed */

                ...

            wait(mutex);
            read count--;
            if (read_count == 0)
                signal(rw_mutex);
            signal(mutex);
        } while (true);
```

The dining-philosophers problem

- **Thinking and eating alternatively**

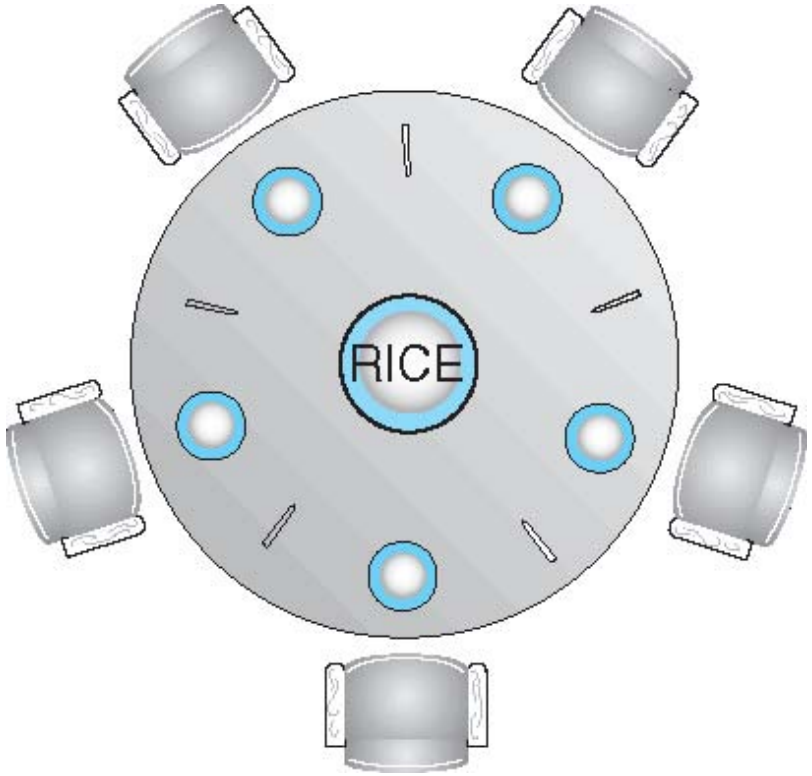


```
semaphore chopstick[5];
```

```
do {
     wait (chopstick[i] );
     wait (chopStick[ (i + 1) % 5] );


       //  eat


     signal (chopstick[i] );
     signal (chopstick[ (i + 1) % 5] );

       //  think

} while (TRUE);
```

Any problem?

Other problems with semaphore

- **Problems with bad usage**

```
signal(mutex);
    ...
  critical section
    ...
wait(mutex);
```

```
wait(mutex);
    ...
  critical section
    ...
wait(mutex);
```

```
    ...
  critical section
    ...
wait(mutex);
```

```
wait(mutex);
    ...
  critical section
    ...
```

- **Deadlock and starvation are possible.**

5) Monitor

- A high-level abstraction that provides a convenient and effective mechanism for process synchronization

- Only one process may be active within the monitor at a time

```
monitor monitor-name
{
        // shared variable declarations

        procedure P1 (…) { …. }

        procedure Pn (…) {……}

     Initialization_Code (…) { … }

}
```

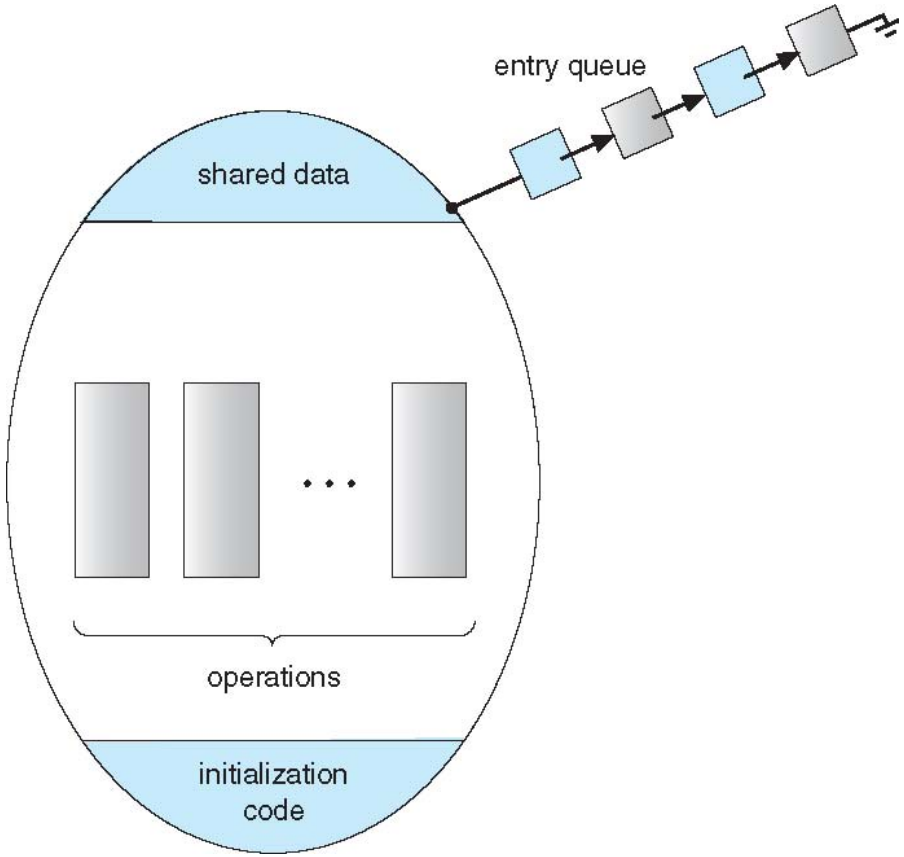

Monitor (with *condition variables)*

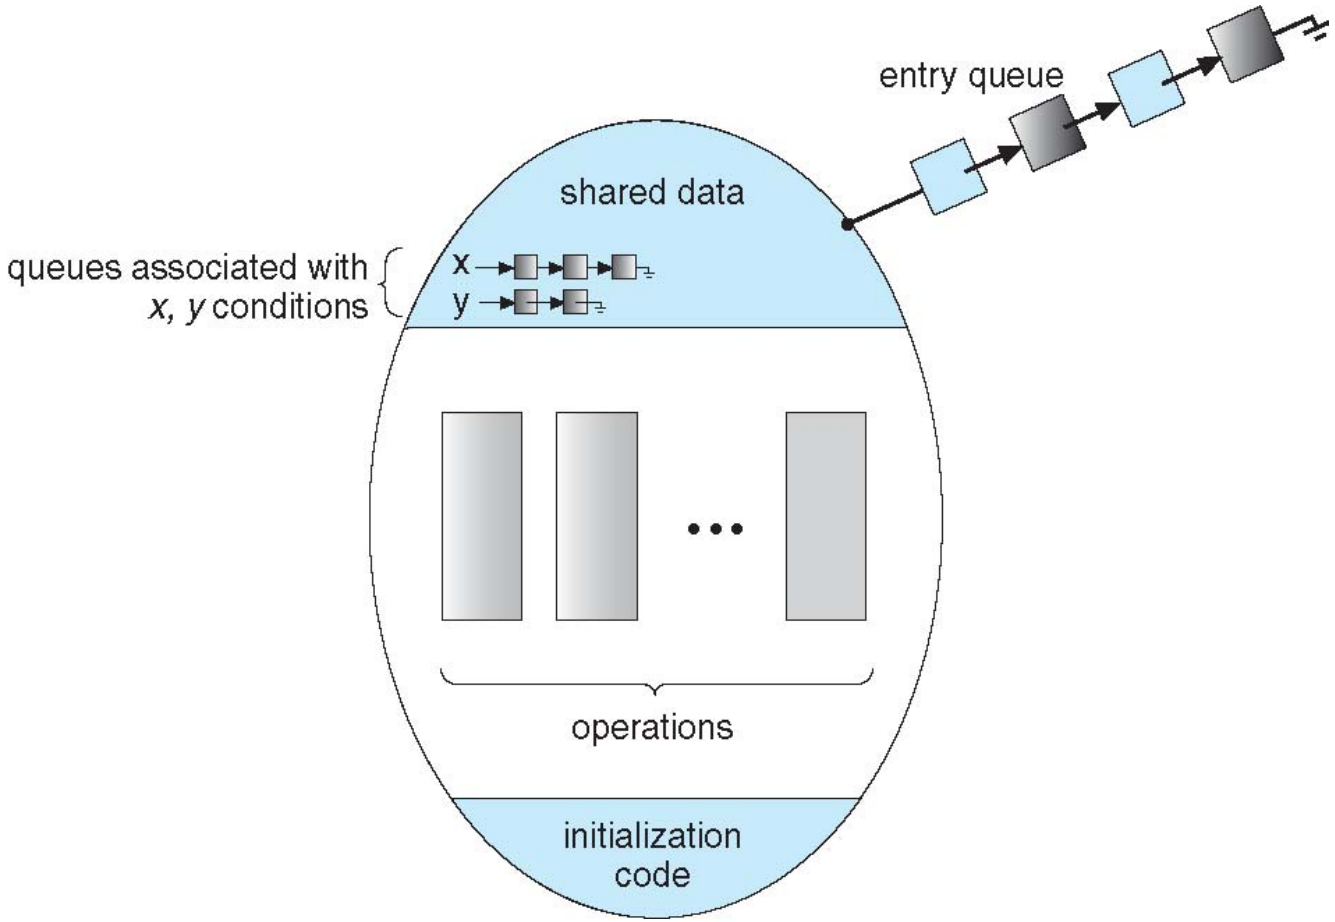

Structure of a Monitor

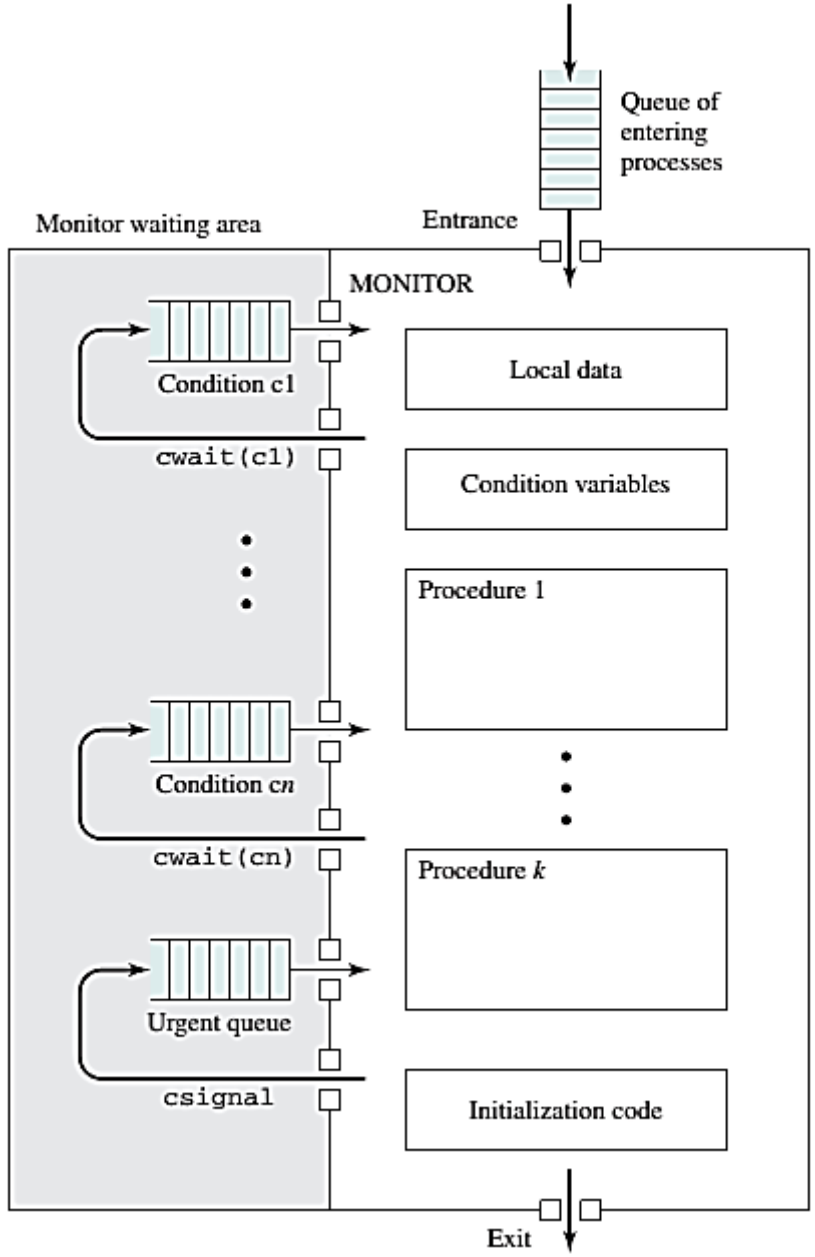

The dining-philosophers problem

```
monitor DiningPhilosophers
{
    enum { THINKING; HUNGRY, EATING) state [5] ;
    condition self [5];

    void pickup (int i) {
        state[i] = HUNGRY;
        test(i);
        if (state[i] != EATING)
                self[i].wait();
    }

    void putdown (int i) {
        state[i] = THINKING;
        // test left and right neighbors
        test((i + 4) % 5);
        test((i + 1) % 5);
    }
```

```
void test (int i) {
     if ((state[(i + 4) % 5] != EATING) &&
     (state[i] == HUNGRY) &&
     (state[(i + 1) % 5] != EATING) ) {
          state[i] = EATING;
          self[i].signal();
      }
}

initialization_code() {
     for (int i = 0; i < 5; i++)
          state[i] = THINKING;
}

}
```

The dining-philosophers problem

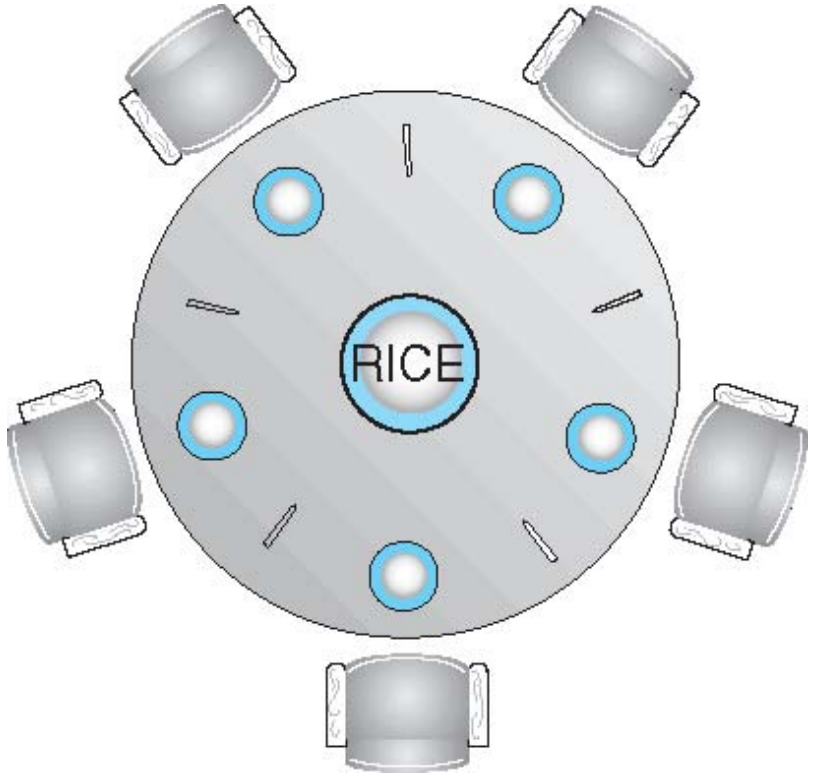


```
DiningPhilosophers.pickup(i);

EAT

DiningPhilosophers.putdown(i);
```

Any problem?

No deadlock

Starvation is possible

Solving bounded-buffer using a Monitor

```
/* program producerconsumer */
monitor boundedbuffer;
char buffer [N];                                    /* space for N items */
int nextin, nextout;                                /* buffer pointers */
int count;                                          /* number of items in buffer */
cond notfull, notempty;                 /* condition variables for synchronization */
void append (char x)

{
      if (count == N) cwait(notfull);           /* buffer is full; avoid overflow */
      buffer[nextin] = x;
      nextin = (nextin + 1) % N;
      count++;
      /* one more item in buffer */
      csignal (notempty);                       /*resume any waiting consumer */
}
void take (char x)
{
      if (count == 0) cwait(notempty);      /* buffer is empty; avoid underflow */
      x = buffer[nextout];
      nextout = (nextout + 1) % N);
      count--;                                  /* one fewer item in buffer */
      csignal (notfull);                        /* resume any waiting producer */
}
{                                                   /* monitor body */
      nextin = 0; nextout = 0; count = 0;           /* buffer initially empty */
}
```

```
void producer()
{
      char x;
      while (true) {
      produce(x);
      append(x);
      }
}
void consumer()
{
      char x;
      while (true) {
      take(x);
      consume(x);
      }
}
void main()
{
      parbegin (producer, consumer);
}
```

Points to monitor

- Monitors can be implemented by semaphores (See the textbook).
- OSes support
  - Monitor, semaphore, spinlock, mutex
  - Examples
    - Solaris
    - Windows
    - Linux
    - Pthreads
- Alternative approaches
  - Transactional Memory
  - OpenMP
  - Functional Programming Languages

```
void update(int value)
{
        #pragma omp critical
        {
          count += value
        }
}
```

Questions?

آیا می‌توان انتظار محدود داشت ولی پیشرفت نداشت؟ استدلال زیر درست است؟

- اگر الگوریتم انتخاب درست عمل کند و در زمان محدود حتما همه فرآیندها انتخاب شوند اما به دلیل مشکلاتی که در کد هست، فرآیند انتخاب شده وارد ناحیه بحرانی نشود، مثلا قبل از ناحیه بحرانی هم wait باشد و هم signal یا هر خطای دیگر...
- در این حالت می‌توان گفت فرآیندها در زمان محدود انتخاب میشوند ولی چون کد ناحیه بحرانی را نمی‌توانند اجرا کنند، درنتیجه پیشرفت ندارند.