
Possible solutions for user feedback integration in LogCluster

Khmayes

Problem definition

Outsider/user occasionally intervene to point out algo's mis-predictions

How can we take that into consideration and 'correct' our model?

LogCluster

Training:

Input: Sets of logs (logs of the same block id for the case of HDFS benchmark)


Output: Clusters

Anomaly Detection :

Input/data point: A set of logs

Output: Anomaly score (= distance to the closest cluster) > Threshold ?

Two ways of looking at the problem

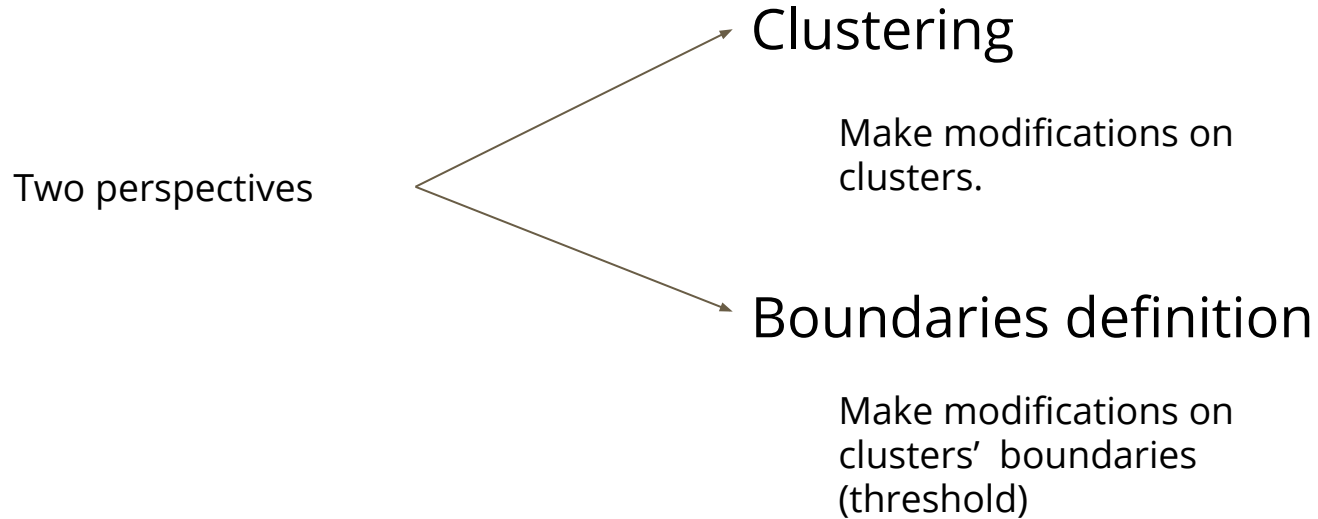

Possibilities

One way

- FP -> Create a small cluster around
- FN -> Move point away from clusters

Another way

- FP -> Adapt threshold to closest cluster
- FN -> Decrease threshold

