

Worldwide Oilfield Machine

Subsea Intervention System




WORLDWIDE OILFIELD MACHINE
Est. 1980



Invention,
Unique Design &
Extraordinary
Craftsmanship

Subsea Intervention Systems
Custom Design & Manufacture
Wellheads & Christmas Trees
Magnum Gate Valves
Blow Out Preventers
Manifold Systems
Ball Valves
Well Test Products

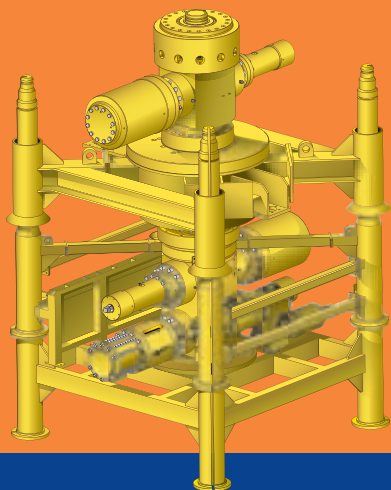

The New Standard in Subsea Intervention



Subsea Intervention System

As part of a comprehensive offshore work over system, WOM subsea gate valves and actuators provide significant weight and space advantages. Now, this lightweight and compact intervention system can safely work over wells from much smaller, less expensive vessels.

This **“Patented”** intervention system isolates wellbore pressure when tools are being changed out and offers two levels of redundancy for safety.


In an emergency shutdown situation, the Magnum valve and actuator cut 2-7/8” coil tubing to shut in the well without leaving a slug in the valve body. After cutting, the fast acting WOM “Sure-Seal” proved positive by sealing after the cut in testing witnessed by DNV.

WOM’s Subsea gate valve and actuators have successfully passed the requirements for API 17D. WOM’s Subsea gate

valve and actuators have been subjected to 11,000 feet of water depth in simulated testing with successful results.



The Intervention System is fitted with an Emergency Shut Down (ESD) control system. The system will carry out a controlled closure of the Flowhead, EDP (Emergency Disconnect Package), and LRP (Lower Riser Package) valves in emergency situations. The Intervention System Components, Flowhead, EDP, LRP, and Choke Manifolds will isolate and secure the well. Additional components of the Subsea Intervention System are the HPU (Hydraulic Power Unit) and the Umbilical Reeler.

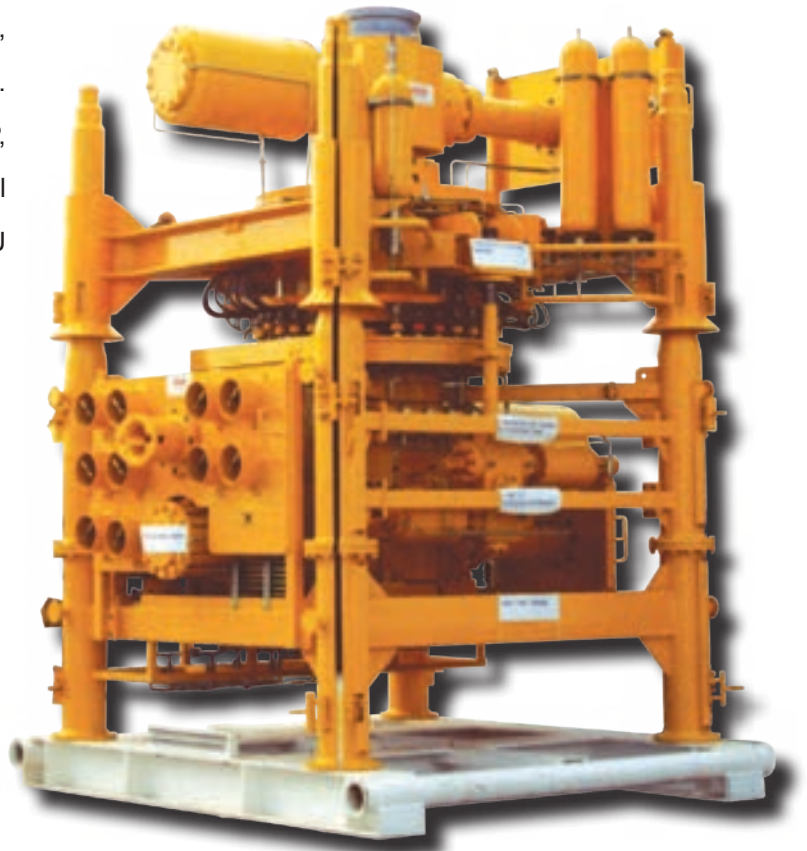


WOM Subsea Intervention System



*7-3/8" 10,000 psi Flowhead
(Compact Size w/Integral Swivel)*




7-3/8" 10,000 psi Flowhead (Standard Size)

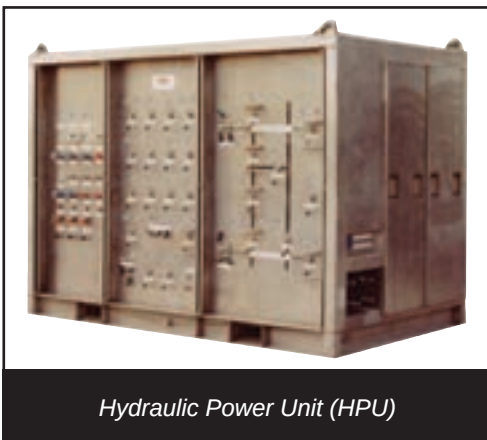

Hydraulic Power Unit (HPU)



Choke Manifolds (1 of 2)

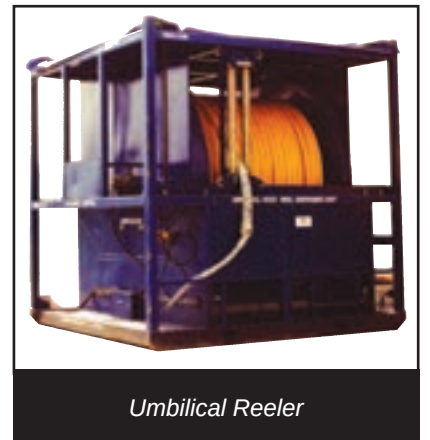


Umbilical Reeler

Subsea Intervention System

Emergency Disconnect Package (EDP) Features:


Mono block construction to reduce height and weight. 7-3/8" 10,000 psi wp hydraulic fail-close gate valve and actuator can cut electric line and seal 10,000 psi. Actuator has a pilot operated quick dump valve, loss of hydraulic pressure closes valve.

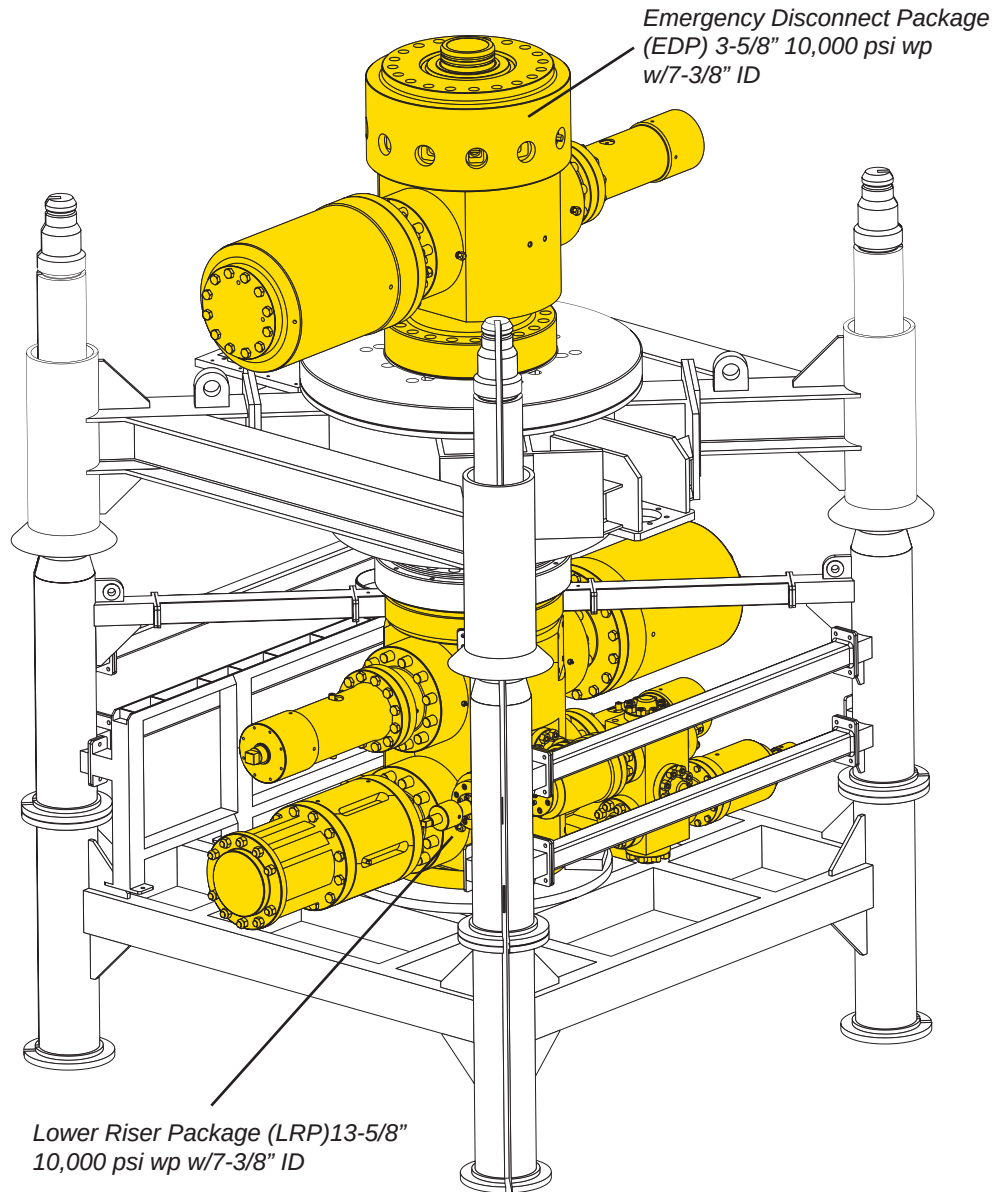

Lower Riser Package (LRP) Features:

Mono block construction to reduce height and weight. 13-5/8" 10,000 psi wp hub profile mandrel up to mate with the EDP connector. Upper valve (7-3/8") can cut electric line and seal 10,000 psi. Lower valve (7-3/8") with fail as is actuator will cut coil tubing (up to 2-7/8") or wireline and seal 10,000 psi. Upper actuator has a pilot operated directional control valve fed from an independent subsea accumulator bank to ensure a rapid response time on the ESD command from the surface.



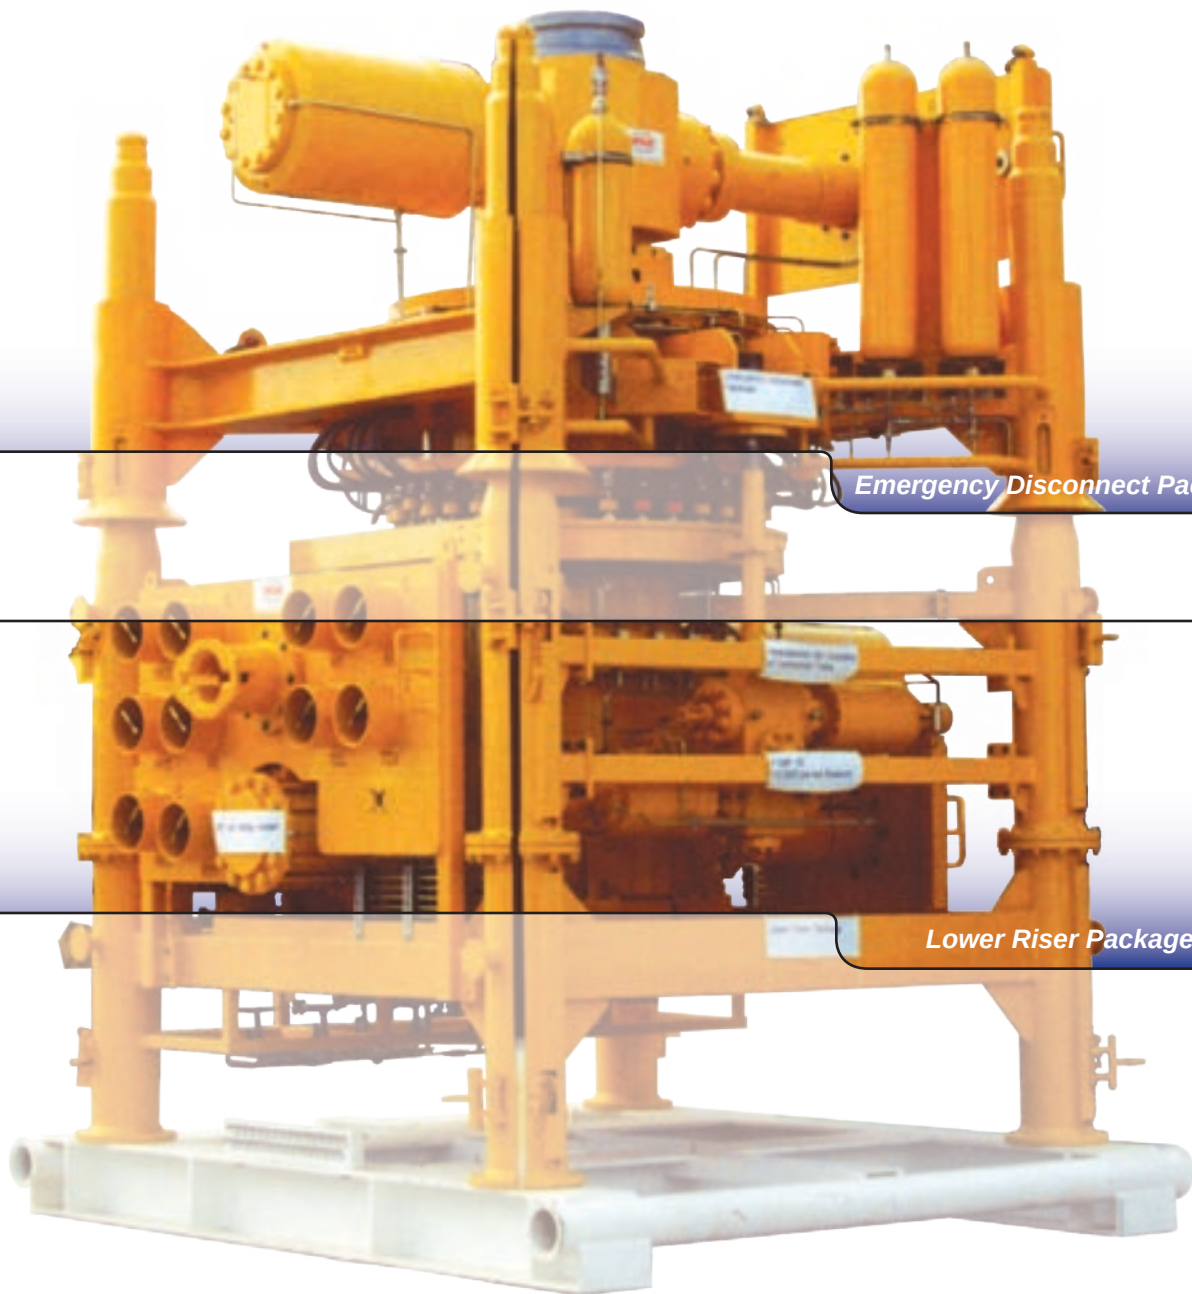


Subsea Intervention System

Subsea Intervention System

Lower Riser Package (LRP) Features:

Mono block construction to reduce height and weight. 13-5/8" 10,000 psi wp hub profile mandrel up to mate with the EDP connector.

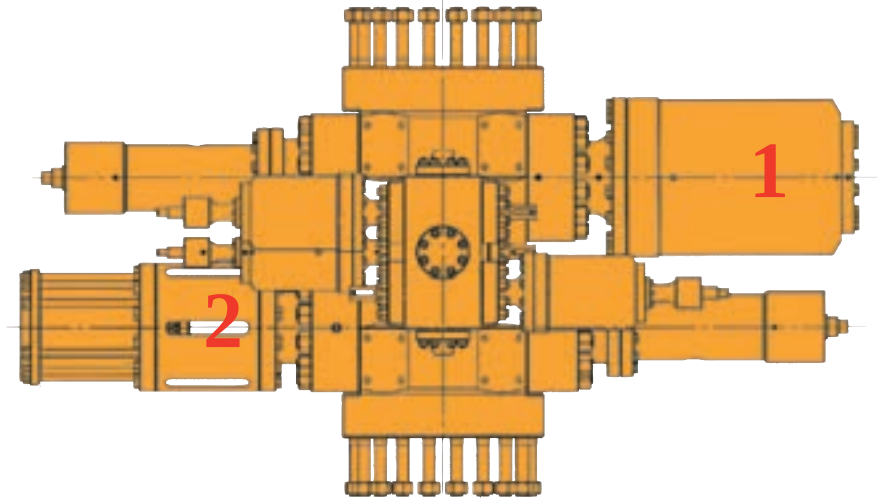

Upper valve (1) is a 7-3/8" 10,000 psi wp Hydraulic Fail-Safe Magnum Gate Valve that is capable of cutting braided cable and slickline. The Actuator spring is capable of closing the valve after cutting in 18 seconds. The Manual Override for the valve is located on the opposite side of the actuator, reducing overall size and weight. The actuator assembly features a closed cylinder design and the spring chamber is isolated from operating fluid. Spring cartridge design for easy field assembly and a quick disconnect mechanism allows easy removal of actuator from bonnet

The Lower Valve (2) is a 7-3/8" 10,000 psi wp Hydraulic Double Acting Magnum Gate Valve that cuts 2-7/8" diameter, 80,000 psi yield coil tubing and seals after the cut. (**Witnessed by DNV**) The Lower Valve is capable of multiple cuts and requires only 2500 psi of hydraulic pressure to cut 2-7/8" coil tubing.

The manual override for the valve is located on the opposite side of the actuator, reducing overall size and weight. The operator can be removed for service without removing the bonnet. Valve position indicator is viewable from all sides. Quick disconnect mechanism is provided for easy operator removal, and an indicator is provided below the operator for easy ROV access.





WOM's Subsea Intervention System being
deployed on Cal Dive's Q-4000.





Contact Us



Worldwide Oilfield Machine, Inc. Headquarters/ U.S.A

11809 Canemont Street
Houston, Texas 77035 USA
Phone: +1 (713) 729-9200
Fax: +1 (713) 729-7321



Worldwide Oilfield Machine, Inc.

5800 Cunningham
Houston, Texas 77041 USA
Phone: +1 (713) 937-0795
Fax: +1 (713) 937-8574



Worldwide Oilfield Machine, Inc.

11625 Fairmont St.
Houston, Texas 77035 USA
Phone: +1 (713) 721-5200
Fax: +1 (713) 721-5205



Worldwide Oilfield Machine, Inc.

11400 Tanner Rd.
Houston, Texas 77041 USA
Phone: +1 (713)-937-8323
Fax: +1 (713) 937-8574



Worldwide Oilfield Machine Ltd. - UK

7 St Machar Road
Aberdeen
AB24 2UU
Scotland, UK
Phone: +44 (01224) 484400
Fax: +44 (01224) 489740



Worldwide Oilfield Machine Pvt. Ltd - India

Gat No. 778, at Post Velu
Pune Satara Rd.
Tal. Bhore, Dist. Pune 412 205. India
Phone 1: +91-8308210300
Phone 2: +91-8308215300



Magna Casting & Machine Works

Gat No. 777, at Post Velu
Pune Satara Rd.
Tal. Bhore, Dist. Pune 412 205. India
Phone 1: +91-8308210300
Phone 2: +91-8308215300



Magnum Forge & Machine Works

Gat No. 777, at Post Velu
Pune Satara Rd.
Tal. Bhore, Dist. Pune 412 205. India
Phone 1: +91-8308210300
Phone 2: +91-8308215300



Worldwide Oilfield Machine, Inc.- Turkmenistan

Yimpash Business Centre
Turkmenbashi Shayoly 54
Office #308 3rd Floor
Ashgabat –Turkmenistan 744000
Phone 1: +99-365 820130
Phone 2: +99-365 309757



Worldwide Oilfield Machine, M.E. - U.A.E

Jebel Ali Free Zone (JAFZA) South,
Plot# S61302, Near Gate#12,
P.O. Box: 32478
Dubai (UAE)
Phone: (971-4) 81 63 600
Fax: (971-4) 81 63 601



Magnum Technology Center

Jebel Ali Free Zone (JAFZA) South,
Plot# S61302, Near Gate#12,
P.O. Box: 32478
Dubai (UAE)
Phone: (971-4) 81 63 600
Fax: (971-4) 81 63 601



PT Worldwide Oilfield Machine - Indonesia

#11-08 One Pacific Place
Sudirman Central Business District
Jl. Jenderal Sudirman Kav. 52-53,
Jakarta 12190
Phone: + 1-832-372-0674



Worldwide Oilfield Machine Asia Pacific-Singapore

17 Gul Way
Singapore 629194
Phone: +(65) 66901700
Fax: +(65) 65603859



Worldwide Oilfield Machine- Korea

#1012, 481-10, Byucksan Digital Vally-II,
Gasandong, GumchonGu
Seoul, Korea 153-803
Phone: +82-2-854-6806



WORLDWIDE OILFIELD MACHINE
Est. 1980

©2011 Worldwide Oilfield Machine, Inc. www.womusa.com

Disclaimer. This catalog is published for informational purposes only. All previous catalogs are not valid and should not be used as a reference in any form.
Rev. 2016