
Threshold choice for the small-calibration datasets (BMD-HS 4, PASCAL 18 normal calibration patients)

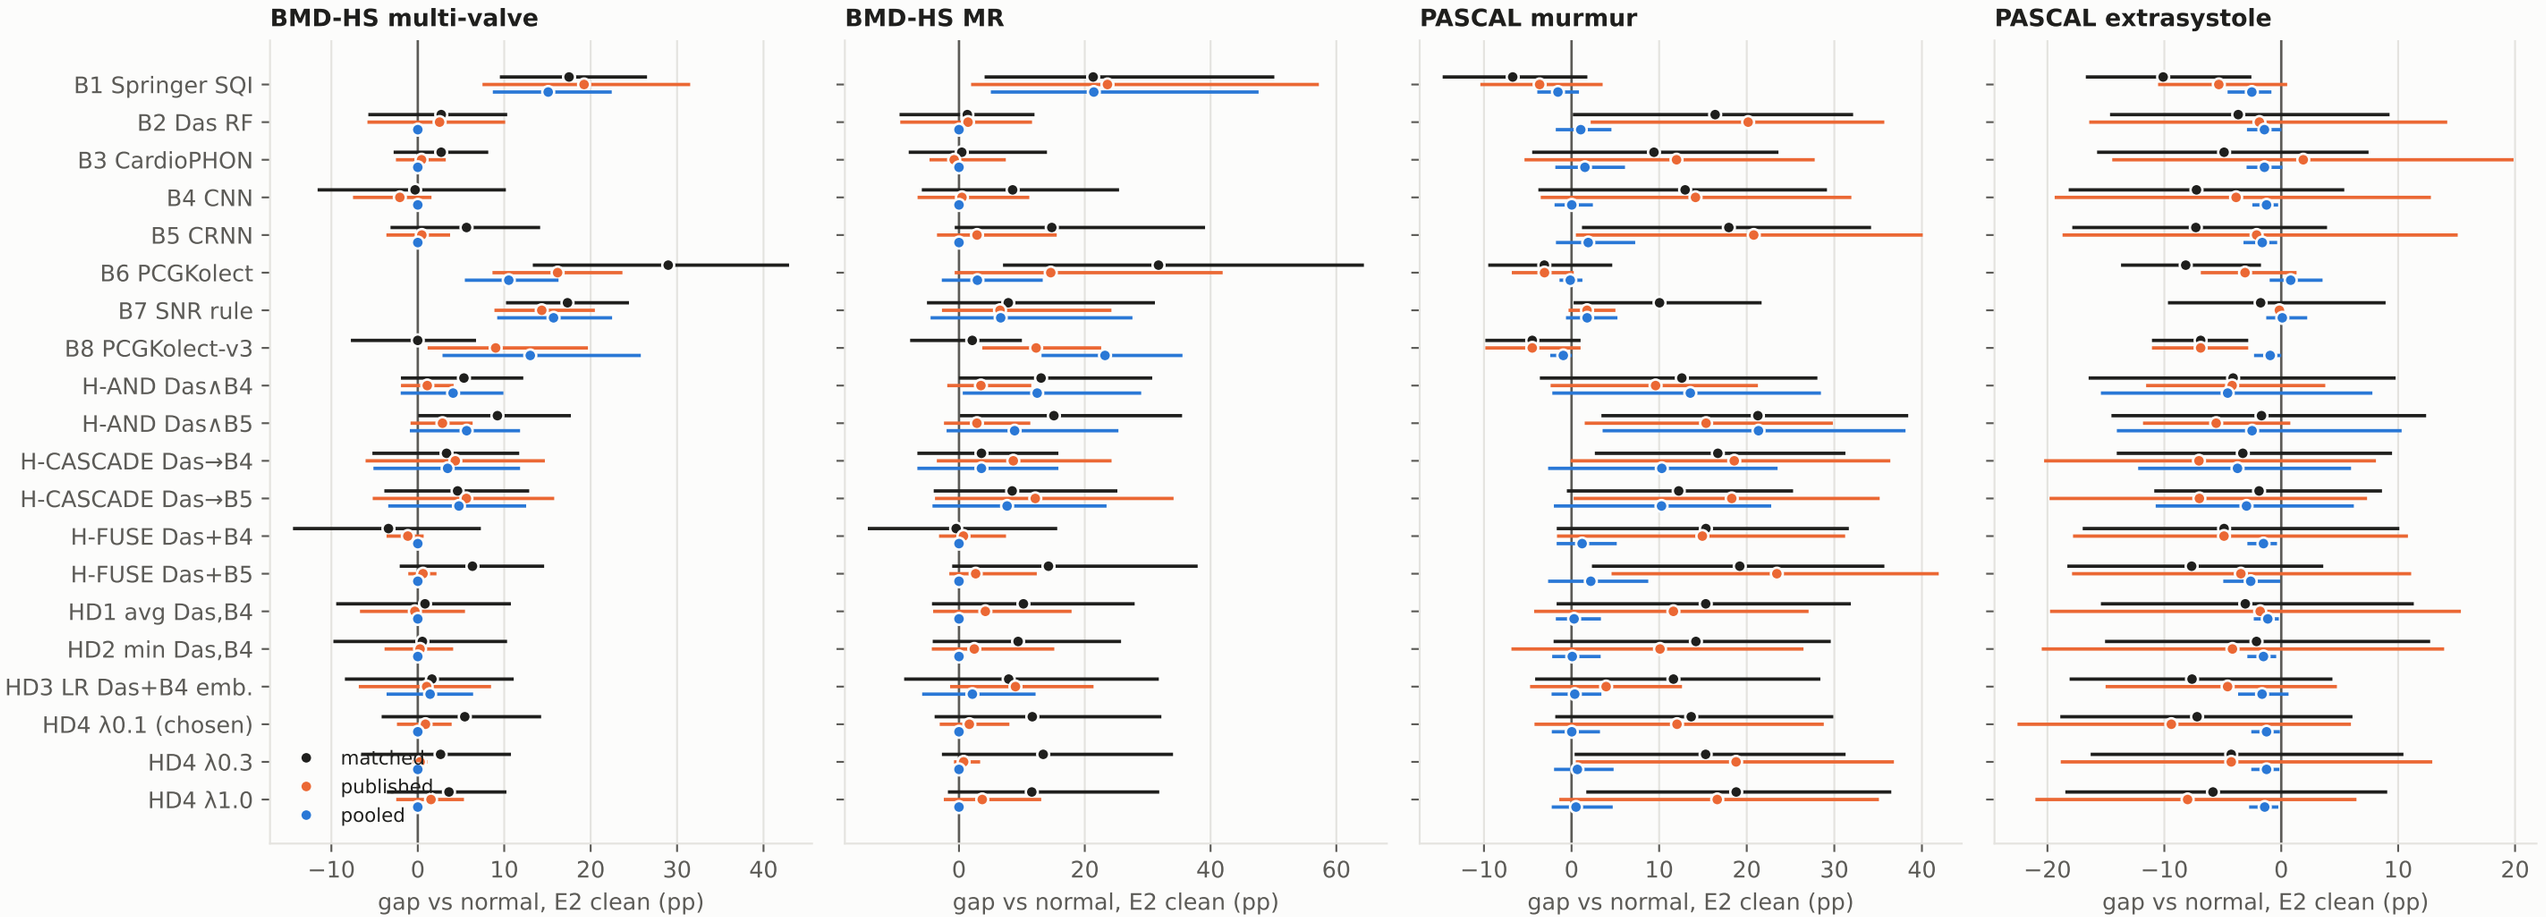

Pooled thresholds reject 0-3 % of these datasets' clean normal beats, so gaps collapse by floor effect; published-threshold gaps for B1/B6/B7 (BMD-HS) and B2-B5 (PASCAL murmur) persist. Seeded models and hybrids: mean of 3 seeds.