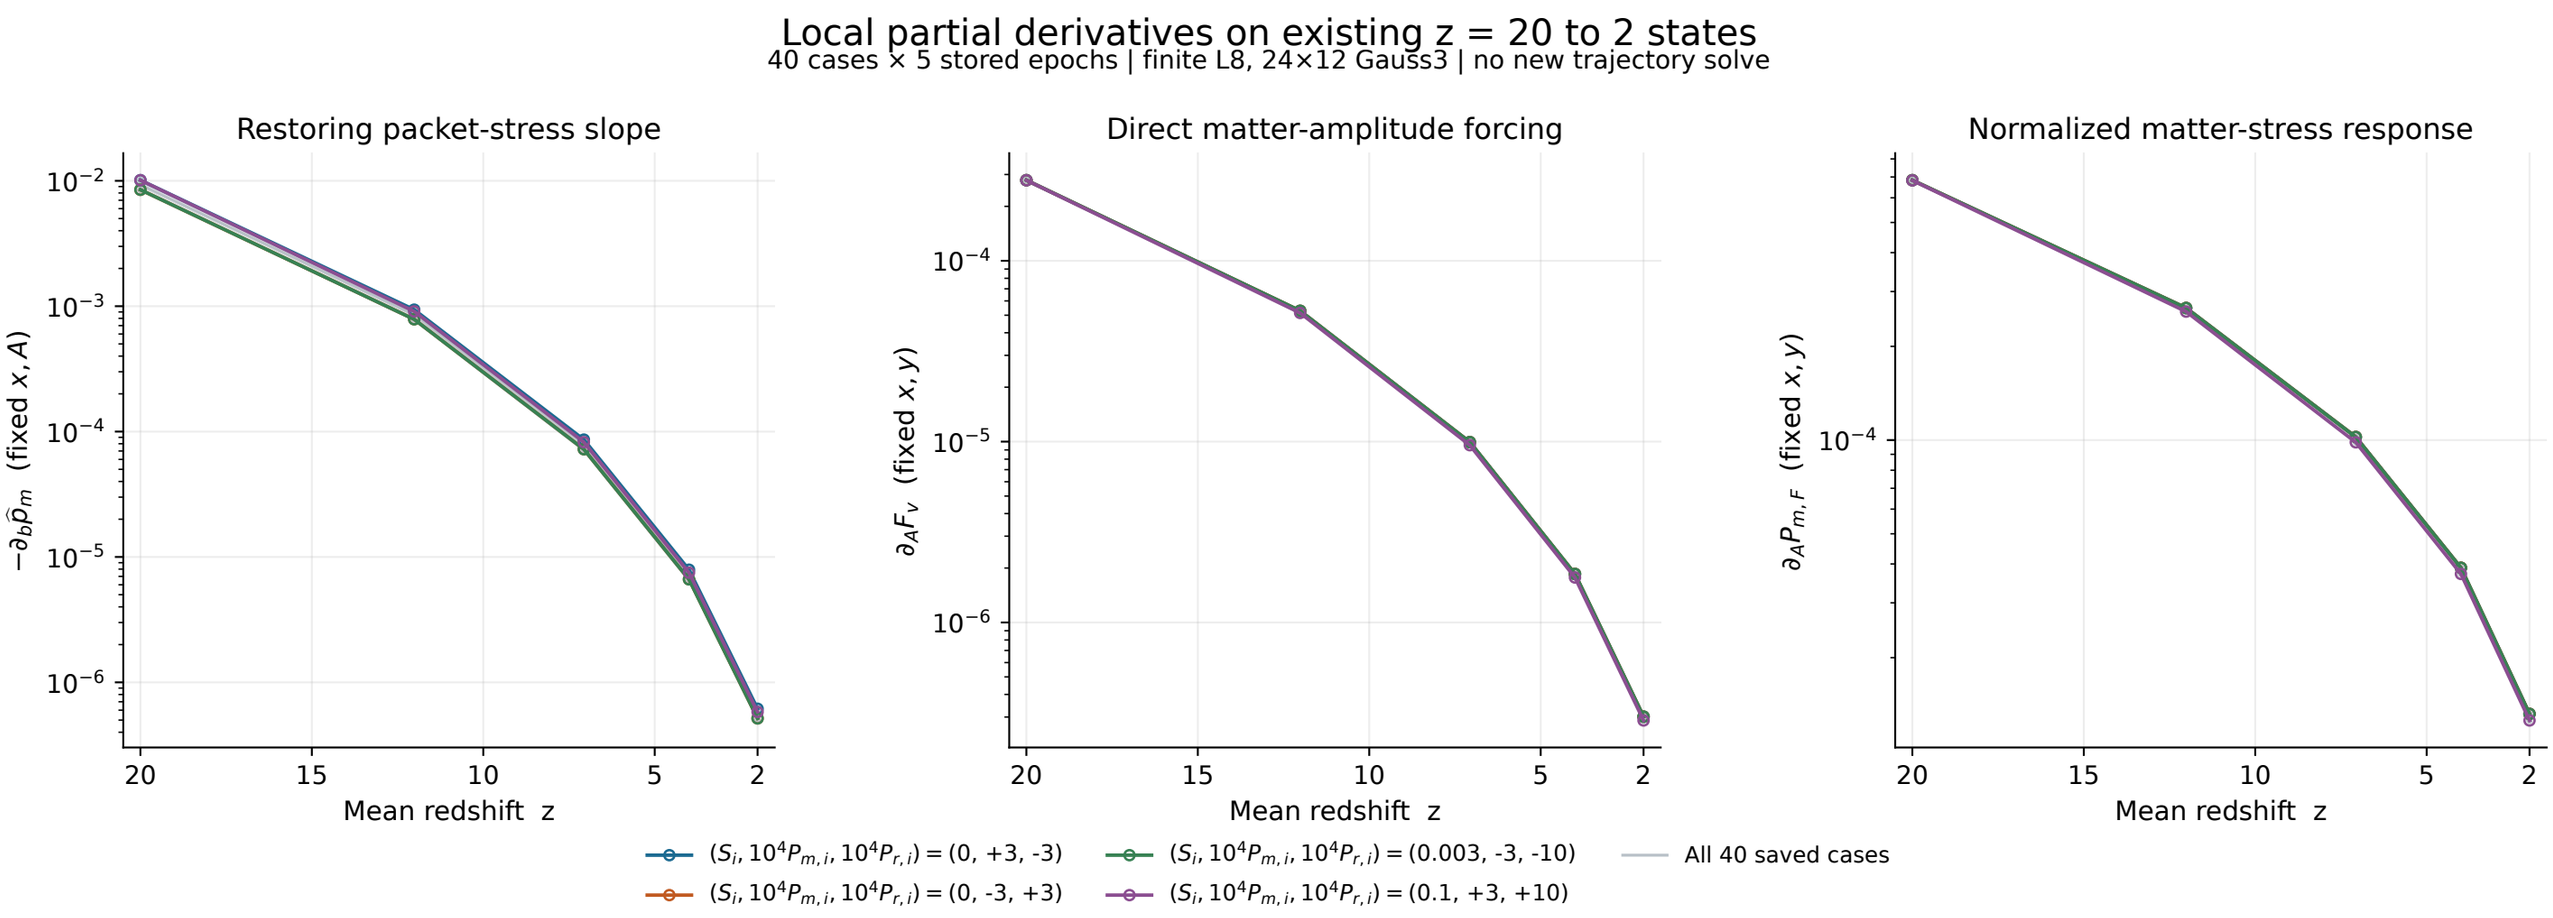

Local partial derivatives on existing z = 20 to 2 states
40 cases × 5 stored epochs | finite L8, 24×12 Gauss3 | no new trajectory solve
Restoring packet-stress slope
Direct matter-amplitude forcing
Normalized matter-stress response
$-\partial_b \hat{p}_m$ (fixed x, A)
$\partial_A F_v$ (fixed x, y)
$\partial_A P_{m,F}$ (fixed x, y)
Mean redshift z
$(S_i, 10^4 P_{m,i}, 10^4 P_{r,i}) = (0, +3, -3)$
$(S_i, 10^4 P_{m,i}, 10^4 P_{r,i}) = (0, -3, +3)$
$(S_i, 10^4 P_{m,i}, 10^4 P_{r,i}) = (0.003, -3, -10)$
$(S_i, 10^4 P_{m,i}, 10^4 P_{r,i}) = (0.1, +3, +10)$
All 40 saved cases
$\hat{p}_m = p_m/\rho_{m,\mathrm{ref}}$, $v = s/H_{\mathrm{ref}}$, $F_v = dv/dx$, $x = \ln(a/a_{\mathrm{ref}})$. Lines only connect stored samples.
These are fixed-state partial derivatives; full initial-seed trajectory responses require the augmented IVP.