pi_m: signed stress and geometry versus redshift
Fixed other parameters refer to initial values, not entire histories
Auxiliary axis uses reference clock: quotient_L16_S0_Am0_Ar0; other cases have different z(t).

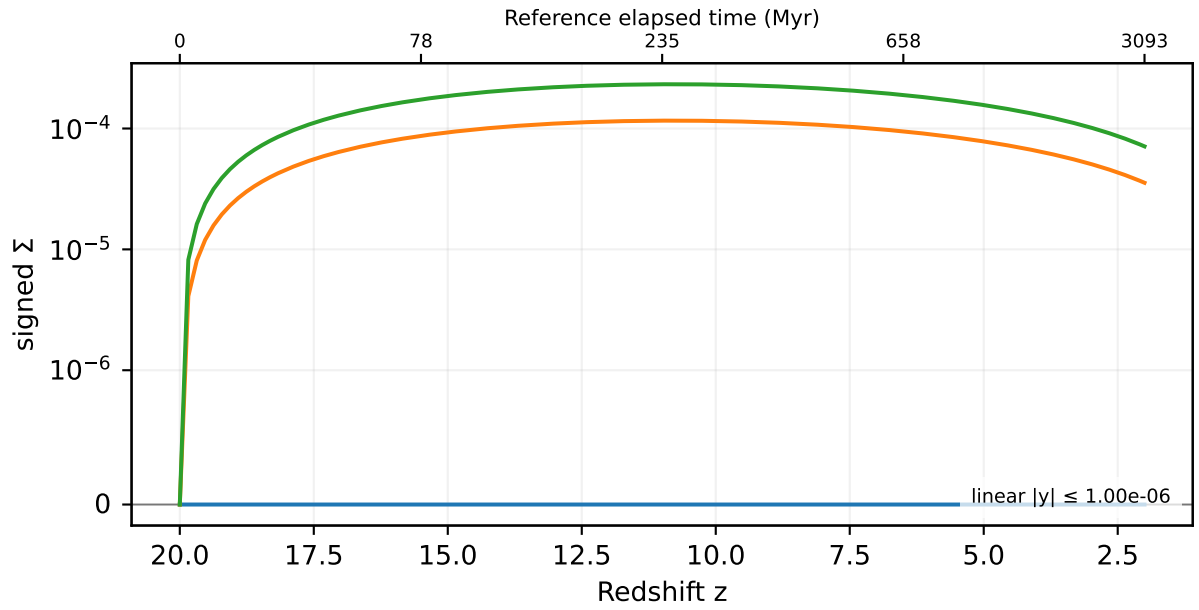

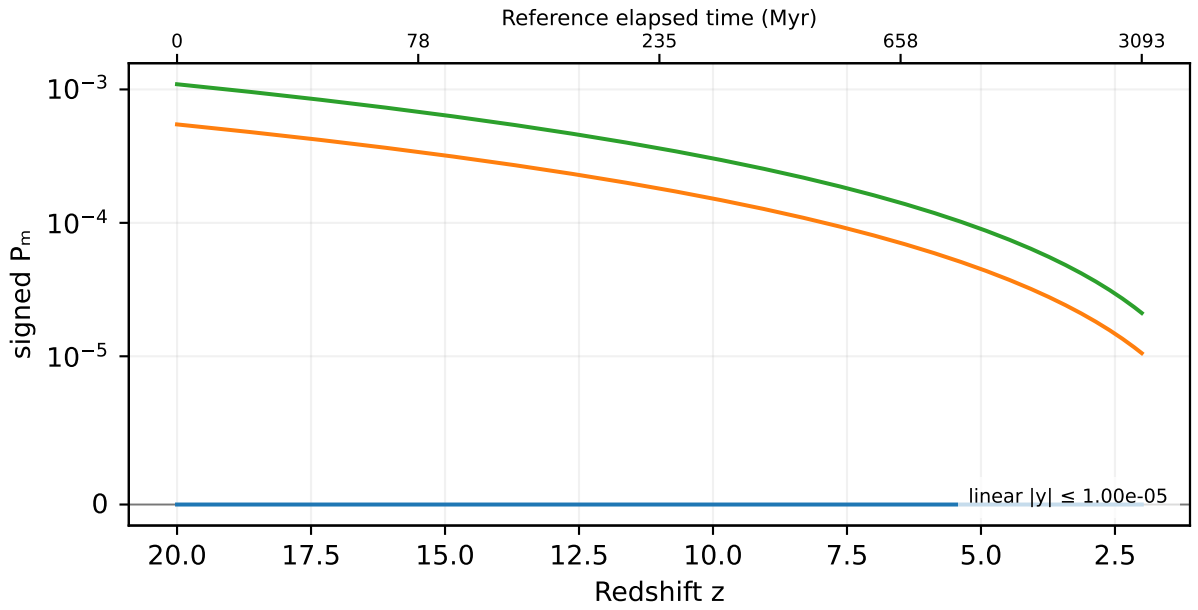

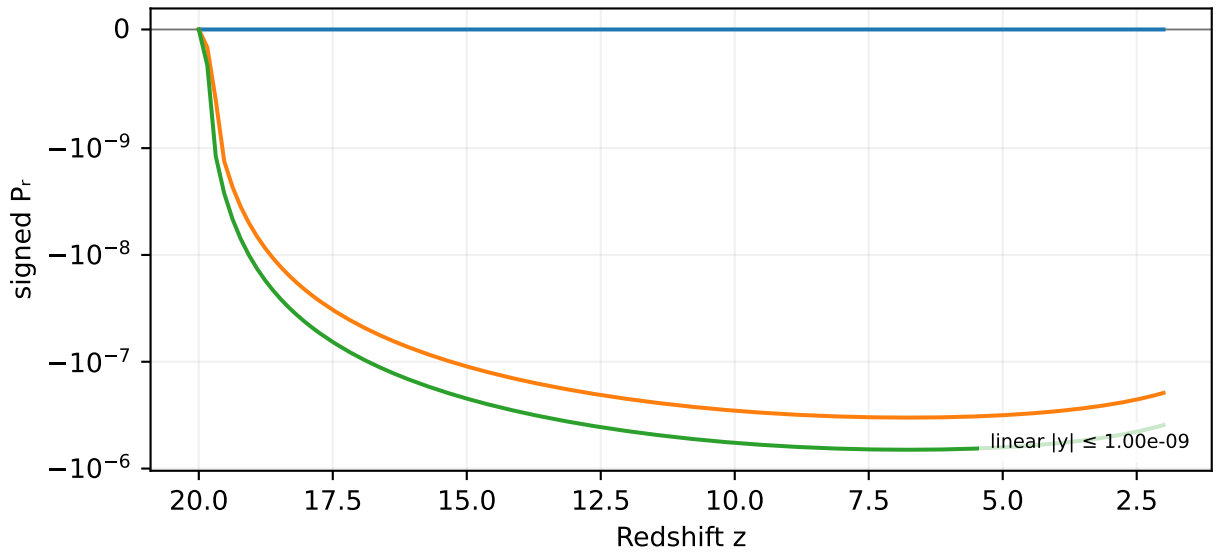

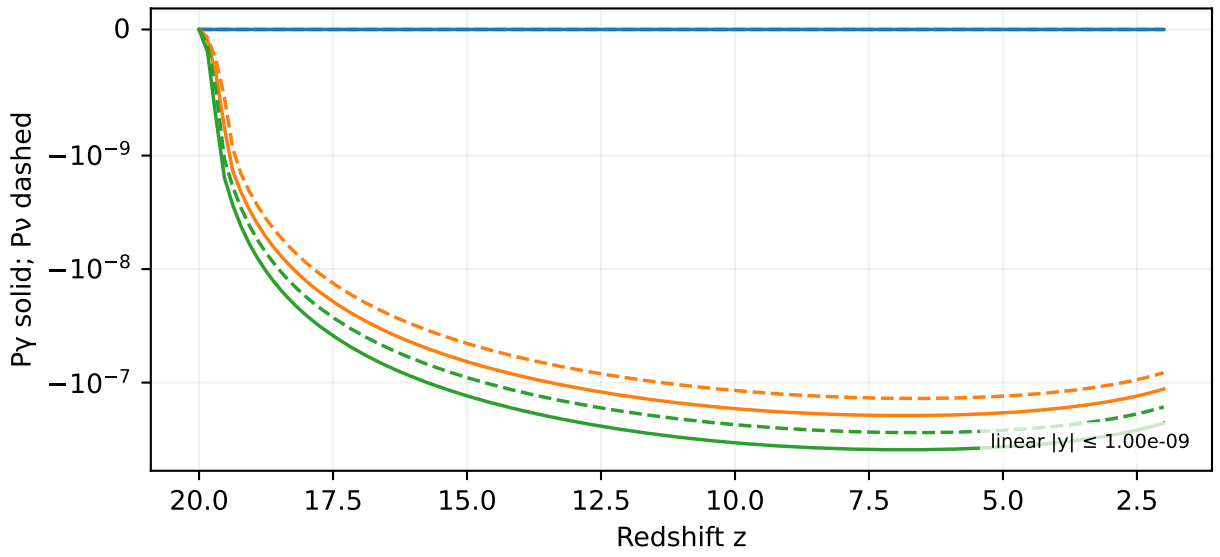

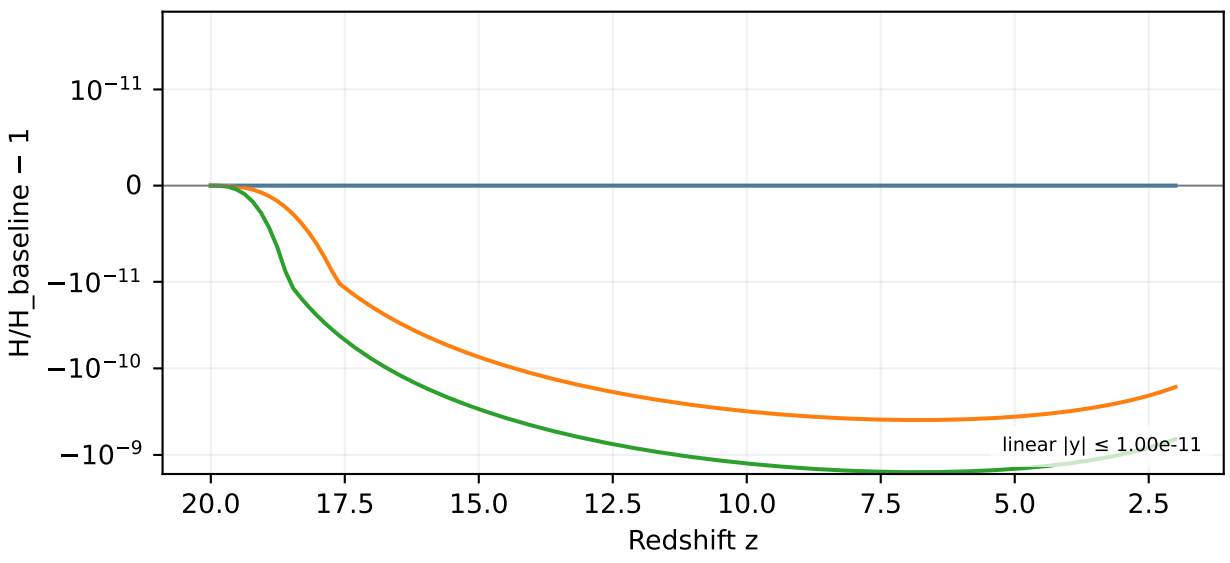

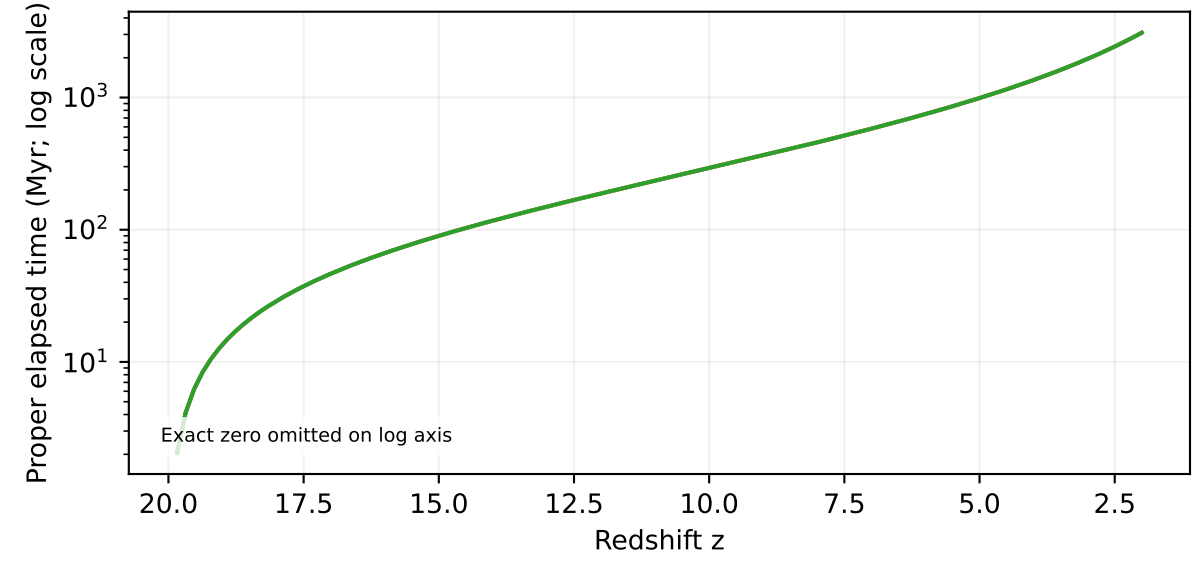

Σ₀=≈0, P_{m0}=≈0, P_{r0}=≈0
Σ₀=≈0, P_{m0}=+5.47e-04, P_{r0}=≈0
Σ₀=≈0, P_{m0}=+1.09e-03, P_{r0}=≈0