Bootstrap 5

PARTE 2

NAV

<UL CLASS="NAV">

EXISTE LA CLASE NAV PREPARADA PARA ARMAR UN MENÚ, SE APLICA A UNA LISTA DE ELEMENTOS:

```
<LI CLASS="NAV-ITEM">
                                                                            Se puede combinar con:
  <A CLASS="NAV-LINK ACTIVE" ARIA-CURRENT="PAGE" HREF="#">ACTIVE</A>
                                                                            justify-content-center
 </LI>
                                                                             Flex-colum
 <!! CLASS="NAV-ITEM">
                                                                             nav-tabs
  <A CLASS="NAV-LINK" HREF="#">LINK</A>
                                                                             nav-pills
 </LI>
                                                                             nav-justified
 <LI CLASS="NAV-ITEM">
  <A CLASS="NAV-LINK" HREF="#">LINK</A>
 </LI>
 <LI CLASS="NAV-ITEM">
  <A CLASS="NAV-LINK DISABLED" HREF="#" TABINDEX="-1" ARIA-DISABLED="TRUE">DISABLED</A>
 </LI>
</UL>
```

PESTAÑAS Y PILLS DINÁMICAS



Home Menu 1 Menu 2

Menu 2

Sed ut perspiciatis unde omnis iste natus error sit voluptatem accusantium doloremque laudantium, totam rem aperiam.

PESTAÑAS DINÁMICAS

```
<UL CLASS="NAV NAV-TABS">
 <LI CLASS="NAV-ITEM">
  <A CLASS="NAV-LINK ACTIVE" DATA-TOGGLE="TAB" HREF="#HOME">HOME</A>
 </LI>
 <LI CLASS="NAV-ITEM">
  <A CLASS="NAV-LINK" DATA-TOGGLE="TAB" HREF="#MENU1">MENU 1</A>
 </LI>
 <LI CLASS="NAV-ITEM">
  <A CLASS="NAV-LINK" DATA-TOGGLE="TAB" HREF="#MENU2">MENU 2</A>
 </LI>
</UL>
<!-- TAB PANES -->
<DIV CLASS="TAB-CONTENT">
 <DIV CLASS="TAB-PANE CONTAINER ACTIVE" ID="HOME">...</DIV>
 <DIV CLASS="TAB-PANE CONTAINER FADE" ID="MENU1">...</DIV>
 <DIV CLASS="TAB-PANE CONTAINER FADE" ID="MENU2">...</DIV>
</DIV>
```

NAVBAR

Se puede combinar con:
fixed-top
fixed-bottom
sticky-top

COLLAPSE

<BUTTON DATA-TOGGLE="COLLAPSE" DATA-TARGET="#DEMO">DESPLEGABLE</BUTTON>

EJEMPLO:


HTTPS://WWW.W3SCHOOLS.COM/BOOTSTRAP4/TRYIT.ASP?FILENAME=TRYBS C OLLAPSIBLE&STACKED=H

FORM


<torm></torm>	
<div class="mb-3"></div>	
<label class="form-label" for="exampleInputEmail1">Email address</label>	
<input aria-describedby="emailHelp" class="form-control" id="exampleInputEmail1" type="email"/>	
<div class="form-text" id="emailHelp">We'll never share your email with anyone else.</div>	
<div class="mb-3"></div>	Email address
<pre><label class="form-label" for="exampleInputPassword1">Password</label></pre>	Linaii address
<input class="form-control" id="exampleInputPassword1" type="password"/>	
	We'll never share your email with anyone else.
<div class="mb-3 form-check"></div>	Password
<input class="form-check-input" id="exampleCheck1" type="checkbox"/>	
<pre><label class="form-check-label" for="exampleCheck1">Check me out</label></pre>	
	Check me out
<button class="btn btn-primary" type="submit">Submit</button>	
	Submit

FORM GRID

FORM GRID

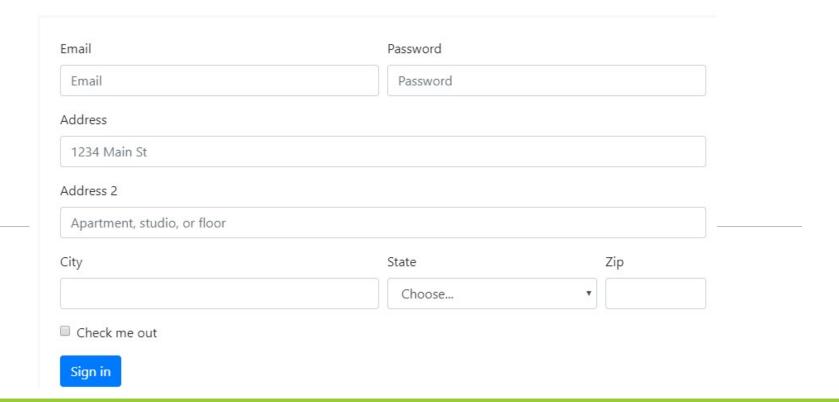

CUSTOM FORMS

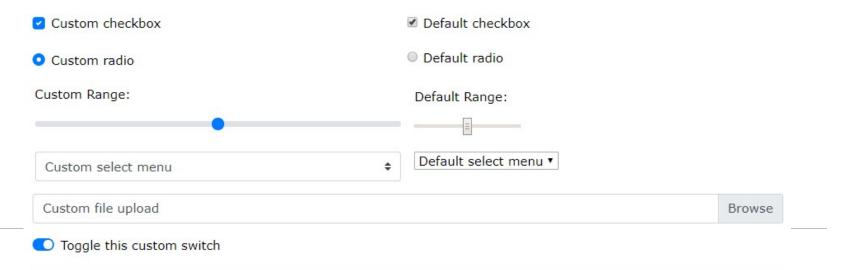

MODAL

```
<!-- BUTTON TO OPEN THE MODAL -->
<BUTTON TYPE="BUTTON" CLASS="BTN BTN-PRIMARY" DATA-TOGGLE="MODAL" DATA-</pre>
TARGET="#MYMODAL">
 OPEN MODAL
</BUTTON>
<!-- THE MODAL -->
<DIV CLASS="MODAL" ID="MYMODAL">
 <DIV CLASS="MODAL-DIALOG">
  <DIV CLASS="MODAL-CONTENT">
    <!-- MODAL HEADER -->
    <DIV CLASS="MODAL-HEADER">
     <H4 CLASS="MODAL-TITLE">MODAL HEADING</H4>
<BUTTON TYPE="BUTTON" CLASS="CLOSE" DATA-</pre>
DISMISS="MODAL">×</BUTTON>
    </DIV>
    <!-- MODAL BODY -->
   <DIV CLASS="MODAL-BODY">
    MODAL BODY...
    </DIV>
    <!-- MODAL FOOTER -->
   <DIV CLASS="MODAL-FOOTER">
     <BUTTON TYPE="BUTTON" CLASS="BTN BTN-DANGER" DATA-
DISMISS="MODAL">CLOSE</BUTTON>
    </DIV>
  </DIV>
 </DIV>
</DIV>
```

CAROUSEL

```
<DIV ID="DEMO" CLASS="CAROUSEL SLIDE" DATA-RIDE="CAROUSEL">
 <!-- INDICATORS -->
 <UL CLASS="CAROUSEL-INDICATORS">
  <LI DATA-TARGET="#DEMO" DATA-SLIDE-TO="0" CLASS="ACTIVE"></LI>
  <LI DATA-TARGET="#DEMO" DATA-SLIDE-TO="1"></LI>
  <LI DATA-TARGET="#DEMO" DATA-SLIDE-TO="2"></LI>
 </UL>
 <!-- THE SLIDESHOW -->
 <DIV CLASS="CAROUSEL-INNER">
  <DIV CLASS="CAROUSEL-ITEM ACTIVE">
   <IMG SRC="LA.JPG" ALT="LOS ANGELES">
  </DIV>
  <DIV CLASS="CAROUSEL-ITEM">
   <IMG SRC="CHICAGO.JPG" ALT="CHICAGO">
  </DIV>
  <DIV CLASS="CAROUSEL-ITEM">
   <IMG SRC="NY.JPG" ALT="NEW YORK">
  </DIV>
 </DIV>
 <!-- LEFT AND RIGHT CONTROLS -->
 <A CLASS="CAROUSEL-CONTROL-PREV" HREF="#DEMO" DATA-SLIDE="PREV">
  <SPAN CLASS="CAROUSEL-CONTROL-PREV-ICON"></SPAN>
 <A CLASS="CAROUSEL-CONTROL-NEXT" HREF="#DEMO" DATA-SLIDE="NEXT">
  <SPAN CLASS="CAROUSEL-CONTROL-NEXT-ICON"></SPAN>
 </A>
</DIV>
```

COMPONENTES CON JQUERY

TOOLTIP:

```
<A HREF="#" DATA-
TOGGLE="TOOLTIP" TITLE="HOORAY!">HOVER OVER
ME</A>
```

```
<SCRIPT>
$(DOCUMENT).READY(FUNCTION(){
  $('[DATA-TOGGLE="TOOLTIP"]').TOOLTIP();
});
</SCRIPT>
```

COMPONENTES CON JQUERY

FILTER TABLE:

HTTPS://WWW.W3SCHOOLS.COM/BOOTSTRAP5/

HTTPS://WWW.W3SCHOOLS.COM/BOOTSTRAP5/TRYIT.ASP?FIL ENAME=TRYBS_TABLE_BASIC&STACKED=H

COMPONENTES CON JQUERY

SCROLLSPY:

HTTPS://WWW.W3SCHOOLS.COM/BOOTSTRAP4/TRYIT.A
SP?FILENAME=TRYBS SCROLLSPY&STACKED=H