## HNCO


# Runtime as a function of size of (1+1) EA and RLS on OneMax and LeadingOnes


#### December 1, 2017


#### Contents


1	Function OneMax	1
2	Function LeadingOnes	2
A	Plan	3
В	Default parameters	4

#### 1 Function OneMax

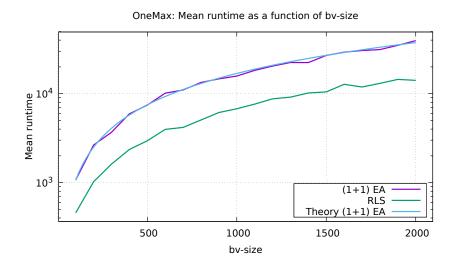


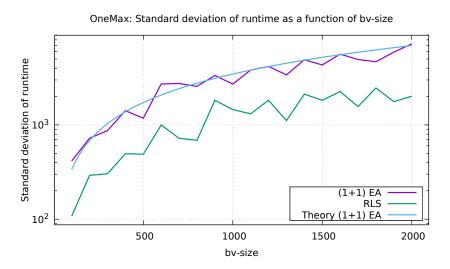

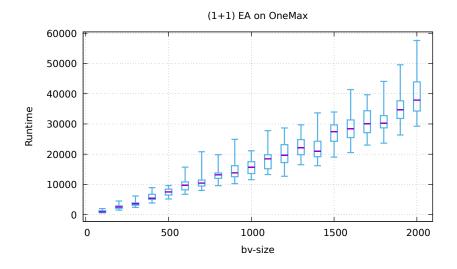


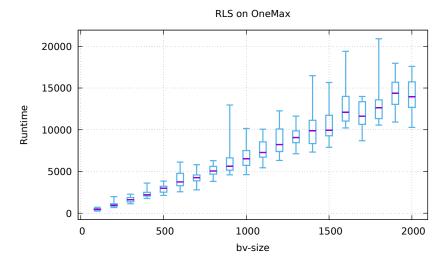



## 2 Function LeadingOnes

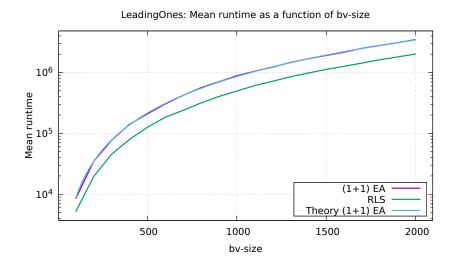

#### LeadingOnes: Standard deviation of runtime as a function of by-size

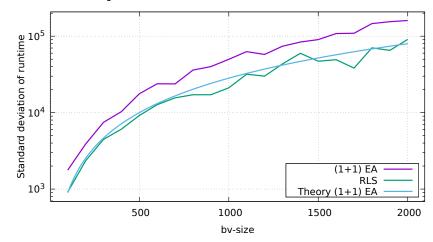

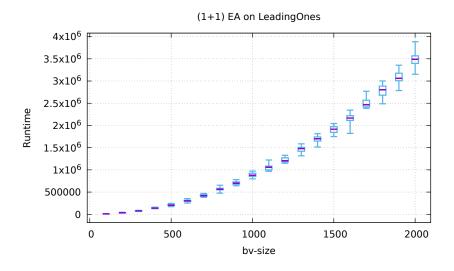

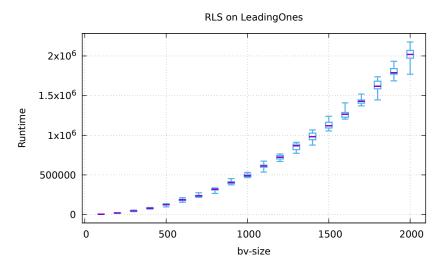

### A Plan

```
{
    "exec": "hnco",
    "opt": "--print-performance -i 0 -b 0 --stop-on-maximum",
    "num_runs": 20,
    "parallel": false,
    "results": "results",
    "report": "report",
    "graphics": "graphics",
    "parameter": {
```

```
"id": "bv-size",
    "values_perl": "map { 100 + 100 * $_ } (0 .. 19)",
    "boxwidth": "40"
},
"functions": [
    {
        "id": "one-max",
         "name": "OneMax",
        "opt": "-F 0",
         "mean_gnuplot": [
             {
                 "expression": "f(x) = exp(1) * (x + 1/2) * log(x) - 1.8925417883 * x",
                 "title": "Theory (1+1) EA"
             }
        ],
         "stddev_gnuplot": [
                 "expression": f(x) = \operatorname{sqrt}(pi**2 / 6 * (\exp(1) * x)**2 - (2 * \exp(1) + 1) * \exp(1)
                 \rightarrow * x * log(x))",
                 "title": "Theory (1+1) EA"
             }
        ]
    },
        "id": "leading-ones",
        "name": "LeadingOnes",
         "opt": "-F 10",
         "mean_gnuplot": [
             {
                 "expression": f(x) = (exp(1) - 1) / 2 * x**2",
                 "title": "Theory (1+1) EA"
             }
        ],
        "stddev_gnuplot": [
                 "expression": f(x) = sqrt((exp(2) - 1) / 8 * x**3)",
                 "title": "Theory (1+1) EA"
             }
        ]
    }
],
"algorithms": [
    {
        "id": "ea-1p1",
         "name": "(1+1) EA",
         "opt": "-A 300 --allow-stay"
    },
    {
        "id": "rls",
         "name": "RLS",
         "opt": "-A 100 --rls-patience 0"
    }
]
```

#### B Default parameters

```
# algorithm = 100
# bm_mc_reset_strategy = 1
# bm_num_gs_cycles = 1
# bm_num_gs_steps = 100
# bm_sampling = 1
```

}

```
# budget = 10000
\# bv_size = 100
\# ea_lambda = 100
\# ea_mu = 10
# fun_name = noname
# fun_num_traps = 10
# fun_prefix_length = 2
# fun_threshold = 10
# function = 0
# ga_crossover_probability = 0.5
# ga_tournament_size = 10
# hea_binary_dynamics = 0
\# hea_delay = 10000
# hea_num_par_updates = 1
# hea_num_seq_updates = 100
# hea_rate_strategy = 0
# hea_reset_period = 0
# hea_sampling_method = 0
# hea_time_constant = 1000
# hea_weight = 1
# learning_rate = 0.001
# map = 0
# map_input_size = 100
# map_path = nopath
# neighborhood = 0
# neighborhood_iterator = 0
# noise_stddev = 1
# num_iterations = 0
# num_threads = 1
# path = nopath
# population_size = 10
# pv_log_num_components = 5
# radius = 2
# rls_patience = 50
# sa_initial_acceptance_probability = 0.6
# sa_num_transitions = 50
# sa_num_trials = 100
# sa_rate = 1.2
# scaled_mutation_probability = 1
\# seed = 0
# selection_size = 1
# target = 100
# print_default_parameters
# last_parameter
# exec_name = hnco
\# version = 0.7
```

# Generated from hnco.json