

HNCO

Visualization of empirical autocorrelation functions of various functions defined on bit vectors

August 8, 2018

Abstract

This document proposes to visualize empirical autocorrelation functions of various functions defined on bit vectors (hypercube) of size $n = 100$. If f is a fitness function, a random walk $(X_t)_{t \geq 1}$ on the hypercube gives rise to a time series $(f(X_t))$ which is analyzed through its empirical autocorrelation function.

Contents

1	Introduction	2
2	All functions	2
3	one-max	3
4	lin	3
5	leading-ones	4
6	ridge	4
7	jmp-5	5
8	jmp-10	5
9	djmp-5	6
10	djmp-10	6
11	fp-5	7
12	fp-10	7
13	nk	8
14	max-sat	8
15	labs	9
16	ep	9
17	cancel	10
18	trap	10
19	hiff	11
20	plateau	11
21	walsh2	12
A	Plan	12
B	Default parameters	13


1 Introduction

The underlying process is a random walk $(X_t)_{t \geq 1}$ on the hypercube initialized uniformly. If f is the fitness function then its autocorrelation function ρ is defined by


$$\rho(\tau) = \frac{1}{(n - \tau)\sigma^2} \sum_{t=1}^{T-\tau} (f(X_t) - \mu)(f(X_{t+\tau}) - \mu) \quad (1)$$

where μ and σ are the mean and standard deviation respectively of the process $(f(X_t))$, T is the length of the Markov chain and the lag τ is such that $0 \leq \tau < T$. The empirical autocorrelation function is estimated and computed in a naive way. It should be noted that the estimated function does not necessarily have properties such as positivity, monotonicity, or convexity. Normalized autocorrelation functions $\rho(\tau)/\rho(0)$ are represented in the following sections.


2 All functions

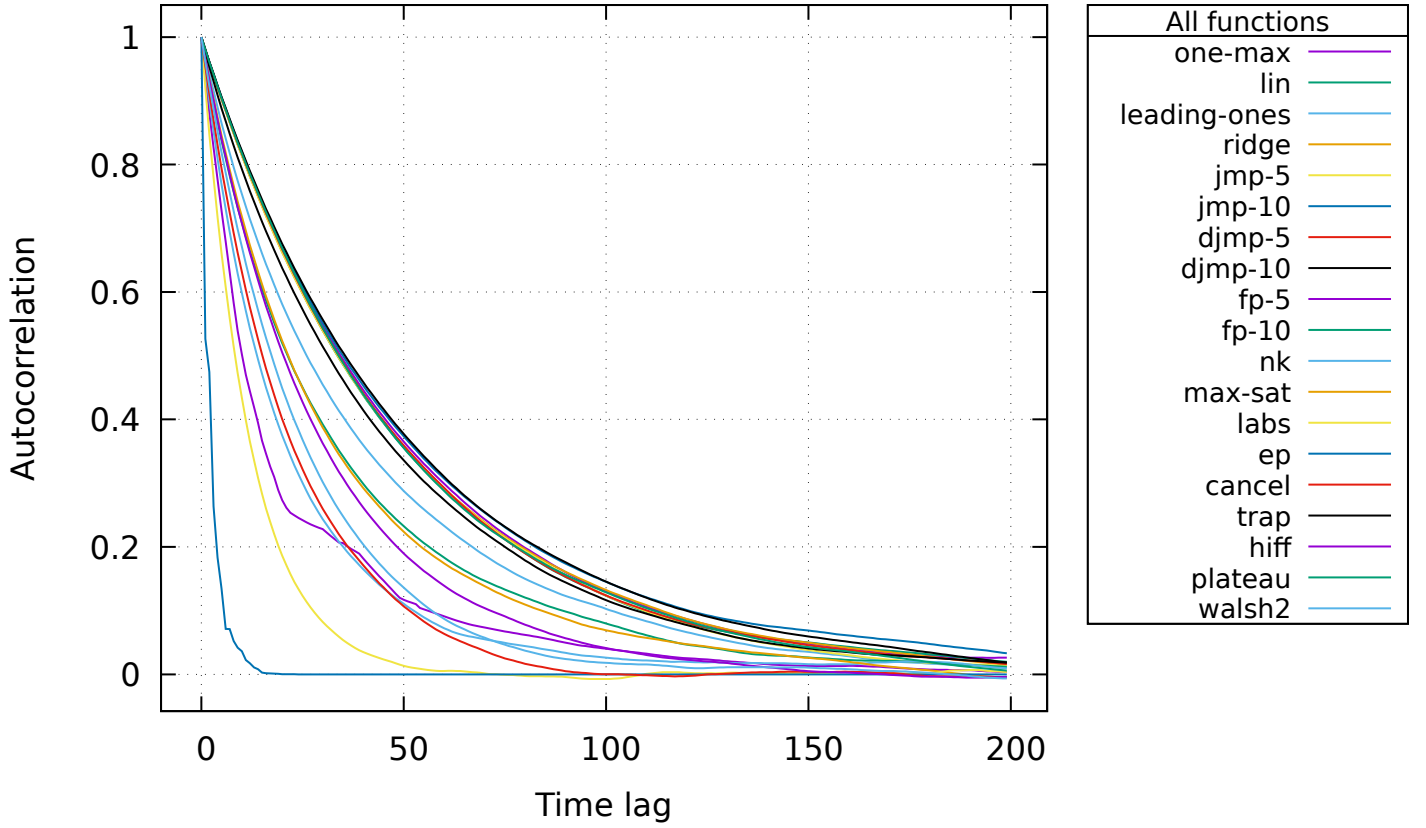


3 one-max

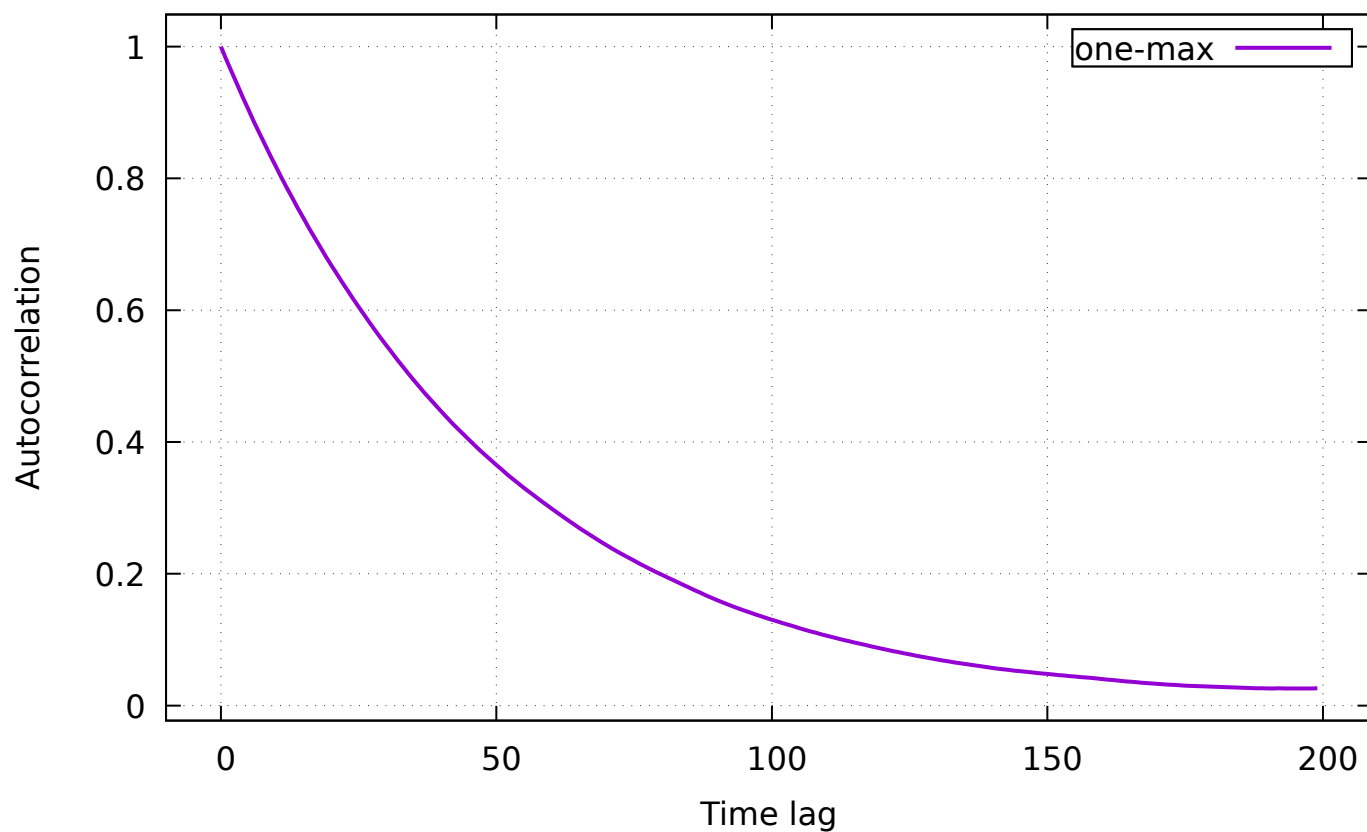


4 lin

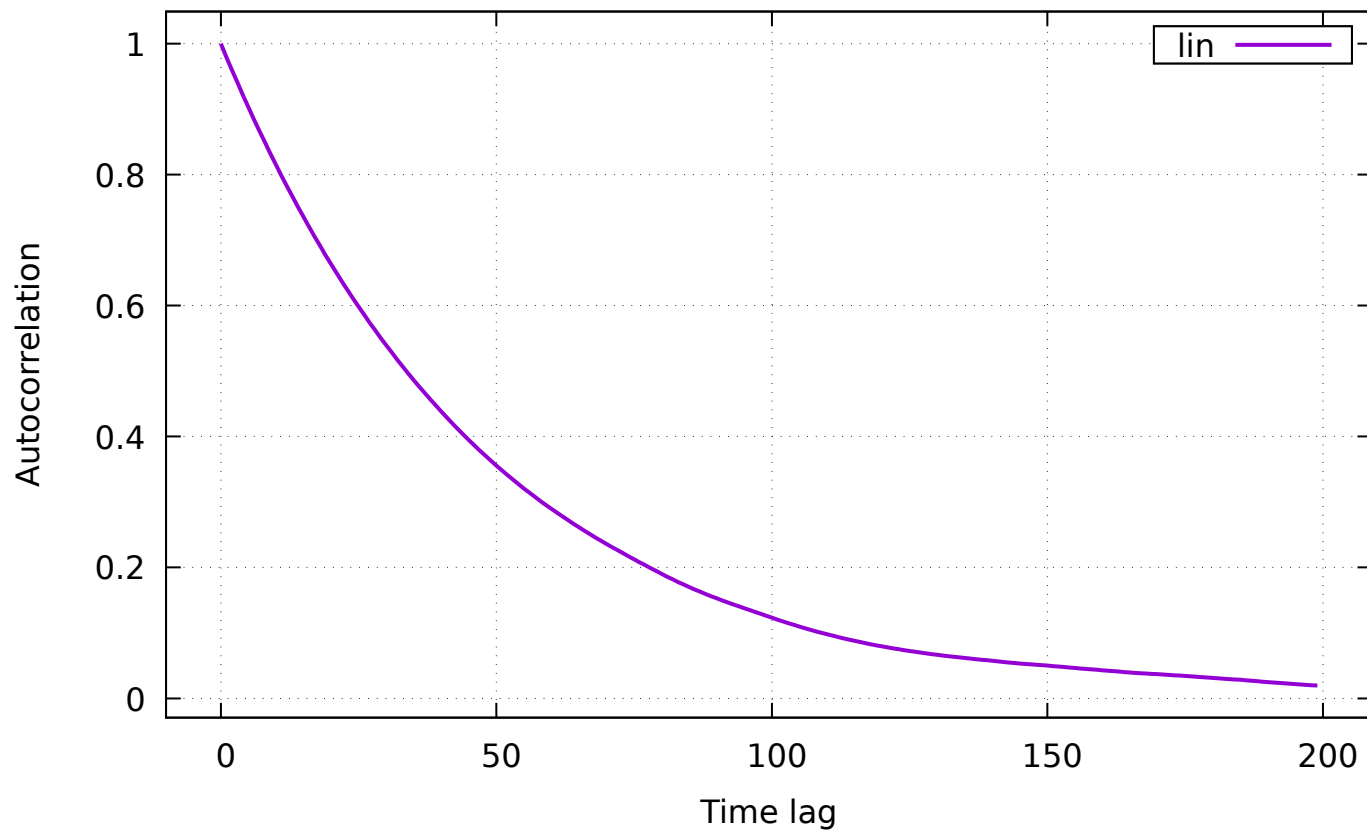


5 leading-ones

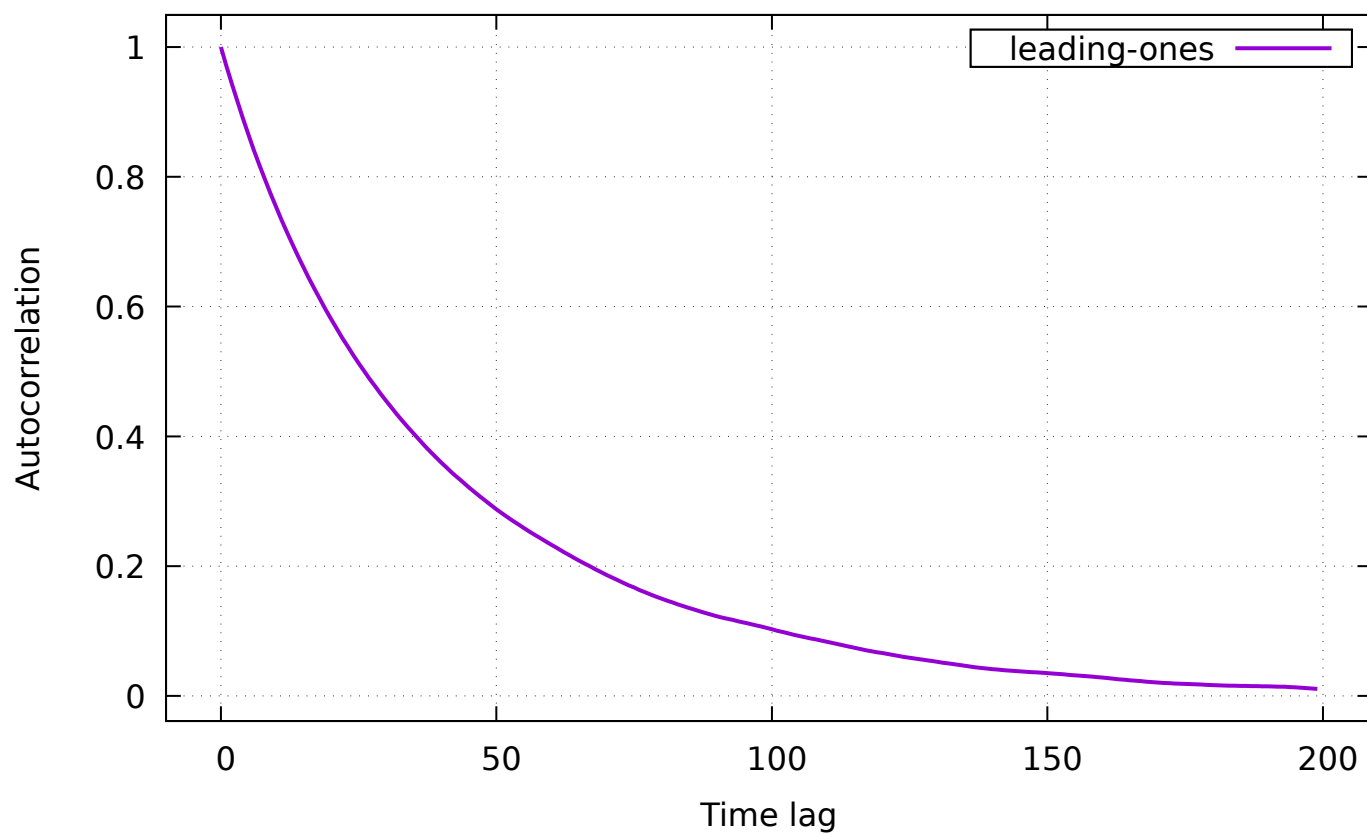


6 ridge

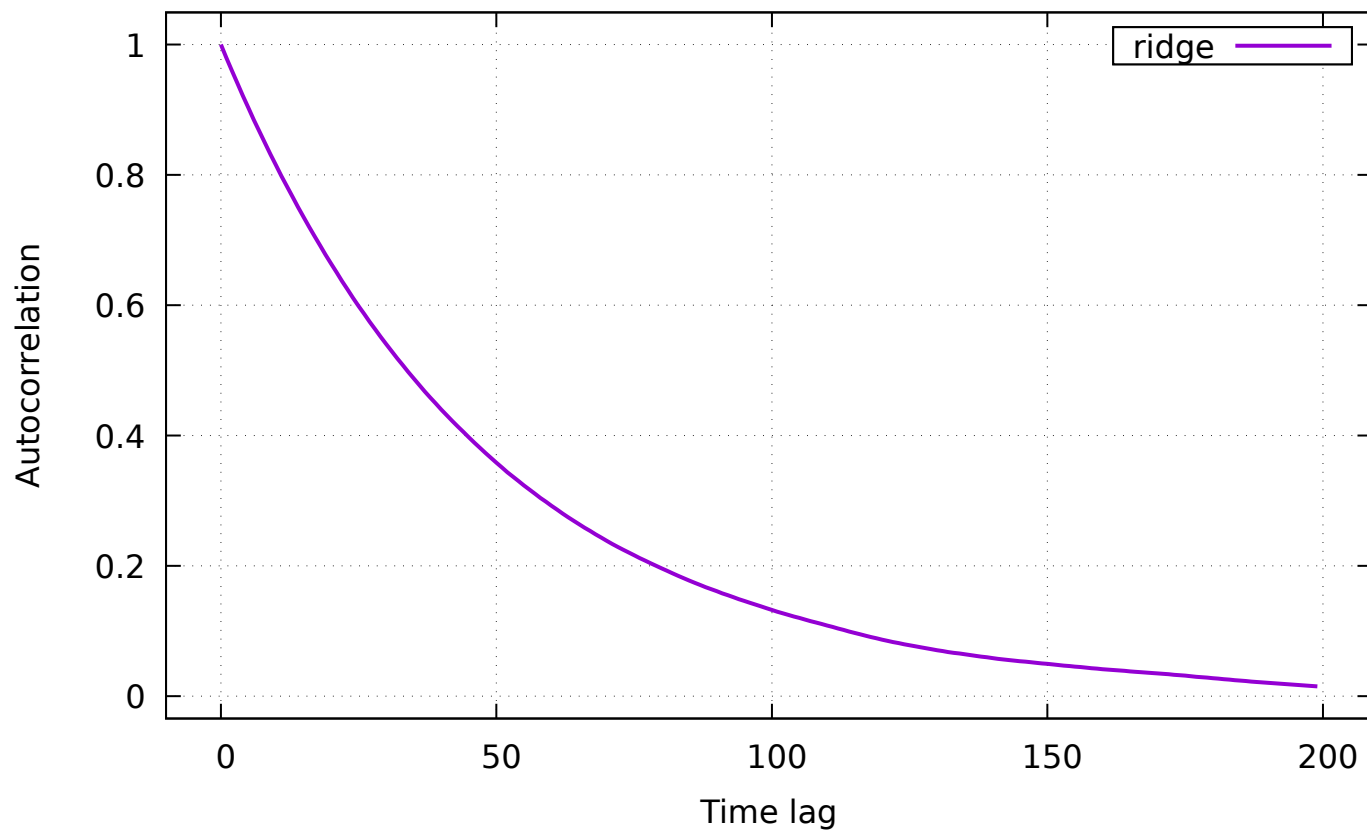


7 jmp-5

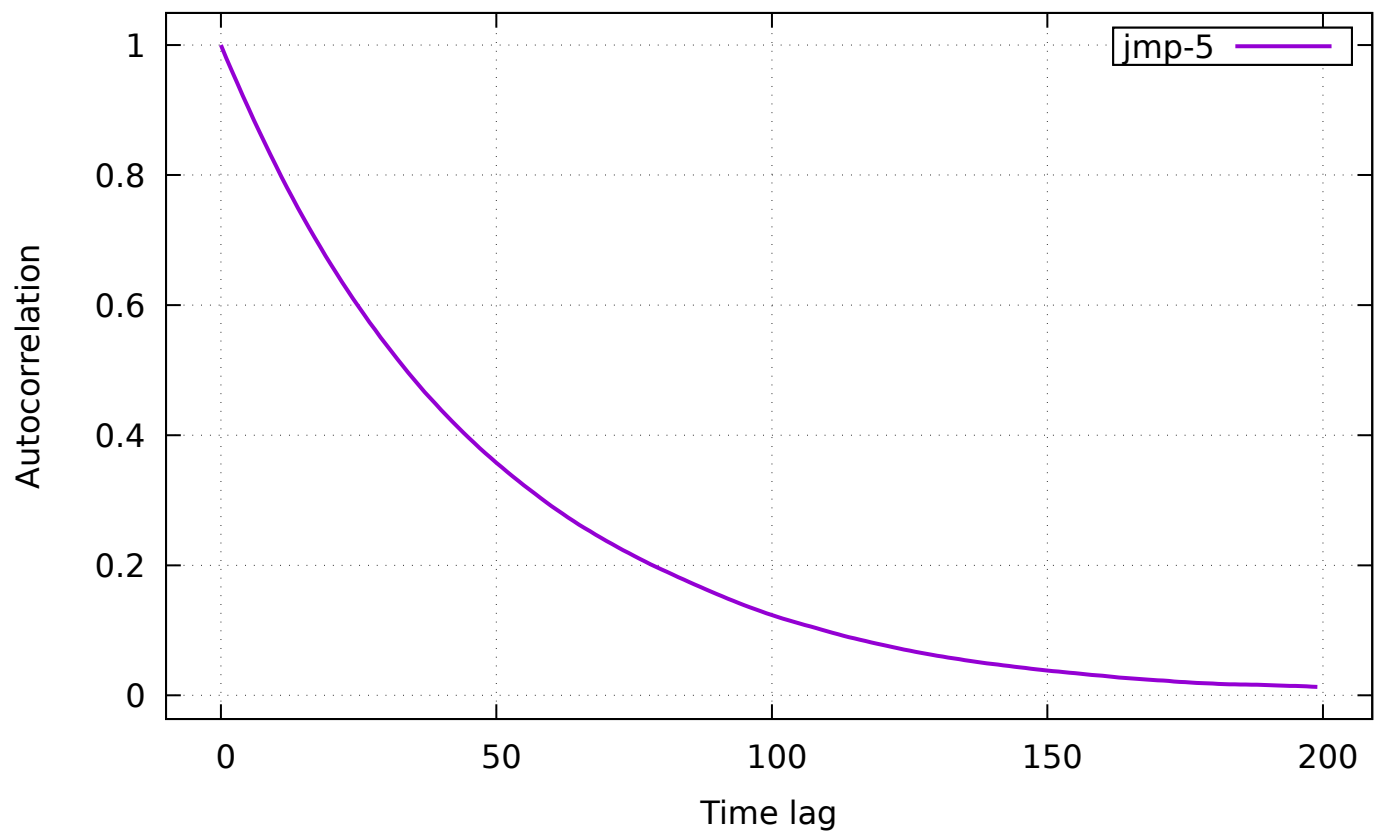


8 jmp-10

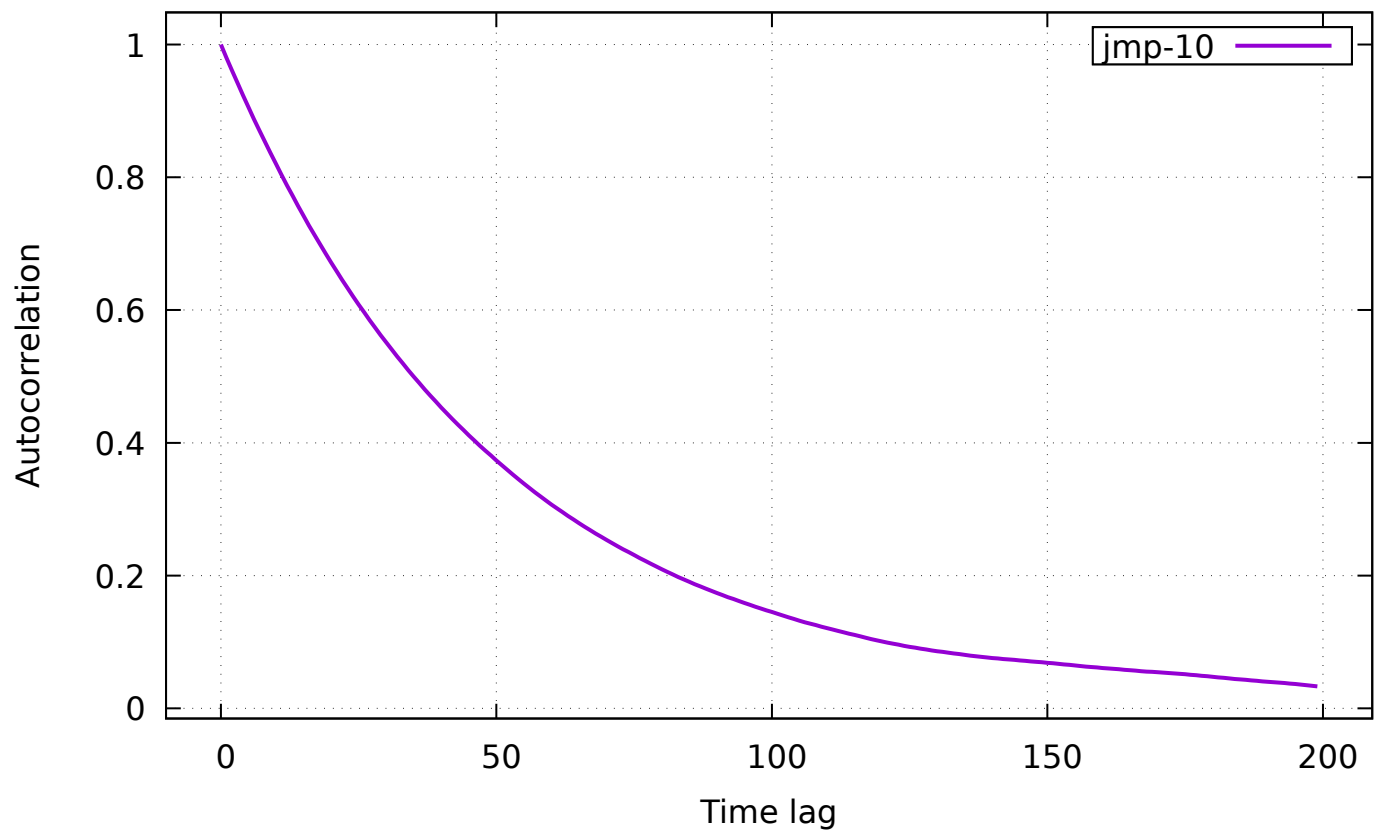


9 djump-5

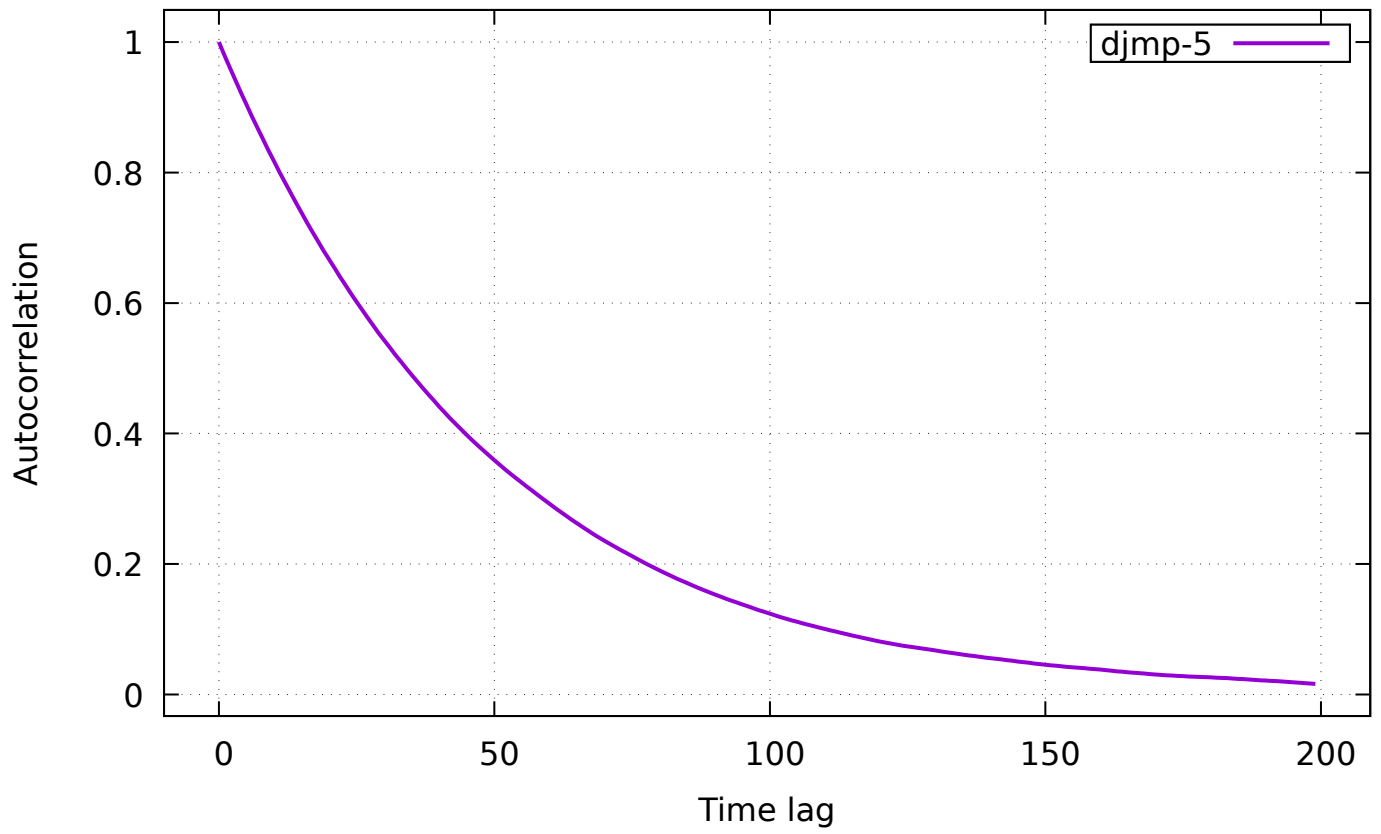


10 djump-10

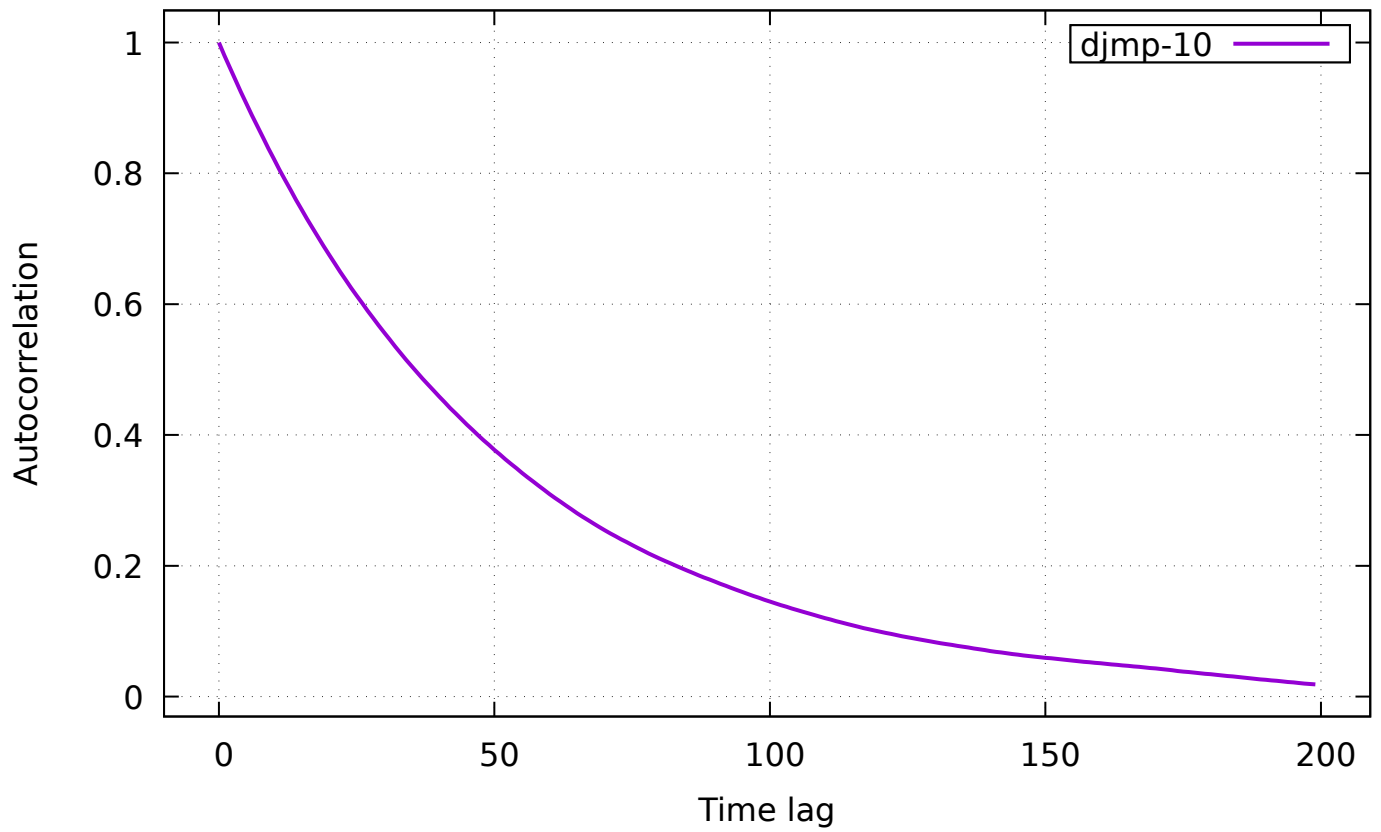


11 fp-5

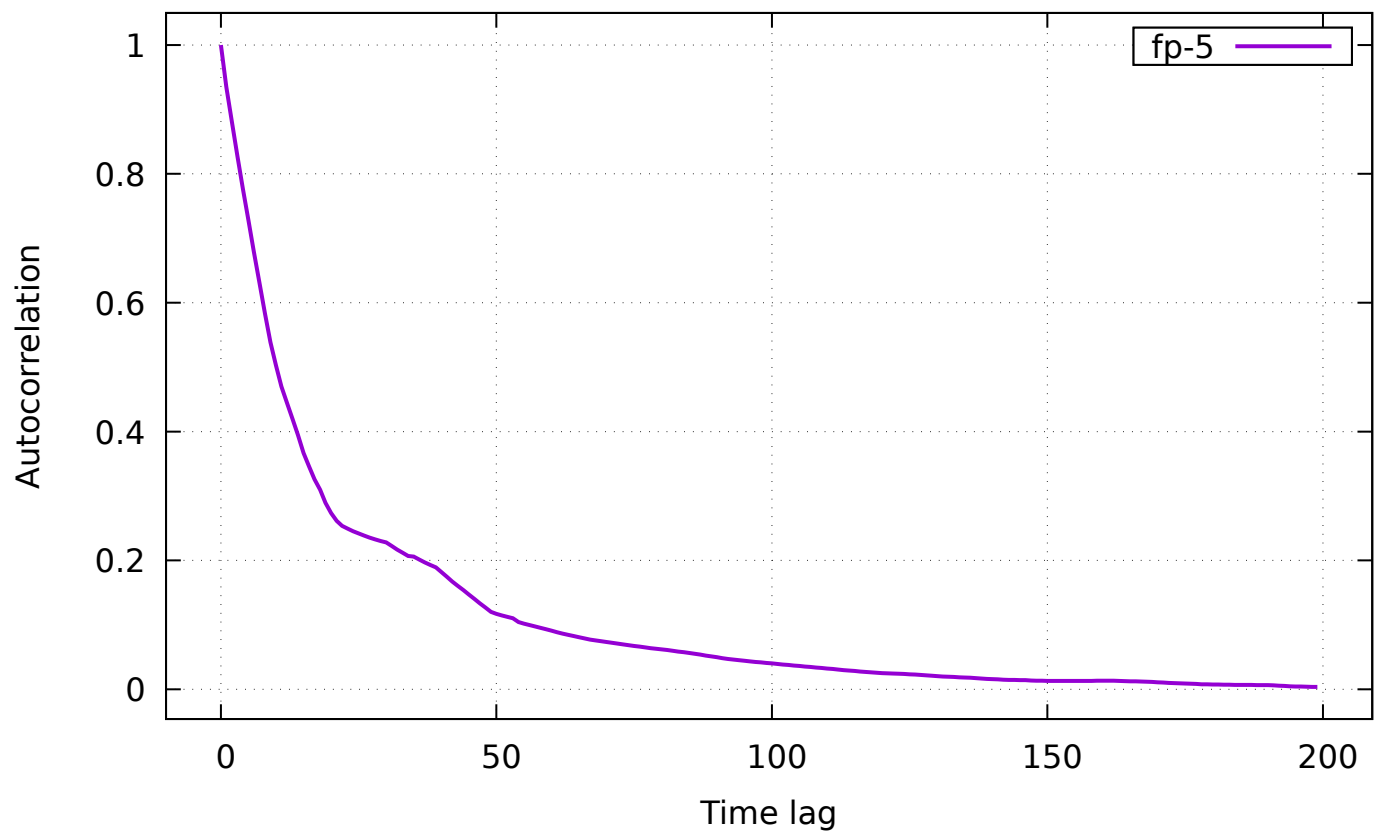


12 fp-10

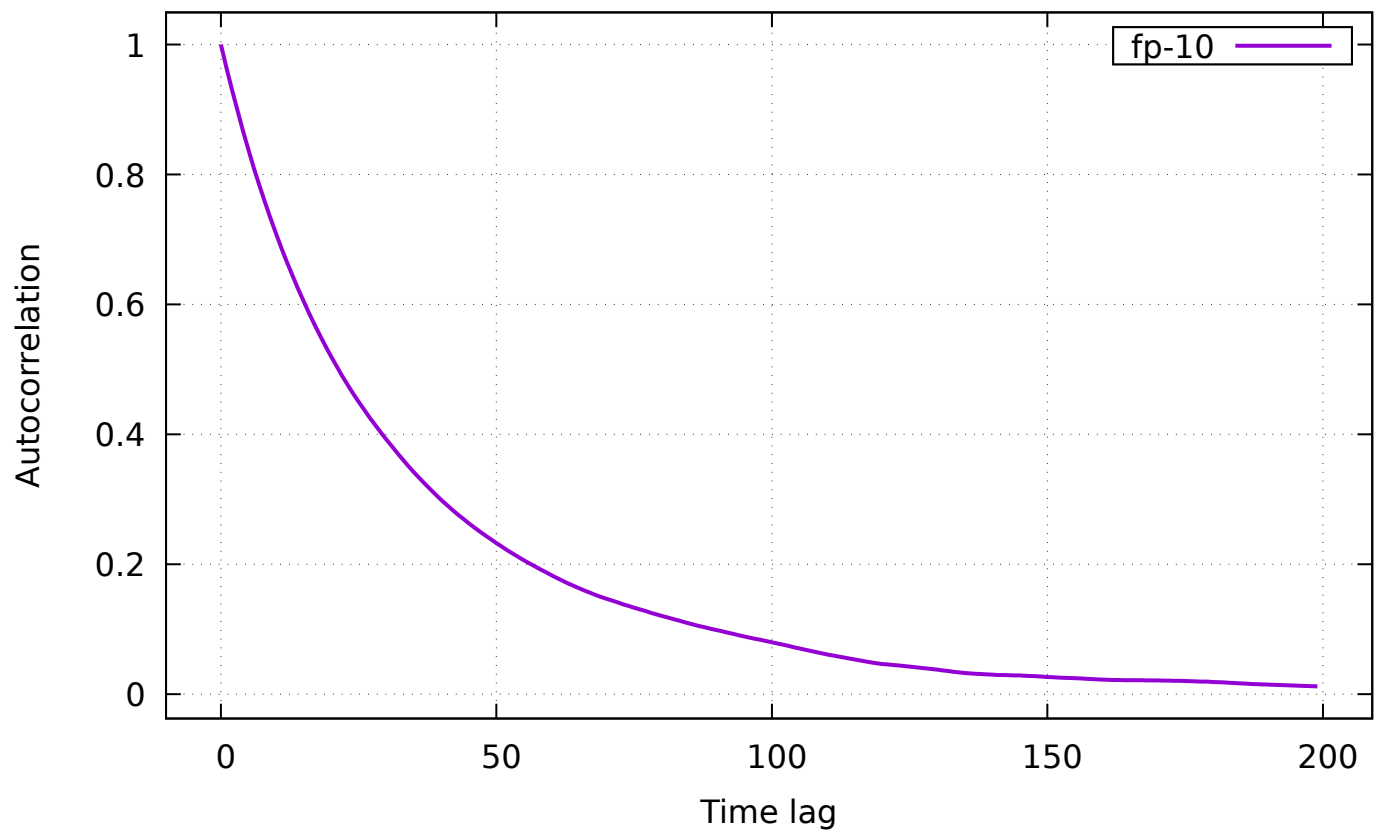


13 nk

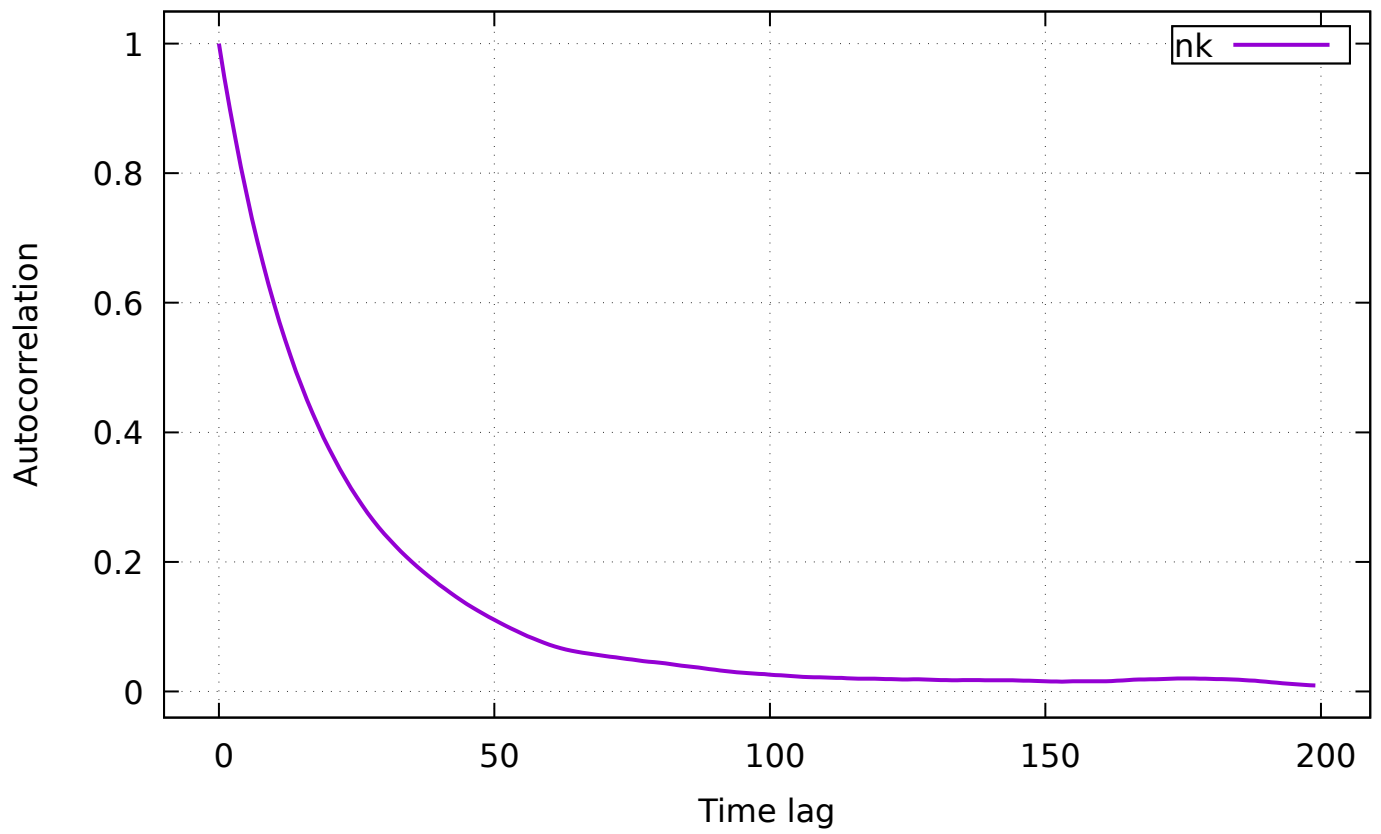


14 max-sat

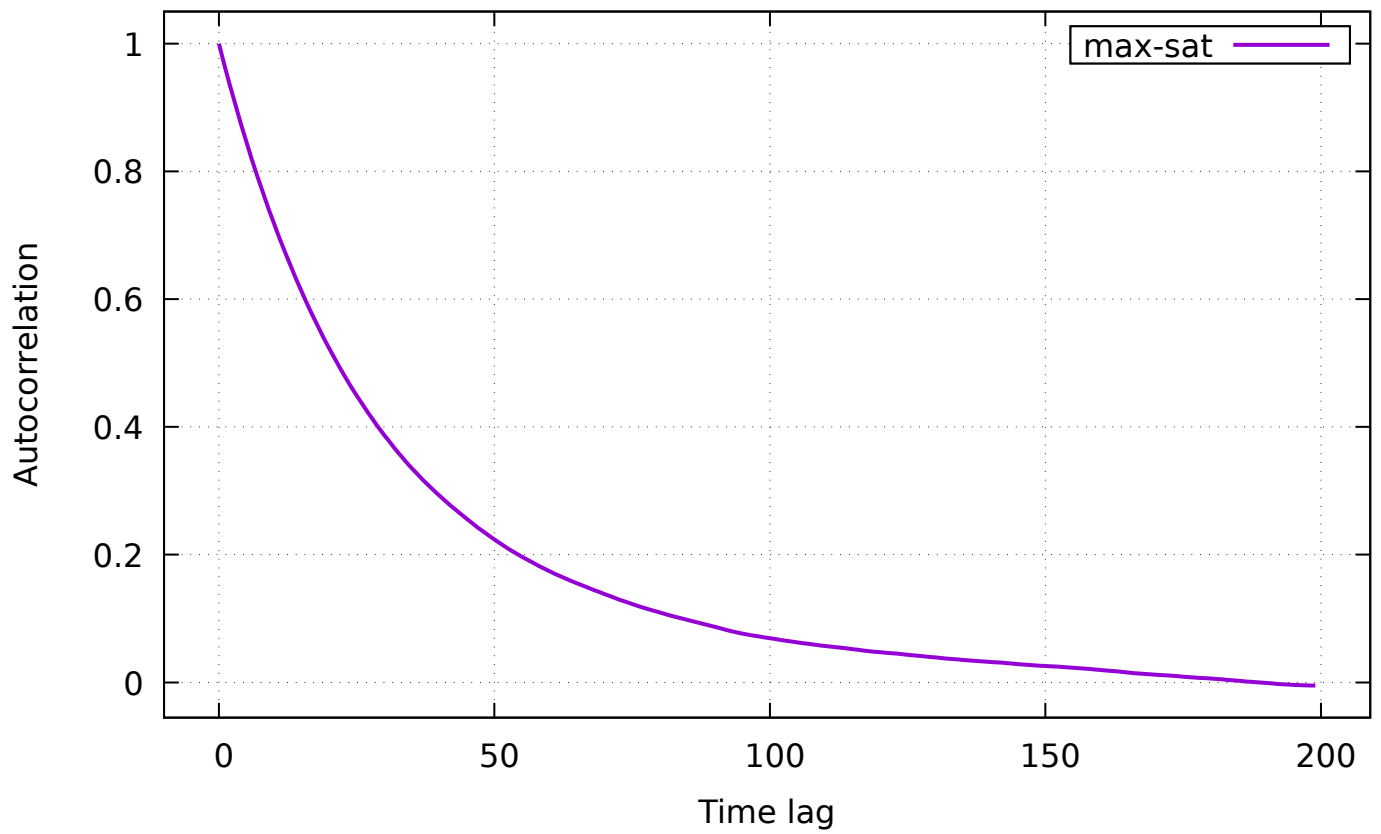


15 labs

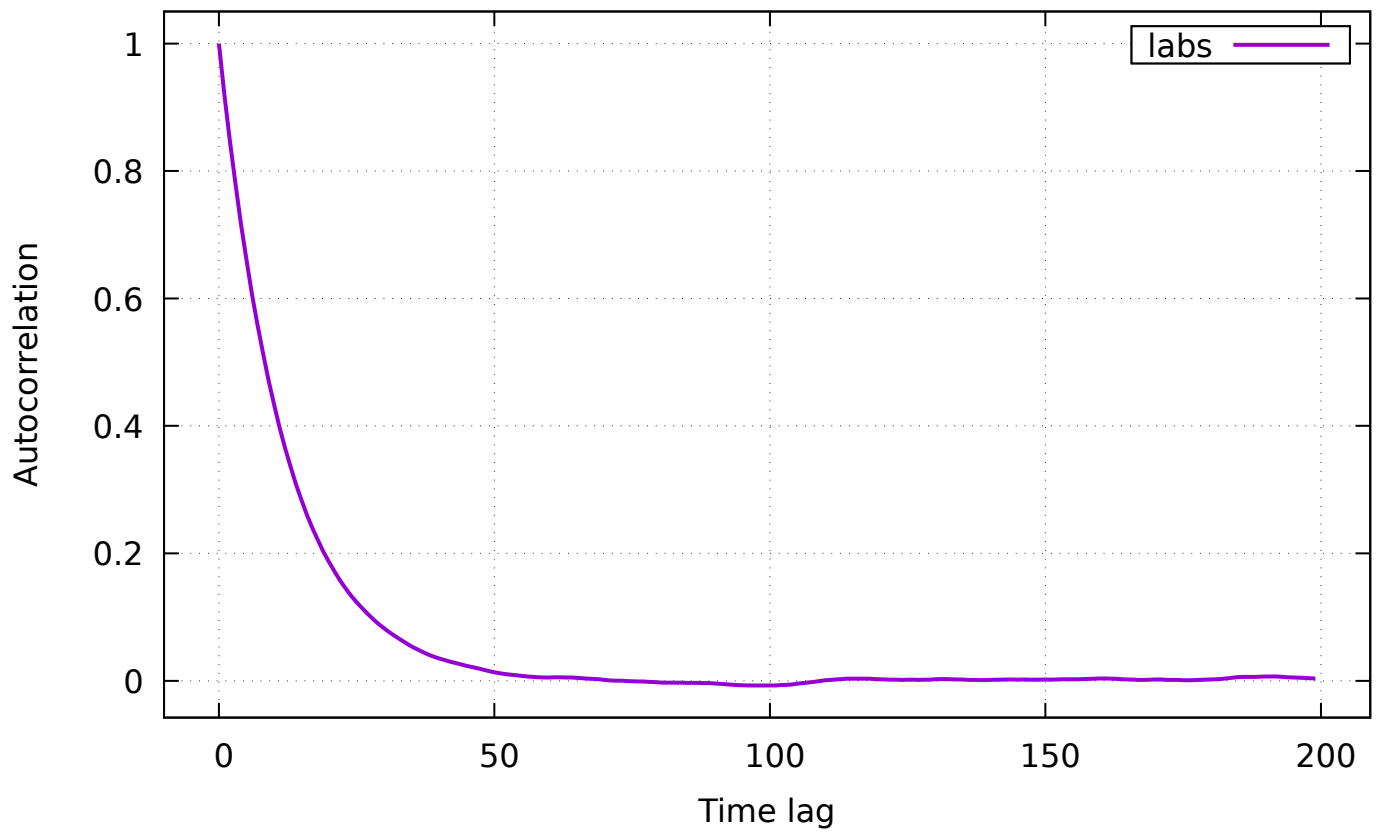


16 ep

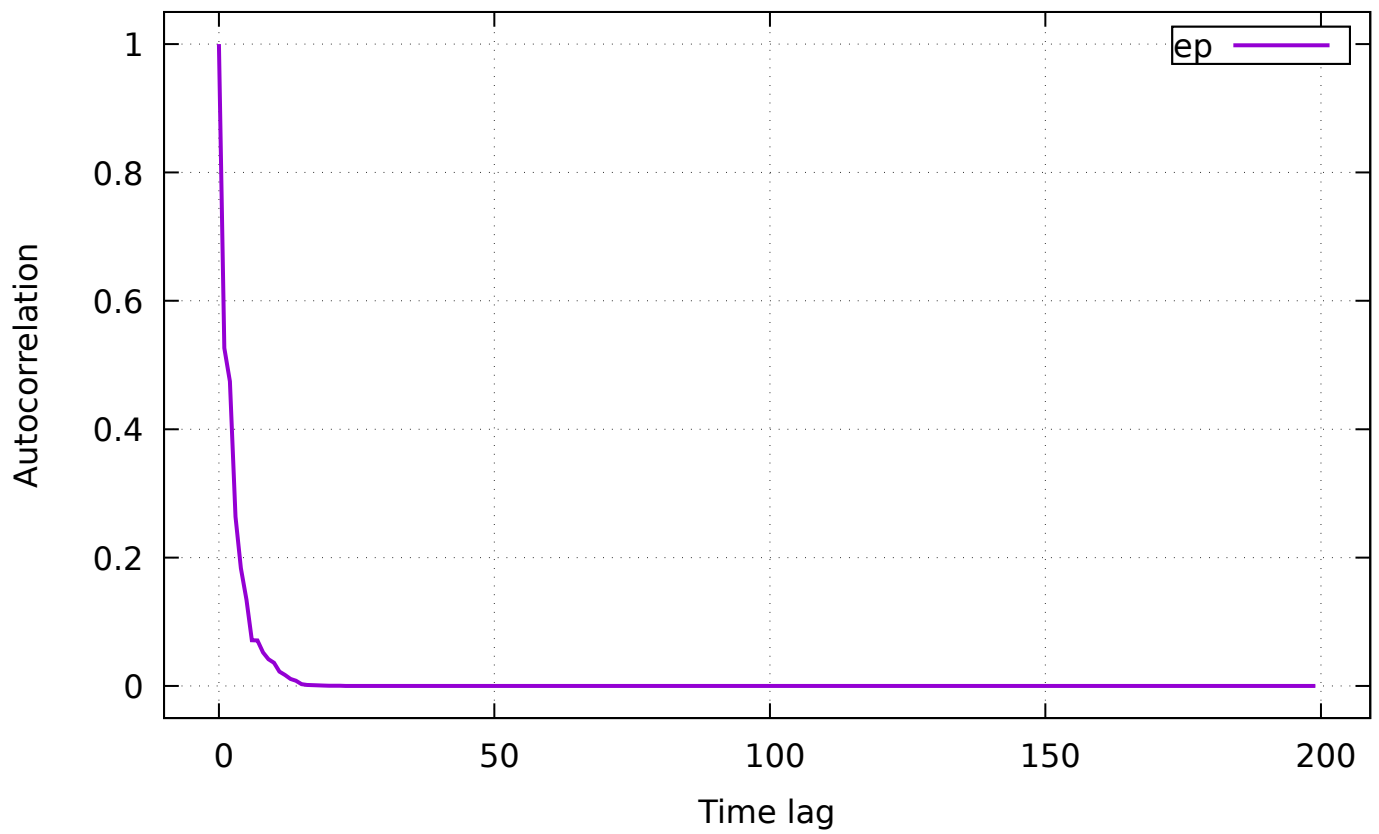


17 cancel

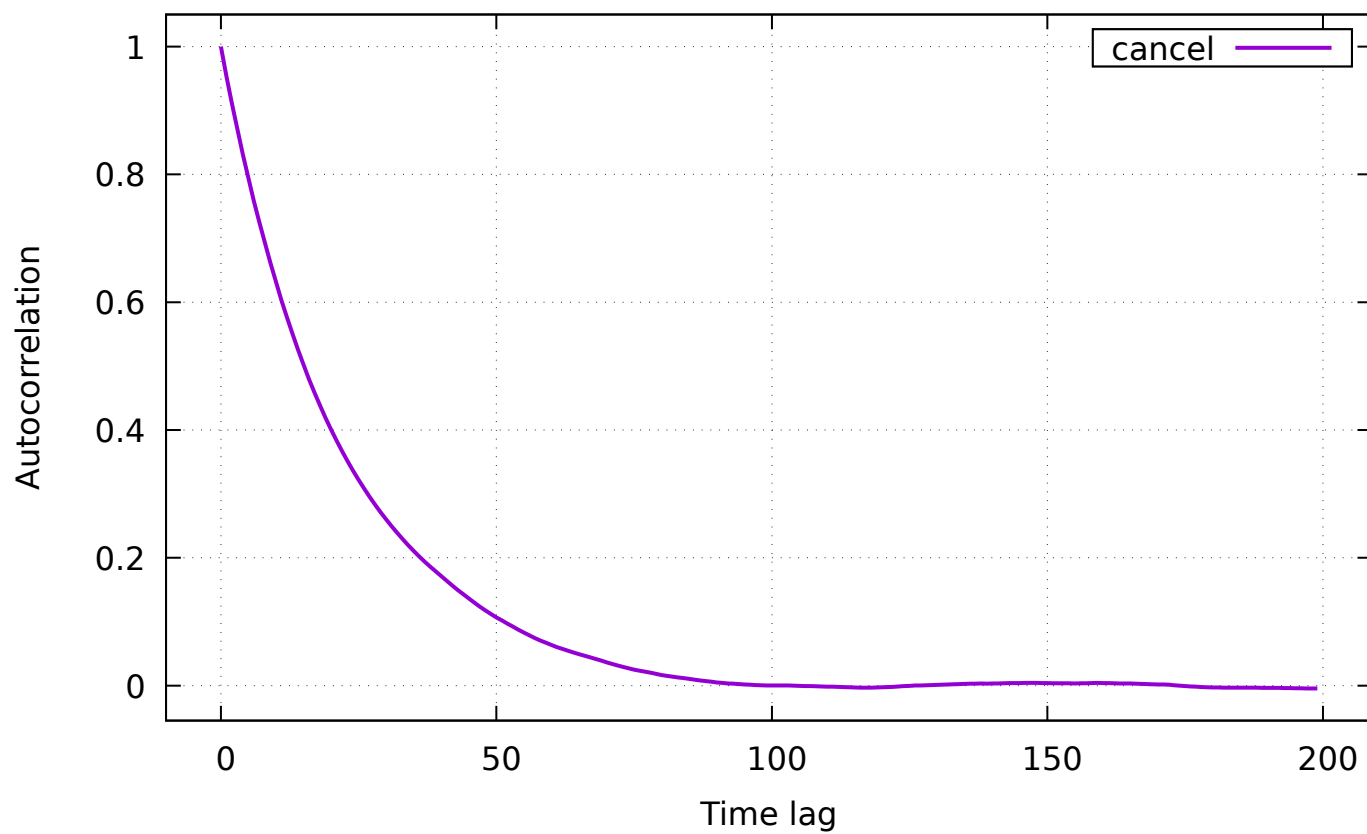


18 trap

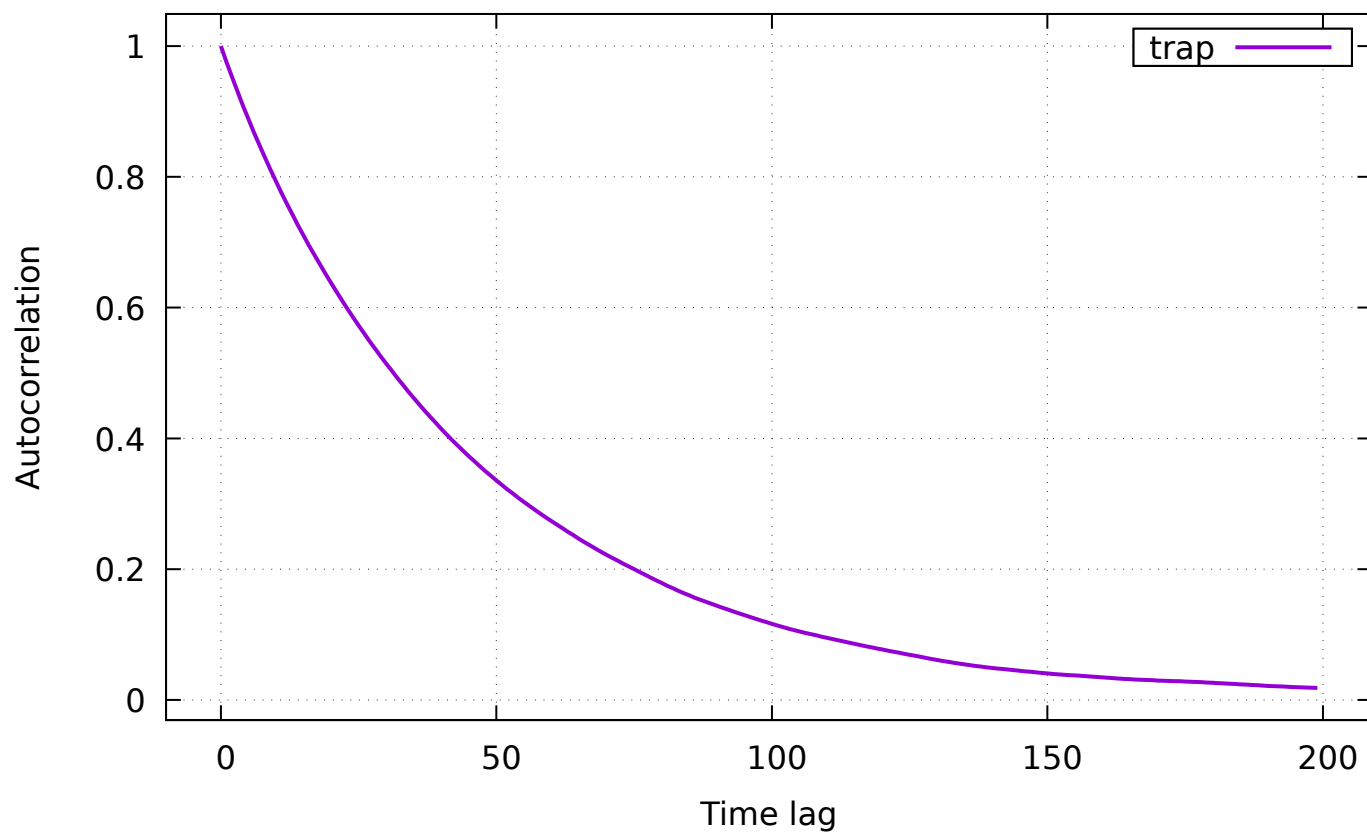


19 hiff

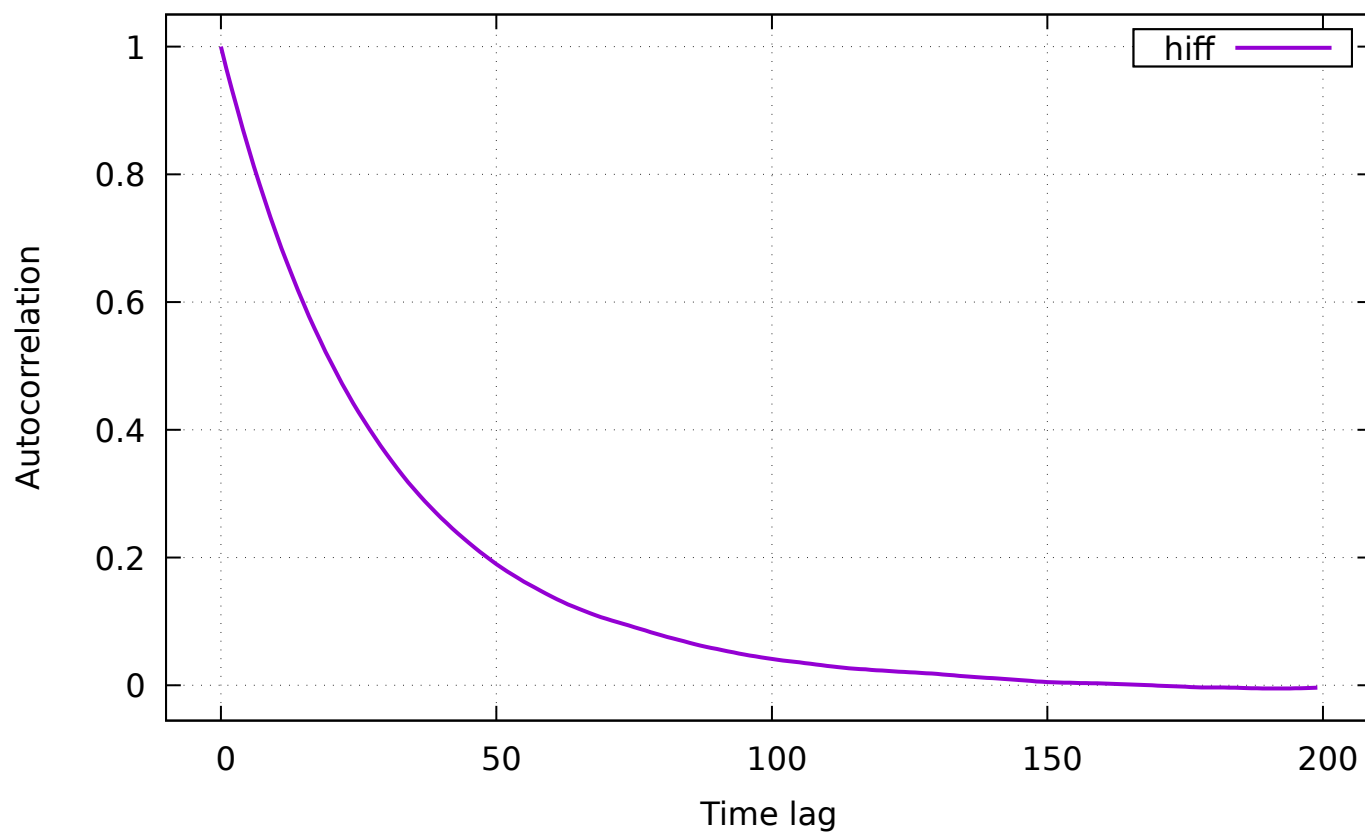

20 plateau

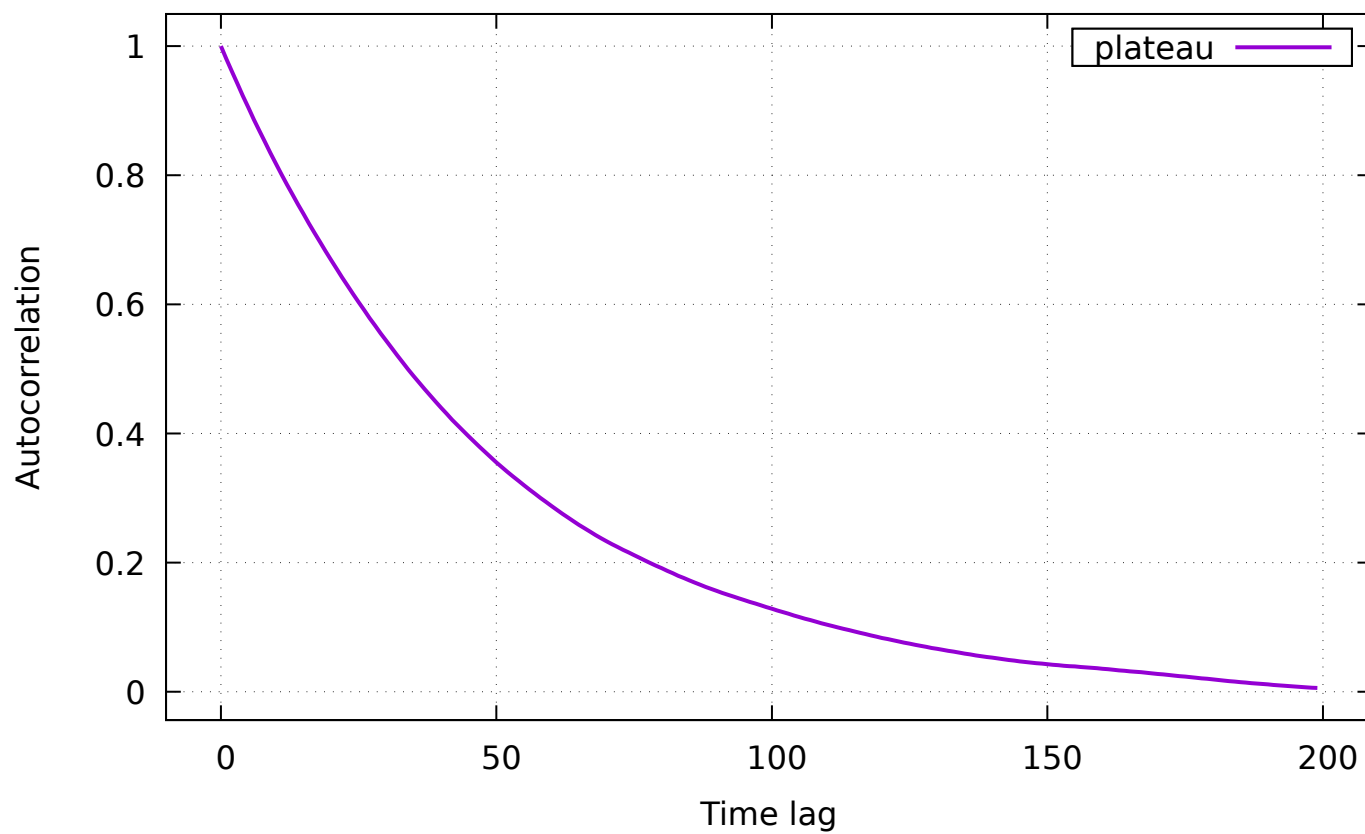

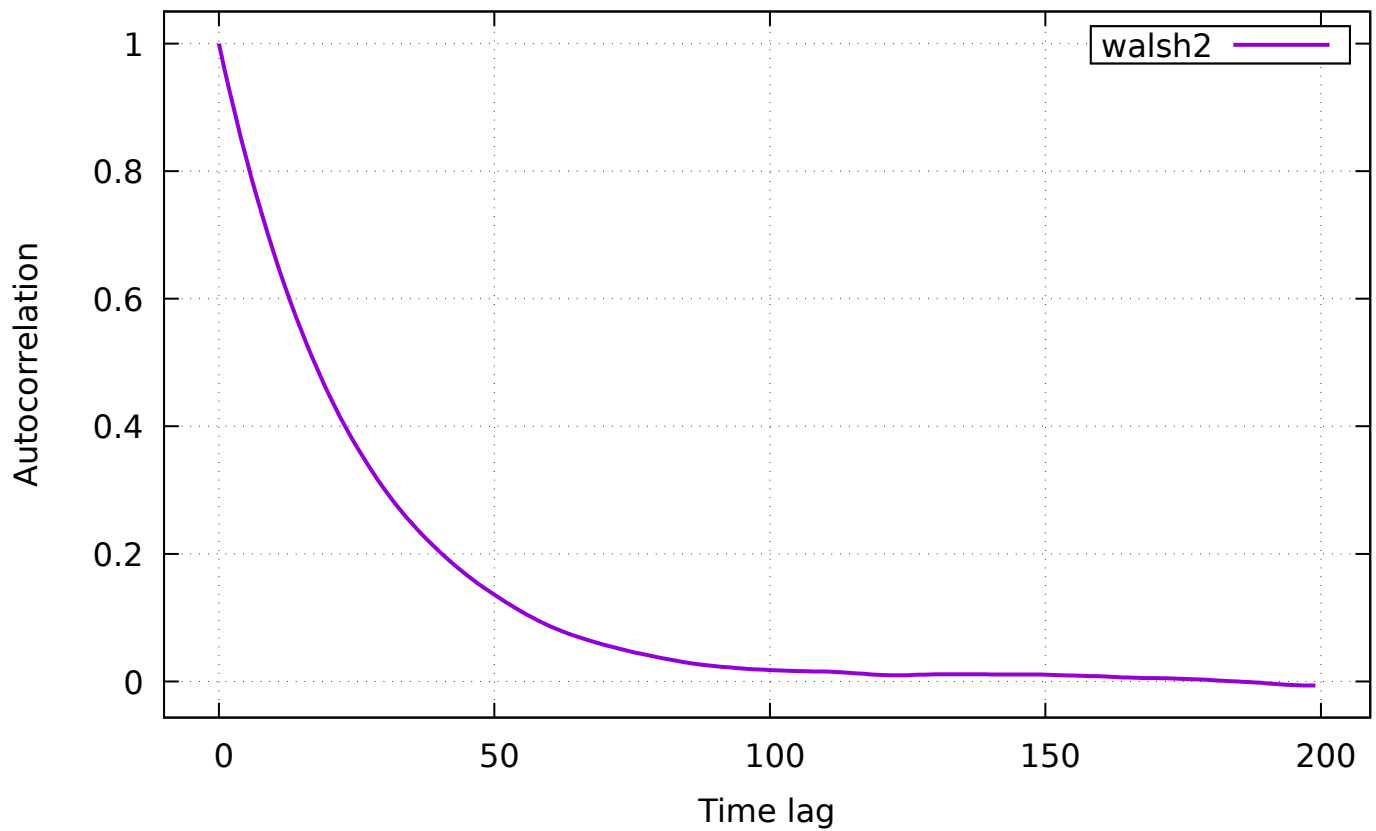

A Plan

```
{
  "exec": "hnco",
  "opt": "-s 100 -i 500000 -b 0 -A 20 --rw-log-value",
  "parallel": true,
  "results": "results",
  "graphics": "graphics",
  "report": "report",
  "lag_max": 200,
  "functions": [
    {
      "id": "one-max",
      "opt": "-F 0"
    },
    {
      "id": "lin",
      "opt": "-F 1 -p instances/lin.100"
    },
    {
      "id": "leading-ones",
      "opt": "-F 10"
    },
    {
      "id": "ridge",
      "opt": "-F 11"
    },
    {
      "id": "jmp-5",
      "opt": "-F 30 -t 5"
    },
    {
      "id": "jmp-10",

```

```

    "opt": "-F 30 -t 10"
  },
  {
    "id": "djmp-5",
    "opt": "-F 31 -t 5"
  },
  {
    "id": "djmp-10",
    "opt": "-F 31 -t 10"
  },
  {
    "id": "fp-5",
    "opt": "-F 40 -t 5"
  },
  {
    "id": "fp-10",
    "opt": "-F 40 -t 10"
  },
  {
    "id": "nk",
    "opt": "-F 60 -p instances/nk.100.4"
  },
  {
    "id": "max-sat",
    "opt": "-F 70 -p instances/ms.100.3.1000"
  },
  {
    "id": "labs",
    "opt": "-F 80"
  },
  {
    "id": "ep",
    "opt": "-F 90 -p instances/ep.100"
  },
  {
    "id": "cancel",
    "opt": "-F 100 -s 99"
  },
  {
    "id": "trap",
    "opt": "-F 110 --fn-num-traps 10"
  },
  {
    "id": "hiff",
    "opt": "-F 120 -s 128"
  },
  {
    "id": "plateau",
    "opt": "-F 130"
  },
  {
    "id": "walsh2",
    "opt": "-F 162 -p instances/walsh2.100"
  }
}
]
}

```

B Default parameters

```

# algorithm = 100
# bm_mc_reset_strategy = 1
# bm_num_gs_cycles = 1

```

```

# bm_num_gs_steps = 100
# bm_sampling = 1
# budget = 10000
# bv_size = 100
# cache_budget = 0
# ea_lambda = 100
# ea_mu = 10
# fn_name = noname
# fn_num_traps = 10
# fn_prefix_length = 2
# fn_threshold = 10
# function = 0
# ga_crossover_bias = 0.5
# ga_crossover_probability = 0.5
# ga_tournament_size = 10
# hea_binary_dynamics = 0
# hea_delay = 10000
# hea_num_par_updates = 1
# hea_num_seq_updates = 100
# hea_rate_strategy = 0
# hea_reset_period = 0
# hea_sampling_method = 0
# hea_time_constant = 1000
# hea_weight = 1
# learning_rate = 0.001
# map = 0
# map_input_size = 100
# map_path = nopath
# mutation_probability = 1
# neighborhood = 0
# neighborhood_iterator = 0
# noise_stddev = 1
# num_iterations = 0
# num_threads = 1
# path = nopath
# pn_mutation_probability = 1
# pn_neighborhood = 0
# pn_radius = 2
# population_size = 10
# pv_log_num_components = 5
# radius = 2
# rls_patience = 50
# sa_beta_ratio = 1.2
# sa_initial_acceptance_probability = 0.6
# sa_num_transitions = 50
# sa_num_trials = 100
# seed = 0
# selection_size = 1
# target = 100
# print_defaults
# last_parameter
# exec_name = hnco
# version = 0.10
# Generated from hnco.json

```