

HNCO

0.13

Generated by Doxygen 1.8.13

Contents

1	Namespace Index	1
1.1	Namespace List	1
2	Hierarchical Index	3
2.1	Class Hierarchy	3
3	Class Index	7
3.1	Class List	7
4	Namespace Documentation	13
4.1	hnco Namespace Reference	13
4.1.1	Detailed Description	17
4.1.2	Typedef Documentation	17
4.1.2.1	bit_t	17
4.1.2.2	sparse_bit_matrix_t	17
4.1.2.3	sparse_bit_vector_t	17
4.1.3	Function Documentation	17
4.1.3.1	bm_add_rows()	18
4.1.3.2	bm_identity()	18
4.1.3.3	bm_invert()	18
4.1.3.4	bm_multiply()	19
4.1.3.5	bm_rank()	19
4.1.3.6	bm_row_echelon_form()	19
4.1.3.7	bm_solve()	19
4.1.3.8	bm_solve_upper_triangular()	20

4.1.3.9	bv_from_vector_bool()	21
4.1.3.10	bv_to_vector_bool()	21
4.1.3.11	perm_identity()	21
4.1.3.12	perm_random()	22
4.1.3.13	sbm_multiply()	22
4.2	hnco::algorithm Namespace Reference	22
4.2.1	Detailed Description	25
4.3	hnco::algorithm::bm_pbil Namespace Reference	25
4.3.1	Detailed Description	25
4.4	hnco::algorithm::hea Namespace Reference	25
4.4.1	Detailed Description	25
4.5	hnco::exception Namespace Reference	26
4.5.1	Detailed Description	26
4.6	hnco::function Namespace Reference	26
4.6.1	Detailed Description	29
4.7	hnco::function::real Namespace Reference	29
4.7.1	Detailed Description	29
4.8	hnco::neighborhood Namespace Reference	29
4.8.1	Detailed Description	30
4.9	hnco::random Namespace Reference	30
4.9.1	Detailed Description	30

5	Class Documentation	31
5.1	AbstractLabs Class Reference	31
5.1.1	Detailed Description	32
5.2	AbstractMaxSat Class Reference	32
5.2.1	Detailed Description	33
5.2.2	Member Function Documentation	33
5.2.2.1	load()	33
5.2.3	Member Data Documentation	33
5.2.3.1	_expression	33
5.3	AdditiveGaussianNoise Class Reference	34
5.3.1	Detailed Description	35
5.4	AffineMap Class Reference	35
5.4.1	Detailed Description	36
5.4.2	Member Function Documentation	36
5.4.2.1	is_surjective()	36
5.4.2.2	random()	36
5.5	Algorithm Class Reference	37
5.5.1	Detailed Description	39
5.5.2	Member Function Documentation	39
5.5.2.1	set_solution()	39
5.5.2.2	update_solution()	40
5.5.3	Member Data Documentation	40
5.5.3.1	_functions	40
5.6	BernoulliProcess Class Reference	40
5.6.1	Detailed Description	41
5.6.2	Constructor & Destructor Documentation	41
5.6.2.1	BernoulliProcess() [1/2]	41
5.6.2.2	BernoulliProcess() [2/2]	42
5.6.3	Member Function Documentation	42
5.6.3.1	set_allow_stay()	42

5.6.3.2	set_probability()	42
5.7	BiasedCrossover Class Reference	43
5.7.1	Detailed Description	43
5.7.2	Member Function Documentation	43
5.7.2.1	breed()	43
5.8	BitHerding Class Reference	44
5.8.1	Detailed Description	45
5.8.2	Member Enumeration Documentation	45
5.8.2.1	anonymous enum	45
5.9	BitMoment Struct Reference	46
5.9.1	Detailed Description	47
5.10	BmPbil Class Reference	47
5.10.1	Detailed Description	49
5.10.2	Member Enumeration Documentation	49
5.10.2.1	anonymous enum	49
5.10.2.2	anonymous enum	50
5.10.2.3	anonymous enum	50
5.10.3	Member Function Documentation	50
5.10.3.1	set_selection_size()	50
5.11	Cache Class Reference	51
5.11.1	Detailed Description	52
5.11.2	Constructor & Destructor Documentation	52
5.11.2.1	Cache()	52
5.11.3	Member Function Documentation	52
5.11.3.1	provides_incremental_evaluation()	53
5.12	CallCounter Class Reference	53
5.12.1	Detailed Description	54
5.13	CompactGa Class Reference	54
5.13.1	Detailed Description	56
5.14	CompleteSearch Class Reference	56

5.14.1 Detailed Description	57
5.15 Crossover Class Reference	57
5.15.1 Detailed Description	57
5.15.2 Member Function Documentation	58
5.15.2.1 breed()	58
5.16 DeceptiveJump Class Reference	58
5.16.1 Detailed Description	59
5.16.2 Member Function Documentation	59
5.16.2.1 get_maximum()	59
5.16.2.2 has_known_maximum()	60
5.17 DyadicRealRepresentation Class Reference	60
5.17.1 Detailed Description	61
5.17.2 Constructor & Destructor Documentation	61
5.17.2.1 DyadicRealRepresentation()	61
5.18 EqualProducts Class Reference	62
5.18.1 Detailed Description	63
5.18.2 Member Function Documentation	63
5.18.2.1 generate()	63
5.18.2.2 random()	63
5.19 Error Class Reference	65
5.19.1 Detailed Description	66
5.20 ProgressTracker::Event Struct Reference	66
5.20.1 Detailed Description	66
5.21 Exception Class Reference	66
5.21.1 Detailed Description	67
5.22 Factorization Class Reference	67
5.22.1 Detailed Description	68
5.22.2 Constructor & Destructor Documentation	68
5.22.2.1 Factorization()	68
5.22.3 Member Function Documentation	69

5.22.3.1	load()	69
5.23	FirstAscentHillClimbing Class Reference	69
5.23.1	Detailed Description	70
5.24	FourPeaks Class Reference	71
5.24.1	Detailed Description	72
5.24.2	Member Function Documentation	72
5.24.2.1	get_maximum()	72
5.24.2.2	has_known_maximum()	73
5.25	Function Class Reference	73
5.25.1	Detailed Description	75
5.25.2	Member Function Documentation	75
5.25.2.1	compute_walsh_transform()	75
5.25.2.2	get_maximum()	76
5.25.2.3	incremental_eval()	76
5.25.2.4	provides_incremental_evaluation()	77
5.25.2.5	safe_eval()	77
5.26	FunctionController Class Reference	78
5.26.1	Detailed Description	79
5.26.2	Member Function Documentation	79
5.26.2.1	provides_incremental_evaluation()	79
5.27	FunctionDecorator Class Reference	79
5.27.1	Detailed Description	80
5.28	FunctionMapComposition Class Reference	80
5.28.1	Detailed Description	81
5.28.2	Constructor & Destructor Documentation	81
5.28.2.1	FunctionMapComposition()	81
5.28.3	Member Function Documentation	82
5.28.3.1	get_maximum()	82
5.28.3.2	has_known_maximum()	82
5.29	FunctionModifier Class Reference	83

5.29.1 Detailed Description	83
5.30 FunctionPlugin Class Reference	84
5.30.1 Detailed Description	85
5.30.2 Constructor & Destructor Documentation	85
5.30.2.1 FunctionPlugin()	85
5.31 GeneticAlgorithm Class Reference	85
5.31.1 Detailed Description	87
5.31.2 Constructor & Destructor Documentation	87
5.31.2.1 GeneticAlgorithm()	87
5.31.3 Member Function Documentation	88
5.31.3.1 set_allow_stay()	88
5.32 HammingBall Class Reference	88
5.32.1 Detailed Description	89
5.32.2 Constructor & Destructor Documentation	89
5.32.2.1 HammingBall()	89
5.33 HammingSphere Class Reference	90
5.33.1 Detailed Description	91
5.33.2 Constructor & Destructor Documentation	91
5.33.2.1 HammingSphere()	91
5.34 HammingSphereIterator Class Reference	91
5.34.1 Detailed Description	92
5.34.2 Constructor & Destructor Documentation	93
5.34.2.1 HammingSphereIterator()	93
5.35 Hboa Class Reference	93
5.35.1 Detailed Description	94
5.36 Hea< Moment, Herding > Class Template Reference	94
5.36.1 Detailed Description	97
5.36.2 Member Enumeration Documentation	97
5.36.2.1 anonymous enum	97
5.36.3 Constructor & Destructor Documentation	97

5.36.3.1	Hea()	97
5.36.4	Member Function Documentation	98
5.36.4.1	set_reset_period()	98
5.36.4.2	set_selection_size()	98
5.37	Hiff Class Reference	99
5.37.1	Detailed Description	99
5.37.2	Member Function Documentation	100
5.37.2.1	get_maximum()	100
5.37.2.2	has_known_maximum()	100
5.38	HncoEvaluator Class Reference	100
5.38.1	Detailed Description	101
5.39	Hypercubeliterator Class Reference	101
5.39.1	Detailed Description	102
5.40	Injection Class Reference	102
5.40.1	Detailed Description	103
5.40.2	Constructor & Destructor Documentation	103
5.40.2.1	Injection()	103
5.41	IterativeAlgorithm Class Reference	104
5.41.1	Detailed Description	105
5.41.2	Constructor & Destructor Documentation	105
5.41.2.1	IterativeAlgorithm()	105
5.41.3	Member Function Documentation	106
5.41.3.1	maximize()	106
5.41.3.2	set_num_iterations()	106
5.42	Iterator Class Reference	107
5.42.1	Detailed Description	108
5.43	Jump Class Reference	108
5.43.1	Detailed Description	109
5.43.2	Member Function Documentation	109
5.43.2.1	get_maximum()	109

5.43.2.2	has_known_maximum()	109
5.44	Labs Class Reference	110
5.44.1	Detailed Description	110
5.45	LabsMeritFactor Class Reference	111
5.45.1	Detailed Description	111
5.46	LastEvaluation Class Reference	112
5.46.1	Detailed Description	112
5.47	LeadingOnes Class Reference	112
5.47.1	Detailed Description	113
5.47.2	Member Function Documentation	113
5.47.2.1	get_maximum()	113
5.47.2.2	has_known_maximum()	114
5.48	LinearFunction Class Reference	114
5.48.1	Detailed Description	115
5.48.2	Member Function Documentation	116
5.48.2.1	generate()	116
5.48.2.2	has_known_maximum()	116
5.48.2.3	provides_incremental_evaluation()	116
5.48.2.4	random()	116
5.49	LinearMap Class Reference	117
5.49.1	Detailed Description	118
5.49.2	Member Function Documentation	118
5.49.2.1	is_surjective()	118
5.49.2.2	random()	118
5.50	LocalMaximum Class Reference	119
5.50.1	Detailed Description	120
5.51	LogContext Class Reference	120
5.51.1	Detailed Description	120
5.52	LongPath Class Reference	121
5.52.1	Detailed Description	122

5.52.2	Member Function Documentation	122
5.52.2.1	get_maximum()	122
5.52.2.2	has_known_maximum()	123
5.53	Ltga Class Reference	123
5.53.1	Detailed Description	124
5.54	Map Class Reference	124
5.54.1	Detailed Description	125
5.54.2	Member Function Documentation	125
5.54.2.1	is_surjective()	125
5.55	MapComposition Class Reference	126
5.55.1	Detailed Description	126
5.55.2	Constructor & Destructor Documentation	127
5.55.2.1	MapComposition()	127
5.55.3	Member Function Documentation	127
5.55.3.1	is_surjective()	127
5.56	MaximumReached Class Reference	128
5.56.1	Detailed Description	128
5.57	MaxNae3Sat Class Reference	129
5.57.1	Detailed Description	129
5.57.2	Member Function Documentation	129
5.57.2.1	load()	129
5.58	MaxSat Class Reference	130
5.58.1	Detailed Description	131
5.58.2	Member Function Documentation	131
5.58.2.1	random() [1/2]	131
5.58.2.2	random() [2/2]	131
5.59	Mimic Class Reference	132
5.59.1	Detailed Description	133
5.60	Mmas Class Reference	134
5.60.1	Detailed Description	135

5.61 Model Class Reference	135
5.61.1 Detailed Description	136
5.62 ModelParameters Class Reference	136
5.62.1 Detailed Description	137
5.63 MuCommaLambdaEa Class Reference	137
5.63.1 Detailed Description	138
5.63.2 Constructor & Destructor Documentation	138
5.63.2.1 MuCommaLambdaEa()	138
5.63.3 Member Function Documentation	139
5.63.3.1 set_allow_stay()	139
5.64 MultiBitFlip Class Reference	139
5.64.1 Detailed Description	140
5.64.2 Constructor & Destructor Documentation	140
5.64.2.1 MultiBitFlip()	140
5.64.3 Member Function Documentation	140
5.64.3.1 bernoulli_trials()	140
5.64.3.2 reservoir_sampling()	141
5.65 MuPlusLambdaEa Class Reference	141
5.65.1 Detailed Description	142
5.65.2 Constructor & Destructor Documentation	143
5.65.2.1 MuPlusLambdaEa()	143
5.65.3 Member Function Documentation	143
5.65.3.1 set_allow_stay()	143
5.66 NearestNeighborIsingModel1 Class Reference	144
5.66.1 Detailed Description	145
5.66.2 Member Function Documentation	146
5.66.2.1 eval()	146
5.66.2.2 generate()	146
5.66.2.3 provides_incremental_evaluation()	146
5.66.2.4 random()	147

5.67 NearestNeighborIsingModel2 Class Reference	147
5.67.1 Detailed Description	149
5.67.2 Member Function Documentation	149
5.67.2.1 eval()	149
5.67.2.2 generate()	149
5.67.2.3 provides_incremental_evaluation()	150
5.67.2.4 random()	150
5.68 Needle Class Reference	151
5.68.1 Detailed Description	151
5.68.2 Member Function Documentation	152
5.68.2.1 get_maximum()	152
5.68.2.2 has_known_maximum()	152
5.69 Negation Class Reference	153
5.69.1 Detailed Description	154
5.69.2 Member Function Documentation	154
5.69.2.1 provides_incremental_evaluation()	154
5.70 Neighborhood Class Reference	155
5.70.1 Detailed Description	156
5.70.2 Constructor & Destructor Documentation	156
5.70.2.1 Neighborhood()	156
5.70.3 Member Function Documentation	157
5.70.3.1 map()	157
5.70.3.2 mutate()	157
5.71 NeighborhoodIterator Class Reference	158
5.71.1 Detailed Description	158
5.71.2 Constructor & Destructor Documentation	158
5.71.2.1 NeighborhoodIterator()	158
5.72 NkLandscape Class Reference	159
5.72.1 Detailed Description	160
5.72.2 Member Function Documentation	160

5.72.2.1	generate()	160
5.72.2.2	random()	161
5.72.2.3	random_structure()	161
5.73	NpsPbil Class Reference	161
5.73.1	Detailed Description	163
5.74	OnBudgetFunction Class Reference	163
5.74.1	Detailed Description	164
5.74.2	Member Function Documentation	164
5.74.2.1	eval()	164
5.74.2.2	incremental_eval()	165
5.74.2.3	update()	165
5.75	OneMax Class Reference	165
5.75.1	Detailed Description	166
5.75.2	Member Function Documentation	167
5.75.2.1	get_maximum()	167
5.75.2.2	has_known_maximum()	167
5.75.2.3	provides_incremental_evaluation()	167
5.76	OnePlusLambdaCommaLambdaGa Class Reference	168
5.76.1	Detailed Description	169
5.76.2	Constructor & Destructor Documentation	169
5.76.2.1	OnePlusLambdaCommaLambdaGa()	169
5.77	OnePlusOneEa Class Reference	170
5.77.1	Detailed Description	171
5.77.2	Constructor & Destructor Documentation	171
5.77.2.1	OnePlusOneEa()	171
5.77.3	Member Function Documentation	172
5.77.3.1	set_allow_stay()	172
5.77.3.2	set_num_iterations()	172
5.78	ParameterLessPopulationPyramid Class Reference	172
5.78.1	Detailed Description	173

5.79	ParsedModifier Class Reference	174
5.79.1	Detailed Description	175
5.79.2	Constructor & Destructor Documentation	175
5.79.2.1	ParsedModifier()	175
5.80	ParsedRealMultivariateFunction Class Reference	175
5.80.1	Detailed Description	176
5.80.2	Constructor & Destructor Documentation	176
5.80.2.1	ParsedRealMultivariateFunction()	176
5.81	Pbil Class Reference	177
5.81.1	Detailed Description	178
5.82	Permutation Class Reference	178
5.82.1	Detailed Description	179
5.82.2	Member Function Documentation	179
5.82.2.1	is_surjective()	180
5.83	Plateau Class Reference	180
5.83.1	Detailed Description	181
5.83.2	Member Function Documentation	181
5.83.2.1	get_maximum()	181
5.83.2.2	has_known_maximum()	181
5.84	PointValueException Class Reference	182
5.84.1	Detailed Description	182
5.85	Population Class Reference	183
5.85.1	Detailed Description	184
5.85.2	Member Function Documentation	185
5.85.2.1	comma_selection() [1/2]	185
5.85.2.2	comma_selection() [2/2]	185
5.85.2.3	get_best_bv() [1/4]	186
5.85.2.4	get_best_bv() [2/4]	186
5.85.2.5	get_best_bv() [3/4]	186
5.85.2.6	get_best_bv() [4/4]	186

5.85.2.7	get_best_value() [1/2]	187
5.85.2.8	get_best_value() [2/2]	187
5.85.2.9	get_worst_bv() [1/2]	187
5.85.2.10	get_worst_bv() [2/2]	188
5.85.2.11	plus_selection() [1/2]	188
5.85.2.12	plus_selection() [2/2]	189
5.85.3	Member Data Documentation	189
5.85.3.1	_compare_index_value	189
5.85.3.2	_lookup	189
5.86	PriorNoise Class Reference	190
5.86.1	Detailed Description	191
5.86.2	Member Function Documentation	191
5.86.2.1	get_maximum()	191
5.86.2.2	has_known_maximum()	191
5.86.2.3	provides_incremental_evaluation()	192
5.87	ProgressTracker Class Reference	192
5.87.1	Detailed Description	194
5.87.2	Member Function Documentation	194
5.87.2.1	get_last_improvement()	194
5.88	ProgressTrackerContext Class Reference	194
5.88.1	Detailed Description	195
5.89	Projection Class Reference	195
5.89.1	Detailed Description	196
5.89.2	Constructor & Destructor Documentation	196
5.89.2.1	Projection()	196
5.89.3	Member Function Documentation	197
5.89.3.1	is_surjective()	197
5.90	PvAlgorithm Class Reference	197
5.90.1	Detailed Description	199
5.91	Qubo Class Reference	199

5.91.1 Detailed Description	200
5.91.2 Member Function Documentation	200
5.91.2.1 load()	200
5.91.3 Member Data Documentation	201
5.91.3.1 _q	201
5.92 Random Struct Reference	201
5.92.1 Detailed Description	202
5.93 RandomLocalSearch Class Reference	202
5.93.1 Detailed Description	203
5.93.2 Member Function Documentation	203
5.93.2.1 set_patience()	203
5.94 RandomSearch Class Reference	204
5.94.1 Detailed Description	205
5.95 RandomWalk Class Reference	205
5.95.1 Detailed Description	206
5.96 RealMultivariateFunction Class Reference	206
5.96.1 Detailed Description	207
5.97 RealMultivariateFunctionAdapter Class Reference	207
5.97.1 Detailed Description	208
5.97.2 Constructor & Destructor Documentation	208
5.97.2.1 RealMultivariateFunctionAdapter()	208
5.98 RealRepresentation Class Reference	209
5.98.1 Detailed Description	209
5.99 Restart Class Reference	210
5.99.1 Detailed Description	211
5.100Ridge Class Reference	211
5.100.1 Detailed Description	212
5.100.2 Member Function Documentation	212
5.100.2.1 get_maximum()	212
5.100.2.2 has_known_maximum()	212

5.101 SimulatedAnnealing Class Reference	213
5.101.1 Detailed Description	214
5.101.2 Member Function Documentation	214
5.101.2.1 init_beta()	214
5.102 SingleBitFlip Class Reference	215
5.102.1 Detailed Description	215
5.103 SingleBitFlipIterator Class Reference	216
5.103.1 Detailed Description	216
5.103.2 Constructor & Destructor Documentation	217
5.103.2.1 SingleBitFlipIterator()	217
5.104 SinusSummationCancellation Class Reference	217
5.104.1 Detailed Description	218
5.105 SixPeaks Class Reference	218
5.105.1 Detailed Description	219
5.105.2 Member Function Documentation	220
5.105.2.1 get_maximum()	220
5.105.2.2 has_known_maximum()	220
5.106 SpinHerdng Class Reference	220
5.106.1 Detailed Description	222
5.106.2 Member Enumeration Documentation	222
5.106.2.1 anonymous enum	222
5.106.3 Constructor & Destructor Documentation	223
5.106.3.1 SpinHerdng()	223
5.106.4 Member Function Documentation	223
5.106.4.1 q_variation()	223
5.107 SpinMoment Struct Reference	223
5.107.1 Detailed Description	224
5.107.2 Member Data Documentation	224
5.107.2.1 _second	225
5.108 SteepestAscentHillClimbing Class Reference	225

5.108.1 Detailed Description	226
5.109StopOnMaximum Class Reference	226
5.109.1 Detailed Description	227
5.109.2 Constructor & Destructor Documentation	227
5.109.2.1 StopOnMaximum()	227
5.109.3 Member Function Documentation	228
5.109.3.1 eval()	228
5.109.3.2 incremental_eval()	228
5.109.3.3 update()	228
5.110StopOnTarget Class Reference	229
5.110.1 Detailed Description	230
5.110.2 Constructor & Destructor Documentation	230
5.110.2.1 StopOnTarget()	230
5.110.3 Member Function Documentation	231
5.110.3.1 eval()	231
5.110.3.2 incremental_eval()	231
5.110.3.3 update()	232
5.111StopWatch Class Reference	232
5.111.1 Detailed Description	233
5.112SummationCancellation Class Reference	233
5.112.1 Detailed Description	234
5.112.2 Constructor & Destructor Documentation	234
5.112.2.1 SummationCancellation()	234
5.112.3 Member Function Documentation	235
5.112.3.1 has_known_maximum()	235
5.113TargetReached Class Reference	235
5.113.1 Detailed Description	236
5.114TournamentSelection Class Reference	236
5.114.1 Detailed Description	237
5.114.2 Member Function Documentation	237

5.114.2.1 <code>select()</code>	237
5.115 Translation Class Reference	238
5.115.1 Detailed Description	239
5.115.2 Member Function Documentation	239
5.115.2.1 <code>is_surjective()</code>	239
5.116 Trap Class Reference	239
5.116.1 Detailed Description	240
5.116.2 Constructor & Destructor Documentation	240
5.116.2.1 <code>Trap()</code>	240
5.116.3 Member Function Documentation	241
5.116.3.1 <code>get_maximum()</code>	241
5.116.3.2 <code>has_known_maximum()</code>	241
5.117 Umda Class Reference	242
5.117.1 Detailed Description	243
5.118 UniformCrossover Class Reference	243
5.118.1 Detailed Description	244
5.118.2 Member Function Documentation	244
5.118.2.1 <code>breed()</code>	244
5.119 WalshExpansion Class Reference	244
5.119.1 Detailed Description	246
5.119.2 Member Function Documentation	246
5.119.2.1 <code>generate()</code>	246
5.119.2.2 <code>random()</code>	246
5.120 WalshExpansion1 Class Reference	247
5.120.1 Detailed Description	248
5.120.2 Member Function Documentation	248
5.120.2.1 <code>generate()</code>	248
5.120.2.2 <code>has_known_maximum()</code>	249
5.120.2.3 <code>provides_incremental_evaluation()</code>	249
5.120.2.4 <code>random()</code>	249
5.121 WalshExpansion2 Class Reference	250
5.121.1 Detailed Description	251
5.121.2 Member Function Documentation	251
5.121.2.1 <code>generate()</code>	251
5.121.2.2 <code>generate_ising1_long_range()</code>	252
5.121.2.3 <code>generate_ising1_long_range_periodic()</code>	252
5.121.2.4 <code>random()</code>	253
5.121.3 Member Data Documentation	253
5.121.3.1 <code>_quadratic</code>	253
5.122 Function::WalshTransformTerm Struct Reference	253
5.122.1 Detailed Description	254
5.122.2 Member Data Documentation	254
5.122.2.1 <code>feature</code>	254

Chapter 1

Namespace Index

1.1 Namespace List

Here is a list of all documented namespaces with brief descriptions:

hnco	Top-level HNCO namespace	13
hnco::algorithm	Algorithms	22
hnco::algorithm::bm_pbil	Boltzmann machine PBIL	25
hnco::algorithm::hea	Herdling evolutionary algorithm	25
hnco::exception	Exceptions	26
hnco::function	Real black box functions defined on bit vectors	26
hnco::function::real	Real multivariate functions	29
hnco::neighborhood	Neighborhoods for local search	29
hnco::random	Pseudo random numbers	30

Chapter 2

Hierarchical Index

2.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

Algorithm	37
CompleteSearch	56
Hboa	93
Ltga	123
ParameterLessPopulationPyramid	172
IterativeAlgorithm	104
BmPbil	47
Mimic	132
FirstAscentHillClimbing	69
GeneticAlgorithm	85
Hea< Moment, Herding >	94
MuCommaLambdaEa	137
MuPlusLambdaEa	141
OnePlusLambdaCommaLambdaGa	168
PvAlgorithm	197
CompactGa	54
Mmas	134
NpsPbil	161
Pbil	177
Umda	242
RandomLocalSearch	202
RandomSearch	204
RandomWalk	205
Restart	210
SimulatedAnnealing	213
SteepestAscentHillClimbing	225
OnePlusOneEa	170
BitHerding	44
BitMoment	46
Crossover	57
BiasedCrossover	43
UniformCrossover	243
Evaluator	
HncoEvaluator	100

ProgressTracker::Event	66
Exception	66
Error	65
LastEvaluation	112
PointValueException	182
LocalMaximum	119
MaximumReached	128
TargetReached	235
Function	73
AbstractLabs	31
Labs	110
LabsMeritFactor	111
AbstractMaxSat	32
MaxNae3Sat	129
MaxSat	130
DeceptiveJump	58
EqualProducts	62
Factorization	67
FourPeaks	71
FunctionDecorator	79
FunctionController	78
Cache	51
CallCounter	53
OnBudgetFunction	163
ProgressTracker	192
StopOnMaximum	226
StopOnTarget	229
FunctionModifier	83
AdditiveGaussianNoise	34
FunctionMapComposition	80
Negation	153
ParsedModifier	174
PriorNoise	190
FunctionPlugin	84
Hiff	99
Jump	108
LeadingOnes	112
LinearFunction	114
LongPath	121
NearestNeighborIsingModel1	144
NearestNeighborIsingModel2	147
Needle	151
NkLandscape	159
OneMax	165
Plateau	180
Qubo	199
RealMultivariateFunctionAdapter	207
Ridge	211
SixPeaks	218
SummationCancellation	233
SinusSummationCancellation	217
Trap	239
WalshExpansion	244
WalshExpansion1	247
WalshExpansion2	250
Iterator	107
HypercubeIterator	101

NeighborhoodIterator	158
HammingSphereIterator	91
SingleBitFlipIterator	216
LogContext	120
ProgressTrackerContext	194
Map	124
AffineMap	35
Injection	102
LinearMap	117
MapComposition	126
Permutation	178
Projection	195
Translation	238
Model	135
ModelParameters	136
Neighborhood	155
MultiBitFlip	139
BernoulliProcess	40
HammingBall	88
HammingSphere	90
SingleBitFlip	215
Population	183
TournamentSelection	236
Random	201
RealMultivariateFunction	206
ParsedRealMultivariateFunction	175
RealRepresentation	209
DyadicRealRepresentation	60
SpinHerdin	220
SpinMoment	223
StopWatch	232
Function::WalshTransformTerm	253

Chapter 3

Class Index

3.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

AbstractLabs	Abstract class for low autocorrelation binary sequences	31
AbstractMaxSat	Abstract class for MaxSat-like functions	32
AdditiveGaussianNoise	Additive Gaussian Noise	34
AffineMap	Affine map	35
Algorithm	Abstract search algorithm	37
BernoulliProcess	Bernoulli process	40
BiasedCrossover	Biased crossover	43
BitHerding	Herding with bit features	44
BitMoment	Moment for bit features	46
BmPbil	Boltzmann machine PBIL	47
Cache	Cache	51
CallCounter	Call counter	53
CompactGa	Compact genetic algorithm	54
CompleteSearch	Complete search	56
Crossover	Crossover	57
DeceptiveJump	Deceptive jump	58
DyadicRealRepresentation	Dyadic real representation	60
EqualProducts	Equal products	62

Error	
Error	65
ProgressTracker::Event	
Event	66
Exception	
Basic exception	66
Factorization	
Factorization	67
FirstAscentHillClimbing	
First ascent hill climbing	69
FourPeaks	
Four Peaks	71
Function	
Function	73
FunctionController	
Function controller	78
FunctionDecorator	
Function decorator	79
FunctionMapComposition	
Composition of a function and a map	80
FunctionModifier	
Function modifier	83
FunctionPlugin	
Function plugin	84
GeneticAlgorithm	
Genetic algorithm	85
HammingBall	
Hamming ball	88
HammingSphere	
Hamming sphere	90
HammingSphereIterator	
Hamming sphere neighborhood iterator	91
Hboa	
Hierarchical Bayesian Optimization Algorithm	93
Hea< Moment, Herding >	
Herding evolutionary algorithm	94
Hiff	
Hierarchical if and only if	99
HncoEvaluator	
Evaluator for HNCO functions	100
HypercubeIterator	
Hypercube iterator	101
Injection	
Injection	102
IterativeAlgorithm	
Iterative search	104
Iterator	
Iterator over bit vectors	107
Jump	
Jump	108
Labs	
Low autocorrelation binary sequences	110
LabsMeritFactor	
Low autocorrelation binary sequences merit factor	111
LastEvaluation	
Last evaluation	112
LeadingOnes	
Leading ones	112

LinearFunction	
Linear function	114
LinearMap	
Linear map	117
LocalMaximum	
Local maximum	119
LogContext	
Log context	120
LongPath	
Long path	121
Ltga	
Linkage Tree Genetic Algorithm	123
Map	
Map	124
MapComposition	
Map composition	126
MaximumReached	
Maximum reached	128
MaxNae3Sat	
Max not-all-equal 3SAT	129
MaxSat	
MAX-SAT	130
Mimic	
Mutual information maximizing input clustering	132
Mmas	
Max-min ant system	134
Model	
Model of a Boltzmann machine	135
ModelParameters	
Parameters of a Boltzmann machine	136
MuCommaLambdaEa	
(mu, lambda) EA	137
MultiBitFlip	
Multi bit flip	139
MuPlusLambdaEa	
(mu+lambda) EA	141
NearestNeighborsIsingModel1	
Nearest neighbor Ising model in one dimension	144
NearestNeighborsIsingModel2	
Nearest neighbor Ising model in two dimensions	147
Needle	
Needle in a haystack	151
Negation	
Negation	153
Neighborhood	
Neighborhood	155
NeighborhoodIterator	
Neighborhood iterator	158
NkLandscape	
NK landscape	159
NpsPbil	
Population-based incremental learning with negative and positive selection	161
OnBudgetFunction	
CallCounter with a limited number of evaluations	163
OneMax	
OneMax	165
OnePlusLambdaCommaLambdaGa	
(1+(lambda, lambda)) genetic algorithm	168

OnePlusOneEa	
(1+1) EA	170
ParameterLessPopulationPyramid	
Parameter-less Population Pyramid	172
ParsedModifier	
Parsed modifier	174
ParsedRealMultivariateFunction	
Parsed real multivariate function	175
Pbil	
Population-based incremental learning	177
Permutation	
Permutation	178
Plateau	
Plateau	180
PointValueException	
Point-value exception	182
Population	
Population	183
PriorNoise	
Prior noise	190
ProgressTracker	
ProgressTracker	192
ProgressTrackerContext	
Log context for ProgressTracker	194
Projection	
Projection	195
PvAlgorithm	
Probability vector algorithm	197
Qubo	
Quadratic unconstrained binary optimization	199
Random	
Random numbers	201
RandomLocalSearch	
Random local search	202
RandomSearch	
Random search	204
RandomWalk	
Random walk	205
RealMultivariateFunction	
Real multivariate function	206
RealMultivariateFunctionAdapter	
Real multivariate function adapter	207
RealRepresentation	
Real representation	209
Restart	
Restart	210
Ridge	
Ridge	211
SimulatedAnnealing	
Simulated annealing	213
SingleBitFlip	
One bit neighborhood	215
SingleBitFlipIterator	
Single bit flip neighborhood iterator	216
SinusSummationCancellation	
Summation cancellation with sinus	217
SixPeaks	
Six Peaks	218

SpinHerding	
Herding with spin variables	220
SpinMoment	
Moment for spin variables	223
SteepestAscentHillClimbing	
Steepest ascent hill climbing	225
StopOnMaximum	
Stop on maximum	226
StopOnTarget	
Stop on target	229
StopWatch	
Stop watch	232
SummationCancellation	
Summation cancellation	233
TargetReached	
Target reached	235
TournamentSelection	
Population with tournament selection	236
Translation	
Translation	238
Trap	
Trap	239
Umda	
Univariate marginal distribution algorithm	242
UniformCrossover	
Uniform crossover	243
WalshExpansion	
Walsh expansion	244
WalshExpansion1	
Walsh expansion of degree 1	247
WalshExpansion2	
Walsh expansion of degree 2	250
Function::WalshTransformTerm	
Walsh transform term	253

Chapter 4

Namespace Documentation

4.1 hnco Namespace Reference

top-level HNCO namespace

Namespaces

- [algorithm](#)
Algorithms.
- [exception](#)
Exceptions.
- [function](#)
Real black box functions defined on bit vectors.
- [neighborhood](#)
Neighborhoods for local search.
- [random](#)
Pseudo random numbers.

Classes

- class [AffineMap](#)
Affine map.
- class [HypercubeIterator](#)
Hypercube iterator.
- class [Injection](#)
Injection.
- class [Iterator](#)
Iterator over bit vectors.
- class [LinearMap](#)
Linear map.
- class [Map](#)
Map.
- class [MapComposition](#)
Map composition.

- class [Permutation](#)
Permutation.
- class [Projection](#)
Projection.
- class [StopWatch](#)
Stop watch.
- class [Translation](#)
Translation.

Functions

- template<class T >
T [square](#) (T x)
Generic square function.
- double [logistic](#) (double x)
Logistic function (sigmoid)

Types and functions related to bit matrices

- typedef std::vector< [bit_vector_t](#) > [bit_matrix_t](#)
Bit matrix.
- void [bm_display](#) (const [bit_matrix_t](#) &M, std::ostream &stream)
Display bit matrix.
- bool [bm_is_valid](#) (const [bit_matrix_t](#) &M)
Check whether a bit matrix is valid.
- int [bm_num_rows](#) (const [bit_matrix_t](#) &M)
Number of rows.
- int [bm_num_columns](#) (const [bit_matrix_t](#) &M)
Number of columns.
- bool [bm_is_square](#) (const [bit_matrix_t](#) &M)
Check whether the matrix is a square matrix.
- bool [bm_is_identity](#) (const [bit_matrix_t](#) &M)
Check whether the matrix is the identity matrix.
- bool [bm_is_upper_triangular](#) (const [bit_matrix_t](#) &M)
Check whether the matrix is upper triangular.
- void [bm_resize](#) ([bit_matrix_t](#) &M, int num_rows, int num_columns)
Resize a bit matrix.
- void [bm_resize](#) ([bit_matrix_t](#) &M, int num_rows)
Resize a bit matrix and make it a square matrix.
- void [bm_clear](#) ([bit_matrix_t](#) &M)
Clear bit matrix.
- void [bm_identity](#) ([bit_matrix_t](#) &M)
Set the matrix to the identity matrix.
- void [bm_random](#) ([bit_matrix_t](#) &M)
Sample a random bit matrix.
- void [bm_swap_rows](#) ([bit_matrix_t](#) &M, int i, int j)
Swap two rows.
- void [bm_add_rows](#) ([bit_matrix_t](#) &M, int i, int j)
Add two rows.

- void [bm_row_echelon_form](#) ([bit_matrix_t](#) &A)
Compute a row echelon form of a matrix.
- int [bm_rank](#) (const [bit_matrix_t](#) &A)
Compute the rank of a matrix.
- bool [bm_solve](#) ([bit_matrix_t](#) &A, [bit_vector_t](#) &b)
Solve a linear system.
- bool [bm_solve_upper_triangular](#) ([bit_matrix_t](#) &A, [bit_vector_t](#) &b)
Solve a linear system in upper triangular form.
- bool [bm_invert](#) ([bit_matrix_t](#) &M, [bit_matrix_t](#) &N)
Invert a bit matrix.
- void [bm_multiply](#) (const [bit_matrix_t](#) &M, const [bit_vector_t](#) &x, [bit_vector_t](#) &y)
Multiply a bit matrix and a bit vector.
- void [bm_transpose](#) (const [bit_matrix_t](#) &M, [bit_matrix_t](#) &N)
Transpose.

Types and functions related to bit

- typedef char [bit_t](#)
Bit.
- [bit_t bit_flip](#) ([bit_t](#) b)
Flip bit.
- [bit_t bit_random](#) (double p)
Sample a random bit.

Types and functions related to bit vectors

- typedef std::vector< [bit_t](#) > [bit_vector_t](#)
Bit vector.
- typedef std::pair< [bit_vector_t](#), double > [point_value_t](#)
Type to represent point value pairs.
- void [bv_display](#) (const [bit_vector_t](#) &v, std::ostream &stream)
Display bit vector.
- bool [bv_is_valid](#) (const [bit_vector_t](#) &x)
Check whether the bit vector is valid.
- bool [bv_is_zero](#) (const [bit_vector_t](#) &x)
Check whether the bit vector is zero.
- int [bv_hamming_weight](#) (const [bit_vector_t](#) &x)
Hamming weight.
- int [bv_hamming_weight](#) (const std::vector< bool > &x)
Hamming weight.
- int [bv_hamming_distance](#) (const [bit_vector_t](#) &x, const [bit_vector_t](#) &y)
Hamming distance between two bit vectors.
- [bit_t bv_dot_product](#) (const [bit_vector_t](#) &x, const [bit_vector_t](#) &y)
Dot product.
- [bit_t bv_dot_product](#) (const [bit_vector_t](#) &x, const std::vector< bool > &y)
Dot product.
- void [bv_clear](#) ([bit_vector_t](#) &x)
Clear bit vector.
- void [bv_flip](#) ([bit_vector_t](#) &x, int i)

- Flip a single bit.*
 - void [bv_flip](#) ([bit_vector_t](#) &x, const [bit_vector_t](#) &mask)
- Flip many bits.*
 - void [bv_random](#) ([bit_vector_t](#) &x)
- Sample a random bit vector.*
 - void [bv_random](#) ([bit_vector_t](#) &x, int k)
- Sample a random bit vector with given Hamming weight.*
 - void [bv_add](#) (const [bit_vector_t](#) &src, [bit_vector_t](#) &dest)
- Add two bit vectors.*
 - void [bv_add](#) (const [bit_vector_t](#) &x, const [bit_vector_t](#) &y, [bit_vector_t](#) &dest)
- Add two bit vectors.*
 - void [bv_to_vector_bool](#) (const [bit_vector_t](#) &x, std::vector< bool > &y)
- Convert a bit vector to a bool vector.*
 - void [bv_from_vector_bool](#) ([bit_vector_t](#) &x, const std::vector< bool > &y)
- Convert a bool vector to a bit vector.*
 - std::size_t [bv_to_size_type](#) (const [bit_vector_t](#) &x)
- Convert a bit vector to a size_t.*
 - void [bv_from_size_type](#) ([bit_vector_t](#) &x, std::size_t index)
- Convert a size_t to a bit vector.*

Types and functions related to permutations

- typedef std::vector< int > [permutation_t](#)
Permutation type.
- bool [perm_is_valid](#) (const [permutation_t](#) &permutation)
Check that a vector represents a permutation.
- void [perm_identity](#) ([permutation_t](#) &s)
Identity permutation.
- void [perm_random](#) ([permutation_t](#) &s)
Sample a random permutation.

Types and functions related to sparse bit matrices

- typedef std::vector< [sparse_bit_vector_t](#) > [sparse_bit_matrix_t](#)
Sparse bit matrix.
- void [sbm_display](#) (const [sparse_bit_matrix_t](#) &sbm, std::ostream &stream)
Display sparse bit matrix.
- void [bm_to_sbm](#) (const [bit_matrix_t](#) &bm, [sparse_bit_matrix_t](#) &sbm)
Convert a bit matrix to a sparse bit matrix.
- void [sbm_multiply](#) (const [sparse_bit_matrix_t](#) &M, const [bit_vector_t](#) &x, [bit_vector_t](#) &y)
Multiply a sparse bit matrix and a bit vector.

Types and functions related to sparse bit vectors

- typedef std::vector< int > [sparse_bit_vector_t](#)
Sparse bit vector.
- void [bv_flip](#) ([bit_vector_t](#) &x, const [sparse_bit_vector_t](#) &sbv)
Flip many bits.
- void [sbv_display](#) (const [sparse_bit_vector_t](#) &v, std::ostream &stream)
Display sparse bit vector.
- void [bv_to_sbv](#) (const [bit_vector_t](#) &bv, [sparse_bit_vector_t](#) &sbv)
Convert a bit vector to a sparse bit vector.

4.1.1 Detailed Description

top-level HNGO namespace

4.1.2 Typedef Documentation

4.1.2.1 `bit_t`

```
typedef char bit_t
```

Bit.

A single bit is represented by an unsigned char.

Definition at line 49 of file `bit-vector.hh`.

4.1.2.2 `sparse_bit_matrix_t`

```
typedef std::vector<sparse_bit_vector_t> sparse_bit_matrix_t
```

Sparse bit matrix.

A sparse bit matrix is represented as an array of sparse bit vectors. It knows its number of row, not its number of columns.

Definition at line 45 of file `sparse-bit-matrix.hh`.

4.1.2.3 `sparse_bit_vector_t`

```
typedef std::vector<int> sparse_bit_vector_t
```

Sparse bit vector.

A sparse bit vector is represented as an array containing the indices of its non-zero components. The indices must be sorted in ascending order.

A sparse bit vector does not know the dimension of the space it belongs to.

Definition at line 47 of file `sparse-bit-vector.hh`.

4.1.3 Function Documentation

4.1.3.1 `bm_add_rows()`

```
void bm_add_rows (
    bit_matrix_t & M,
    int i,
    int j )
```

Add two rows.

Row *i* is added to row *j*.

Definition at line 124 of file bit-matrix.cc.

4.1.3.2 `bm_identity()`

```
void bm_identity (
    bit_matrix_t & M )
```

Set the matrix to the identity matrix.

Precondition

`bm_is_square(M)`

Definition at line 47 of file bit-matrix.cc.

4.1.3.3 `bm_invert()`

```
bool bm_invert (
    bit_matrix_t & M,
    bit_matrix_t & N )
```

Invert a bit matrix.

Parameters

<i>M</i>	input matrix
<i>N</i>	inverse matrix

Precondition

`bm_is_square(M)`
`bm_is_square(N)`

Returns

true if *M* is invertible

Warning

M is modified by the function. Provided that M is invertible, after returning from the function, M is the identity matrix and N is the computed inverse matrix.

Definition at line 238 of file bit-matrix.cc.

4.1.3.4 bm_multiply()

```
void bm_multiply (
    const bit_matrix_t & M,
    const bit_vector_t & x,
    bit_vector_t & y )
```

Multiply a bit matrix and a bit vector.

The result is $y = Mx$.

Definition at line 282 of file bit-matrix.cc.

4.1.3.5 bm_rank()

```
int bm_rank (
    const bit_matrix_t & A )
```

Compute the rank of a matrix.

Precondition

A must be in row echelon form.

Definition at line 166 of file bit-matrix.cc.

4.1.3.6 bm_row_echelon_form()

```
void bm_row_echelon_form (
    bit_matrix_t & A )
```

Compute a row echelon form of a matrix.

Warning

A is modified by the function.

Definition at line 135 of file bit-matrix.cc.

4.1.3.7 bm_solve()

```
bool bm_solve (
    bit_matrix_t & A,
    bit_vector_t & b )
```

Solve a linear system.

Solve the linear equation $Ax = b$.

Parameters

A	Matrix
b	Right hand side

Precondition

```
bm_is_square(A)
bm_num_rows(A) == b.size()
```

Returns

true if the system has a unique solution

Warning

Both A and b are modified by the function. Provided that A is invertible, after returning from the function, A is the identity matrix and b is the unique solution to the linear equation.

Definition at line 184 of file bit-matrix.cc.

4.1.3.8 `bm_solve_upper_triangular()`

```
bool bm_solve_upper_triangular (
    bit_matrix_t & A,
    bit_vector_t & b )
```

Solve a linear system in upper triangular form.

Solve the linear equation $Ax = b$.

Parameters

A	Upper triangular matrix
b	Right hand side

Precondition

```
bm_is_square(A)
bm_num_rows(A) == b.size()
bm_is_upper_triangular(A)
```

Returns

true if the system has a unique solution

Warning

Both A and b are modified by the function. Provided that A is invertible, after returning from the function, A is the identity matrix and b is the unique solution to the linear equation.

Definition at line 217 of file bit-matrix.cc.

4.1.3.9 bv_from_vector_bool()

```
void bv_from_vector_bool (
    bit_vector_t & x,
    const std::vector< bool > & y )
```

Convert a bool vector to a bit vector.

Warning

Vectors must be of the same size.

Definition at line 153 of file bit-vector.cc.

4.1.3.10 bv_to_vector_bool()

```
void bv_to_vector_bool (
    const bit_vector_t & x,
    std::vector< bool > & y )
```

Convert a bit vector to a bool vector.

Warning

Vectors must be of the same size.

Definition at line 140 of file bit-vector.cc.

4.1.3.11 perm_identity()

```
void hnco::perm_identity (
    permutation_t & s ) [inline]
```

Identity permutation.

Warning

This function does not set the size of the permutation.

Definition at line 46 of file permutation.hh.

4.1.3.12 perm_random()

```
void hnco::perm_random (
    permutation_t & s ) [inline]
```

Sample a random permutation.

Warning

This function does not set the size of the permutation.

Definition at line 56 of file permutation.hh.

4.1.3.13 sbm_multiply()

```
void sbm_multiply (
    const sparse_bit_matrix_t & M,
    const bit_vector_t & x,
    bit_vector_t & y )
```

Multiply a sparse bit matrix and a bit vector.

The result is $y = Mx$.

Definition at line 47 of file sparse-bit-matrix.cc.

4.2 hnco::algorithm Namespace Reference

Algorithms.

Namespaces

- [bm_pbil](#)
Boltzmann machine PBIL.
- [hea](#)
Herding evolutionary algorithm.

Classes

- class [Algorithm](#)
Abstract search algorithm.
- class [BiasedCrossover](#)
Biased crossover.
- class [CompactGa](#)
Compact genetic algorithm.
- class [CompleteSearch](#)
Complete search.
- class [Crossover](#)
Crossover.
- class [FirstAscentHillClimbing](#)
First ascent hill climbing.
- class [GeneticAlgorithm](#)
Genetic algorithm.
- class [IterativeAlgorithm](#)
Iterative search.
- class [LogContext](#)
Log context.
- class [Mmas](#)
Max-min ant system.
- class [MuCommaLambdaEa](#)
(mu, lambda) EA.
- class [MuPlusLambdaEa](#)
(mu+lambda) EA.
- class [NpsPbil](#)
Population-based incremental learning with negative and positive selection.
- class [OnePlusLambdaCommaLambdaGa](#)
(1+(lambda, lambda)) genetic algorithm.
- class [OnePlusOneEa](#)
(1+1) EA.
- class [Pbil](#)
Population-based incremental learning.
- class [Population](#)
Population.
- class [ProgressTrackerContext](#)
Log context for ProgressTracker.
- class [PvAlgorithm](#)
Probability vector algorithm.
- class [RandomLocalSearch](#)
Random local search.
- class [RandomSearch](#)
Random search.
- class [RandomWalk](#)
Random walk.
- class [Restart](#)
Restart.
- class [SimulatedAnnealing](#)
Simulated annealing.
- class [SteepestAscentHillClimbing](#)

- *Steepest ascent hill climbing.*
- class [TournamentSelection](#)
Population with tournament selection.
- class [Umda](#)
Univariate marginal distribution algorithm.
- class [UniformCrossover](#)
Uniform crossover.

Functions

- template<class T >
bool [matrix_is_symmetric](#) (const std::vector< std::vector< T > > &A)
Check for symmetric matrix.
- template<class T >
bool [matrix_is_strictly_lower_triangular](#) (const std::vector< std::vector< T > > &A)
Check for strictly lower triangular matrix.
- template<class T >
bool [matrix_has_diagonal](#) (const std::vector< std::vector< T > > &A, T x)
Check for diagonal elements.
- template<class T >
bool [matrix_has_range](#) (const std::vector< std::vector< T > > &A, T inf, T sup)
Check for element range.
- template<class T >
bool [matrix_has_dominant_diagonal](#) (const std::vector< std::vector< T > > &A)
Check for element range.

Type and functions related to probability vectors

- typedef std::vector< double > [pv_t](#)
Probability vector type.
- double [pv_entropy](#) (const [pv_t](#) &pv)
Entropy of a probability vector.
- void [pv_sample](#) (const [pv_t](#) &pv, [bit_vector_t](#) &x)
Sample a bit vector.
- void [pv_uniform](#) ([pv_t](#) &pv)
Probability vector of the uniform distribution.
- void [pv_init](#) ([pv_t](#) &pv)
Initialize.
- void [pv_add](#) ([pv_t](#) &pv, const [bit_vector_t](#) &x)
Accumulate a bit vector.
- void [pv_add](#) ([pv_t](#) &pv, const [bit_vector_t](#) &x, double weight)
Accumulate a bit vector.
- void [pv_average](#) ([pv_t](#) &pv, int count)
Average.
- void [pv_update](#) ([pv_t](#) &pv, double rate, const [bit_vector_t](#) &x)
Update a probability vector toward a bit vector.
- void [pv_update](#) ([pv_t](#) &pv, double rate, const std::vector< double > &x)
Update a probability vector toward a probability vector.
- void [pv_update](#) ([pv_t](#) &pv, double rate, const std::vector< double > &x, const std::vector< double > &y)
Update a probability vector toward a probability vector and away from another one.
- void [pv_bound](#) ([pv_t](#) &pv, double lower_bound, double upper_bound)
Bound the components of a probability vector.

4.2.1 Detailed Description

Algorithms.

4.3 `hnco::algorithm::bm_pbil` Namespace Reference

Boltzmann machine PBIL.

Classes

- class [BmPbil](#)
Boltzmann machine PBIL.
- class [Model](#)
Model of a Boltzmann machine.
- class [ModelParameters](#)
Parameters of a Boltzmann machine.

4.3.1 Detailed Description

Boltzmann machine PBIL.

4.4 `hnco::algorithm::hea` Namespace Reference

Herding evolutionary algorithm.

Classes

- class [BitHerding](#)
Herding with bit features.
- struct [BitMoment](#)
Moment for bit features.
- class [Hea](#)
Herding evolutionary algorithm.
- class [SpinHerding](#)
Herding with spin variables.
- struct [SpinMoment](#)
Moment for spin variables.

4.4.1 Detailed Description

Herding evolutionary algorithm.

4.5 hnco::exception Namespace Reference

Exceptions.

Classes

- class [Error](#)
Error.
- class [Exception](#)
Basic exception.
- class [LastEvaluation](#)
Last evaluation.
- class [LocalMaximum](#)
Local maximum.
- class [MaximumReached](#)
Maximum reached.
- class [PointValueException](#)
Point-value exception.
- class [TargetReached](#)
target reached

4.5.1 Detailed Description

Exceptions.

4.6 hnco::function Namespace Reference

Real black box functions defined on bit vectors.

Namespaces

- [real](#)
Real multivariate functions.

Classes

- class [AbstractLabs](#)
Abstract class for low autocorrelation binary sequences.
- class [AbstractMaxSat](#)
Abstract class for MaxSat-like functions.
- class [AdditiveGaussianNoise](#)
Additive Gaussian Noise.
- class [Cache](#)
Cache.
- class [CallCounter](#)
Call counter.
- class [DeceptiveJump](#)
Deceptive jump.
- class [EqualProducts](#)
Equal products.
- class [Factorization](#)
Factorization.
- class [FourPeaks](#)
Four Peaks.
- class [Function](#)
Function.
- class [FunctionController](#)
Function controller.
- class [FunctionDecorator](#)
Function decorator.
- class [FunctionMapComposition](#)
Composition of a function and a map.
- class [FunctionModifier](#)
Function modifier.
- class [FunctionPlugin](#)
Function plugin.
- class [Hiff](#)
Hierarchical if and only if.
- class [Jump](#)
Jump.
- class [Labs](#)
Low autocorrelation binary sequences.
- class [LabsMeritFactor](#)
Low autocorrelation binary sequences merit factor.
- class [LeadingOnes](#)
Leading ones.
- class [LinearFunction](#)
Linear function.
- class [LongPath](#)
Long path.
- class [MaxNae3Sat](#)
Max not-all-equal 3SAT.
- class [MaxSat](#)
MAX-SAT.
- class [NearestNeighborIsingModel1](#)

- *Nearest neighbor Ising model in one dimension.*
- class [NearestNeighborIsingModel2](#)
 - *Nearest neighbor Ising model in two dimensions.*
- class [Needle](#)
 - *Needle in a haystack.*
- class [Negation](#)
 - *Negation.*
- class [NkLandscape](#)
 - *NK landscape.*
- class [OnBudgetFunction](#)
 - *CallCounter with a limited number of evaluations.*
- class [OneMax](#)
 - *OneMax.*
- class [ParsedModifier](#)
 - *Parsed modifier.*
- class [Plateau](#)
 - *Plateau.*
- class [PriorNoise](#)
 - *Prior noise.*
- class [ProgressTracker](#)
 - *ProgressTracker.*
- class [Qubo](#)
 - *Quadratic unconstrained binary optimization.*
- class [Ridge](#)
 - *Ridge.*
- class [SinusSummationCancellation](#)
 - *Summation cancellation with sinus.*
- class [SixPeaks](#)
 - *Six Peaks.*
- class [StopOnMaximum](#)
 - *Stop on maximum.*
- class [StopOnTarget](#)
 - *Stop on target.*
- class [SummationCancellation](#)
 - *Summation cancellation.*
- class [Trap](#)
 - *Trap.*
- class [WalshExpansion](#)
 - *Walsh expansion.*
- class [WalshExpansion1](#)
 - *Walsh expansion of degree 1.*
- class [WalshExpansion2](#)
 - *Walsh expansion of degree 2.*

Functions

- `std::ostream & operator<< (std::ostream &stream, const ProgressTracker::Event &event)`
 - *Insert formatted output.*
- `bool bv_is_locally_maximal (const bit_vector_t &bv, Function &fn, hnco::neighborhood::NeighborhoodIterator &it)`
 - *Check whether a bit vector is locally maximal.*
- `bool bv_is_globally_maximal (const bit_vector_t &bv, Function &fn)`
 - *Check whether a bit vector is globally maximal.*

4.6.1 Detailed Description

Real black box functions defined on bit vectors.

4.7 `hnco::function::real` Namespace Reference

Real multivariate functions.

Classes

- class [DyadicRealRepresentation](#)
Dyadic real representation.
- class [ParsedRealMultivariateFunction](#)
Parsed real multivariate function.
- class [RealMultivariateFunction](#)
Real multivariate function.
- class [RealMultivariateFunctionAdapter](#)
Real multivariate function adapter.
- class [RealRepresentation](#)
Real representation.

4.7.1 Detailed Description

Real multivariate functions.

4.8 `hnco::neighborhood` Namespace Reference

Neighborhoods for local search.

Classes

- class [BernoulliProcess](#)
Bernoulli process.
- class [HammingBall](#)
Hamming ball.
- class [HammingSphere](#)
Hamming sphere.
- class [HammingSphereIterator](#)
Hamming sphere neighborhood iterator.
- class [MultiBitFlip](#)
Multi bit flip.
- class [Neighborhood](#)
Neighborhood.
- class [NeighborhoodIterator](#)
Neighborhood iterator.
- class [SingleBitFlip](#)
One bit neighborhood.
- class [SingleBitFlipIterator](#)
Single bit flip neighborhood iterator.

4.8.1 Detailed Description

Neighborhoods for local search.

There are two unrelated kinds of neighborhoods, those for random local search and those for exhaustive local search.

4.9 hnco::random Namespace Reference

Pseudo random numbers.

Classes

- struct [Random](#)
[Random](#) numbers.

4.9.1 Detailed Description

Pseudo random numbers.

Chapter 5


Class Documentation

5.1 AbstractLabs Class Reference

Abstract class for low autocorrelation binary sequences.

```
#include <hnco/functions/labs.hh>
```

Inheritance diagram for AbstractLabs:

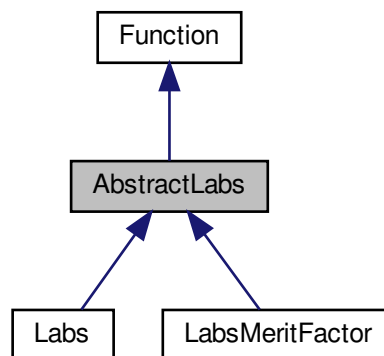

Public Member Functions

- [AbstractLabs](#) (int n)
Constructor.
- int [get_bv_size](#) ()
Get bit vector size.
- double [compute_autocorrelation](#) (const [bit_vector_t](#) &)
Compute autocorrelation.

Protected Attributes

- `std::vector< int > _sequence`
Binary sequence written using 1 and -1.

5.1.1 Detailed Description

Abstract class for low autocorrelation binary sequences.

Definition at line 32 of file labs.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/labs.hh
- lib/hnco/functions/labs.cc

5.2 AbstractMaxSat Class Reference

Abstract class for MaxSat-like functions.

```
#include <hnco/functions/max-sat.hh>
```

Inheritance diagram for AbstractMaxSat:

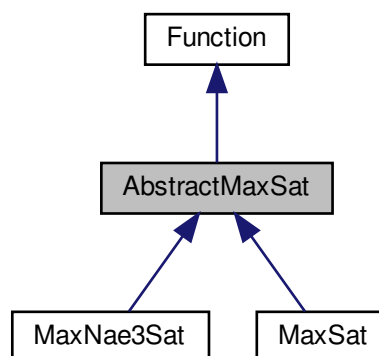

Public Member Functions

- `AbstractMaxSat ()`
Default constructor.
- `int get_bv_size ()`
Get bit vector size.
- `void display (std::ostream &stream)`
Display the expression.
- `virtual void load (std::istream &stream)`
Load an instance.
- `virtual void save (std::ostream &stream)`
Save an instance.

Protected Attributes

- `std::vector< std::vector< int > > _expression`
Expression.
- `int _num_variables`
Number of variables.

5.2.1 Detailed Description

Abstract class for MaxSat-like functions.

Definition at line 35 of file max-sat.hh.

5.2.2 Member Function Documentation

5.2.2.1 load()

```
void load (
    std::istream & stream ) [virtual]
```

Load an instance.

Exceptions

Error	
-------	--

Reimplemented in [MaxNae3Sat](#).

Definition at line 61 of file max-sat.cc.

5.2.3 Member Data Documentation

5.2.3.1 _expression

```
std::vector<std::vector<int> > _expression [protected]
```

Expression.

An expression is represented by a vector of clauses. A clause is represented by a vector of literals. A literal is represented by a non null integer; if the integer is positive then the literal is a variable; if it is negative then it is the logical negation of a variable.

Definition at line 47 of file max-sat.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/max-sat.hh
- lib/hnco/functions/max-sat.cc

5.3 AdditiveGaussianNoise Class Reference

Additive Gaussian Noise.

```
#include <hnco/functions/decorators/function-modifier.hh>
```

Inheritance diagram for AdditiveGaussianNoise:

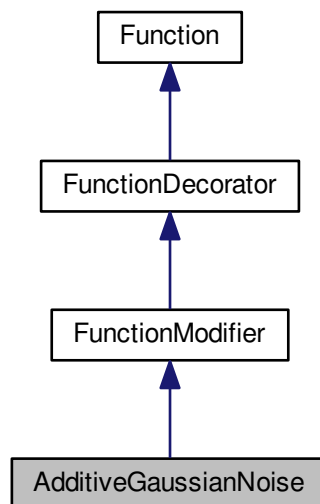

Public Member Functions

- [AdditiveGaussianNoise](#) ([Function](#) *function, double stddev)
Constructor.
- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.

Information about the function

- int [get_bv_size](#) ()
Get bit vector size.

Private Attributes

- `std::normal_distribution< double > _dist`
Normal distribution.

Additional Inherited Members

5.3.1 Detailed Description

Additive Gaussian Noise.

Definition at line 169 of file function-modifier.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/decorators/function-modifier.hh
- lib/hnco/functions/decorators/function-modifier.cc

5.4 AffineMap Class Reference

Affine map.

```
#include <hnco/map.hh>
```

Inheritance diagram for AffineMap:



Public Member Functions

- void `random` (int rows, int cols, bool surjective)
Random instance.
- void `map` (const `bit_vector_t` &input, `bit_vector_t` &output)
Map.
- int `get_input_size` ()
Get input size.
- int `get_output_size` ()
Get output size.
- bool `is_surjective` ()
Check for surjective map.

Private Member Functions

- `template<class Archive >`
void [save](#) (Archive &ar, const unsigned int version) const
Save.
- `template<class Archive >`
void [load](#) (Archive &ar, const unsigned int version)
Load.

Private Attributes

- [bit_matrix_t _bm](#)
Bit matrix.
- [bit_vector_t _bv](#)
Translation vector.

Friends

- class **boost::serialization::access**

5.4.1 Detailed Description

Affine map.

An affine map f from Z_2^m to Z_2^n is defined by $f(x) = Ax + b$, where A is an $n \times m$ bit matrix and b is an n -dimensional bit vector.

Definition at line 257 of file map.hh.

5.4.2 Member Function Documentation

5.4.2.1 is_surjective()

```
bool is_surjective ( ) [virtual]
```

Check for surjective map.

Returns

true if `rank(_bm) == bm_num_rows(_bm)`

Reimplemented from [Map](#).

Definition at line 136 of file map.cc.

5.4.2.2 random()

```
void random (
    int rows,
    int cols,
    bool surjective )
```

Random instance.

Parameters

<i>rows</i>	Number of rows
<i>cols</i>	Number of columns
<i>surjective</i>	Flag to ensure a surjective map

Exceptions

<i>Error</i>	
--------------	--

Definition at line 99 of file map.cc.

The documentation for this class was generated from the following files:


- lib/hnco/map.hh
- lib/hnco/map.cc

5.5 Algorithm Class Reference

Abstract search algorithm.

```
#include <hnco/algorithms/algorithm.hh>
```

Inheritance diagram for Algorithm:

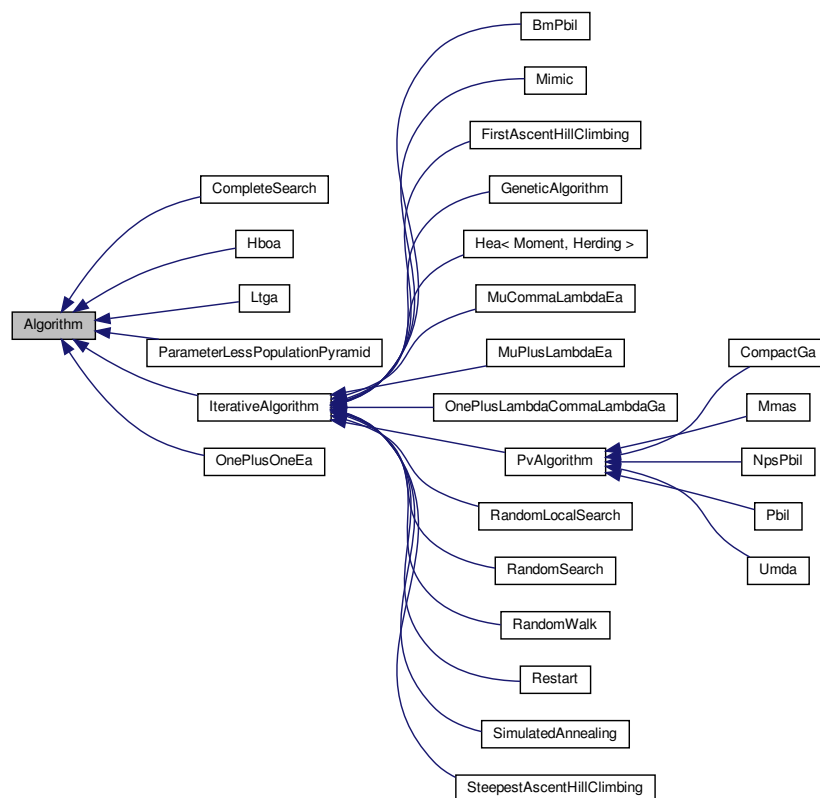

Public Member Functions

- [Algorithm](#) (int n)
Constructor.
- virtual [~Algorithm](#) ()
Destructor.

Optimization

- virtual void [init](#) ()
Initialization.
- virtual void [maximize](#) ()=0
Maximize.

Getters

- virtual const [point_value_t](#) & [get_solution](#) ()
Solution.
- virtual int [get_bv_size](#) ()
Get bit vector size.

Setters

- virtual void [set_function](#) (function::Function *function)
Set function.
- virtual void [set_functions](#) (const std::vector< [function::Function](#) *> functions)
Set functions.
- void [set_stream](#) (std::ostream *x)
Output stream.
- void [set_log_context](#) (LogContext *lc)
Set log context.

Protected Member Functions

Managing solution

- void [random_solution](#) ()
Random solution.
- void [set_solution](#) (const [bit_vector_t](#) &x, double value)
Set solution.
- void [set_solution](#) (const [bit_vector_t](#) &x)
Set solution.
- void [update_solution](#) (const [bit_vector_t](#) &x, double value)
Update solution (strict)
- void [update_solution](#) (const [point_value_t](#) &pv)
Update solution (strict)
- void [update_solution](#) (const [bit_vector_t](#) &x)
Update solution (strict).

Protected Attributes

- `function::Function * _function`
Function.
- `std::vector< function::Function * > _functions`
Functions.
- `point_value_t _solution`
Solution.
- `LogContext * _log_context = nullptr`
Log context.

Parameters

- `std::ostream * _stream = &std::cout`
Output stream.

5.5.1 Detailed Description

Abstract search algorithm.

All algorithms maximize some given function, sometimes called a fitness function or an objective function.

Definition at line 41 of file algorithm.hh.

5.5.2 Member Function Documentation

5.5.2.1 set_solution()

```
void set_solution (
    const bit_vector_t & x ) [protected]
```

Set solution.

Warning

Evaluates the function once.

Definition at line 47 of file algorithm.cc.

5.5.2.2 update_solution()

```
void update_solution (
    const bit_vector_t & x ) [protected]
```

Update solution (strict).

Warning

Evaluates the function once.

Definition at line 70 of file algorithm.cc.

5.5.3 Member Data Documentation

5.5.3.1 _functions

```
std::vector<function::Function *> _functions [protected]
```

Functions.

Each thread has its own function.

Definition at line 52 of file algorithm.hh.

The documentation for this class was generated from the following files:


- lib/hnco/algorithms/algorithm.hh
- lib/hnco/algorithms/algorithm.cc

5.6 BernoulliProcess Class Reference

Bernoulli process.

```
#include <hnco/neighborhoods/neighborhood.hh>
```

Inheritance diagram for BernoulliProcess:



Public Member Functions

- [BernoulliProcess](#) (int n)
Constructor.
- [BernoulliProcess](#) (int n, double p)
Constructor.
- void [set_probability](#) (double p)
Set probability.

Private Member Functions

- void [sample_bits](#) ()
Sample bits.
- void [bernoulli_process](#) ()
Bernoulli process.

Private Attributes

- std::bernoulli_distribution [_bernoulli_dist](#)
Bernoulli distribution (biased coin)
- std::binomial_distribution< int > [_binomial_dist](#)
Binomial distribution.
- bool [_reservoir_sampling](#) = false
Reservoir sampling.

Parameters

- bool [_allow_stay](#) = false
Allow stay.
- void [set_allow_stay](#) (bool x)
Set the flag _allow_stay.

Additional Inherited Members

5.6.1 Detailed Description

Bernoulli process.

Each component of the origin bit vector is flipped with some fixed probability. If no component has been flipped at the end, the process is started all over again. Thus the number of flipped bits follows a pseudo binomial law.

Definition at line 220 of file neighborhood.hh.

5.6.2 Constructor & Destructor Documentation

5.6.2.1 BernoulliProcess() [1/2]

```
BernoulliProcess (
    int n ) [inline]
```

Constructor.

Parameters

n	Size of bit vectors
-----	---------------------

The Bernoulli probability is set to $1 / n$.

Definition at line 255 of file neighborhood.hh.

5.6.2.2 BernoulliProcess() [2/2]

```
BernoulliProcess (
    int n,
    double p ) [inline]
```

Constructor.

Parameters

n	Size of bit vectors
p	Bernoulli probability

Definition at line 265 of file neighborhood.hh.

5.6.3 Member Function Documentation**5.6.3.1 set_allow_stay()**

```
void set_allow_stay (
    bool x ) [inline]
```

Set the flag `_allow_stay`.

In case no mutation occurs allow the current bit vector to stay unchanged.

Definition at line 292 of file neighborhood.hh.

5.6.3.2 set_probability()

```
void set_probability (
    double p ) [inline]
```

Set probability.

Sets `_reservoir_sampling` to true if $E(X) < \sqrt{n}$, where X is a random variable with a binomial distribution $B(n, p)$, that is if $np < \sqrt{n}$ or $p < 1 / \sqrt{n}$.

Definition at line 276 of file neighborhood.hh.

The documentation for this class was generated from the following files:


- lib/hnco/neighborhoods/neighborhood.hh
- lib/hnco/neighborhoods/neighborhood.cc

5.7 BiasedCrossover Class Reference

Biased crossover.

```
#include <hnco/algorithms/ea/crossover.hh>
```

Inheritance diagram for BiasedCrossover:



Public Member Functions

- [BiasedCrossover](#) ()
Constructor.
- void [breed](#) (const [bit_vector_t](#) &parent1, const [bit_vector_t](#) &parent2, [bit_vector_t](#) &offspring)
Breed.
- void [set_bias](#) (double b)
Set bias.

Private Attributes

- `std::bernoulli_distribution` [_bernoulli_dist](#)
Bernoulli distribution.

5.7.1 Detailed Description

Biased crossover.

Definition at line 75 of file `crossover.hh`.

5.7.2 Member Function Documentation

5.7.2.1 breed()

```
void breed (  
    const bit\_vector\_t & parent1,  
    const bit\_vector\_t & parent2,  
    bit\_vector\_t & offspring ) [virtual]
```

Breed.

Each offspring's bit is copied from second parent with a fixed probability (the crossover bias), from first parent otherwise.

Parameters

<i>parent1</i>	First parent
<i>parent2</i>	Second parent
<i>offspring</i>	Offspring

Implements [Crossover](#).

Definition at line 45 of file crossover.cc.

The documentation for this class was generated from the following files:

- lib/hnco/algorithms/ea/crossover.hh
- lib/hnco/algorithms/ea/crossover.cc

5.8 BitHerding Class Reference

Herding with bit features.

```
#include <hnco/algorithms/hea/bit-herding.hh>
```

Public Types

- enum { [DYNAMICS_MINIMIZE_NORM](#), [DYNAMICS_MAXIMIZE_INNER_PRODUCT](#) }

Public Member Functions

- [BitHerding](#) (int n)
Constructor.
- void [init](#) ()
Initialization.
- void [sample](#) (const [BitMoment](#) &target, [bit_vector_t](#) &x)
Sample a bit vector.
- double [error](#) (const [BitMoment](#) &target)
Compute the error.

Getters

- const [BitMoment](#) & [get_delta](#) ()
Get delta.

Setters

- void [set_randomize_bit_order](#) (bool x)
Randomize bit order.
- void [set_dynamics](#) (int x)
Set the dynamics.
- void [set_weight](#) (double x)
Set the weight of second order moments.

Protected Member Functions

- void `compute_delta` (const `BitMoment` &target)
Compute delta.
- void `sample_minimize_norm` (const `BitMoment` &target, `bit_vector_t` &x)
Sample a bit vector.
- void `sample_maximize_inner_product` (const `BitMoment` &target, `bit_vector_t` &x)
Sample a bit vector.

Protected Attributes

- `BitMoment _count`
Counter moment.
- `BitMoment _delta`
Delta moment.
- `permutation_t _permutation`
Permutation.
- `std::uniform_int_distribution< int > _choose_bit`
Choose bit.
- `int _time`
Time.

Parameters

- `bool _randomize_bit_order` = false
Randomize bit order.
- `int _dynamics` = `DYNAMICS_MINIMIZE_NORM`
Dynamics.
- `double _weight` = 1
Weight of second order moments.

5.8.1 Detailed Description

Herding with bit features.

Definition at line 38 of file `bit-herding.hh`.

5.8.2 Member Enumeration Documentation

5.8.2.1 anonymous enum

anonymous enum

Enumerator

<code>DYNAMICS_MINIMIZE_NORM</code>	Dynamics defined as minimization of a norm.
<code>DYNAMICS_MAXIMIZE_INNER_PRODUCT</code>	Dynamics defined as maximization of an inner product.

Definition at line 83 of file bit-herding.hh.

The documentation for this class was generated from the following files:

- lib/hnco/algorithms/hea/bit-herding.hh
- lib/hnco/algorithms/hea/bit-herding.cc

5.9 BitMoment Struct Reference

Moment for bit features.

```
#include <hnco/algorithms/hea/bit-moment.hh>
```

Public Member Functions

- [BitMoment](#) (int n)
Constructor.
- void [uniform](#) ()
Set the moment to that of the uniform distribution.
- void [init](#) ()
Initialize.
- void [add](#) (const [bit_vector_t](#) &x)
Accumulate a bit vector.
- void [average](#) (int count)
Compute average.
- void [update](#) (const [BitMoment](#) &p, double rate)
Update moment.
- void [bound](#) (double margin)
Bound moment.
- double [distance](#) (const [BitMoment](#) &p) const
Distance.
- double [norm_2](#) () const
Compute the norm 2.
- double [diameter](#) () const
Compute the diameter.
- size_t [size](#) () const
Size.
- void [display](#) (std::ostream &stream)
Display.

Public Attributes

- std::vector< std::vector< double > > [_moment](#)
Moment.
- double [_weight](#) = 1
Weight of second order moments.

5.9.1 Detailed Description

Moment for bit features.

Definition at line 38 of file bit-moment.hh.

The documentation for this struct was generated from the following files:


- lib/hnco/algorithms/hea/bit-moment.hh
- lib/hnco/algorithms/hea/bit-moment.cc

5.10 BmPbil Class Reference

Boltzmann machine PBIL.

```
#include <hnco/algorithms/bm-pbil/bm-pbil.hh>
```

Inheritance diagram for BmPbil:



Public Types

- enum { LOG_NORM_INFINITE, LOG_NORM_L1, **LAST_LOG** }
- enum { **SAMPLING_ASYNCHRONOUS**, **SAMPLING_ASYNCHRONOUS_FULL_SCAN**, **SAMPLING_SYNCHRONOUS** }
- enum { **RESET_NO_RESET**, **RESET_ITERATION**, **RESET_BIT_VECTOR** }
- typedef std::bitset< LAST_LOG > **log_flags_t**

Public Member Functions

- **BmPbil** (int n, int population_size)
Constructor.
- void **init** ()
Initialization.

Private Member Functions

- void `iterate ()`
Single iteration.
- void `log ()`
Log.
- void `sample (bit_vector_t &x)`
Sample a bit vector.
- void `sample_asynchronous ()`
Asynchronous sampling.
- void `sample_asynchronous_full_scan ()`
Asynchronous sampling with full scan.
- void `sample_synchronous ()`
Synchronous sampling.

Private Attributes

- `log_flags_t _log_flags`
Log flags.
- `Population _population`
Population.
- `Model _model`
Model.
- `ModelParameters _parameters_all`
Parameters averaged over all individuals.
- `ModelParameters _parameters_best`
Parameters averaged over selected individuals.
- `ModelParameters _parameters_worst`
Parameters averaged over negatively selected individuals.
- `std::uniform_int_distribution< size_t > _choose_bit`
Uniform distribution on bit_vector_t components.
- `permutation_t _permutation`
Permutation.

Parameters

- `int _selection_size = 1`
Selection size (number of selected individuals in the population)
- `double _learning_rate = 1e-3`
Learning rate.
- `int _num_gs_steps = 100`
Number of gibbs sampler steps.
- `int _num_gs_cycles = 1`
Number of gibbs sampler cycles.
- `bool _negative_positive_selection = false`
Negative and positive selection.
- `int _sampling = SAMPLING_ASYNCHRONOUS`
Sampling mode.
- `int _mc_reset_strategy = RESET_NO_RESET`

- *MC reset strategy.*
- void [set_selection_size](#) (int x)
Set the selection size.
- void [set_learning_rate](#) (double x)
Set the learning rate.
- void [set_num_gs_steps](#) (int x)
Set the number of gibbs sampler steps.
- void [set_num_gs_cycles](#) (int x)
Set the number of gibbs sampler cycles.
- void [set_negative_positive_selection](#) (bool x)
Set negative and positive selection.
- void [set_sampling](#) (int x)
Set the sampling mode.
- void [set_mc_reset_strategy](#) (int x)
Set the MC reset strategy.
- void [set_log_flags](#) (const log_flags_t &lf)
Set log flags.

Additional Inherited Members

5.10.1 Detailed Description

Boltzmann machine PBIL.

The BM model is slightly different from the one given in the reference below. More precisely, 0/1 variables are mapped to -1/+1 variables as in Walsh analysis.

Reference:

Arnaud Berny. 2002. Boltzmann machine for population-based incremental learning. In ECAI 2002. IOS Press, Lyon.

Definition at line 51 of file bm-pbil.hh.

5.10.2 Member Enumeration Documentation

5.10.2.1 anonymous enum

anonymous enum

Enumerator

LOG_NORM_INFINITE	Log infinite norm of the model parameters.
LOG_NORM_L1	Log 1-norm of the model parameters.

Definition at line 56 of file bm-pbil.hh.

5.10.2.2 anonymous enum

anonymous enum

Enumerator

SAMPLING_ASYNCHRONOUS	Asynchronous sampling. A single component of the internal state is randomly selected then updated by Gibbs sampling. This step is repeated <code>_num_gs_steps</code> times.
SAMPLING_ASYNCHRONOUS_FULL_SCAN	Asynchronous sampling with full scan. To sample a new bit vector, a random permutation is sampled and all components of the internal state are updated by Gibbs sampling in the order defined by the permutation.
SAMPLING_SYNCHRONOUS	Synchronous sampling. The full internal state is updated in one step from the probability vector made of the very marginal probabilities used in Gibbs sampling.

Definition at line 66 of file bm-pbil.hh.

5.10.2.3 anonymous enum

anonymous enum

Enumerator

RESET_NO_RESET	No reset.
RESET_ITERATION	Reset MC at the beginning of each iteration.
RESET_BIT_VECTOR	Reset MC before sampling each bit vector.

Definition at line 93 of file bm-pbil.hh.

5.10.3 Member Function Documentation

5.10.3.1 set_selection_size()

```
void set_selection_size (
    int x ) [inline]
```

Set the selection size.

The selection size is the number of selected individuals in the population.

Definition at line 210 of file bm-pbil.hh.

The documentation for this class was generated from the following files:


- lib/hnco/algorithms/bm-pbil/bm-pbil.hh
- lib/hnco/algorithms/bm-pbil/bm-pbil.cc

5.11 Cache Class Reference

[Cache](#).

```
#include <hnco/functions/decorators/function-controller.hh>
```

Inheritance diagram for Cache:

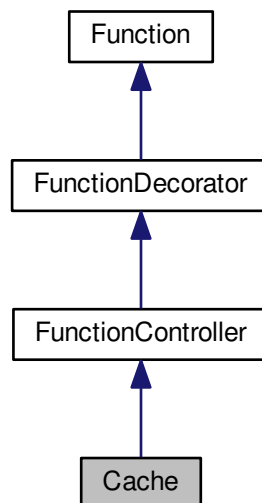

Public Member Functions

- [Cache](#) ([Function](#) *function)
Constructor.
- bool [provides_incremental_evaluation](#) ()
Check whether the function provides incremental evaluation.
- double [get_lookup_ratio](#) ()
Get lookup ratio.

Evaluation

- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.

Private Attributes

- `std::unordered_map< std::vector< bool >, double > _cache`
Cache.
- `std::vector< bool > _key`
Key.
- `int _num_evaluations`
Evaluation counter.
- `int _num_lookups`
Lookup counter.

Additional Inherited Members

5.11.1 Detailed Description

Cache.

This is a naive approach, in particular with respect to time complexity. Moreover, there is no control on the size of the database.

There is no default hash function for `std::vector<char>` hence the need to first copy a `bit_vector_t` into a `std::vector<bool>`, for which such a function exists, before inserting it or checking its existence in the map.

Definition at line 362 of file `function-controller.hh`.

5.11.2 Constructor & Destructor Documentation

5.11.2.1 Cache()

```
Cache (
    Function * function ) [inline]
```

Constructor.

Parameters

<i>function</i>	Decorated function
-----------------	--------------------

Definition at line 381 of file `function-controller.hh`.

5.11.3 Member Function Documentation

5.11.3.1 provides_incremental_evaluation()

```
bool provides_incremental_evaluation ( ) [inline], [virtual]
```

Check whether the function provides incremental evaluation.

Returns

false

Reimplemented from [FunctionController](#).

Definition at line 390 of file function-controller.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/decorators/function-controller.hh
- lib/hnco/functions/decorators/function-controller.cc

5.12 CallCounter Class Reference

Call counter.

```
#include <hnco/functions/decorators/function-controller.hh>
```

Inheritance diagram for CallCounter:

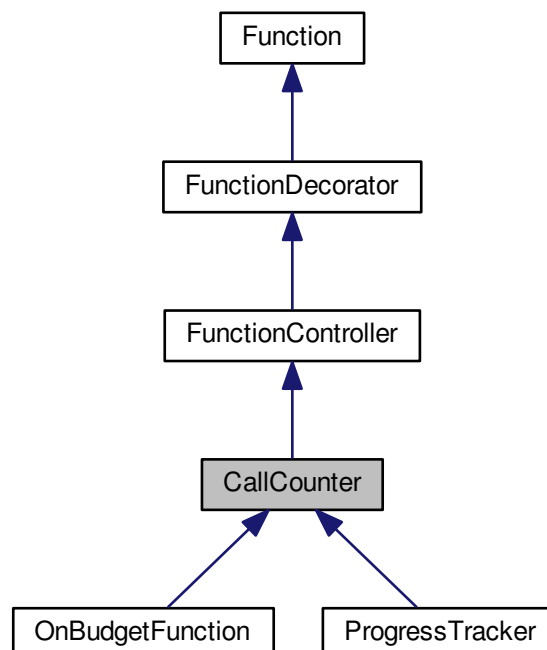

Public Member Functions

- [CallCounter](#) ([Function](#) *function)

Constructor.

- int [get_num_calls](#) ()

Get the number of calls.

Evaluation

- double [eval](#) (const [bit_vector_t](#) &)

Evaluate a bit vector.

- double [incremental_eval](#) (const [bit_vector_t](#) &x, double value, const [hnco::sparse_bit_vector_t](#) &flipped←_bits)

Incremental evaluation.

- void [update](#) (const [bit_vector_t](#) &x, double value)

Update after a safe evaluation.

Protected Attributes

- int [_num_calls](#)

Number of calls.

5.12.1 Detailed Description

Call counter.

Definition at line 173 of file function-controller.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/decorators/function-controller.hh
- lib/hnco/functions/decorators/function-controller.cc

5.13 CompactGa Class Reference

Compact genetic algorithm.

```
#include <hnco/algorithms/pv/compact-ga.hh>
```

Inheritance diagram for CompactGa:

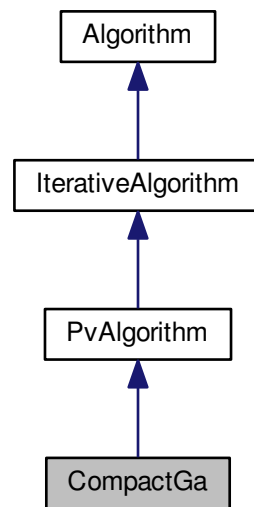

Public Member Functions

- [CompactGa](#) (int n)
Constructor.
- void [init](#) ()
Initialization.

Setters

- void [set_learning_rate](#) (double x)
Set the learning rate.

Protected Member Functions

- void [iterate](#) ()
Single iteration.

Protected Attributes

- std::vector< [bit_vector_t](#) > [_candidates](#)
Candidates.

Parameters

- double [_learning_rate](#) = 1e-3
Learning rate.

5.13.1 Detailed Description

Compact genetic algorithm.

Reference:

Georges R. Harik, Fernando G. Lobo, and David E. Goldberg. 1999. The Compact Genetic Algorithm. IEEE Trans. on Evolutionary Computation 3, 4 (November 1999), 287–297.

Definition at line 43 of file compact-ga.hh.

The documentation for this class was generated from the following files:


- lib/hnco/algorithms/pv/compact-ga.hh
- lib/hnco/algorithms/pv/compact-ga.cc

5.14 CompleteSearch Class Reference

Complete search.

```
#include <hnco/algorithms/complete-search.hh>
```

Inheritance diagram for CompleteSearch:



Public Member Functions

- [CompleteSearch](#) (int n)
Constructor.
- void [maximize](#) ()
Maximize.

Additional Inherited Members

5.14.1 Detailed Description

Complete search.

Definition at line 34 of file complete-search.hh.

The documentation for this class was generated from the following files:


- lib/hnco/algorithms/complete-search.hh
- lib/hnco/algorithms/complete-search.cc

5.15 Crossover Class Reference

[Crossover](#).

```
#include <hnco/algorithms/ea/crossover.hh>
```

Inheritance diagram for Crossover:

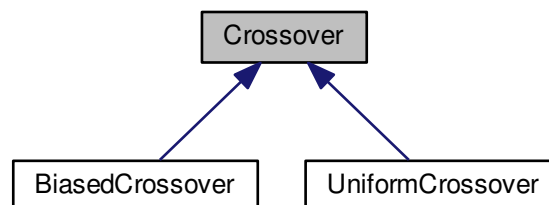

Public Member Functions

- virtual [~Crossover](#) ()
Destructor.
- virtual void [breed](#) (const [bit_vector_t](#) &parent1, const [bit_vector_t](#) &parent2, [bit_vector_t](#) &offspring)=0
Breed.

5.15.1 Detailed Description

[Crossover](#).

Definition at line 35 of file crossover.hh.

5.15.2 Member Function Documentation

5.15.2.1 breed()

```
virtual void breed (
    const bit\_vector\_t & parent1,
    const bit\_vector\_t & parent2,
    bit\_vector\_t & offspring ) [pure virtual]
```

Breed.

The offspring is the crossover of two parents.

Parameters

<i>parent1</i>	First parent
<i>parent2</i>	Second parent
<i>offspring</i>	Offspring

Implemented in [BiasedCrossover](#), and [UniformCrossover](#).

The documentation for this class was generated from the following file:


- `lib/hnco/algorithms/ea/crossover.hh`

5.16 DeceptiveJump Class Reference

Deceptive jump.

```
#include <hnco/functions/jump.hh>
```

Inheritance diagram for DeceptiveJump:



Public Member Functions

- [DeceptiveJump](#) (int bv_size, int gap)
Constructor.
- int [get_bv_size](#) ()
Get bit vector size.
- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- bool [has_known_maximum](#) ()
Check for a known maximum.
- double [get_maximum](#) ()
Get the global maximum.

Private Attributes

- int [_bv_size](#)
Bit vector size.
- int [_gap](#)
Gap.

5.16.1 Detailed Description

Deceptive jump.

This is a jump function with a deceptive gap as defined in "Analyzing evolutionary algorithms" by Thomas Jansen, where it is called Jump_k. Algorithms in the neighborhood of the maximizer (which is the all one bit vector) are taken away from it.

Reference:

Thomas Jansen, Analyzing Evolutionary Algorithms. Springer, 2013.

Definition at line 85 of file jump.hh.

5.16.2 Member Function Documentation

5.16.2.1 [get_maximum\(\)](#)

```
double get_maximum ( ) [inline], [virtual]
```

Get the global maximum.

Returns

[_bv_size](#) + [_gap](#)

Reimplemented from [Function](#).

Definition at line 111 of file jump.hh.

5.16.2.2 has_known_maximum()

```
bool has_known_maximum ( ) [inline], [virtual]
```

Check for a known maximum.

Returns

true

Reimplemented from [Function](#).

Definition at line 107 of file jump.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/jump.hh
- lib/hnco/functions/jump.cc

5.17 DyadicRealRepresentation Class Reference

Dyadic real representation.

```
#include <hnco/functions/real/real-representation.hh>
```

Inheritance diagram for DyadicRealRepresentation:

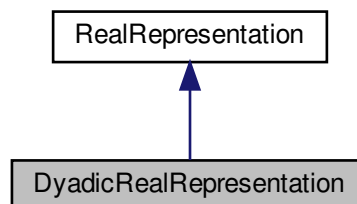

Public Member Functions

- [DyadicRealRepresentation](#) (double lower_bound, double upper_bound, int num_bits)
Constructor.
- int [size](#) ()
Size of the representation.
- double [convert](#) (hnco::bit_vector_t::const_iterator first, hnco::bit_vector_t::const_iterator last)
Convert a bit vector range into a double.

Private Member Functions

- double `affine_transformation` (double x)
Affine transformation.

Private Attributes

- `std::vector< double > _lengths`
Lengths of dyadic intervals.
- double `_lower_bound`
Lower bound of the search interval.
- double `_length`
Length of the search interval.

5.17.1 Detailed Description

Dyadic real representation.

Definition at line 52 of file `real-representation.hh`.

5.17.2 Constructor & Destructor Documentation

5.17.2.1 DyadicRealRepresentation()

```
DyadicRealRepresentation (
    double lower_bound,
    double upper_bound,
    int num_bits )
```

Constructor.

Parameters

<code>lower_bound</code>	Lower bound of the search interval
<code>upper_bound</code>	Upper bound of the search interval
<code>num_bits</code>	Number of bits per real

Definition at line 31 of file `real-representation.cc`.

The documentation for this class was generated from the following files:


- `lib/hnco/functions/real/real-representation.hh`
- `lib/hnco/functions/real/real-representation.cc`

5.18 EqualProducts Class Reference

Equal products.

```
#include <hnco/functions/equal-products.hh>
```

Inheritance diagram for EqualProducts:



Public Member Functions

- [EqualProducts](#) ()
Constructor.
- int [get_bv_size](#) ()
Get bit vector size.
- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.

Instance generators

- template<class Generator >
void [generate](#) (int n, Generator generator)
Instance generator.
- void [random](#) (int n)
Random instance.

Private Member Functions

- template<class Archive >
void [serialize](#) (Archive &ar, const unsigned int version)
Serialize.

Private Attributes

- std::vector< double > [_numbers](#)
Numbers.

Friends

- class **boost::serialization::access**

5.18.1 Detailed Description

Equal products.

Partition a finite set of positive numbers into two subsets such that the product of numbers in the first subset is the closest to the product of numbers in the second subset. This is equivalent to the partition problem applied to the logarithms of the given numbers.

The function computes the negation of the distance between the product of numbers corresponding to ones in the bit vector and the product of those corresponding to zeros. The negation is a consequence of the fact that algorithms in HNCO maximize rather than minimize a function.

Reference:

S. Baluja and S. Davies. 1997. Using optimal dependency-trees for combinatorial optimization: learning the structure of the search space. Technical Report CMU- CS-97-107. Carnegie-Mellon University.

Definition at line 61 of file equal-products.hh.

5.18.2 Member Function Documentation

5.18.2.1 generate()

```
void generate (
    int n,
    Generator generator ) [inline]
```

Instance generator.

Parameters

<i>n</i>	Size of bit vectors
<i>generator</i>	Number generator

Definition at line 94 of file equal-products.hh.

5.18.2.2 random()

```
void random (
    int n ) [inline]
```

Random instance.

The weights are sampled from the uniform distribution on $[0,1)$.

Parameters

n	Size of bit vector
-----	--------------------

Definition at line 109 of file equal-products.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/equal-products.hh
- lib/hnco/functions/equal-products.cc

5.19 Error Class Reference

[Error](#).

```
#include <hnco/exception.hh>
```

Inheritance diagram for Error:



Public Member Functions

- [Error](#) ()
Constructor.
- [Error](#) (const std::string &s)
Constructor.
- virtual [~Error](#) ()
Destructor.
- virtual const char * [what](#) () const
Get message.

Protected Attributes

- std::string [_what](#)
Message.

5.19.1 Detailed Description

Error.

Definition at line 84 of file exception.hh.

The documentation for this class was generated from the following file:

- lib/hnco/exception.hh

5.20 ProgressTracker::Event Struct Reference

Event.

```
#include <hnco/functions/decorators/function-controller.hh>
```

Public Attributes

- int [num_evaluations](#)
Number of evaluations.
- double [value](#)
Value.

5.20.1 Detailed Description

Event.

Definition at line 222 of file function-controller.hh.

The documentation for this struct was generated from the following file:


- lib/hnco/functions/decorators/function-controller.hh

5.21 Exception Class Reference

Basic exception.

```
#include <hnco/exception.hh>
```

Inheritance diagram for Exception:

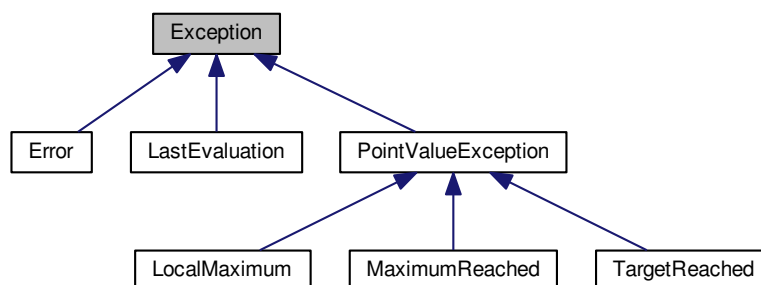

5.21.1 Detailed Description

Basic exception.

Definition at line 36 of file exception.hh.

The documentation for this class was generated from the following file:


- lib/hnco/exception.hh

5.22 Factorization Class Reference

[Factorization](#).

```
#include <hnco/functions/factorization.hh>
```

Inheritance diagram for Factorization:



Public Member Functions

- [Factorization](#) ()
Constructor.
- [Factorization](#) (const std::string number)
Constructor.
- [~Factorization](#) ()
Destructor.
- void [load](#) (std::istream &stream)
Load an instance.
- int [get_bv_size](#) ()
Get bit vector size.
- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- void [display](#) (std::ostream &stream)
Display.
- void [describe](#) (const [bit_vector_t](#) &x, std::ostream &stream)
Describe a bit vector.

Private Member Functions

- void `init` ()
Init GMP data structures.
- void `clear` ()
Clear GMP data structures.
- void `set_number` (const std::string number)
Set number.
- void `convert` (const bit_vector_t &x)
Convert a bit vector into two numbers.

Private Attributes

- mpz_t `_number`
Number to factorize.
- mpz_t `_first_factor`
First factor.
- mpz_t `_second_factor`
Second factor.
- mpz_t `_product`
Product.
- std::string `_first_factor_string`
First factor in binary form.
- std::string `_second_factor_string`
Secon factor in binary form.
- size_t `_number_size`
Number size in bits.
- size_t `_first_factor_size`
First factor size in bits.
- size_t `_second_factor_size`
Second factor size in bits.
- int `_bv_size`
Bit vector size.

5.22.1 Detailed Description

[Factorization](#).

Reference:

Torbjörn Granlund and the GMP development team. 2012. GNU MP: The GNU Multiple Precision Arithmetic Library (5.0.5 ed.).

<http://gmplib.org/>.

Definition at line 28 of file factorization.hh.

5.22.2 Constructor & Destructor Documentation

5.22.2.1 Factorization()

```
Factorization (
    const std::string number ) [inline]
```

Constructor.

Parameters

<i>number</i>	Number to factorize written in decimal form
---------------	---

Definition at line 82 of file factorization.hh.

5.22.3 Member Function Documentation**5.22.3.1 load()**

```
void load (
    std::istream & stream )
```

Load an instance.

Warning

The file is a text file which contains exactly one natural number written in base 10 without any space.

Exceptions

<i>Error</i>	
--------------	--

Definition at line 37 of file factorization.cc.

The documentation for this class was generated from the following files:


- lib/hnco/functions/factorization.hh
- lib/hnco/functions/factorization.cc

5.23 FirstAscentHillClimbing Class Reference

First ascent hill climbing.

```
#include <hnco/algorithms/ls/first-ascent-hill-climbing.hh>
```

Inheritance diagram for FirstAscentHillClimbing:

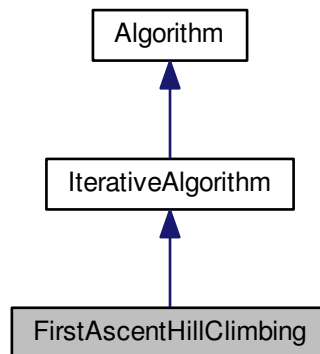

Public Member Functions

- [FirstAscentHillClimbing](#) (int n, [neighborhood::NeighborhoodIterator](#) *neighborhood)
Constructor.
- void [init](#) ()
Random initialization.
- void [init](#) (const [bit_vector_t](#) &x)
Explicit initialization.
- void [init](#) (const [bit_vector_t](#) &x, double value)
Explicit initialization.

Protected Member Functions

- void [iterate](#) ()
Single iteration.

Protected Attributes

- [neighborhood::NeighborhoodIterator](#) * [_neighborhood](#)
Neighborhood.

5.23.1 Detailed Description

First ascent hill climbing.

Definition at line 35 of file first-ascent-hill-climbing.hh.

The documentation for this class was generated from the following files:


- lib/hnco/algorithms/ls/first-ascent-hill-climbing.hh
- lib/hnco/algorithms/ls/first-ascent-hill-climbing.cc

5.24 FourPeaks Class Reference

Four Peaks.

```
#include <hnco/functions/four-peaks.hh>
```

Inheritance diagram for FourPeaks:



Public Member Functions

- `FourPeaks` (int bv_size, int threshold)
Constructor.
- int `get_bv_size` ()
Get bit vector size.
- double `eval` (const `bit_vector_t` &)
Evaluate a bit vector.
- bool `has_known_maximum` ()
Check for a known maximum.
- double `get_maximum` ()
Get the global maximum.

Private Attributes

- int `_bv_size`
Bit vector size.
- int `_threshold`
Threshold.
- int `_maximum`
Maximum.

5.24.1 Detailed Description

Four Peaks.

It is defined by

$$f(x) = \max\{\text{head}(x, 1) + \text{tail}(x, 0)\} + R(x)$$

where:

- $\text{head}(x, 1)$ is the length of the longest prefix of x made of ones;
- $\text{tail}(x, 0)$ is the length of the longest suffix of x made of zeros;
- $R(x)$ is the reward;
- $R(x) = n$ if $(\text{head}(x, 1) > t \text{ and } \text{tail}(x, 0) > t)$;
- $R(x) = 0$ otherwise;
- the threshold t is a parameter of the function.

This function has four maxima, of which exactly two are global ones.

For example, if $n = 6$ and $t = 1$:

- $f(111111) = 6$ (local maximum)
- $f(111110) = 5$
- $f(111100) = 10$ (global maximum)

Reference:

S. Baluja and R. Caruana. 1995. Removing the genetics from the standard genetic algorithm. In Proceedings of the 12th Annual Conference on Machine Learning. 38–46.

Definition at line 60 of file four-peaks.hh.

5.24.2 Member Function Documentation

5.24.2.1 `get_maximum()`

```
double get_maximum ( ) [inline], [virtual]
```

Get the global maximum.

Returns

$2 * \text{_bv_size} - \text{_threshold} - 1$

Reimplemented from [Function](#).

Definition at line 91 of file four-peaks.hh.

5.24.2.2 `has_known_maximum()`

```
bool has_known_maximum ( ) [inline], [virtual]
```

Check for a known maximum.

Returns

true

Reimplemented from [Function](#).

Definition at line 87 of file four-peaks.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/four-peaks.hh
- lib/hnco/functions/four-peaks.cc

5.25 Function Class Reference

[Function](#).

```
#include <hnco/functions/function.hh>
```

Inheritance diagram for Function:

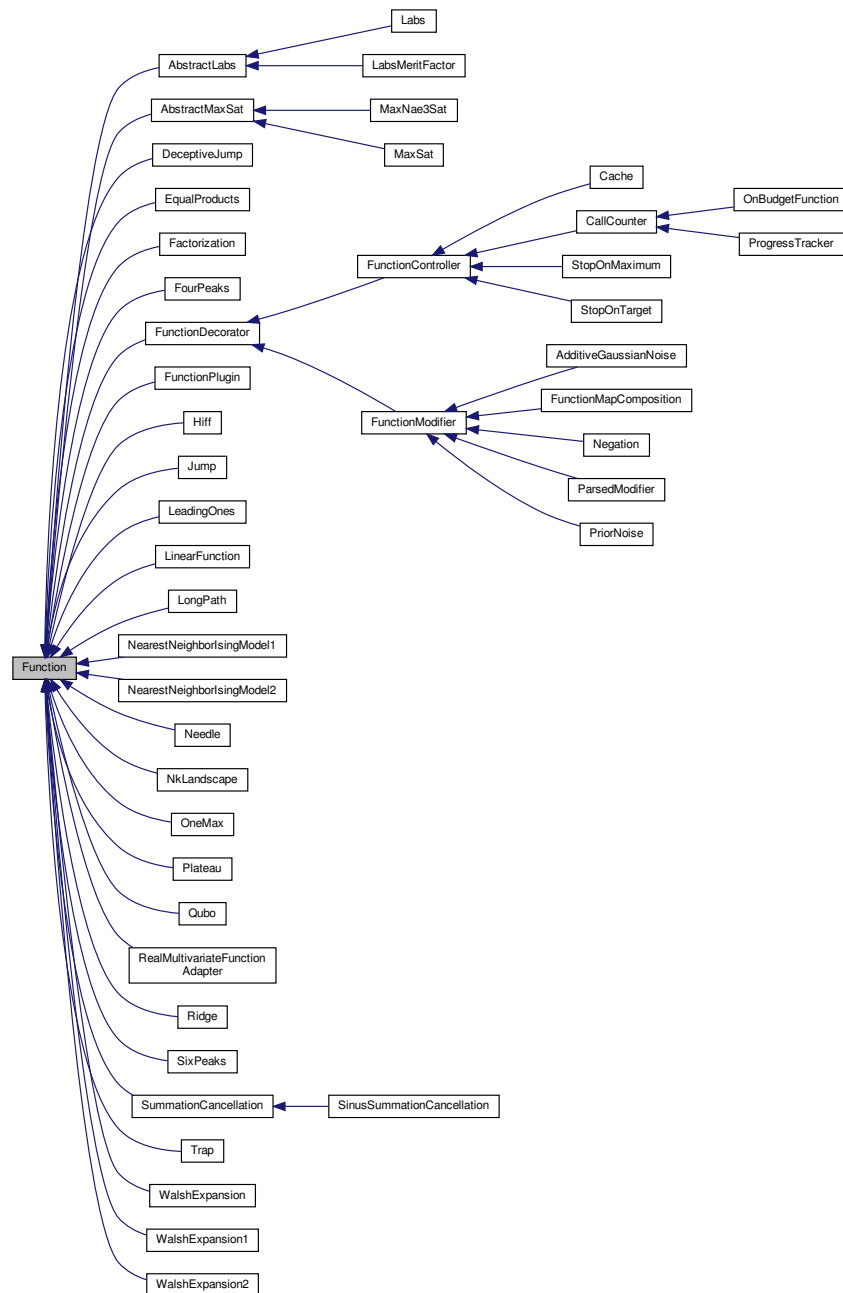

Classes

- struct [WalshTransformTerm](#)
Walsh transform term.

Public Member Functions

- virtual [~Function](#) ()

Destructor.

Information about the function

- virtual int `get_bv_size` ()=0
Get bit vector size.
- virtual double `get_maximum` ()
Get the global maximum.
- virtual bool `has_known_maximum` ()
Check for a known maximum.
- virtual bool `provides_incremental_evaluation` ()
Check whether the function provides incremental evaluation.
- virtual void `compute_walsh_transform` (std::vector< [Function::WalshTransformTerm](#) > &terms)
Compute the Walsh transform of the function.

Evaluation

- virtual double `eval` (const [bit_vector_t](#) &)=0
Evaluate a bit vector.
- virtual double `incremental_eval` (const [bit_vector_t](#) &x, double value, const [hnco::sparse_bit_vector_t](#) &flipped_bits)
Incremental evaluation.
- virtual double `safe_eval` (const [bit_vector_t](#) &x)
Safely evaluate a bit vector.
- virtual void `update` (const [bit_vector_t](#) &x, double value)
Update after a safe evaluation.

Display

- virtual void `display` (std::ostream &stream)
Display.
- virtual void `describe` (const [bit_vector_t](#) &x, std::ostream &stream)
Describe a bit vector.

5.25.1 Detailed Description

[Function.](#)

Definition at line 41 of file `function.hh`.

5.25.2 Member Function Documentation

5.25.2.1 `compute_walsh_transform()`

```
void compute_walsh_transform (
    std::vector< Function::WalshTransformTerm > & terms ) [virtual]
```

Compute the Walsh transform of the function.

Let f be a fitness function defined on the hypercube $\{0,1\}^n$. Then it can be expressed as $\sum_u c_u \chi_u$ where $c_u = \langle f, \chi_u \rangle$, $\langle f, g \rangle = \frac{1}{2^n} \sum_x f(x)g(x)$, $\chi_u(x) = (-1)^{x \cdot u}$, and $x \cdot u = \sum_i x_i u_i \pmod{2}$. In the respective sums, we have x and u in the hypercube and i in $\{1, \dots, n\}$.

We have dropped the normalizing constant 2^n since we are mostly interested in ratios $|c_u/c_{\max}|$, where c_{\max} is the coefficient with the largest amplitude.

Parameters

<i>terms</i>	Vector of non zero terms of the Walsh transform
--------------	---

Warning

The time complexity is exponential in the dimension n . The computation is done with two nested loops over the hypercube. It requires 2^n function evaluations and 2^{2n} dot products and additions.

The size of the Walsh transform is potentially exponential in the dimension n . For example, if $n = 10$ then the number of terms is at most 1024.

Definition at line 31 of file function.cc.

5.25.2.2 `get_maximum()`

```
virtual double get_maximum ( ) [inline], [virtual]
```

Get the global maximum.

Exceptions

<i>Error</i>	
--------------	--

Reimplemented in [Plateau](#), [Ridge](#), [Hiff](#), [SixPeaks](#), [Needle](#), [FunctionMapComposition](#), [WalshExpansion1](#), [LeadingOnes](#), [LinearFunction](#), [DeceptiveJump](#), [LongPath](#), [FourPeaks](#), [SummationCancellation](#), [Trap](#), [PriorNoise](#), [Jump](#), [OneMax](#), and [FunctionController](#).

Definition at line 80 of file function.hh.

5.25.2.3 `incremental_eval()`

```
virtual double incremental_eval (
    const bit\_vector\_t & x,
    double value,
    const hnco::sparse\_bit\_vector\_t & flipped_bits ) [inline], [virtual]
```

Incremental evaluation.

Exceptions

<i>Error</i>	
--------------	--

Reimplemented in [OnBudgetFunction](#), [ProgressTracker](#), [CallCounter](#), [NearestNeighborIsingModel2](#), [NearestNeighborIsingModel1](#), [StopOnTarget](#), [StopOnMaximum](#), [WalshExpansion1](#), [LinearFunction](#), [Negation](#), and [OneMax](#).

Definition at line 133 of file function.hh.

5.25.2.4 provides_incremental_evaluation()

```
virtual bool provides_incremental_evaluation ( ) [inline], [virtual]
```

Check whether the function provides incremental evaluation.

Returns

false

Reimplemented in [Cache](#), [NearestNeighborIsingModel2](#), [NearestNeighborIsingModel1](#), [WalshExpansion1](#), [LinearFunction](#), [Negation](#), [PriorNoise](#), [OneMax](#), and [FunctionController](#).

Definition at line 88 of file function.hh.

5.25.2.5 safe_eval()

```
virtual double safe_eval (
    const bit\_vector\_t & x ) [inline], [virtual]
```

Safely evaluate a bit vector.

Must be thread-safe, that is must avoid throwing exceptions and updating global states (e.g. maximum) in function decorators.

Reimplemented in [FunctionController](#).

Definition at line 143 of file function.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/function.hh
- lib/hnco/functions/function.cc

5.26 FunctionController Class Reference

Function controller.

```
#include <hnco/functions/decorators/function-controller.hh>
```

Inheritance diagram for FunctionController:

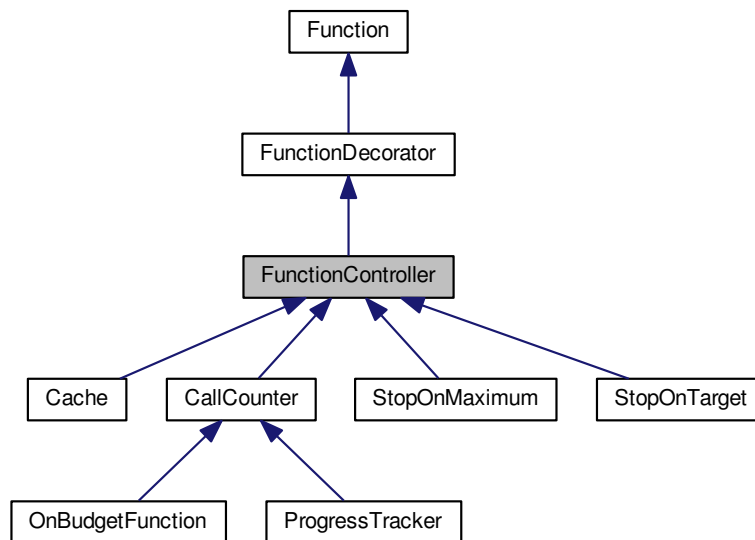

Public Member Functions

- [FunctionController](#) ([Function](#) *function)
Constructor.

Information about the function

- int [get_bv_size](#) ()
Get bit vector size.
- double [get_maximum](#) ()
Get the global maximum.
- bool [has_known_maximum](#) ()
Check for a known maximum.
- bool [provides_incremental_evaluation](#) ()
Check whether the function provides incremental evaluation.

Evaluation

- double [safe_eval](#) (const [bit_vector_t](#) &x)
Safely evaluate a bit vector.

Additional Inherited Members

5.26.1 Detailed Description

[Function](#) controller.

Definition at line 39 of file function-controller.hh.

5.26.2 Member Function Documentation

5.26.2.1 provides_incremental_evaluation()

```
bool provides_incremental_evaluation ( ) [inline], [virtual]
```

Check whether the function provides incremental evaluation.

Returns

true if the decorated function does

Reimplemented from [Function](#).

Reimplemented in [Cache](#).

Definition at line 64 of file function-controller.hh.

The documentation for this class was generated from the following file:


- lib/hnco/functions/decorators/function-controller.hh

5.27 FunctionDecorator Class Reference

[Function](#) decorator.

```
#include <hnco/functions/decorators/function-decorator.hh>
```

Inheritance diagram for FunctionDecorator:

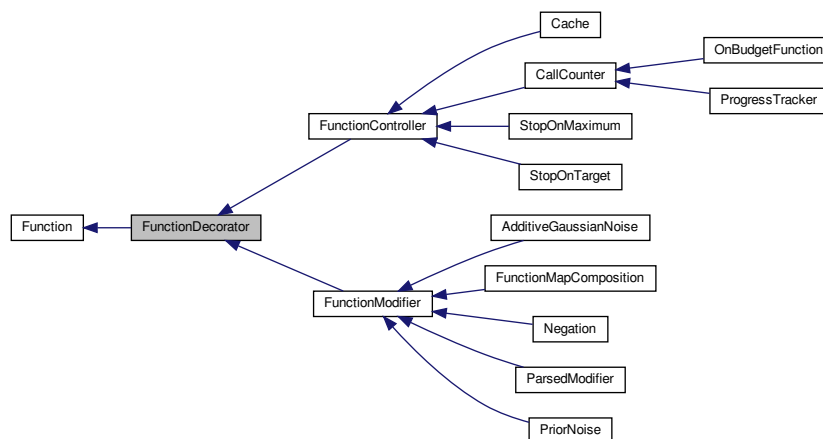

Public Member Functions

- [FunctionDecorator](#) ([Function](#) *function)
Constructor.

Display

- void [display](#) (std::ostream &stream)
Display.
- void [describe](#) (const [bit_vector_t](#) &x, std::ostream &stream)
Describe a bit vector.

Protected Attributes

- [Function](#) * [_function](#)
Decorated function.

5.27.1 Detailed Description

[Function](#) decorator.

Definition at line 33 of file `function-decorator.hh`.

The documentation for this class was generated from the following file:


- `lib/hnco/functions/decorators/function-decorator.hh`

5.28 FunctionMapComposition Class Reference

Composition of a function and a map.

```
#include <hnco/functions/decorators/function-modifier.hh>
```

Inheritance diagram for `FunctionMapComposition`:

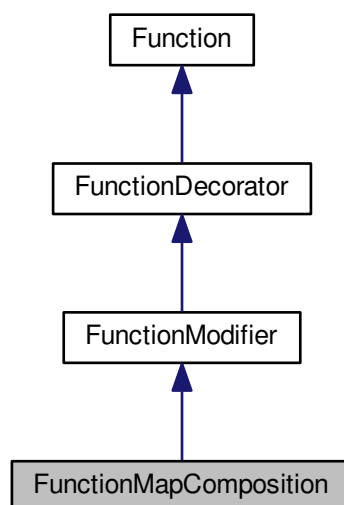

Public Member Functions

- [FunctionMapComposition](#) ([Function](#) *function, [Map](#) *map)
Constructor.
- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.

Information about the function

- int [get_bv_size](#) ()
Get bit vector size.
- double [get_maximum](#) ()
Get the global maximum.
- bool [has_known_maximum](#) ()
Check for a known maximum.

Display

- void [describe](#) (const [bit_vector_t](#) &x, std::ostream &stream)
Describe a bit vector.

Private Attributes

- [Map](#) * [_map](#)
Map.
- [bit_vector_t](#) [_bv](#)
Image of bit vectors under the map.

Additional Inherited Members

5.28.1 Detailed Description

Composition of a function and a map.

Definition at line 99 of file function-modifier.hh.

5.28.2 Constructor & Destructor Documentation

5.28.2.1 FunctionMapComposition()

```
FunctionMapComposition (
    Function * function,
    Map * map ) [inline]
```

Constructor.

Precondition

map->get_output_size() == function->[get_bv_size](#)()

Exceptions

Error	
-------	--

Definition at line 114 of file function-modifier.hh.

5.28.3 Member Function Documentation

5.28.3.1 `get_maximum()`

```
double get_maximum ( ) [inline], [virtual]
```

Get the global maximum.

Exceptions

Error	
-------	--

Reimplemented from [Function](#).

Definition at line 134 of file function-modifier.hh.

5.28.3.2 `has_known_maximum()`

```
bool has_known_maximum ( ) [inline], [virtual]
```

Check for a known maximum.

Returns

true if the function has a known maximum and the map is bijective.

Reimplemented from [Function](#).

Definition at line 144 of file function-modifier.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/decorators/function-modifier.hh
- lib/hnco/functions/decorators/function-modifier.cc

5.29 FunctionModifier Class Reference

Function modifier.

```
#include <hnco/functions/decorators/function-modifier.hh>
```

Inheritance diagram for FunctionModifier:

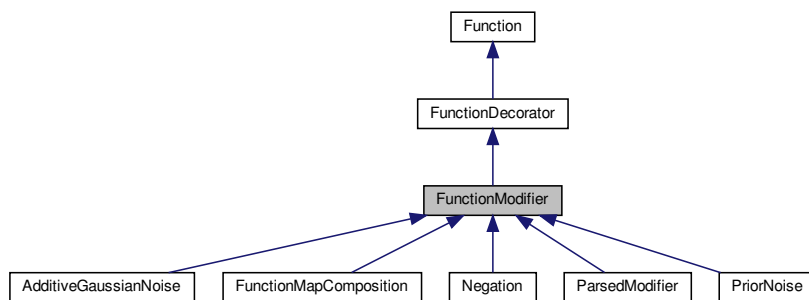

Public Member Functions

- [FunctionModifier](#) ([Function](#) *function)
Constructor.

Additional Inherited Members

5.29.1 Detailed Description

Function modifier.

Definition at line 38 of file function-modifier.hh.

The documentation for this class was generated from the following file:


- lib/hnco/functions/decorators/function-modifier.hh

5.30 FunctionPlugin Class Reference

Function plugin.

```
#include <hnco/functions/plugin.hh>
```

Inheritance diagram for FunctionPlugin:



Public Member Functions

- [FunctionPlugin](#) (int bv_size, std::string path, std::string name)
Constructor.
- [~FunctionPlugin](#) ()
Destructor.
- int [get_bv_size](#) ()
Get bit vector size.
- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.

Private Types

- typedef double(* [extern_function_t](#)) (const [bit_t](#) *, size_t)
Type of an extern function.

Private Attributes

- int [_bv_size](#)
Bit vector size.
- void * [_handle](#)
Handle returned by dlopen.
- [extern_function_t](#) [_extern_function](#)
Extern function.

5.30.1 Detailed Description

Function plugin.

Definition at line 34 of file plugin.hh.

5.30.2 Constructor & Destructor Documentation

5.30.2.1 FunctionPlugin()

```
FunctionPlugin (
    int bv_size,
    std::string path,
    std::string name )
```

Constructor.

Parameters

<i>bv_size</i>	Size of bit vectors
<i>path</i>	Path to a shared library
<i>name</i>	Name of a function of the shared library

Definition at line 33 of file plugin.cc.

The documentation for this class was generated from the following files:


- lib/hnco/functions/plugin.hh
- lib/hnco/functions/plugin.cc

5.31 GeneticAlgorithm Class Reference

Genetic algorithm.

```
#include <hnco/algorithms/ea/genetic-algorithm.hh>
```

Inheritance diagram for GeneticAlgorithm:



Public Member Functions

- [GeneticAlgorithm](#) (int n, int mu)
Constructor.
- void [init](#) ()
Initialization.

Setters

- void [set_mutation_probability](#) (double x)
Set the mutation probability.
- void [set_crossover_probability](#) (double x)
Set the crossover probability.
- void [set_tournament_size](#) (int x)
Set the tournament size.
- void [set_allow_stay](#) (bool x)
Set the flag _allow_stay.

Private Member Functions

- void [iterate](#) ()
Single iteration.

Private Attributes

- [TournamentSelection _parents](#)
Parents.
- [TournamentSelection _offsprings](#)
Offsprings.
- [neighborhood::BernoulliProcess _mutation](#)

Mutation operator.

- `std::bernoulli_distribution _do_crossover`

Do crossover.

- `UniformCrossover _crossover`

Uniform crossover.

Parameters

- `double _mutation_probability`
Mutation probability.
- `double _crossover_probability = 0.5`
Crossover probability.
- `int _tournament_size = 10`
Tournament size.
- `bool _allow_stay = false`
Allow stay.

Additional Inherited Members

5.31.1 Detailed Description

Genetic algorithm.

- Tournament selection for reproduction
- Uniform crossover
- Mutation
- (mu, mu) selection (offspring population replaces parent population)

Reference:

J. H. Holland. 1975. Adaptation in natural and artificial systems. University of Michigan Press, Ann Arbor.

Definition at line 51 of file genetic-algorithm.hh.

5.31.2 Constructor & Destructor Documentation

5.31.2.1 GeneticAlgorithm()

```
GeneticAlgorithm (
    int n,
    int mu ) [inline]
```

Constructor.

Parameters

<i>n</i>	Size of bit vectors
<i>mu</i>	Population size

Definition at line 97 of file genetic-algorithm.hh.

5.31.3 Member Function Documentation

5.31.3.1 set_allow_stay()

```
void set_allow_stay (
    bool x ) [inline]
```

Set the flag `_allow_stay`.

In case no mutation occurs allow the current bit vector to stay unchanged.

Definition at line 125 of file genetic-algorithm.hh.

The documentation for this class was generated from the following files:


- lib/hnco/algorithms/ea/genetic-algorithm.hh
- lib/hnco/algorithms/ea/genetic-algorithm.cc

5.32 HammingBall Class Reference

Hamming ball.

```
#include <hnco/neighborhoods/neighborhood.hh>
```

Inheritance diagram for HammingBall:



Public Member Functions

- [HammingBall](#) (int n, int r)
Constructor.

Private Member Functions

- void [sample_bits](#) ()
Sample bits.

Private Attributes

- std::uniform_int_distribution< int > [_choose_k](#)
Choose the distance to the center.

Additional Inherited Members

5.32.1 Detailed Description

Hamming ball.

Choose k uniformly on [1..r], where r is the radius of the ball, choose k bits uniformly among n and flip them.

Definition at line 304 of file neighborhood.hh.

5.32.2 Constructor & Destructor Documentation

5.32.2.1 HammingBall()

```
HammingBall (
    int n,
    int r ) [inline]
```

Constructor.

Parameters

<i>n</i>	Size of bit vectors
<i>r</i>	Radius of the ball

Definition at line 320 of file neighborhood.hh.

The documentation for this class was generated from the following files:


- `lib/hnco/neighborhoods/neighborhood.hh`
- `lib/hnco/neighborhoods/neighborhood.cc`

5.33 HammingSphere Class Reference

Hamming sphere.

```
#include <hnco/neighborhoods/neighborhood.hh>
```

Inheritance diagram for HammingSphere:

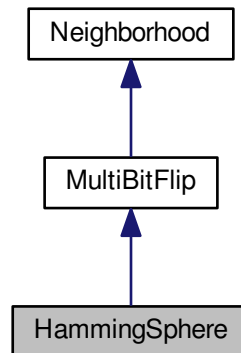

Public Member Functions

- `HammingSphere` (int n, int r)
Constructor.
- void `set_radius` (int r)
Set radius.

Private Member Functions

- void `sample_bits` ()
Sample bits.

Private Attributes

- int `_radius`
Radius of the sphere.

Additional Inherited Members

5.33.1 Detailed Description

Hamming sphere.

Uniformly choose r bits among n and flip them, where r is the radius of the sphere.

Definition at line 337 of file neighborhood.hh.

5.33.2 Constructor & Destructor Documentation

5.33.2.1 HammingSphere()

```
HammingSphere (
    int  $n$ ,
    int  $r$  ) [inline]
```

Constructor.

Parameters

n	Size of bit vectors
r	Radius of the sphere

Definition at line 353 of file neighborhood.hh.

The documentation for this class was generated from the following files:


- lib/hnco/neighborhoods/neighborhood.hh
- lib/hnco/neighborhoods/neighborhood.cc

5.34 HammingSphereIterator Class Reference

Hamming sphere neighborhood iterator.

```
#include <hnco/neighborhoods/neighborhood-iterator.hh>
```

Inheritance diagram for HammingSphereIterator:

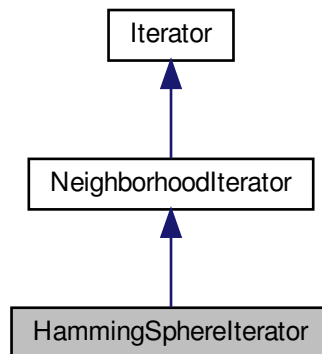

Public Member Functions

- [HammingSphereIterator](#) (int n, int r)
Constructor.
- bool [has_next](#) ()
Has next bit vector.
- const [bit_vector_t](#) & [next](#) ()
Next bit vector.

Private Attributes

- [bit_vector_t](#) [_mask](#)
Mutation mask.
- int [_radius](#)
Radius of the ball.
- int [_index](#)
Index of the next bit to shift to the right.
- int [_weight](#)
Partial Hamming weight.

Additional Inherited Members

5.34.1 Detailed Description

Hamming sphere neighborhood iterator.

This iterator enumerates mutation masks with hamming weight equal to the given radius. Suppose that `_mask` has a first (from left to right) sequence of ones of length `_weight` and ending at `_index`:

0 ... 0 1 ... 1 0 ...

Then the next mask is obtained by moving to the left the first `_weight - 1` ones and moving to the right the last one.

1 ... 1 0 ... 0 1 ...

Definition at line 91 of file neighborhood-iterator.hh.

5.34.2 Constructor & Destructor Documentation

5.34.2.1 HammingSphereIterator()

```
HammingSphereIterator (
    int n,
    int r ) [inline]
```

Constructor.

Parameters

<i>n</i>	Size of bit vectors
<i>r</i>	Radius of Hamming Ball

Definition at line 113 of file neighborhood-iterator.hh.

The documentation for this class was generated from the following files:


- lib/hnco/neighborhoods/neighborhood-iterator.hh
- lib/hnco/neighborhoods/neighborhood-iterator.cc

5.35 Hboa Class Reference

Hierarchical Bayesian Optimization Algorithm.

```
#include <hnco/algorithms/eda/hboa.hh>
```

Inheritance diagram for Hboa:



Public Member Functions

- [Hboa](#) (int n)
Constructor.
- void [maximize](#) ()
Maximize.
- void [set_population_size](#) (int n)
Set population size.

Private Attributes

- int [_population_size](#) = 10
Population size.

Additional Inherited Members

5.35.1 Detailed Description

Hierarchical Bayesian Optimization Algorithm.

Implementation of the Hierarchical Bayesian Optimization Algorithm and helper classes based on the publication: Pelikan, M. and Goldberg, D. (2006). Hierarchical bayesian optimization algorithm. In Scalable Optimization via Probabilistic Modeling, volume 33 of Studies in Computational Intelligence, pages 63–90. Springer Berlin Heidelberg.

Author: Brian W. Goldman

Integrated into HNCO by Arnaud Berny

Definition at line 44 of file hboa.hh.

The documentation for this class was generated from the following files:


- lib/hnco/algorithms/eda/hboa.hh
- lib/hnco/algorithms/eda/hboa.cc

5.36 Hea< Moment, Herding > Class Template Reference

Herding evolutionary algorithm.

```
#include <hnco/algorithms/hea/hea.hh>
```

Inheritance diagram for Hea< Moment, Herding >:

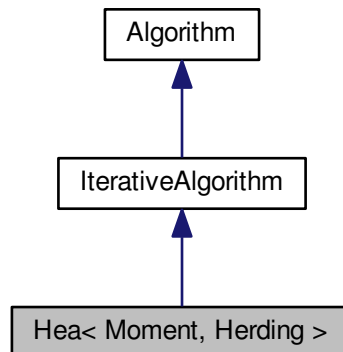

Public Types

- enum {
[LOG_ERROR](#), [LOG_DTU](#), [LOG_DELTA](#), [LOG_SELECTION](#),
[LOG_MOMENT_MATRIX](#), [LAST_LOG](#) }
- typedef std::bitset< LAST_LOG > [log_flags_t](#)
Type for log flags.

Public Member Functions

- [Hea](#) (int n, int population_size)
Constructor.
- void [init](#) ()
Initialization.

Setters

- void [set_herding](#) (Herding *x)
Set the herding algorithm.
- void [set_margin](#) (double x)
Set the moment margin.
- void [set_selection_size](#) (int x)
Set the selection size.
- void [set_reset_period](#) (int x)
Set the reset period.
- void [set_learning_rate](#) (double x)
Set the learning rate.
- void [set_bound_moment](#) (bool x)
Set the bound moment after update.
- void [set_weight](#) (double weight)
Set weight.
- void [set_log_flags](#) (const [log_flags_t](#) &lf)
Set log flags.

Private Member Functions

- void [iterate](#) ()
Single iteration.
- void [log](#) ()
Log.

Private Attributes

- Moment [_target](#)
Moment.
- Moment [_selection](#)
Moment of selected individuals.
- Moment [_uniform](#)
Uniform moment.
- [algorithm::Population](#) [_population](#)
Population.
- Herding * [_herding](#)
Herding.

Logging

- double [_error_cache](#)
Error cache.
- double [_dtu_cache](#)
Distance to uniform cache.
- double [_delta_cache](#)
Delta cache.
- double [_selection_cache](#)
Selection distance cache.
- [log_flags_t](#) [_log_flags](#)
Log flags.

Parameters

- double [_margin](#)
Moment margin.
- int [_selection_size](#) = 1
Selection size.
- int [_reset_period](#) = 0
Reset period.
- double [_learning_rate](#) = 1e-4
Learning rate.
- bool [_bound_moment](#) = false
Bound moment after update.

Additional Inherited Members

5.36.1 Detailed Description

```
template<class Moment, class Herding>
class hnco::algorithm::hea::Hea< Moment, Herding >
```

Herding evolutionary algorithm.

Reference:

Arnaud Berny. 2015. Herding Evolutionary Algorithm. In Proceedings of the Companion Publication of the 2015 Annual Conference on Genetic and Evolutionary Computation (GECCO Companion '15). ACM, New York, NY, USA, 1355–1356.

Definition at line 50 of file hea.hh.

5.36.2 Member Enumeration Documentation

5.36.2.1 anonymous enum

```
anonymous enum
```

Enumerator

LOG_ERROR	Log error.
LOG_DTU	Log distance to uniform.
LOG_DELTA	Log delta (moment increment)
LOG_SELECTION	Log the distance between the target and the selection moment.
LOG_MOMENT_MATRIX	Log the moment matrix.

Definition at line 55 of file hea.hh.

5.36.3 Constructor & Destructor Documentation

5.36.3.1 Hea()

```
Hea (
    int n,
    int population_size ) [inline]
```

Constructor.

Parameters

<i>n</i>	Size of bit vectors
<i>population_size</i>	Population size

`_margin` is initialized to $1 / n$.

Definition at line 214 of file `hea.hh`.

5.36.4 Member Function Documentation

5.36.4.1 `set_reset_period()`

```
void set_reset_period (  
    int x ) [inline]
```

Set the reset period.

Parameters

<i>x</i>	Reset period
----------	--------------

$x \leq 0$ means no reset.

Definition at line 258 of file `hea.hh`.

5.36.4.2 `set_selection_size()`

```
void set_selection_size (  
    int x ) [inline]
```

Set the selection size.

The selection size is the number of selected individuals in the population.

Definition at line 250 of file `hea.hh`.

The documentation for this class was generated from the following file:


- `lib/hnco/algorithms/hea/hea.hh`

5.37 Hiff Class Reference

Hierarchical if and only if.

```
#include <hnco/functions/theory.hh>
```

Inheritance diagram for Hiff:



Public Member Functions

- [Hiff](#) (int bv_size)
Constructor.
- int [get_bv_size](#) ()
Get bit vector size.
- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- bool [has_known_maximum](#) ()
Check for a known maximum.
- double [get_maximum](#) ()
Get the global maximum.

Private Attributes

- int [_bv_size](#)
Bit vector size.
- int [_depth](#)
Tree depth.

5.37.1 Detailed Description

Hierarchical if and only if.

Reference:

Thomas Jansen, Analyzing Evolutionary Algorithms. Springer, 2013.

Definition at line 170 of file theory.hh.

5.37.2 Member Function Documentation

5.37.2.1 `get_maximum()`

```
double get_maximum ( ) [inline], [virtual]
```

Get the global maximum.

Returns

$(i + 1) * 2^i$ where $2^i = _bv_size$

Reimplemented from [Function](#).

Definition at line 196 of file theory.hh.

5.37.2.2 `has_known_maximum()`

```
bool has_known_maximum ( ) [inline], [virtual]
```

Check for a known maximum.

Returns

true

Reimplemented from [Function](#).

Definition at line 192 of file theory.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/theory.hh
- lib/hnco/functions/theory.cc

5.38 HncoEvaluator Class Reference

Evaluator for HNCO functions.

```
#include <hnco/algorithms/eda/hnco-evaluator.hh>
```

Inheritance diagram for HncoEvaluator:



Public Member Functions

- [HncoEvaluator](#) ([hnco::function::Function](#) *function)
Constructor.
- float [evaluate](#) (const std::vector< bool > &x)
Evaluate a bit vector.

Private Attributes

- [hnco::function::Function](#) * [_function](#)
HNCO function.
- [hnco::bit_vector_t](#) [_bv](#)
Argument of HNCO function.

5.38.1 Detailed Description

Evaluator for HNCO functions.

Definition at line 36 of file hnco-evaluator.hh.

The documentation for this class was generated from the following file:


- lib/hnco/algorithms/eda/hnco-evaluator.hh

5.39 Hypercubeliterator Class Reference

Hypercube iterator.

```
#include <hnco/iterator.hh>
```

Inheritance diagram for Hypercubeliterator:



Public Member Functions

- [Hypercubeliterator](#) (int n)
Constructor.
- bool [has_next](#) ()
Has next bit vector.
- const [bit_vector_t](#) & [next](#) ()
Next bit vector.

Additional Inherited Members

5.39.1 Detailed Description

Hypercube iterator.

Implemented as a simple binary adder.

Definition at line 69 of file iterator.hh.

The documentation for this class was generated from the following files:


- lib/hnco/iterator.hh
- lib/hnco/iterator.cc

5.40 Injection Class Reference

[Injection](#).

```
#include <hnco/map.hh>
```

Inheritance diagram for Injection:



Public Member Functions

- [Injection](#) (const std::vector< int > &bit_positions, int output_size)
Constructor.
- void [map](#) (const [bit_vector_t](#) &input, [bit_vector_t](#) &output)
Map.
- int [get_input_size](#) ()
Get input size.
- int [get_output_size](#) ()
Get output size.
- bool [is_surjective](#) ()
Check for surjective map.

Private Attributes

- std::vector< int > [_bit_positions](#)
Bit positions.
- int [_output_size](#)
Output size.

5.40.1 Detailed Description

[Injection](#).

An injection copies the bits of input x to given positions of output y.

Let $I = \{i_1, i_2, \dots, i_m\}$ be a subset of $\{1, 2, \dots, n\}$.

An injection f from Z_2^m to Z_2^n , where $n \geq m$, is defined by $f(x) = y$, where, for all $j \in \{1, 2, \dots, m\}$, $y_{i_j} = x_j$.

If f is a projection and g is an injection with the same bit positions then their composition $f \circ g$ is the identity.

Definition at line 396 of file map.hh.

5.40.2 Constructor & Destructor Documentation

5.40.2.1 Injection()

```
Injection (
    const std::vector< int > & bit_positions,
    int output_size )
```

Constructor.

The input size of the map is given by the size of bit_positions.

Parameters

<i>bit_positions</i>	Bit positions in the output to where input bits are copied
<i>output_size</i>	Output size

Precondition

`output_size >= bit_positions.size()`

Definition at line 144 of file map.cc.

The documentation for this class was generated from the following files:


- lib/hnco/map.hh
- lib/hnco/map.cc

5.41 IterativeAlgorithm Class Reference

Iterative search.

```
#include <hnco/algorithms/algorithm.hh>
```

Inheritance diagram for IterativeAlgorithm:

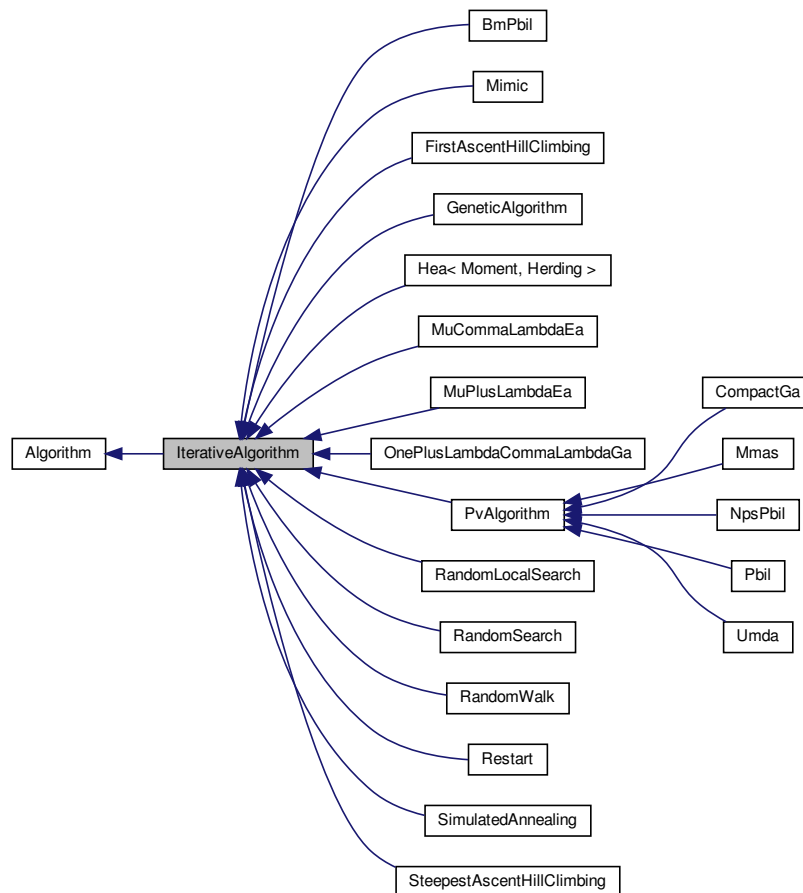

Public Member Functions

- [IterativeAlgorithm](#) (int n)
Constructor.
- void [maximize](#) ()
Maximize.

Setters

- void [set_num_iterations](#) (int x)
Set the number of iterations.

Protected Member Functions

- virtual void [iterate](#) ()=0
Single iteration.
- virtual void [log](#) ()
Log.

Protected Attributes

- int [_iteration](#)
Current iteration.
- bool [_something_to_log](#)
Something to log.

Parameters

- int [_num_iterations](#) = 0
Number of iterations.

5.41.1 Detailed Description

Iterative search.

Definition at line 169 of file algorithm.hh.

5.41.2 Constructor & Destructor Documentation

5.41.2.1 IterativeAlgorithm()

```
IterativeAlgorithm (  
    int n ) [inline]
```

Constructor.

Parameters

n	Size of bit vectors
-----	---------------------

Definition at line 199 of file algorithm.hh.

5.41.3 Member Function Documentation

5.41.3.1 maximize()

```
void maximize ( ) [virtual]
```

Maximize.

Inside the loop:

- call [iterate\(\)](#)
- call [log\(\)](#)

Warning

If an exception such as LocalMaximum is thrown by [iterate\(\)](#), [log\(\)](#) will not be called. However, hnco reports the maximum at the end of the search.

Implements [Algorithm](#).

Definition at line 77 of file algorithm.cc.

5.41.3.2 set_num_iterations()

```
void set_num_iterations (
    int x ) [inline]
```

Set the number of iterations.

Parameters

x	Number of iterations
-----	----------------------

$x \leq 0$ means indefinite

Definition at line 223 of file algorithm.hh.

The documentation for this class was generated from the following files:


- lib/hnco/algorithms/algorithm.hh
- lib/hnco/algorithms/algorithm.cc

5.42 Iterator Class Reference

[Iterator](#) over bit vectors.

```
#include <hnco/iterator.hh>
```

Inheritance diagram for Iterator:

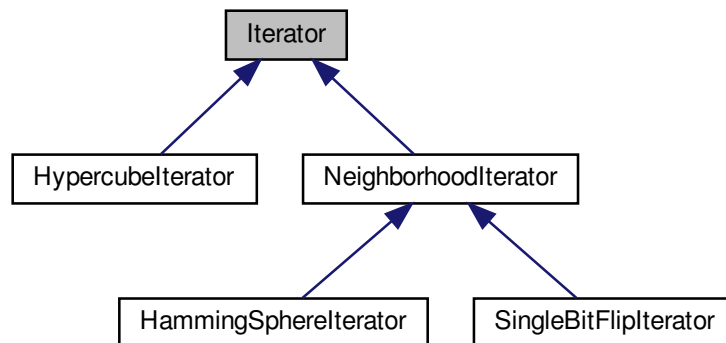

Public Member Functions

- [Iterator](#) (int n)
Constructor.
- virtual [~Iterator](#) ()
Destructor.
- virtual void [init](#) ()
Initialization.
- virtual bool [has_next](#) ()=0
Has next bit vector.
- virtual const [bit_vector_t](#) & [next](#) ()=0
Next bit vector.

Protected Attributes

- [bit_vector_t](#) [_current](#)
Current bit vector.
- bool [_initial_state](#) = true
Flag for initial state.

5.42.1 Detailed Description

[Iterator](#) over bit vectors.

Definition at line 34 of file iterator.hh.

The documentation for this class was generated from the following file:


- lib/hnco/iterator.hh

5.43 Jump Class Reference

[Jump](#).

```
#include <hnco/functions/jump.hh>
```

Inheritance diagram for Jump:



Public Member Functions

- [Jump](#) (int bv_size, int gap)
Constructor.
- int [get_bv_size](#) ()
Get bit vector size.
- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- bool [has_known_maximum](#) ()
Check for a known maximum.
- double [get_maximum](#) ()
Get the global maximum.

Private Attributes

- int [_bv_size](#)
Bit vector size.
- int [_gap](#)
Gap.

5.43.1 Detailed Description

[Jump](#).

Reference:

H. Mühlenbein and T. Mahnig. 2001. Evolutionary Algorithms: From Recombination to Search Distributions. In Theoretical Aspects of Evolutionary Computing, Leila Kallel, Bart Naudts, and Alex Rogers (Eds.). Springer Berlin Heidelberg, 135–174.

Definition at line 41 of file jump.hh.

5.43.2 Member Function Documentation

5.43.2.1 `get_maximum()`

```
double get_maximum ( ) [inline], [virtual]
```

Get the global maximum.

Returns

`_bv_size`

Reimplemented from [Function](#).

Definition at line 67 of file jump.hh.

5.43.2.2 `has_known_maximum()`

```
bool has_known_maximum ( ) [inline], [virtual]
```

Check for a known maximum.

Returns

`true`

Reimplemented from [Function](#).

Definition at line 63 of file jump.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/jump.hh
- lib/hnco/functions/jump.cc

5.44 Labs Class Reference

Low autocorrelation binary sequences.

```
#include <hnco/functions/labs.hh>
```

Inheritance diagram for Labs:



Public Member Functions

- [Labs](#) (int n)
Constructor.
- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.

Additional Inherited Members

5.44.1 Detailed Description

Low autocorrelation binary sequences.

Reference:

S Mertens. 1996. Exhaustive search for low-autocorrelation binary sequences. Journal of Physics A: Mathematical and General 29, 18 (1996), L473.

<http://stacks.iop.org/0305-4470/29/i=18/a=005>

Definition at line 65 of file labs.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/labs.hh
- lib/hnco/functions/labs.cc

5.45 LabsMeritFactor Class Reference

Low autocorrelation binary sequences merit factor.

```
#include <hnco/functions/labs.hh>
```

Inheritance diagram for LabsMeritFactor:



Public Member Functions

- [LabsMeritFactor](#) (int n)
Constructor.
- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.

Additional Inherited Members

5.45.1 Detailed Description

Low autocorrelation binary sequences merit factor.

Reference:

S Mertens. 1996. Exhaustive search for low-autocorrelation binary sequences. Journal of Physics A: Mathematical and General 29, 18 (1996), L473.

<http://stacks.iop.org/0305-4470/29/i=18/a=005>

Definition at line 90 of file labs.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/labs.hh
- lib/hnco/functions/labs.cc

5.46 LastEvaluation Class Reference

Last evaluation.

```
#include <hnco/exception.hh>
```

Inheritance diagram for LastEvaluation:



5.46.1 Detailed Description

Last evaluation.

Definition at line 80 of file exception.hh.

The documentation for this class was generated from the following file:


- lib/hnco/exception.hh

5.47 LeadingOnes Class Reference

Leading ones.

```
#include <hnco/functions/theory.hh>
```

Inheritance diagram for LeadingOnes:



Public Member Functions

- [LeadingOnes](#) (int bv_size)
Constructor.
- int [get_bv_size](#) ()
Get bit vector size.
- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- bool [has_known_maximum](#) ()
Check for a known maximum.
- double [get_maximum](#) ()
Get the global maximum.

Private Attributes

- int [_bv_size](#)
Bit vector size.

5.47.1 Detailed Description

Leading ones.

Reference:

Thomas Jansen, Analyzing Evolutionary Algorithms. Springer, 2013.

Definition at line 98 of file theory.hh.

5.47.2 Member Function Documentation

5.47.2.1 [get_maximum\(\)](#)

```
double get_maximum ( ) [inline], [virtual]
```

Get the global maximum.

Returns

[_bv_size](#)

Reimplemented from [Function](#).

Definition at line 122 of file theory.hh.

5.47.2.2 has_known_maximum()

```
bool has_known_maximum ( ) [inline], [virtual]
```

Check for a known maximum.

Returns

true

Reimplemented from [Function](#).

Definition at line 118 of file theory.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/theory.hh
- lib/hnco/functions/theory.cc

5.48 LinearFunction Class Reference

Linear function.

```
#include <hnco/functions/linear-function.hh>
```

Inheritance diagram for LinearFunction:



Public Member Functions

- [LinearFunction](#) ()
Constructor.

Instance generators

- `template<class Generator >`
void [generate](#) (int n, Generator generator)
Instance generator.
- void [random](#) (int n)
Random instance.

Evaluation

- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- double [incremental_eval](#) (const [bit_vector_t](#) &x, double v, const [hnco::sparse_bit_vector_t](#) &flipped_bits)
Incremental evaluation.

Information about the function

- int [get_bv_size](#) ()
Get bit vector size.
- double [get_maximum](#) ()
Get the global maximum.
- bool [has_known_maximum](#) ()
Check for a known maximum.
- bool [provides_incremental_evaluation](#) ()
Check whether the function provides incremental evaluation.

Private Member Functions

- `template<class Archive >`
void [serialize](#) (Archive &ar, const unsigned int version)
Serialize.

Private Attributes

- `std::vector< double >` [_weights](#)
Weights.

Friends

- class **boost::serialization::access**

5.48.1 Detailed Description

Linear function.

Definition at line 40 of file linear-function.hh.

5.48.2 Member Function Documentation

5.48.2.1 generate()

```
void generate (
    int n,
    Generator generator ) [inline]
```

Instance generator.

Parameters

<i>n</i>	Size of bit vectors
<i>generator</i>	Weight generator

Definition at line 72 of file linear-function.hh.

5.48.2.2 has_known_maximum()

```
bool has_known_maximum ( ) [inline], [virtual]
```

Check for a known maximum.

Returns

true

Reimplemented from [Function](#).

Definition at line 119 of file linear-function.hh.

5.48.2.3 provides_incremental_evaluation()

```
bool provides_incremental_evaluation ( ) [inline], [virtual]
```

Check whether the function provides incremental evaluation.

Returns

true

Reimplemented from [Function](#).

Definition at line 124 of file linear-function.hh.

5.48.2.4 random()

```
void random (
    int n ) [inline]
```

Random instance.

The weights are sampled from the normal distribution.

Parameters

n	Size of bit vectors
-----	---------------------

Definition at line 86 of file linear-function.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/linear-function.hh
- lib/hnco/functions/linear-function.cc

5.49 LinearMap Class Reference

Linear map.

```
#include <hnco/map.hh>
```

Inheritance diagram for LinearMap:



Public Member Functions

- void `random` (int rows, int cols, bool surjective)
Random instance.
- void `map` (const `bit_vector_t` &input, `bit_vector_t` &output)
Map.
- int `get_input_size` ()
Get input size.
- int `get_output_size` ()
Get output size.
- bool `is_surjective` ()
Check for surjective map.

Private Member Functions

- `template<class Archive >`
void [save](#) (Archive &ar, const unsigned int version) const
Save.
- `template<class Archive >`
void [load](#) (Archive &ar, const unsigned int version)
Load.

Private Attributes

- [bit_matrix_t_bm](#)
Bit matrix.

Friends

- class **boost::serialization::access**

5.49.1 Detailed Description

Linear map.

A linear map f from Z_2^m to Z_2^n is defined by $f(x) = Ax$, where A is an $n \times m$ bit matrix.

Definition at line 193 of file map.hh.

5.49.2 Member Function Documentation

5.49.2.1 is_surjective()

```
bool is_surjective ( ) [virtual]
```

Check for surjective map.

Returns

true if `rank(_bm) == bm_num_rows(_bm)`

Reimplemented from [Map](#).

Definition at line 90 of file map.cc.

5.49.2.2 random()

```
void random (
    int rows,
    int cols,
    bool surjective )
```

Random instance.

Parameters

<i>rows</i>	Number of rows
<i>cols</i>	Number of columns
<i>surjective</i>	Flag to ensure a surjective map

Exceptions

<i>Error</i>	
--------------	--

Definition at line 61 of file map.cc.

The documentation for this class was generated from the following files:


- lib/hnco/map.hh
- lib/hnco/map.cc

5.50 LocalMaximum Class Reference

Local maximum.

```
#include <hnco/exception.hh>
```

Inheritance diagram for LocalMaximum:



Public Member Functions

- [LocalMaximum](#) (const [point_value_t](#) &pv)
Const.

Additional Inherited Members

5.50.1 Detailed Description

Local maximum.

Definition at line 71 of file exception.hh.

The documentation for this class was generated from the following file:


- lib/hnco/exception.hh

5.51 LogContext Class Reference

Log context.

```
#include <hnco/algorithms/log-context.hh>
```

Inheritance diagram for LogContext:



Public Member Functions

- virtual std::string [get_context](#) ()=0
Get context.

5.51.1 Detailed Description

Log context.

A log context gives an algorithm more information about what is going on during optimization than what can be gained through its function. In particular, its function may not be a function controller. Information is provided through a log context in the form of a string.

Definition at line 39 of file log-context.hh.

The documentation for this class was generated from the following file:


- lib/hnco/algorithms/log-context.hh

5.52 LongPath Class Reference

Long path.

```
#include <hnco/functions/long-path.hh>
```

Inheritance diagram for LongPath:



Public Member Functions

- [LongPath](#) (int bv_size, int prefix_length)

Constructor.

- double [eval](#) (const [bit_vector_t](#) &)

Evaluate a bit vector.

Information about the function

- int [get_bv_size](#) ()
Get bit vector size.
- bool [has_known_maximum](#) ()
Check for a known maximum.
- double [get_maximum](#) ()
Get the global maximum.

Private Attributes

- int [_bv_size](#)
Bit vector size.
- int [_prefix_length](#)
Prefix length.

5.52.1 Detailed Description

Long path.

Long paths have been introduced by Jeffrey Horn, David E. Goldberg, and Kalyanmoy Deb. Here we mostly follow the definition given by Thomas Jansen (see references below).

As an example, here is the 2-long path of dimension 4:

- 0000
- 0001
- 0011
- 0111
- 1111
- 1101
- 1100

The fitness is increasing along the path. The fitness on the complementary of the path is defined as a linear function pointing to the beginning of the path.

To help with the detection of maximum, we have dropped the constant n^2 whose sole purpose was to make the function non negative.

References:

Jeffrey Horn, David E. Goldberg, and Kalyanmoy Deb, "Long Path Problems", PPSN III, 1994.

Thomas Jansen, Analyzing Evolutionary Algorithms. Springer, 2013.

Definition at line 62 of file long-path.hh.

5.52.2 Member Function Documentation

5.52.2.1 get_maximum()

```
double get_maximum ( ) [virtual]
```

Get the global maximum.

Let n be the bit vector size and k the prefix length which must divide n . Then the maximum is $k2^{n/k} - k + 1$.

Exceptions

Error	
-------	--

Reimplemented from [Function](#).

Definition at line 62 of file long-path.cc.

5.52.2.2 has_known_maximum()

```
bool has_known_maximum ( ) [virtual]
```

Check for a known maximum.

Let n be the bit vector size and k the prefix length which must divide n .

We have to check that the maximum can be represented exactly as a double, that is, it must be lower or equal to 2^{53} . We are a little bit more conservative with the following test.

If $\log_2(k) + n/k \leq 53$ then returns true else returns false.

Reimplemented from [Function](#).

Definition at line 52 of file long-path.cc.

The documentation for this class was generated from the following files:


- lib/hnco/functions/long-path.hh
- lib/hnco/functions/long-path.cc

5.53 Ltga Class Reference

Linkage Tree Genetic Algorithm.

```
#include <hnco/algorithms/eda/ltga.hh>
```

Inheritance diagram for Ltga:



Public Member Functions

- [Ltga](#) (int n)
Constructor.
- void [maximize](#) ()
Maximize.
- void [set_population_size](#) (int n)
Set population size.

Private Attributes

- int [_population_size](#) = 10
Population size.

Additional Inherited Members

5.53.1 Detailed Description

Linkage Tree Genetic Algorithm.

Implementation of the Linkage Tree Genetic Algorithm Designed to match the variant in the paper: "Hierarchical problem solving with the linkage tree genetic algorithm" by D. Thierens and P. A. N. Bosman

Author: Brian W. Goldman

Integrated into HNCO by Arnaud Berny

Definition at line 42 of file Ltga.hh.

The documentation for this class was generated from the following files:


- lib/hnco/algorithms/eda/Ltga.hh
- lib/hnco/algorithms/eda/Ltga.cc

5.54 Map Class Reference

[Map](#).

```
#include <hnco/map.hh>
```

Inheritance diagram for Map:



Public Member Functions

- virtual [~Map](#) ()
Destructor.
- virtual void [map](#) (const [bit_vector_t](#) &input, [bit_vector_t](#) &output)=0
Map.
- virtual int [get_input_size](#) ()=0
Get input size.
- virtual int [get_output_size](#) ()=0
Get output size.
- virtual bool [is_surjective](#) ()
Check for surjective map.

5.54.1 Detailed Description

[Map](#).

Definition at line 39 of file map.hh.

5.54.2 Member Function Documentation

5.54.2.1 [is_surjective\(\)](#)

```
virtual bool is_surjective ( ) [inline], [virtual]
```

Check for surjective map.

Returns

false

Reimplemented in [Projection](#), [Injection](#), [MapComposition](#), [AffineMap](#), [LinearMap](#), [Permutation](#), and [Translation](#).

Definition at line 59 of file map.hh.

The documentation for this class was generated from the following file:


- lib/hnco/map.hh

5.55 MapComposition Class Reference

Map composition.

```
#include <hnco/map.hh>
```

Inheritance diagram for MapComposition:



Public Member Functions

- [MapComposition](#) ()
Default constructor.
- [MapComposition](#) ([Map](#) *outer, [Map](#) *inner)
Constructor.
- void [map](#) (const [bit_vector_t](#) &input, [bit_vector_t](#) &output)
Map.
- int [get_input_size](#) ()
Get input size.
- int [get_output_size](#) ()
Get output size.
- bool [is_surjective](#) ()
Check for surjective map.

Private Attributes

- [Map](#) * [_outer](#)
Outer map.
- [Map](#) * [_inner](#)
Inner map.
- [bit_vector_t](#) [_bv](#)
Temporary bit vector.

5.55.1 Detailed Description

Map composition.

The resulting composition f is defined for all bit vector x by $f(x) = \text{outer}(\text{inner}(x))$.

Definition at line 327 of file map.hh.

5.55.2 Constructor & Destructor Documentation

5.55.2.1 MapComposition()

```
MapComposition (
    Map * outer,
    Map * inner ) [inline]
```

Constructor.

Parameters

<i>outer</i>	outer map
<i>inner</i>	inner map

Precondition

```
outer->get_input_size() == inner->get_output_size()
```

Definition at line 351 of file map.hh.

5.55.3 Member Function Documentation

5.55.3.1 is_surjective()

```
bool is_surjective ( ) [inline], [virtual]
```

Check for surjective map.

Returns

true if both maps are surjective

Reimplemented from [Map](#).

Definition at line 375 of file map.hh.

The documentation for this class was generated from the following file:


- lib/hnco/map.hh

5.56 MaximumReached Class Reference

Maximum reached.

```
#include <hnco/exception.hh>
```

Inheritance diagram for MaximumReached:



Public Member Functions

- [MaximumReached](#) (const [point_value_t](#) &pv)
Constructor.

Additional Inherited Members

5.56.1 Detailed Description

Maximum reached.

Definition at line 53 of file exception.hh.

The documentation for this class was generated from the following file:


- lib/hnco/exception.hh

5.57 MaxNae3Sat Class Reference

Max not-all-equal 3SAT.

```
#include <hnco/functions/max-sat.hh>
```

Inheritance diagram for MaxNae3Sat:

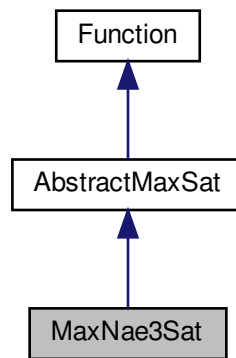

Public Member Functions

- [MaxNae3Sat](#) ()
Default constructor.
- void [load](#) (std::istream &stream)
Load an instance.
- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.

Additional Inherited Members

5.57.1 Detailed Description

Max not-all-equal 3SAT.

Reference:

Christos M. Papadimitriou. 1994. Computational complexity. Addison-Wesley, Reading, Massachusetts.

Definition at line 125 of file max-sat.hh.

5.57.2 Member Function Documentation

5.57.2.1 load()

```
void load (
    std::istream & stream ) [virtual]
```

Load an instance.

Exceptions

Error	
-------	--

Reimplemented from [AbstractMaxSat](#).

Definition at line 282 of file max-sat.cc.

The documentation for this class was generated from the following files:


- lib/hnco/functions/max-sat.hh
- lib/hnco/functions/max-sat.cc

5.58 MaxSat Class Reference

MAX-SAT.

```
#include <hnco/functions/max-sat.hh>
```

Inheritance diagram for MaxSat:



Public Member Functions

- [MaxSat](#) ()
Default constructor.
- void [random](#) (int n, int k, int c)
Random instance.
- void [random](#) (const [bit_vector_t](#) &solution, int k, int c)
Random instance with satisfiable expression.
- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.

Additional Inherited Members

5.58.1 Detailed Description

MAX-SAT.

Reference:

Christos M. Papadimitriou. 1994. Computational complexity. Addison-Wesley, Reading, Massachusetts.

Definition at line 81 of file max-sat.hh.

5.58.2 Member Function Documentation

5.58.2.1 `random()` [1/2]

```
void random (  
    int n,  
    int k,  
    int c )
```

Random instance.

Parameters

<i>n</i>	Size of bit vectors
<i>k</i>	Number of literals per clause
<i>c</i>	Number of clauses

Definition at line 190 of file max-sat.cc.

5.58.2.2 `random()` [2/2]

```
void random (  
    const bit_vector_t & solution,  
    int k,  
    int c )
```

Random instance with satisfiable expression.

Warning

Since the expression is satisfiable, the maximum of the function is equal to the number of clauses in the expression. However, this information is lost in the save and load cycle as the archive format only manages the expression itself.

Parameters

<i>solution</i>	Solution
<i>k</i>	Number of literals per clause
<i>c</i>	Number of clauses

Definition at line 218 of file max-sat.cc.

The documentation for this class was generated from the following files:


- lib/hnco/functions/max-sat.hh
- lib/hnco/functions/max-sat.cc

5.59 Mimic Class Reference

Mutual information maximizing input clustering.

```
#include <hnco/algorithms/eda/mimic.hh>
```

Inheritance diagram for Mimic:

**Public Member Functions**

- [Mimic](#) (int n, int population_size)
Constructor.
- void [init](#) ()
Initialization.

Setters

- void [set_selection_size](#) (int x)
Set the selection size.

Protected Member Functions

- void `iterate` ()
Single iteration.
- void `sample` (`bit_vector_t` &bv)
Sample a bit vector.
- void `compute_conditional_entropy` (int index)
Compute conditional entropy.
- void `update_model` ()
Update model.

Protected Attributes

- `Population` `_population`
Population.
- `permutation_t` `_permutation`
Permutation.
- `std::array< pv_t, 2 >` `_parameters`
Model parameters.
- `pv_t` `_mean`
Mean of selected bit vectors.
- `std::vector< double >` `_entropies`
Conditional entropies.
- `std::array< std::array< int, 2 >, 2 >` `_table`
Contingency table.
- `double` `_lower_bound`
Lower bound of probability.
- `double` `_upper_bound`
Upper bound of probability.

Parameters

- int `_selection_size`
Selection size.

5.59.1 Detailed Description

Mutual information maximizing input clustering.

This implementation differs from the algorithm described in the reference below in that it constrains all probabilities (marginal and conditional) to stay away from the values 0 and 1 by a fixed margin equal to $1/n$, as usually done in algorithms such as [Pbil](#) or [Umda](#).

Reference:

Jeremy S. De Bonet and Charles L. Isbell and Jr. and Paul Viola, MIMIC: Finding Optima by Estimating Probability Densities, in Advances in Neural Information Processing Systems, 1996, MIT Press.

Definition at line 54 of file `mimic.hh`.

The documentation for this class was generated from the following files:


- `lib/hnco/algorithms/eda/mimic.hh`
- `lib/hnco/algorithms/eda/mimic.cc`

5.60 Mmas Class Reference

Max-min ant system.

```
#include <hnco/algorithms/pv/mmas.hh>
```

Inheritance diagram for Mmas:

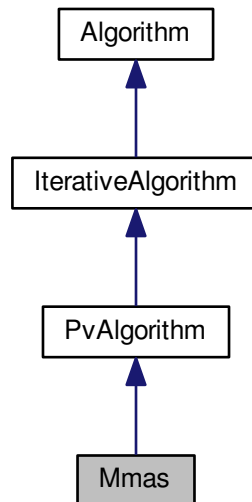

Public Member Functions

- [Mmas](#) (int n)
Constructor.
- void [init](#) ()
Initialization.

Setters

- void [set_compare](#) (std::function< bool(double, double)> x)
Set the binary operator for comparing evaluations.
- void [set_learning_rate](#) (double x)
Set the learning rate.

Protected Member Functions

- void [iterate](#) ()
Single iteration.

Protected Attributes

- [bit_vector_t_x](#)
Candidate solution.

Parameters

- `std::function< bool(double, double)> _compare = std::greater_equal<double>()`
Binary operator for comparing evaluations.
- `double _learning_rate = 1e-3`
Learning rate.

5.60.1 Detailed Description

Max-min ant system.

Reference:

Thomas Stützle and Holger H. Hoos. 2000. MAX-MIN Ant System. *Future Generation Computer Systems* 16, 8 (2000), 889–914.

Definition at line 42 of file mmas.hh.

The documentation for this class was generated from the following files:

- `lib/hnco/algorithms/pv/mmas.hh`
- `lib/hnco/algorithms/pv/mmas.cc`

5.61 Model Class Reference

[Model](#) of a Boltzmann machine.

```
#include <hnco/algorithms/bm-pbil/model.hh>
```

Public Member Functions

- [Model](#) (int n)
Constructor.
- void [init](#) ()
Initialize.
- void [reset_mc](#) ()
Reset Markov chain.
- void [gibbs_sampler](#) (size_t i)
A Gibbs sampler cycle.
- void [gibbs_sampler_synchronous](#) ()
A synchronous Gibbs sampler.
- const [bit_vector_t](#) & [get_state](#) ()
Get the state of the Gibbs sampler.
- void [update](#) (const [ModelParameters](#) &p, const [ModelParameters](#) &q, double rate)
Update parameters in the direction of p and away from q.
- double [norm_infinite](#) ()
Infinite norm of the parameters.
- double [norm_l1](#) ()
l1 norm of the parameters

Private Attributes

- [ModelParameters _model_parameters](#)
Model parameters.
- [bit_vector_t _state](#)
State of the Gibbs sampler.
- [pv_t _pv](#)
Probability vector for synchronous Gibbs sampling.

5.61.1 Detailed Description

[Model](#) of a Boltzmann machine.

Definition at line 75 of file `model.hh`.

The documentation for this class was generated from the following files:

- `lib/hnco/algorithms/bm-pbil/model.hh`
- `lib/hnco/algorithms/bm-pbil/model.cc`

5.62 ModelParameters Class Reference

Parameters of a Boltzmann machine.

```
#include <hnco/algorithms/bm-pbil/model.hh>
```

Public Member Functions

- [ModelParameters](#) (int n)
Constructor.
- void [init](#) ()
Initialize.
- void [add](#) (const [bit_vector_t](#) &x)
Add a bit_vector_t.
- void [average](#) (int count)
Compute averages.
- void [update](#) (const [ModelParameters](#) &p, const [ModelParameters](#) &q, double rate)
Update parameters in the direction of p and away from q.
- double [norm_infinite](#) ()
Infinite norm of the parameters.
- double [norm_l1](#) ()
l1 norm of the parameters

Private Attributes

- `std::vector< std::vector< double > >` [_weight](#)
Weights.
- `std::vector< double >` [_bias](#)
Bias.

Friends

- class **Model**

5.62.1 Detailed Description

Parameters of a Boltzmann machine.

Definition at line 36 of file model.hh.

The documentation for this class was generated from the following files:


- lib/hnco/algorithms/bm-pbil/model.hh
- lib/hnco/algorithms/bm-pbil/model.cc

5.63 MuCommaLambdaEa Class Reference

(mu, lambda) EA.

```
#include <hnco/algorithms/ea/mu-comma-lambda-ea.hh>
```

Inheritance diagram for MuCommaLambdaEa:

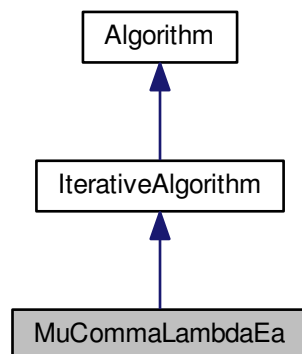

Public Member Functions

- [MuCommaLambdaEa](#) (int n, int mu, int lambda)
Constructor.
- void [init](#) ()
Initialization.

Setters

- void [set_mutation_probability](#) (double x)
Set the mutation probability.
- void [set_allow_stay](#) (bool x)
Set the flag _allow_stay.

Private Member Functions

- void `iterate` ()
Single iteration.

Private Attributes

- `Population _parents`
Parents.
- `Population _offsprings`
Offsprings.
- `neighborhood::BernoulliProcess _mutation`
Mutation operator.
- `std::uniform_int_distribution< int > _select_parent`
Select parent.

Parameters

- double `_mutation_probability`
Mutation probability.
- bool `_allow_stay` = false
Allow stay.

Additional Inherited Members

5.63.1 Detailed Description

(mu, lambda) EA.

Reference:

Thomas Jansen, Analyzing Evolutionary Algorithms. Springer, 2013.

Definition at line 41 of file mu-comma-lambda-ea.hh.

5.63.2 Constructor & Destructor Documentation

5.63.2.1 MuCommaLambdaEa()

```
MuCommaLambdaEa (
    int n,
    int mu,
    int lambda ) [inline]
```

Constructor.

Parameters

<i>n</i>	Size of bit vectors
<i>mu</i>	Parent population size
<i>lambda</i>	Offspring population size

Definition at line 79 of file mu-comma-lambda-ea.hh.

5.63.3 Member Function Documentation

5.63.3.1 set_allow_stay()

```
void set_allow_stay (
    bool x ) [inline]
```

Set the flag `_allow_stay`.

In case no mutation occurs allow the current bit vector to stay unchanged.

Definition at line 102 of file mu-comma-lambda-ea.hh.

The documentation for this class was generated from the following files:


- lib/hnco/algorithms/ea/mu-comma-lambda-ea.hh
- lib/hnco/algorithms/ea/mu-comma-lambda-ea.cc

5.64 MultiBitFlip Class Reference

Multi bit flip.

```
#include <hnco/neighborhoods/neighborhood.hh>
```

Inheritance diagram for MultiBitFlip:

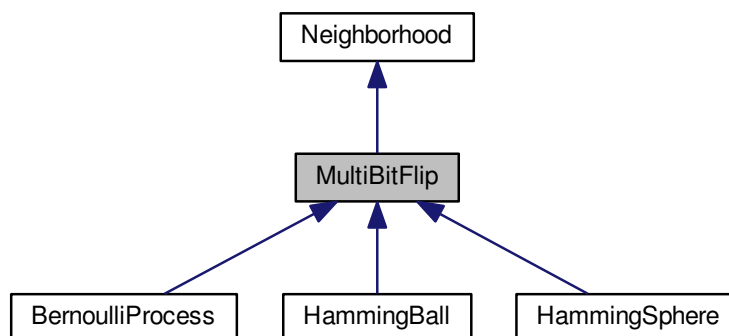

Public Member Functions

- [MultiBitFlip](#) (int n)
Constructor.

Protected Member Functions

- void [bernoulli_trials](#) (int k)
Sample a given number of bits using Bernoulli trials.
- void [reservoir_sampling](#) (int k)
Sample a given number of bits using resevoir sampling.

Additional Inherited Members

5.64.1 Detailed Description

Multi bit flip.

Definition at line 183 of file neighborhood.hh.

5.64.2 Constructor & Destructor Documentation

5.64.2.1 MultiBitFlip()

```
MultiBitFlip (  
    int n ) [inline]
```

Constructor.

Parameters

<i>n</i>	Size of bit vectors
----------	---------------------

Definition at line 206 of file neighborhood.hh.

5.64.3 Member Function Documentation

5.64.3.1 bernoulli_trials()

```
void bernoulli_trials (  
    int k ) [protected]
```

Sample a given number of bits using Bernoulli trials.

Parameters

k	Number of bits to sample
-----	--------------------------

Definition at line 34 of file neighborhood.cc.

5.64.3.2 reservoir_sampling()

```
void reservoir_sampling (  
    int  $k$  )    [protected]
```

Sample a given number of bits using resevoir sampling.

Parameters

k	Number of bits to sample
-----	--------------------------

Definition at line 52 of file neighborhood.cc.

The documentation for this class was generated from the following files:


- lib/hnco/neighborhoods/neighborhood.hh
- lib/hnco/neighborhoods/neighborhood.cc

5.65 MuPlusLambdaEa Class Reference

(mu+lambda) EA.

```
#include <hnco/algorithms/ea/mu-plus-lambda-ea.hh>
```

Inheritance diagram for MuPlusLambdaEa:

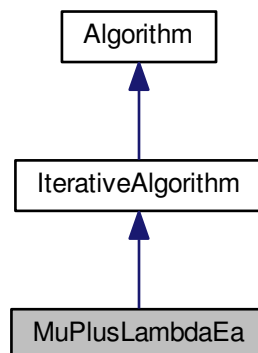

Public Member Functions

- [MuPlusLambdaEa](#) (int n, int mu, int lambda)
Constructor.
- void [init](#) ()
Initialization.

Setters

- void [set_mutation_probability](#) (double x)
Set the mutation probability.
- void [set_allow_stay](#) (bool x)
Set the flag `_allow_stay`.

Private Member Functions

- void [iterate](#) ()
Single iteration.

Private Attributes

- [Population _parents](#)
Parents.
- [Population _offsprings](#)
Offsprings.
- [neighborhood::BernoulliProcess _mutation](#)
Mutation operator.
- `std::uniform_int_distribution< int >` [_select_parent](#)
Select parent.

Parameters

- double [_mutation_probability](#)
Mutation probability.
- bool [_allow_stay](#) = false
Allow stay.

Additional Inherited Members

5.65.1 Detailed Description

(mu+lambda) EA.

Reference:

Thomas Jansen, Analyzing Evolutionary Algorithms. Springer, 2013.

Definition at line 40 of file mu-plus-lambda-ea.hh.

5.65.2 Constructor & Destructor Documentation

5.65.2.1 MuPlusLambdaEa()

```
MuPlusLambdaEa (
    int n,
    int mu,
    int lambda ) [inline]
```

Constructor.

Parameters

<i>n</i>	Size of bit vectors
<i>mu</i>	Parent population size
<i>lambda</i>	Offspring population size

Definition at line 78 of file mu-plus-lambda-ea.hh.

5.65.3 Member Function Documentation

5.65.3.1 set_allow_stay()

```
void set_allow_stay (
    bool x ) [inline]
```

Set the flag `_allow_stay`.

In case no mutation occurs allow the current bit vector to stay unchanged.

Definition at line 101 of file mu-plus-lambda-ea.hh.

The documentation for this class was generated from the following files:


- lib/hnco/algorithms/ea/mu-plus-lambda-ea.hh
- lib/hnco/algorithms/ea/mu-plus-lambda-ea.cc

5.66 NearestNeighborIsingModel1 Class Reference

Nearest neighbor Ising model in one dimension.

```
#include <hnco/functions/ising/nearest-neighbor-ising-model-1.hh>
```

Inheritance diagram for NearestNeighborIsingModel1:

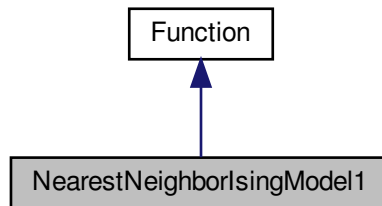

Public Member Functions

- [NearestNeighborIsingModel1](#) ()
Constructor.
- void [set_periodic_boundary_conditions](#) (bool x)
Set periodic boundary conditions.
- void [display](#) (std::ostream &stream)
Display.

Instance generators

- template<class CouplingGen , class FieldGen >
void [generate](#) (int n, CouplingGen coupling_gen, FieldGen field_gen)
Instance generator.
- void [random](#) (int n)
Random instance.

Evaluation

- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- double [incremental_eval](#) (const [bit_vector_t](#) &x, double v, const [sparse_bit_vector_t](#) &flipped_bits)
Incremental evaluation.

Information about the function

- int [get_bv_size](#) ()
Get bit vector size.
- bool [provides_incremental_evaluation](#) ()
Check whether the function provides incremental evaluation.

Private Member Functions

- template<class Archive >
void [save](#) (Archive &ar, const unsigned int version) const
Save.
- template<class Archive >
void [load](#) (Archive &ar, const unsigned int version)
Load.
- void [resize](#) (int n)
Resize data structures.

Private Attributes

- std::vector< double > [_coupling](#)
Coupling with nearest neighbor to the right.
- std::vector< double > [_field](#)
External field.
- [bit_vector_t_flipped_bits](#)
Flipped bits.
- bool [_periodic_boundary_conditions](#) = false
Periodic boundary conditions.

Friends

- class **boost::serialization::access**

5.66.1 Detailed Description

Nearest neighbor Ising model in one dimension.

Its expression is of the form

$$f(x) = \sum_i J_{i,i+1} (1 - 2x_i)(1 - 2x_{i+1}) + \sum_i h_i (1 - 2x_i)$$

or equivalently

$$f(x) = \sum_i J_{i,i+1} (-1)^{x_i + x_{i+1}} + \sum_i h_i (-1)^{x_i}$$

where $J_{i,i+1}$ is the interaction between adjacent sites i and $i+1$ and h_i is the external magnetic field interacting with site i .

In the case of periodic boundary conditions, the sum $i + 1$ is mod n .

Since we are maximizing f or minimizing $-f$, the expression of f is compatible with what can be found in physics textbooks.

It should be noted that such an Ising model can be represented by a Walsh expansion of degree 2, that is [Walsh↵Expansion2](#).

Reference: https://en.wikipedia.org/wiki/Ising_model

Definition at line 65 of file nearest-neighbor-ising-model-1.hh.

5.66.2 Member Function Documentation

5.66.2.1 eval()

```
double eval (
    const bit\_vector\_t & s ) [virtual]
```

Evaluate a bit vector.

Complexity: $O(n)$

Implements [Function](#).

Definition at line 44 of file nearest-neighbor-ising-model-1.cc.

5.66.2.2 generate()

```
void generate (
    int n,
    CouplingGen coupling_gen,
    FieldGen field_gen ) [inline]
```

Instance generator.

Parameters

<i>n</i>	Size of bit vectors
<i>coupling_gen</i>	Coupling generator
<i>field_gen</i>	External field generator

Definition at line 126 of file nearest-neighbor-ising-model-1.hh.

5.66.2.3 provides_incremental_evaluation()

```
bool provides_incremental_evaluation ( ) [inline], [virtual]
```

Check whether the function provides incremental evaluation.

Returns

true

Reimplemented from [Function](#).

Definition at line 176 of file nearest-neighbor-ising-model-1.hh.

5.66.2.4 random()

```
void random (
    int n ) [inline]
```

Random instance.

The weights are sampled from the normal distribution.

Parameters

<i>n</i>	Size of bit vector
----------	--------------------

Definition at line 142 of file nearest-neighbor-ising-model-1.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/ising/nearest-neighbor-ising-model-1.hh
- lib/hnco/functions/ising/nearest-neighbor-ising-model-1.cc

5.67 NearestNeighborIsingModel2 Class Reference

Nearest neighbor Ising model in two dimensions.

```
#include <hnco/functions/ising/nearest-neighbor-ising-model-2.hh>
```

Inheritance diagram for NearestNeighborIsingModel2:

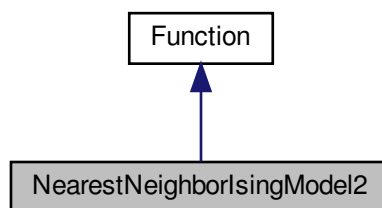

Public Member Functions

- [NearestNeighborIsingModel2](#) ()
Constructor.
- void [set_periodic_boundary_conditions](#) (bool x)
Set periodic boundary conditions.
- void [display](#) (std::ostream &stream)
Display.

Instance generators

- template<class CouplingGen , class FieldGen >
void [generate](#) (int num_rows, int num_columns, CouplingGen coupling_gen, FieldGen field_gen)
Instance generator.
- void [random](#) (int num_rows, int num_columns)
Random instance.

Evaluation

- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- double [incremental_eval](#) (const [bit_vector_t](#) &x, double v, const [sparse_bit_vector_t](#) &flipped_bits)
Incremental evaluation.

Information about the function

- int [get_bv_size](#) ()
Get bit vector size.
- bool [provides_incremental_evaluation](#) ()
Check whether the function provides incremental evaluation.

Private Member Functions

- template<class Archive >
void [save](#) (Archive &ar, const unsigned int version) const
Save.
- template<class Archive >
void [load](#) (Archive &ar, const unsigned int version)
Load.
- void [resize](#) (int num_rows, int num_columns)
Resize data structures.

Private Attributes

- std::vector< std::vector< double > > [_coupling_right](#)
Coupling with nearest neighbor to the right.
- std::vector< std::vector< double > > [_coupling_below](#)
Coupling with nearest neighbor below.
- std::vector< std::vector< double > > [_field](#)
External field.
- [bit_vector_t](#) [_flipped_bits](#)
Flipped bits.
- bool [_periodic_boundary_conditions](#) = false
Periodic boundary conditions.

Friends

- class **boost::serialization::access**

5.67.1 Detailed Description

Nearest neighbor Ising model in two dimensions.

We are considering a rectangular lattice in which each site has (at most) four neighbors (left, right, above, below).

The expression of the function is of the form

$$f(x) = \sum_{(i,j)} J_{ij}(1 - 2x_i)(1 - 2x_j) + \sum_i h_i(1 - 2x_i)$$

or equivalently

$$f(x) = \sum_{(i,j)} J_{ij}(-1)^{x_i+x_j} + \sum_i h_i(-1)^{x_i}$$

where the first sum is over adjacent sites (i, j), J_{ij} is the interaction between adjacent sites i and j, and h_i is the external magnetic field interacting with site i.

Since we are maximizing f or minimizing -f, the expression of f is compatible with what can be found in physics textbooks.

It should be noted that such an Ising model can be represented by a Walsh expansion of degree 2, that is [Walsh↔Expansion2](#).

Reference: https://en.wikipedia.org/wiki/Ising_model

Definition at line 67 of file nearest-neighbor-ising-model-2.hh.

5.67.2 Member Function Documentation

5.67.2.1 eval()

```
double eval (
    const bit_vector_t & s ) [virtual]
```

Evaluate a bit vector.

Complexity: O(n)

Implements [Function](#).

Definition at line 47 of file nearest-neighbor-ising-model-2.cc.

5.67.2.2 generate()

```
void generate (
    int num_rows,
    int num_columns,
    CouplingGen coupling_gen,
    FieldGen field_gen ) [inline]
```

Instance generator.

Parameters

<i>num_rows</i>	Number of rows
<i>num_columns</i>	Number of columns
<i>coupling_gen</i>	Coupling generator
<i>field_gen</i>	External field generator

Definition at line 134 of file nearest-neighbor-ising-model-2.hh.

5.67.2.3 provides_incremental_evaluation()

```
bool provides_incremental_evaluation ( ) [inline], [virtual]
```

Check whether the function provides incremental evaluation.

Returns

true

Reimplemented from [Function](#).

Definition at line 194 of file nearest-neighbor-ising-model-2.hh.

5.67.2.4 random()

```
void random (
    int num_rows,
    int num_columns ) [inline]
```

Random instance.

The weights are sampled from the normal distribution.

Parameters

<i>num_rows</i>	Number of rows
<i>num_columns</i>	Number of columns

Definition at line 154 of file nearest-neighbor-ising-model-2.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/ising/nearest-neighbor-ising-model-2.hh
- lib/hnco/functions/ising/nearest-neighbor-ising-model-2.cc

5.68 Needle Class Reference

[Needle](#) in a haystack.

```
#include <hnco/functions/theory.hh>
```

Inheritance diagram for Needle:



Public Member Functions

- [Needle](#) (int bv_size)
Constructor.
- int [get_bv_size](#) ()
Get bit vector size.
- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- bool [has_known_maximum](#) ()
Check for a known maximum.
- double [get_maximum](#) ()
Get the global maximum.

Private Attributes

- int [_bv_size](#)
Bit vector size.

5.68.1 Detailed Description

[Needle](#) in a haystack.

Reference:

Thomas Jansen, Analyzing Evolutionary Algorithms. Springer, 2013.

Definition at line 134 of file theory.hh.

5.68.2 Member Function Documentation

5.68.2.1 `get_maximum()`

```
double get_maximum ( ) [inline], [virtual]
```

Get the global maximum.

Returns

1

Reimplemented from [Function](#).

Definition at line 158 of file theory.hh.

5.68.2.2 `has_known_maximum()`

```
bool has_known_maximum ( ) [inline], [virtual]
```

Check for a known maximum.

Returns

true

Reimplemented from [Function](#).

Definition at line 154 of file theory.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/theory.hh
- lib/hnco/functions/theory.cc

5.69 Negation Class Reference

Negation.

```
#include <hnco/functions/decorators/function-modifier.hh>
```

Inheritance diagram for Negation:

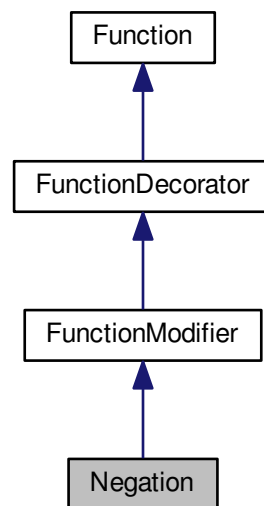

Public Member Functions

- [Negation](#) ([Function](#) *function)
Constructor.

Information about the function

- int [get_bv_size](#) ()
Get bit vector size.
- bool [provides_incremental_evaluation](#) ()
Check whether the function provides incremental evaluation.

Evaluation

- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- double [incremental_eval](#) (const [bit_vector_t](#) &x, double value, const [hnco::sparse_bit_vector_t](#) &flipped, [_bits](#))
Incremental evaluation.

Additional Inherited Members

5.69.1 Detailed Description

[Negation](#).

Use cases:

- for algorithms which minimize rather than maximize a function
- for functions one wishes to minimize
- when minimization is needed inside an algorithm

Definition at line 59 of file function-modifier.hh.

5.69.2 Member Function Documentation

5.69.2.1 `provides_incremental_evaluation()`

```
bool provides_incremental_evaluation ( ) [inline], [virtual]
```

Check whether the function provides incremental evaluation.

Returns

true

Reimplemented from [Function](#).

Definition at line 78 of file function-modifier.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/decorators/function-modifier.hh
- lib/hnco/functions/decorators/function-modifier.cc

5.70 Neighborhood Class Reference

[Neighborhood](#).

```
#include <hnco/neighborhoods/neighborhood.hh>
```

Inheritance diagram for Neighborhood:

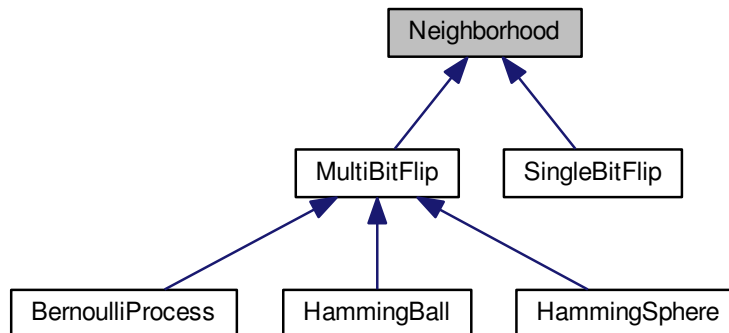

Public Member Functions

- [Neighborhood](#) (int n)
Constructor.
- virtual [~Neighborhood](#) ()
Destructor.
- virtual void [set_origin](#) (const [bit_vector_t](#) &x)
Set the origin.
- virtual const [bit_vector_t](#) & [get_origin](#) ()
Get the origin.
- virtual const [bit_vector_t](#) & [get_candidate](#) ()
Get the candidate bit vector.
- virtual const [sparse_bit_vector_t](#) & [get_flipped_bits](#) ()
Get flipped bits.
- virtual void [propose](#) ()
Propose a candidate bit vector.
- virtual void [keep](#) ()
Keep the candidate bit vector.
- virtual void [forget](#) ()
Forget the candidate bit vector.
- virtual void [mutate](#) ([bit_vector_t](#) &bv)
Mutate.
- virtual void [map](#) (const [bit_vector_t](#) &input, [bit_vector_t](#) &output)
Map.

Protected Member Functions

- virtual void [sample_bits](#) ()=0
Sample bits.

Protected Attributes

- [bit_vector_t _origin](#)
Origin of the neighborhood.
- [bit_vector_t _candidate](#)
candidate bit vector
- `std::uniform_int_distribution< int > _index_dist`
Index distribution.
- [sparse_bit_vector_t _flipped_bits](#)
Flipped bits.

5.70.1 Detailed Description

[Neighborhood.](#)

A neighborhood maintains two points, `_origin` and `_candidate`. They are initialized in the same state by `set_origin`. A [Neighborhood](#) class must implement the member function `sample_bits` which samples the bits to flip in `_origin` to get a `_candidate`. The following member functions take care of the modifications:

- `propose`: flip `_candidate`
- `keep`: flip `_origin`
- `forget` flip `_candidate`

After `keep` or `forget`, `_origin` and `_candidate` are in the same state again.

A [Neighborhood](#) class can also behave as a mutation operator through the member functions `mutate` and `map`.

Definition at line 61 of file `neighborhood.hh`.

5.70.2 Constructor & Destructor Documentation

5.70.2.1 [Neighborhood\(\)](#)

```
Neighborhood (
    int n ) [inline]
```

Constructor.

Parameters

<i>n</i>	Size of bit vectors
----------	---------------------

Definition at line 86 of file neighborhood.hh.

5.70.3 Member Function Documentation

5.70.3.1 map()

```
virtual void map (
    const bit\_vector\_t & input,
    bit\_vector\_t & output ) [inline], [virtual]
```

Map.

The output bit vector is a mutated version of the input bit vector.

Parameters

<i>input</i>	Input bit vector
<i>output</i>	Output bit vector

Definition at line 148 of file neighborhood.hh.

5.70.3.2 mutate()

```
virtual void mutate (
    bit\_vector\_t & bv ) [inline], [virtual]
```

Mutate.

In-place mutation of the bit vector.

Parameters

<i>bv</i>	Bit vector to mutate
-----------	----------------------

Definition at line 134 of file neighborhood.hh.

The documentation for this class was generated from the following file:


- lib/hnco/neighborhoods/neighborhood.hh

5.71 NeighborhoodIterator Class Reference

[Neighborhood](#) iterator.

```
#include <hnco/neighborhoods/neighborhood-iterator.hh>
```

Inheritance diagram for NeighborhoodIterator:

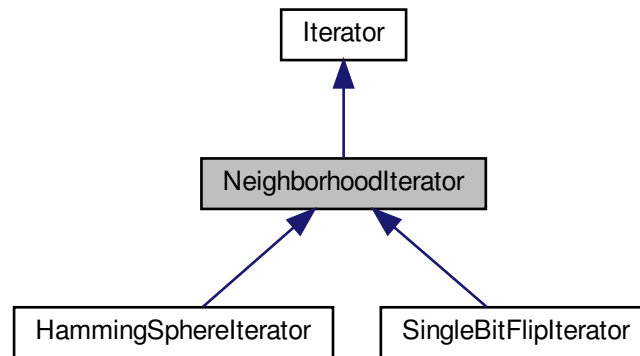

Public Member Functions

- [NeighborhoodIterator](#) (int n)
Constructor.
- virtual void [set_origin](#) (const [bit_vector_t](#) &x)
Set origin.

Additional Inherited Members

5.71.1 Detailed Description

[Neighborhood](#) iterator.

Definition at line 35 of file neighborhood-iterator.hh.

5.71.2 Constructor & Destructor Documentation

5.71.2.1 NeighborhoodIterator()

```
NeighborhoodIterator (  
    int n ) [inline]
```

Constructor.

Parameters

n	Size of bit vectors
-----	---------------------

Definition at line 44 of file neighborhood-iterator.hh.

The documentation for this class was generated from the following files:


- lib/hnco/neighborhoods/neighborhood-iterator.hh
- lib/hnco/neighborhoods/neighborhood-iterator.cc

5.72 NkLandscape Class Reference

NK landscape.

```
#include <hnco/functions/nk-landscape.hh>
```

Inheritance diagram for NkLandscape:



Public Member Functions

- [NkLandscape](#) ()
Default constructor.
- int [get_bv_size](#) ()
Get bit vector size.
- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- void [display](#) (std::ostream &stream)
Display.

Instance generators

- template<class Generator >
void [generate](#) (int n, int k, Generator generator)
Instance generator.
- void [random](#) (int n, int k)
Random instance.

Private Member Functions

- `template<class Archive >`
void `serialize` (Archive &ar, const unsigned int version)
Serialize.
- void `random_structure` (int n, int k)
Random structue.

Private Attributes

- `std::vector< std::vector< int > > _neighbors`
Bit neighbors.
- `std::vector< std::vector< double > > _partial_functions`
Partial functions.

Friends

- class `boost::serialization::access`

5.72.1 Detailed Description

NK landscape.

Reference:

S. A. Kauffman. 1993. The origins of order: self-organisation and selection in evolution. Oxford University Press.

Definition at line 47 of file nk-landscape.hh.

5.72.2 Member Function Documentation

5.72.2.1 generate()

```
void generate (
    int n,
    int k,
    Generator generator ) [inline]
```

Instance generator.

Parameters

<i>n</i>	Size of bit vector
<i>k</i>	Number of neighbors of each bit
<i>generator</i>	Generator for partial function values

Definition at line 92 of file nk-landscape.hh.

5.72.2.2 random()

```
void random (
    int n,
    int k ) [inline]
```

Random instance.

Partial function values are sampled from the normal distribution.

Parameters

n	Size of bit vector
-----	--------------------

Definition at line 109 of file nk-landscape.hh.

5.72.2.3 random_structure()

```
void random_structure (
    int n,
    int k ) [private]
```

Random structue.

Parameters

n	Size of bit vector
k	Number of neighbors of each bit

Definition at line 32 of file nk-landscape.cc.

The documentation for this class was generated from the following files:


- lib/hnco/functions/nk-landscape.hh
- lib/hnco/functions/nk-landscape.cc

5.73 NpsPbil Class Reference

Population-based incremental learning with negative and positive selection.

```
#include <hnco/algorithms/pv/nps-pbil.hh>
```

Inheritance diagram for NpsPbil:

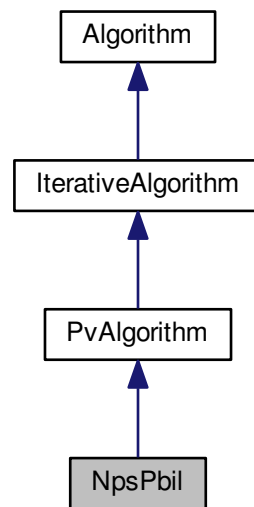

Public Member Functions

- [NpsPbil](#) (int n, int population_size)
Constructor.
- void [init](#) ()
Initialization.

Setters

- void [set_selection_size](#) (int x)
Set the selection size.
- void [set_learning_rate](#) (double x)
Set the learning rate.

Protected Member Functions

- void [iterate](#) ()
Single iteration.

Protected Attributes

- [Population _population](#)
Population.
- [pv_t _mean_best](#)
Mean of best individuals.
- [pv_t _mean_worst](#)

Mean of worst individuals.

Parameters

- int `_selection_size` = 1
Selection size.
- double `_learning_rate` = 1e-3
Learning rate.

5.73.1 Detailed Description

Population-based incremental learning with negative and positive selection.

Reference:

Arnaud Berny. 2001. Extending selection learning toward fixed-length d-ary strings. In Artificial Evolution (Lecture Notes in Computer Science), P. Collet and others (Eds.). Springer, Le Creusot.

Definition at line 42 of file nps-pbil.hh.

The documentation for this class was generated from the following files:


- lib/hnco/algorithms/pv/nps-pbil.hh
- lib/hnco/algorithms/pv/nps-pbil.cc

5.74 OnBudgetFunction Class Reference

[CallCounter](#) with a limited number of evaluations.

```
#include <hnco/functions/decorators/function-controller.hh>
```

Inheritance diagram for OnBudgetFunction:

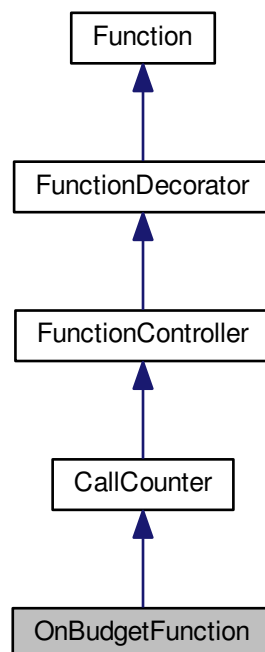

Public Member Functions

- [OnBudgetFunction](#) ([Function](#) *function, int budget)
Constructor.

Evaluation

- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- double [incremental_eval](#) (const [bit_vector_t](#) &x, double value, const [hnco::sparse_bit_vector_t](#) &flipped↔
_bits)
Incremental evaluation.
- void [update](#) (const [bit_vector_t](#) &x, double value)
Update after a safe evaluation.

Private Attributes

- int [_budget](#)
Budget.

Additional Inherited Members

5.74.1 Detailed Description

[CallCounter](#) with a limited number of evaluations.

Definition at line 317 of file function-controller.hh.

5.74.2 Member Function Documentation

5.74.2.1 [eval\(\)](#)

```
double eval (
    const bit\_vector\_t & x ) [virtual]
```

Evaluate a bit vector.

Exceptions

<i>LastEvaluation</i>	
-----------------------	--

Reimplemented from [CallCounter](#).

Definition at line 121 of file function-controller.cc.

5.74.2.2 incremental_eval()

```
double incremental_eval (
    const bit_vector_t & x,
    double value,
    const hnco::sparse_bit_vector_t & flipped_bits ) [virtual]
```

Incremental evaluation.

Exceptions

<i>LastEvaluation</i>	
-----------------------	--

Reimplemented from [CallCounter](#).

Definition at line 132 of file function-controller.cc.

5.74.2.3 update()

```
void update (
    const bit_vector_t & x,
    double value ) [virtual]
```

Update after a safe evaluation.

Exceptions

<i>LastEvaluation</i>	
-----------------------	--

Reimplemented from [CallCounter](#).

Definition at line 143 of file function-controller.cc.

The documentation for this class was generated from the following files:


- lib/hnco/functions/decorators/function-controller.hh
- lib/hnco/functions/decorators/function-controller.cc

5.75 OneMax Class Reference

[OneMax](#).

```
#include <hnco/functions/theory.hh>
```

Inheritance diagram for OneMax:



Public Member Functions

- [OneMax](#) (int bv_size)
Constructor.

Information about the function

- int [get_bv_size](#) ()
Get bit vector size.
- double [get_maximum](#) ()
Get the global maximum.
- bool [has_known_maximum](#) ()
Check for a known maximum.
- bool [provides_incremental_evaluation](#) ()
Check whether the function provides incremental evaluation.

Evaluation

- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- double [incremental_eval](#) (const [bit_vector_t](#) &x, double v, const [hnco::sparse_bit_vector_t](#) &flipped_bits)
Incremental evaluation.

Private Attributes

- int [_bv_size](#)
Bit vector size.

5.75.1 Detailed Description

[OneMax](#).

References:

Heinz Mühlenbein, "How genetic algorithms really work: I. mutation and hillclimbing", in Proc. 2nd Int. Conf. on Parallel Problem Solving from Nature, 1992

Thomas Jansen, Analyzing Evolutionary Algorithms. Springer, 2013.

Definition at line 41 of file theory.hh.

5.75.2 Member Function Documentation

5.75.2.1 `get_maximum()`

```
double get_maximum ( ) [inline], [virtual]
```

Get the global maximum.

Returns

`_bv_size`

Reimplemented from [Function](#).

Definition at line 62 of file theory.hh.

5.75.2.2 `has_known_maximum()`

```
bool has_known_maximum ( ) [inline], [virtual]
```

Check for a known maximum.

Returns

`true`

Reimplemented from [Function](#).

Definition at line 66 of file theory.hh.

5.75.2.3 `provides_incremental_evaluation()`

```
bool provides_incremental_evaluation ( ) [inline], [virtual]
```

Check whether the function provides incremental evaluation.

Returns

`true`

Reimplemented from [Function](#).

Definition at line 71 of file theory.hh.

The documentation for this class was generated from the following files:


- `lib/hnco/functions/theory.hh`
- `lib/hnco/functions/theory.cc`

5.76 OnePlusLambdaCommaLambdaGa Class Reference

(1+(lambda, lambda)) genetic algorithm.

```
#include <hnco/algorithms/ea/one-plus-lambda-comma-lambda-ga.hh>
```

Inheritance diagram for OnePlusLambdaCommaLambdaGa:

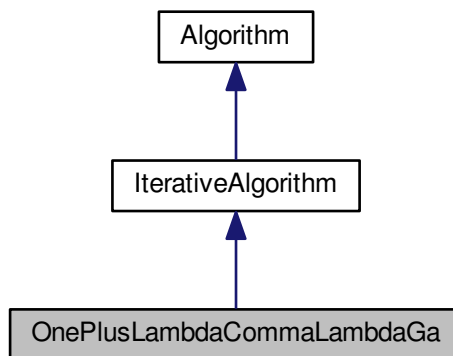

Public Member Functions

- [OnePlusLambdaCommaLambdaGa](#) (int n, int lambda)
Constructor.
- void [init](#) ()
Initialization.

Setters

- void [set_mutation_probability](#) (double x)
Set the mutation probability.
- void [set_crossover_bias](#) (double x)
Set the crossover bias.

Private Member Functions

- void [iterate](#) ()
Single iteration.

Private Attributes

- [Population _offsprings](#)
Offsprings.
- `std::binomial_distribution< int > _radius_dist`
Radius distribution.
- [neighborhood::HammingSphere _mutation](#)
Mutation operator.
- [bit_vector_t _parent](#)
Parent.
- [BiasedCrossover _crossover](#)
Biased crossover.

Parameters

- `double _mutation_probability`
Mutation probability.
- `double _crossover_bias`
Crossover bias.

Additional Inherited Members

5.76.1 Detailed Description

(1+(lambda, lambda)) genetic algorithm.

Reference:

Benjamin Doerr, Carola Doerr, and Franziska Ebel. 2015. From black-box complexity to designing new genetic algorithms. Theoretical Computer Science 567 (2015), 87–104.

Definition at line 49 of file one-plus-lambda-comma-lambda-ga.hh.

5.76.2 Constructor & Destructor Documentation

5.76.2.1 OnePlusLambdaCommaLambdaGa()

```
OnePlusLambdaCommaLambdaGa (
    int n,
    int lambda ) [inline]
```

Constructor.

By default, `_mutation_probability` is set to `lambda / n` and `_crossover_bias` to `1 / lambda`.

Parameters

<i>n</i>	Size of bit vectors
<i>lambda</i>	Offspring population size

Definition at line 92 of file one-plus-lambda-comma-lambda-ga.hh.

The documentation for this class was generated from the following files:


- lib/hnco/algorithms/ea/one-plus-lambda-comma-lambda-ga.hh
- lib/hnco/algorithms/ea/one-plus-lambda-comma-lambda-ga.cc

5.77 OnePlusOneEa Class Reference

(1+1) EA.

```
#include <hnco/algorithms/ea/one-plus-one-ea.hh>
```

Inheritance diagram for OnePlusOneEa:



Public Member Functions

- [OnePlusOneEa](#) (int n)
Constructor.
- void [set_function](#) (function::Function *function)
Set function.
- void [init](#) ()
Initialization.
- void [maximize](#) ()
Maximize.
- const [point_value_t](#) & [get_solution](#) ()
Solution.

Setters

- void [set_num_iterations](#) (int x)
Set the number of iterations.
- void [set_mutation_probability](#) (double x)
Set the mutation probability.
- void [set_allow_stay](#) (bool x)
Set the flag_allow_stay.
- void [set_incremental_evaluation](#) (bool x)
Set incremental evaluation.

Private Attributes

- [neighborhood::BernoulliProcess _neighborhood](#)
Neighborhood.
- [RandomLocalSearch _rls](#)
Random local search.

Parameters

- `int _num_iterations = 0`
Number of iterations.
- `double _mutation_probability`
Mutation probability.
- `bool _allow_stay = false`
Allow stay.
- `bool _incremental_evaluation = false`
Incremental evaluation.

Additional Inherited Members

5.77.1 Detailed Description

(1+1) EA.

(1+1) EA is implemented as a [RandomLocalSearch](#) with a [BernoulliProcess](#) neighborhood and infinite patience. Thus it does derive from [IterativeAlgorithm](#). It should be noted that member [Algorithm::_solution](#) is not used by [OnePlusOneEa](#).

Reference:

Thomas Jansen, Analyzing Evolutionary Algorithms. Springer, 2013.

Definition at line 45 of file one-plus-one-ea.hh.

5.77.2 Constructor & Destructor Documentation

5.77.2.1 OnePlusOneEa()

```
OnePlusOneEa (
    int n ) [inline]
```

Constructor.

Parameters

<i>n</i>	Size of bit vectors
----------	---------------------

`_mutation_probability` is initialized to $1 / n$.

Definition at line 80 of file `one-plus-one-ea.hh`.

5.77.3 Member Function Documentation

5.77.3.1 `set_allow_stay()`

```
void set_allow_stay (
    bool x ) [inline]
```

Set the flag `_allow_stay`.

In case no mutation occurs allow the current bit vector to stay unchanged.

Definition at line 127 of file `one-plus-one-ea.hh`.

5.77.3.2 `set_num_iterations()`

```
void set_num_iterations (
    int x ) [inline]
```

Set the number of iterations.

Parameters

<code>x</code>	Number of iterations
----------------	----------------------

$x \leq 0$ means indefinite

Definition at line 117 of file `one-plus-one-ea.hh`.

The documentation for this class was generated from the following file:


- `lib/hnco/algorithms/ea/one-plus-one-ea.hh`

5.78 ParameterLessPopulationPyramid Class Reference

Parameter-less Population Pyramid.

```
#include <hnco/algorithms/eda/p3.hh>
```

Inheritance diagram for ParameterLessPopulationPyramid:

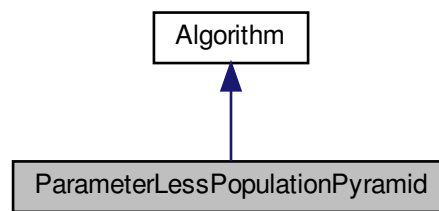

Public Member Functions

- [ParameterLessPopulationPyramid](#) (int n)
Constructor.
- void [maximize](#) ()
Maximize.

Additional Inherited Members

5.78.1 Detailed Description

Parameter-less Population Pyramid.

Implementation of the Parameter-less Population Pyramid (P3 for short).

Author: Brian W. Goldman

Reference:

"Fast and Efficient Black Box Optimization using the Parameter-less Population Pyramid" by B. W. Goldman and W. F. Punch

Integrated into HNCO by Arnaud Berny

Definition at line 46 of file p3.hh.

The documentation for this class was generated from the following files:


- lib/hnco/algorithms/eda/p3.hh
- lib/hnco/algorithms/eda/p3.cc

5.79 ParsedModifier Class Reference

Parsed modifier.

```
#include <hnco/functions/decorators/parsed-modifier.hh>
```

Inheritance diagram for ParsedModifier:

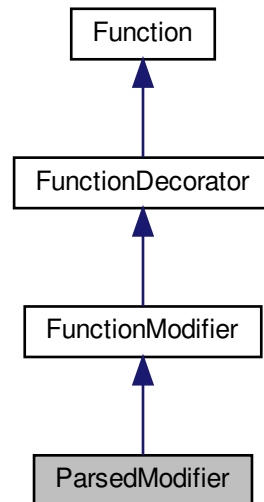

Public Member Functions

- [ParsedModifier](#) ([Function](#) *function, std::string expression)
Constructor.

Information about the function

- int [get_bv_size](#) ()
Get bit vector size.

Evaluation

- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.

Private Attributes

- FunctionParser [_parser](#)
Function parser.
- double [_values](#) [1]
Array of values.

Additional Inherited Members

5.79.1 Detailed Description

Parsed modifier.

Let f be the original function. Then the modified function is equivalent to $g \circ f$, where g is a real function defined by an expression $g(x)$ provided as a string.

Definition at line 39 of file `parsed-modifier.hh`.

5.79.2 Constructor & Destructor Documentation

5.79.2.1 ParsedModifier()

```
ParsedModifier (
    Function * function,
    std::string expression )
```

Constructor.

Parameters

<i>function</i>	Decorated function
<i>expression</i>	Expression to parse

Definition at line 30 of file `parsed-modifier.cc`.

The documentation for this class was generated from the following files:


- `lib/hnco/functions/decorators/parsed-modifier.hh`
- `lib/hnco/functions/decorators/parsed-modifier.cc`

5.80 ParsedRealMultivariateFunction Class Reference

Parsed real multivariate function.

```
#include <hnco/functions/real/real-multivariate-function.hh>
```

Inheritance diagram for ParsedRealMultivariateFunction:

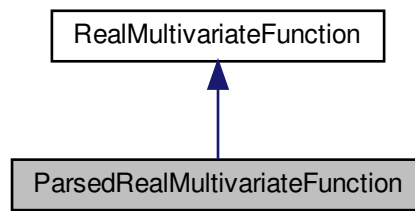

Public Member Functions

- [ParsedRealMultivariateFunction](#) (std::string expression)
Constructor.
- int [get_dimension](#) ()
Get the dimension of vectors.
- double [eval](#) (const std::vector< double > x)
Evaluate a real vector.

Private Attributes

- FunctionParser [_fparser](#)
Function parser.
- int [_num_variables](#) = 0
Number of variables.

5.80.1 Detailed Description

Parsed real multivariate function.

Definition at line 52 of file real-multivariate-function.hh.

5.80.2 Constructor & Destructor Documentation

5.80.2.1 ParsedRealMultivariateFunction()

```
ParsedRealMultivariateFunction (  
    std::string expression )
```

Constructor.

Parameters

<i>expression</i>	Expression to parse
-------------------	---------------------

Definition at line 34 of file real-multivariate-function.cc.

The documentation for this class was generated from the following files:


- lib/hnco/functions/real/real-multivariate-function.hh
- lib/hnco/functions/real/real-multivariate-function.cc

5.81 Pbil Class Reference

Population-based incremental learning.

```
#include <hnco/algorithms/pv/pbil.hh>
```

Inheritance diagram for Pbil:

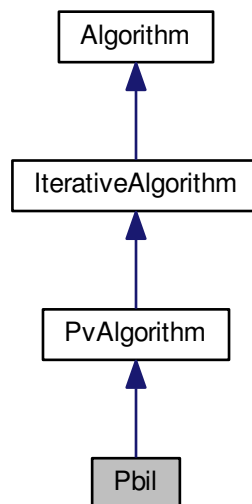

Public Member Functions

- **Pbil** (int n, int population_size)
Constructor.
- void **init** ()
Initialization.

Setters

- void **set_selection_size** (int x)
Set the selection size.
- void **set_learning_rate** (double x)
Set the learning rate.

Protected Member Functions

- void [iterate](#) ()
Single iteration.

Protected Attributes

- [Population _population](#)
Population.
- [pv_t _mean](#)
Mean of selected bit vectors.

Parameters

- int [_selection_size](#) = 1
Selection size.
- double [_learning_rate](#) = 1e-3
Learning rate.

5.81.1 Detailed Description

Population-based incremental learning.

Reference:

S. Baluja and R. Caruana. 1995. Removing the genetics from the standard genetic algorithm. In Proceedings of the 12th Annual Conference on Machine Learning. 38–46.

Definition at line 41 of file pbil.hh.

The documentation for this class was generated from the following files:


- lib/hnco/algorithms/pv/pbil.hh
- lib/hnco/algorithms/pv/pbil.cc

5.82 Permutation Class Reference

[Permutation](#).

```
#include <hnco/map.hh>
```

Inheritance diagram for Permutation:



Public Member Functions

- void [random](#) (int n)
Random instance.
- void [map](#) (const [bit_vector_t](#) &input, [bit_vector_t](#) &output)
Map.
- int [get_input_size](#) ()
Get input size.
- int [get_output_size](#) ()
Get output size.
- bool [is_surjective](#) ()
Check for surjective map.

Private Member Functions

- template<class Archive >
void [save](#) (Archive &ar, const unsigned int version) const
Save.
- template<class Archive >
void [load](#) (Archive &ar, const unsigned int version)
Load.

Private Attributes

- [permutation_t _permutation](#)
Permutation.

Friends

- class **boost::serialization::access**

5.82.1 Detailed Description

[Permutation.](#)

A permutation is a linear map f from Z_2^n to itself defined by $f(x) = y$, where $y_i = x_{\sigma_i}$ and σ is a permutation of 0, 1, ..., $n - 1$.

Definition at line 132 of file map.hh.

5.82.2 Member Function Documentation

5.82.2.1 is_surjective()

```
bool is_surjective ( ) [inline], [virtual]
```

Check for surjective map.

Returns

true

Reimplemented from [Map](#).

Definition at line 183 of file map.hh.

The documentation for this class was generated from the following files:


- lib/hnco/map.hh
- lib/hnco/map.cc

5.83 Plateau Class Reference

[Plateau](#).

```
#include <hnco/functions/theory.hh>
```

Inheritance diagram for Plateau:



Public Member Functions

- [Plateau](#) (int bv_size)
Constructor.
- int [get_bv_size](#) ()
Get bit vector size.
- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- bool [has_known_maximum](#) ()
Check for a known maximum.
- double [get_maximum](#) ()
Get the global maximum.

Private Attributes

- `int _bv_size`
Bit vector size.

5.83.1 Detailed Description

[Plateau](#).

Reference:

Thomas Jansen, Analyzing Evolutionary Algorithms. Springer, 2013.

Definition at line 244 of file theory.hh.

5.83.2 Member Function Documentation

5.83.2.1 `get_maximum()`

```
double get_maximum ( ) [inline], [virtual]
```

Get the global maximum.

Returns

`_bv_size + 2`

Reimplemented from [Function](#).

Definition at line 268 of file theory.hh.

5.83.2.2 `has_known_maximum()`

```
bool has_known_maximum ( ) [inline], [virtual]
```

Check for a known maximum.

Returns

`true`

Reimplemented from [Function](#).

Definition at line 264 of file theory.hh.

The documentation for this class was generated from the following files:


- `lib/hnco/functions/theory.hh`
- `lib/hnco/functions/theory.cc`

5.84 PointValueException Class Reference

Point-value exception.

```
#include <hnco/exception.hh>
```

Inheritance diagram for PointValueException:

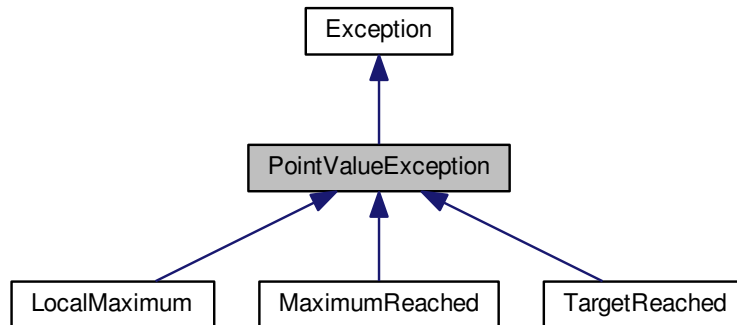

Public Member Functions

- [PointValueException](#) (const [point_value_t](#) &pv)
Constructor.
- const [point_value_t](#) & [get_point_value](#) () const
Get point-value.

Protected Attributes

- [point_value_t _pv](#)
Point-value.

5.84.1 Detailed Description

Point-value exception.

Definition at line 39 of file exception.hh.

The documentation for this class was generated from the following file:


- lib/hnco/exception.hh

5.85 Population Class Reference

Population.

```
#include <hnco/algorithms/population.hh>
```

Inheritance diagram for Population:



Public Types

- `typedef std::pair< int, double > index_value_t`
Index-value type.

Public Member Functions

- `Population (int population_size, int n)`
Constructor.
- `int size () const`
Size.
- `void random ()`
Initialize the population with random bit vectors.

Get bit vectors for non const populations

- `bit_vector_t & get_bv (int i)`
Get a bit vector.
- `bit_vector_t & get_best_bv ()`
Get best bit vector.
- `bit_vector_t & get_best_bv (int i)`
Get best bit vector.
- `bit_vector_t & get_worst_bv (int i)`
Get worst bit vector.

Get bit vectors for const populations

- `const bit_vector_t & get_bv (int i) const`
Get a bit vector.
- `const bit_vector_t & get_best_bv () const`

- *Get best bit vector.*
const [bit_vector_t](#) & [get_best_bv](#) (int i) const
- *Get best bit vector.*
const [bit_vector_t](#) & [get_worst_bv](#) (int i) const
- *Get worst bit vector.*

Get sorted values

- double [get_best_value](#) (int i) const
Get best value.
- double [get_best_value](#) () const
Get best value.

Evaluation and sorting

- void [eval](#) (function::Function *function)
Evaluate the population.
- void [eval](#) (const std::vector< function::Function *> &functions)
Parallel evaluation of the population.
- void [sort](#) ()
Sort the lookup table.
- void [partial_sort](#) (int selection_size)
Partially sort the lookup table.
- void [shuffle](#) ()
Shuffle the lookup table.

Selection

- void [plus_selection](#) (const Population &offsprings)
Plus selection.
- void [plus_selection](#) (Population &offsprings)
Plus selection.
- void [comma_selection](#) (const Population &offsprings)
Comma selection.
- void [comma_selection](#) (Population &offsprings)
Comma selection.

Protected Attributes

- std::vector< [bit_vector_t](#) > [_bvs](#)
Bit vectors.
- std::vector< [index_value_t](#) > [_lookup](#)
Lookup table.
- std::function< bool(const [index_value_t](#) &, const [index_value_t](#) &)> [_compare_index_value](#)
Binary operator for comparing index-value pairs.

5.85.1 Detailed Description

[Population](#).

Definition at line 36 of file population.hh.

5.85.2 Member Function Documentation

5.85.2.1 comma_selection() [1/2]

```
void comma_selection (
    const Population & offsprings )
```

Comma selection.

Implemented with a copy.

Precondition

Offspring population must be partially sorted.

Warning

The function does not break ties randomly (workaround: shuffle offsprings).

Definition at line 112 of file population.cc.

5.85.2.2 comma_selection() [2/2]

```
void comma_selection (
    Population & offsprings )
```

Comma selection.

Implemented with a swap. Should be faster than comma_selection with a copy.

Precondition

Offspring population must be partially sorted.

Warning

The function does not break ties randomly (workaround: shuffle offsprings).
Modifies its argument.

Definition at line 126 of file population.cc.

5.85.2.3 `get_best_bv()` [1/4]

```
bit_vector_t& get_best_bv ( ) [inline]
```

Get best bit vector.

Precondition

The population must be sorted.

Definition at line 85 of file population.hh.

5.85.2.4 `get_best_bv()` [2/4]

```
bit_vector_t& get_best_bv (
    int i ) [inline]
```

Get best bit vector.

Parameters

<i>i</i>	Index in the sorted population
----------	--------------------------------

Precondition

The population must be sorted.

Definition at line 93 of file population.hh.

5.85.2.5 `get_best_bv()` [3/4]

```
const bit_vector_t& get_best_bv ( ) const [inline]
```

Get best bit vector.

Precondition

The population must be sorted.

Definition at line 117 of file population.hh.

5.85.2.6 `get_best_bv()` [4/4]

```
const bit_vector_t& get_best_bv (
    int i ) const [inline]
```

Get best bit vector.

Parameters

<i>i</i>	Index in the sorted population
----------	--------------------------------

Precondition

The population must be sorted.

Definition at line 125 of file population.hh.

5.85.2.7 get_best_value() [1/2]

```
double get_best_value (  
    int i ) const [inline]
```

Get best value.

Parameters

<i>i</i>	Index in the sorted population
----------	--------------------------------

Precondition

The population must be sorted.

Definition at line 148 of file population.hh.

5.85.2.8 get_best_value() [2/2]

```
double get_best_value ( ) const [inline]
```

Get best value.

Precondition

The population must be sorted.

Definition at line 154 of file population.hh.

5.85.2.9 get_worst_bv() [1/2]

```
bit_vector_t& get_worst_bv (  
    int i ) [inline]
```

Get worst bit vector.

Parameters

<i>i</i>	Index in the sorted population
----------	--------------------------------

Precondition

The population must be sorted.

Definition at line 101 of file population.hh.

5.85.2.10 get_worst_bv() [2/2]

```
const bit_vector_t& get_worst_bv (  
    int i ) const [inline]
```

Get worst bit vector.

Parameters

<i>i</i>	Index in the sorted population
----------	--------------------------------

Precondition

The population must be sorted.

Definition at line 133 of file population.hh.

5.85.2.11 plus_selection() [1/2]

```
void plus_selection (  
    const Population & offsprings )
```

Plus selection.

Implemented with a copy.

Precondition

Both populations must be completely sorted.

Warning

The function does not break ties randomly (workaround: shuffle parents and offsprings).

Definition at line 74 of file population.cc.

5.85.2.12 `plus_selection()` [2/2]

```
void plus_selection (
    Population & offsprings )
```

Plus selection.

Implemented with a swap. Should be faster than `plus_selection` with a copy.

Precondition

Both populations must be completely sorted.

Warning

The function does not break ties randomly (workaround: shuffle parents and offsprings).
Modifies its argument.

Definition at line 93 of file `population.cc`.

5.85.3 Member Data Documentation

5.85.3.1 `_compare_index_value`

```
std::function<bool(const index_value_t&, const index_value_t&)> _compare_index_value [protected]
```

Initial value:

```
=
    [](const index_value_t& a, const index_value_t& b) { return a.second > b.
    second; }
```

Binary operator for comparing index-value pairs.

Definition at line 57 of file `population.hh`.

5.85.3.2 `_lookup`

```
std::vector<index_value_t> _lookup [protected]
```

Lookup table.

Let `p` be of type `std::pair<int, double>`. Then `p.first` is the `bv` index in the unsorted population whereas `p.second` is the `bv` value.

Definition at line 54 of file `population.hh`.

The documentation for this class was generated from the following files:


- `lib/hnco/algorithms/population.hh`
- `lib/hnco/algorithms/population.cc`

5.86 PriorNoise Class Reference

Prior noise.

```
#include <hnco/functions/decorators/prior-noise.hh>
```

Inheritance diagram for PriorNoise:

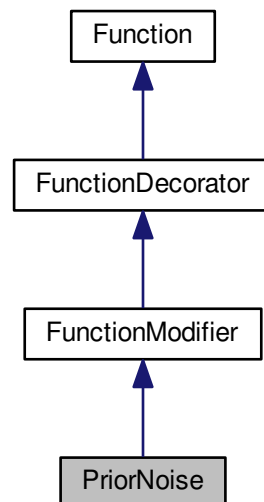

Public Member Functions

- [PriorNoise](#) ([Function](#) *fn, [neighborhood::Neighborhood](#) *nh)
Constructor.

Information about the function

- int [get_bv_size](#) ()
Get bit vector size.
- double [get_maximum](#) ()
Get the global maximum.
- bool [has_known_maximum](#) ()
Check for a known maximum.
- bool [provides_incremental_evaluation](#) ()
Check whether the function provides incremental evaluation.

Evaluation

- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.

Private Attributes

- [neighborhood::Neighborhood](#) * [_neighborhood](#)
Neighborhood.
- [bit_vector_t](#) [_noisy_bv](#)
Noisy bit vector.

Additional Inherited Members

5.86.1 Detailed Description

Prior noise.

Definition at line 36 of file prior-noise.hh.

5.86.2 Member Function Documentation

5.86.2.1 `get_maximum()`

```
double get_maximum ( ) [inline], [virtual]
```

Get the global maximum.

Delegation is questionable here.

Reimplemented from [Function](#).

Definition at line 68 of file prior-noise.hh.

5.86.2.2 `has_known_maximum()`

```
bool has_known_maximum ( ) [inline], [virtual]
```

Check for a known maximum.

Delegation is questionable here.

Reimplemented from [Function](#).

Definition at line 74 of file prior-noise.hh.

5.86.2.3 provides_incremental_evaluation()

```
bool provides_incremental_evaluation ( ) [inline], [virtual]
```

Check whether the function provides incremental evaluation.

Returns

false

Reimplemented from [Function](#).

Definition at line 78 of file prior-noise.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/decorators/prior-noise.hh
- lib/hnco/functions/decorators/prior-noise.cc

5.87 ProgressTracker Class Reference

[ProgressTracker](#).

```
#include <hnco/functions/decorators/function-controller.hh>
```

Inheritance diagram for ProgressTracker:

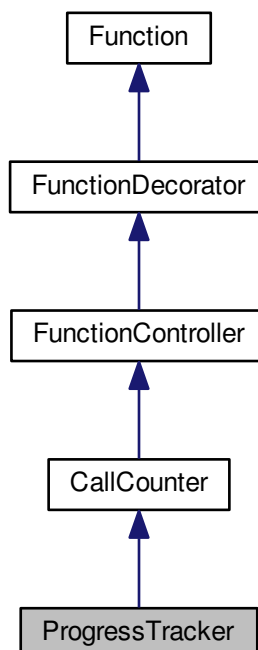

Classes

- struct [Event](#)
Event.

Public Member Functions

- [ProgressTracker](#) ([Function](#) *function)
Constructor.

Evaluation

- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- double [incremental_eval](#) (const [bit_vector_t](#) &x, double value, const [hnco::sparse_bit_vector_t](#) &flipped←_bits)
Incremental evaluation.
- void [update](#) (const [bit_vector_t](#) &x, double value)
Update after a safe evaluation.

Get information

- const [Event](#) & [get_last_improvement](#) ()
Get the last improvement.
- double [get_evaluation_time](#) ()
Get evaluation time.

Setters

- void [set_log_improvement](#) (bool x)
Log improvement.
- void [set_stream](#) (std::ostream *x)
Output stream.

Protected Member Functions

- void [update_last_improvement](#) (double value)
Update last improvement.

Protected Attributes

- [Event](#) [_last_improvement](#)
Last improvement.
- [StopWatch](#) [_stop_watch](#)
Stop watch.

Parameters

- bool [_log_improvement](#) = false
Log improvement.
- std::ostream * [_stream](#) = &std::cout
Output stream.

5.87.1 Detailed Description

ProgressTracker.

A [ProgressTracker](#) is a [CallCounter](#) which keeps track the last improvement, that is its value and the number of evaluations needed to reach it.

Definition at line 216 of file function-controller.hh.

5.87.2 Member Function Documentation

5.87.2.1 `get_last_improvement()`

```
const Event& get_last_improvement ( ) [inline]
```

Get the last improvement.

Warning

If `_last_improvement.num_evaluations` is zero then `_function` has never been called. The [Event](#) returned by `get_last_improvement` has therefore no meaning.

Definition at line 290 of file function-controller.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/decorators/function-controller.hh
- lib/hnco/functions/decorators/function-controller.cc

5.88 ProgressTrackerContext Class Reference

Log context for ProgressTracker.

```
#include <hnco/algorithms/log-context.hh>
```

Inheritance diagram for ProgressTrackerContext:

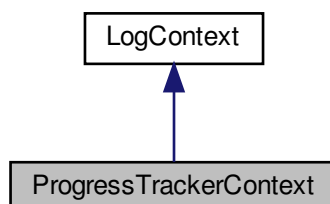

Public Member Functions

- [ProgressTrackerContext](#) ([hnco::function::ProgressTracker](#) *pt)
Constructor.
- `std::string` [get_context](#) ()
Get context.

Private Attributes

- [hnco::function::ProgressTracker](#) * [_pt](#)
Progress tracker.

5.88.1 Detailed Description

Log context for ProgressTracker.

Definition at line 48 of file log-context.hh.

The documentation for this class was generated from the following file:


- lib/hnco/algorithms/log-context.hh

5.89 Projection Class Reference

[Projection](#).

```
#include <hnco/map.hh>
```

Inheritance diagram for Projection:



Public Member Functions

- [Projection](#) (const std::vector< int > &bit_positions, int input_size)
Constructor.
- void [map](#) (const [bit_vector_t](#) &input, [bit_vector_t](#) &output)
Map.
- int [get_input_size](#) ()
Get input size.
- int [get_output_size](#) ()
Get output size.
- bool [is_surjective](#) ()
Check for surjective map.

Private Attributes

- std::vector< int > [_bit_positions](#)
Bit positions.
- int [_input_size](#)
Input size.

5.89.1 Detailed Description

[Projection.](#)

The projection y of a bit vector x is x where we have dropped a given set of components.

Let $I = \{i_1, i_2, \dots, i_m\}$ be a subset of $\{1, 2, \dots, n\}$.

A projection f from Z_2^n to Z_2^m , where $n \geq m$, is defined by $f(x) = y$, where, for all $j \in \{1, 2, \dots, m\}$, $y_j = x_{i_j}$.

If f is a projection and g is an injection with the same bit positions then their composition $f \circ g$ is the identity.

Definition at line 452 of file map.hh.

5.89.2 Constructor & Destructor Documentation

5.89.2.1 [Projection\(\)](#)

```
Projection (
    const std::vector< int > & bit_positions,
    int input_size )
```

Constructor.

The output size of the map is given by the size of `bit_positions`.

Parameters

<i>bit_positions</i>	Bit positions in the input from where output bits are copied
<i>input_size</i>	Input size

Precondition

`input_size >= bit_positions.size()`

Definition at line 164 of file map.cc.

5.89.3 Member Function Documentation

5.89.3.1 is_surjective()

```
bool is_surjective ( ) [inline], [virtual]
```

Check for surjective map.

Returns

`true`

Reimplemented from [Map](#).

Definition at line 490 of file map.hh.

The documentation for this class was generated from the following files:


- `lib/hnco/map.hh`
- `lib/hnco/map.cc`

5.90 PvAlgorithm Class Reference

Probability vector algorithm.

```
#include <hnco/algorithms/pv/pv-algorithm.hh>
```

Inheritance diagram for PvAlgorithm:

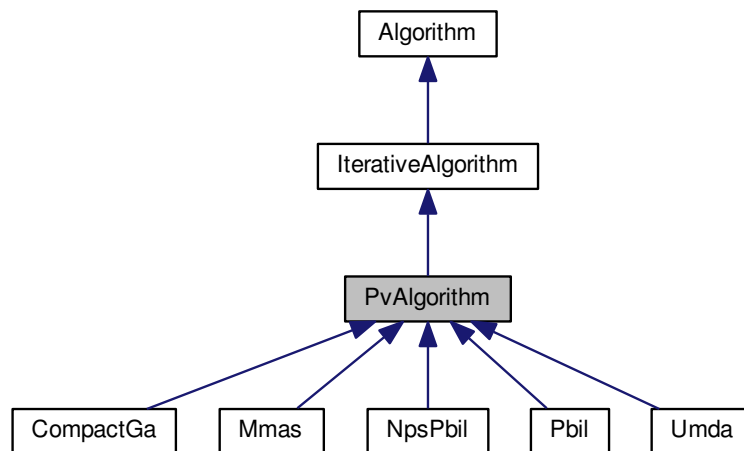

Public Member Functions

- [PvAlgorithm](#) (int n)
Constructor.

Setters for logging

- void [set_log_entropy](#) (bool x)
Log entropy.
- void [set_log_num_components](#) (int x)
Set the number of probability vector components to log.
- void [set_log_pv](#) (bool x)
Log probability vector.
- void [set_something_to_log](#) ()
Set flag for something to log.

Protected Member Functions

- void [log](#) ()
Log.

Protected Attributes

- [pv_t_pv](#)
Probability vector.
- double [_lower_bound](#)
Lower bound of probability.
- double [_upper_bound](#)

Upper bound of probability.

Logging

- bool `_log_entropy` = false
Log entropy.
- bool `_log_pv` = false
Log probability vector.
- int `_log_num_components` = 5
Number of probability vector components to log.

5.90.1 Detailed Description

Probability vector algorithm.

Definition at line 35 of file pv-algorithm.hh.

The documentation for this class was generated from the following files:


- lib/hnco/algorithms/pv/pv-algorithm.hh
- lib/hnco/algorithms/pv/pv-algorithm.cc

5.91 Qubo Class Reference

Quadratic unconstrained binary optimization.

```
#include <hnco/functions/qubo.hh>
```

Inheritance diagram for Qubo:



Public Member Functions

- `Qubo ()`
Constructor.
- void `load (std::istream &stream)`
Load an instance.
- int `get_bv_size ()`
Get bit vector size.
- double `eval (const bit_vector_t &)`
Evaluate a bit vector.

Private Attributes

- `std::vector< std::vector< double > > _q`
Matrix.

5.91.1 Detailed Description

Quadratic unconstrained binary optimization.

Its expression is of the form $f(x) = \sum_i Q_{ii}x_i + \sum_{i < j} Q_{ij}x_ix_j = x^T Q x$, where Q is an n x n upper-triangular matrix.

[Qubo](#) is the problem addressed by qbsolv. Here is its description as given on github:

Qbsolv, a decomposing solver, finds a minimum value of a large quadratic unconstrained binary optimization (QUBO) problem by splitting it into pieces solved either via a D-Wave system or a classical tabu solver.

There are some differences between [WalshExpansion2](#) and [Qubo](#):

- [WalshExpansion2](#) maps 0/1 variables into -1/1 variables whereas [Qubo](#) directly deals with binary variables.
- Hence, there is a separate linear part in [WalshExpansion2](#) whereas the linear part in [Qubo](#) stems from the diagonal elements of the given matrix.

qbsolv aims at minimizing quadratic functions whereas hnco algorithms aim at maximizing them. Hence [Qubo::load](#) negates all elements so that maximizing the resulting function is equivalent to minimizing the original [Qubo](#).

References:

Michael Booth, Steven P. Reinhardt, and Aidan Roy. 2017. Partitioning Optimization Problems for Hybrid Classical/Quantum Execution. Technical Report. D-Wave.

<https://github.com/dwavesystems/qbsolv>

<http://people.brunel.ac.uk/~mastjjb/jeb/orlib/bqpinfo.html>

Definition at line 74 of file qubo.hh.

5.91.2 Member Function Documentation

5.91.2.1 load()

```
void load (
    std::istream & stream )
```

Load an instance.

Exceptions

Error	
-------	--

Definition at line 35 of file qubo.cc.

5.91.3 Member Data Documentation

5.91.3.1 `_q`

```
std::vector<std::vector<double> > _q [private]
```

Matrix.

$n \times n$ upper triangular matrix.

Definition at line 83 of file qubo.hh.

The documentation for this class was generated from the following files:

- lib/hnco/functions/qubo.hh
- lib/hnco/functions/qubo.cc

5.92 Random Struct Reference

[Random](#) numbers.

```
#include <hnco/random.hh>
```

Static Public Member Functions

- static double [uniform](#) ()
Next uniformly distributed sample.
- static double [normal](#) ()
Next normally distributed sample.
- static bool [bernoulli](#) ()
Next random bit.

Static Public Attributes

- static std::mt19937 [generator](#)
Mersenne Twister 19937 generator.

5.92.1 Detailed Description

[Random](#) numbers.

Definition at line 33 of file random.hh.

The documentation for this struct was generated from the following files:


- lib/hnco/random.hh
- lib/hnco/random.cc

5.93 RandomLocalSearch Class Reference

Random local search.

```
#include <hnco/algorithms/ls/random-local-search.hh>
```

Inheritance diagram for RandomLocalSearch:



Public Member Functions

- [RandomLocalSearch](#) (int n, [neighborhood::Neighborhood](#) *neighborhood)
Constructor.
- void [init](#) ()
Random initialization.
- void [init](#) (const [bit_vector_t](#) &x)
Explicit initialization.
- void [init](#) (const [bit_vector_t](#) &x, double value)
Explicit initialization.
- const [point_value_t](#) & [get_solution](#) ()
Solution.

Setters

- void [set_compare](#) (std::function< bool(double, double)> x)
Set the binary operator for comparing evaluations.
- void [set_patience](#) (int x)
Set patience.
- void [set_incremental_evaluation](#) (bool x)
Set incremental evaluation.

Protected Member Functions

- void `iterate` ()
Single iteration.
- void `iterate_full` ()
Single iteration with full evaluation.
- void `iterate_incremental` ()
Single iteration with incremental evaluation.

Protected Attributes

- `neighborhood::Neighborhood * _neighborhood`
Neighborhood.
- int `_num_failures`
Number of failure.

Parameters

- `std::function< bool(double, double)> _compare = std::greater_equal<double>()`
Binary operator for comparing evaluations.
- int `_patience = 50`
Patience.
- bool `_incremental_evaluation = false`
Incremental evaluation.

5.93.1 Detailed Description

Random local search.

Definition at line 39 of file random-local-search.hh.

5.93.2 Member Function Documentation

5.93.2.1 `set_patience()`

```
void set_patience (
    int x ) [inline]
```

Set patience.

Number of consecutive rejected moves before throwing a LocalMaximum exception

Parameters

<code>x</code>	Patience
----------------	----------

If $x \leq 0$ then patience is considered infinite, meaning that the algorithm will never throw any `LocalMaximum` exception.

Definition at line 110 of file `random-local-search.hh`.

The documentation for this class was generated from the following files:


- `lib/hnco/algorithms/ls/random-local-search.hh`
- `lib/hnco/algorithms/ls/random-local-search.cc`

5.94 RandomSearch Class Reference

Random search.

```
#include <hnco/algorithms/random-search.hh>
```

Inheritance diagram for `RandomSearch`:

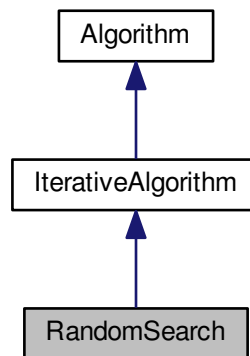

Public Member Functions

- [RandomSearch](#) (int n)
Constructor.

Protected Member Functions

- void [iterate](#) ()
Single iteration.

Private Attributes

- [bit_vector_t _candidate](#)
Candidate.

Additional Inherited Members

5.94.1 Detailed Description

Random search.

Definition at line 31 of file random-search.hh.

The documentation for this class was generated from the following files:


- lib/hnco/algorithms/random-search.hh
- lib/hnco/algorithms/random-search.cc

5.95 RandomWalk Class Reference

Random walk.

```
#include <hnco/algorithms/ls/random-walk.hh>
```

Inheritance diagram for RandomWalk:

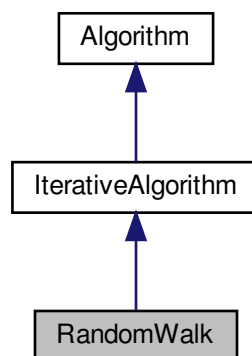

Public Member Functions

- [RandomWalk](#) (int n, [neighborhood::Neighborhood](#) *neighborhood)
Constructor.
- void [init](#) ()
Random initialization.
- void [init](#) (const [bit_vector_t](#) &x)
Explicit initialization.
- void [init](#) (const [bit_vector_t](#) &x, double value)
Explicit initialization.
- void [log](#) ()
Log.

Setters

- void [set_incremental_evaluation](#) (bool x)
Set incremental evaluation.
- void [set_log_value](#) ()
Set log.

Protected Member Functions

- void `iterate` ()
Single iteration.
- void `iterate_full` ()
Single iteration with full evaluation.
- void `iterate_incremental` ()
Single iteration with incremental evaluation.

Protected Attributes

- `neighborhood::Neighborhood * _neighborhood`
Neighborhood.
- double `_value`
Value of the last visited bit vector.

Parameters

- bool `_incremental_evaluation` = false
Incremental evaluation.

5.95.1 Detailed Description

Random walk.

The algorithm simply performs a random walk on the graph implicitly given by the neighborhood. At each iteration, the chosen neighbor does not depend on its evaluation. However optimization takes place as in random search, that is the best visited bit vector is remembered.

Definition at line 42 of file random-walk.hh.

The documentation for this class was generated from the following files:


- lib/hnco/algorithms/ls/random-walk.hh
- lib/hnco/algorithms/ls/random-walk.cc

5.96 RealMultivariateFunction Class Reference

Real multivariate function.

```
#include <hnco/functions/real/real-multivariate-function.hh>
```

Inheritance diagram for RealMultivariateFunction:

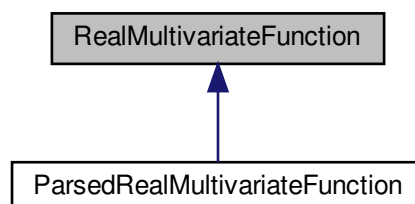

Public Member Functions

- virtual `~RealMultivariateFunction` ()
Destructor.
- virtual int `get_dimension` ()=0
Get the dimension of vectors.
- virtual double `eval` (const std::vector< double > x)=0
Evaluate a real vector.

5.96.1 Detailed Description

Real multivariate function.

Definition at line 35 of file real-multivariate-function.hh.

The documentation for this class was generated from the following file:


- lib/hnco/functions/real/real-multivariate-function.hh

5.97 RealMultivariateFunctionAdapter Class Reference

Real multivariate function adapter.

```
#include <hnco/functions/real/real-multivariate-function-adapter.hh>
```

Inheritance diagram for RealMultivariateFunctionAdapter:



Public Member Functions

- [RealMultivariateFunctionAdapter](#) ([RealRepresentation](#) *rep, [RealMultivariateFunction](#) *fn)
Constructor.

Information about the function

- int [get_bv_size](#) ()
Get bit vector size.

Evaluation

- double [eval](#) (const [bit_vector_t](#) &x)
Evaluate a bit vector.

Display

- void [describe](#) (const [bit_vector_t](#) &x, std::ostream &stream)
Describe a bit vector.

Private Member Functions

- void [convert](#) (const [bit_vector_t](#) &x)
Convert a bit vector.

Private Attributes

- [RealRepresentation](#) * [_representation](#)
Real representation.
- [RealMultivariateFunction](#) * [_function](#)
Real multivariate function.
- std::vector< double > [_rv](#)
Real vector.

5.97.1 Detailed Description

Real multivariate function adapter.

Definition at line 37 of file real-multivariate-function-adapter.hh.

5.97.2 Constructor & Destructor Documentation

5.97.2.1 RealMultivariateFunctionAdapter()

```
RealMultivariateFunctionAdapter (
    RealRepresentation * rep,
    RealMultivariateFunction * fn ) [inline]
```

Constructor.

Parameters

<i>rep</i>	Real representation
<i>fn</i>	Real multivariate function

Definition at line 59 of file real-multivariate-function-adapter.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/real/real-multivariate-function-adapter.hh
- lib/hnco/functions/real/real-multivariate-function-adapter.cc

5.98 RealRepresentation Class Reference

Real representation.

```
#include <hnco/functions/real/real-representation.hh>
```

Inheritance diagram for RealRepresentation:

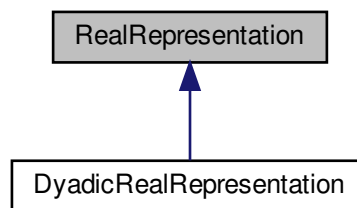

Public Member Functions

- virtual `~RealRepresentation()`
Destructor.
- virtual `int size()`=0
Size of the representation.
- virtual `double convert(hnco::bit_vector_t::const_iterator first, hnco::bit_vector_t::const_iterator last)`=0
Convert a bit vector range into a double.

5.98.1 Detailed Description

Real representation.

Definition at line 35 of file real-representation.hh.

The documentation for this class was generated from the following file:


- lib/hnco/functions/real/real-representation.hh

5.99 Restart Class Reference

[Restart](#).

```
#include <hnco/algorithms/decorators/restart.hh>
```

Inheritance diagram for Restart:

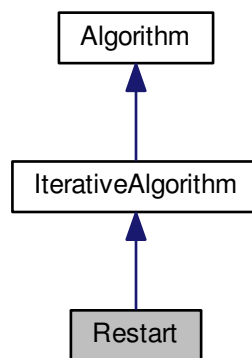

Public Member Functions

- [Restart](#) (int n, [Algorithm](#) *algorithm)
Constructor.
- void [init](#) ()
Initialization.
- void [set_function](#) (function::Function *function)
Set function.
- void [set_functions](#) (const std::vector< [function::Function](#) *> functions)
Set functions.

Private Member Functions

- void [iterate](#) ()
Optimize.

Private Attributes

- [Algorithm](#) * [_algorithm](#)
Algorithm.

Additional Inherited Members

5.99.1 Detailed Description

[Restart](#).

[Restart](#) an [Algorithm](#) an indefinite number of times. Should be used in conjunction with `OnBudgetFunction` or `StopOnMaximum`.

Definition at line 38 of file `restart.hh`.

The documentation for this class was generated from the following files:


- `lib/hnco/algorithms/decorators/restart.hh`
- `lib/hnco/algorithms/decorators/restart.cc`

5.100 Ridge Class Reference

[Ridge](#).

```
#include <hnco/functions/theory.hh>
```

Inheritance diagram for `Ridge`:



Public Member Functions

- [Ridge](#) (int `bv_size`)
Constructor.
- int [get_bv_size](#) ()
Get bit vector size.
- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- bool [has_known_maximum](#) ()
Check for a known maximum.
- double [get_maximum](#) ()
Get the global maximum.

Private Attributes

- `int _bv_size`
Bit vector size.

5.100.1 Detailed Description

[Ridge](#).

Reference:

Thomas Jansen, Analyzing Evolutionary Algorithms. Springer, 2013.

Definition at line 208 of file theory.hh.

5.100.2 Member Function Documentation

5.100.2.1 `get_maximum()`

```
double get_maximum ( ) [inline], [virtual]
```

Get the global maximum.

Returns

`2 * _bv_size`

Reimplemented from [Function](#).

Definition at line 232 of file theory.hh.

5.100.2.2 `has_known_maximum()`

```
bool has_known_maximum ( ) [inline], [virtual]
```

Check for a known maximum.

Returns

`true`

Reimplemented from [Function](#).

Definition at line 228 of file theory.hh.

The documentation for this class was generated from the following files:


- `lib/hnco/functions/theory.hh`
- `lib/hnco/functions/theory.cc`

5.101 SimulatedAnnealing Class Reference

Simulated annealing.

```
#include <hnco/algorithms/ls/simulated-annealing.hh>
```

Inheritance diagram for SimulatedAnnealing:

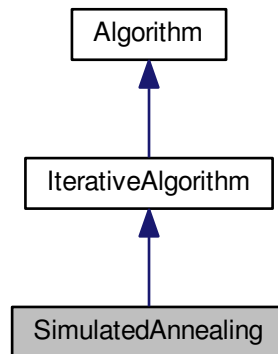

Public Member Functions

- [SimulatedAnnealing](#) (int n, [neighborhood::Neighborhood](#) *neighborhood)
Constructor.
- void [init](#) ()
Initialization.

Setters

- void [set_num_transitions](#) (int x)
Set the number of accepted transitions before annealing.
- void [set_num_trials](#) (int x)
Set the Number of trials.
- void [set_initial_acceptance_probability](#) (double x)
Set the initial acceptance probability.
- void [set_beta_ratio](#) (double x)
Set ratio for beta.

Private Member Functions

- void [init_beta](#) ()
Initialize beta.
- void [iterate](#) ()
Single iteration.

Private Attributes

- `neighborhood::Neighborhood * _neighborhood`
Neighborhood.
- `double _beta`
Inverse temperature.
- `double _current_value`
Current value.
- `int _transitions`
Number of accepted transitions.

Parameters

- `int _num_transitions = 50`
Number of accepted transitions before annealing.
- `int _num_trials = 100`
Number of trials.
- `double _initial_acceptance_probability = 0.6`
Initial acceptance probability.
- `double _beta_ratio = 1.2`
Ratio for beta.

Additional Inherited Members

5.101.1 Detailed Description

Simulated annealing.

Reference:

S. Kirkpatrick, C. D. Gelatt, and M. P. Vecchi. 1983. Optimization by simulated annealing. *Science* 220, 4598 (May 1983), 671–680.

Definition at line 44 of file `simulated-annealing.hh`.

5.101.2 Member Function Documentation

5.101.2.1 `init_beta()`

```
void init_beta ( ) [private]
```

Initialize beta.

Requires $(2 * \text{_num_trials})$ evaluations. This should be taken into account when using `OnBudgetFunction`.

Definition at line 34 of file `simulated-annealing.cc`.

The documentation for this class was generated from the following files:


- `lib/hnco/algorithms/ls/simulated-annealing.hh`
- `lib/hnco/algorithms/ls/simulated-annealing.cc`

5.102 SingleBitFlip Class Reference

One bit neighborhood.

```
#include <hnco/neighborhoods/neighborhood.hh>
```

Inheritance diagram for SingleBitFlip:



Public Member Functions

- [SingleBitFlip](#) (int n)
Constructor.

Private Member Functions

- void [sample_bits](#) ()
Sample bits.

Additional Inherited Members

5.102.1 Detailed Description

One bit neighborhood.

Definition at line 160 of file neighborhood.hh.

The documentation for this class was generated from the following file:


- lib/hnco/neighborhoods/neighborhood.hh

5.103 SingleBitFlipterator Class Reference

Single bit flip neighborhood iterator.

```
#include <hnco/neighborhoods/neighborhood-iterator.hh>
```

Inheritance diagram for SingleBitFlipterator:



Public Member Functions

- [SingleBitFlipterator](#) (int n)
Constructor.
- bool [has_next](#) ()
Has next bit vector.
- const [bit_vector_t](#) & [next](#) ()
Next bit vector.

Private Attributes

- [size_t](#) [_index](#)
Index of the last flipped bit.

Additional Inherited Members

5.103.1 Detailed Description

Single bit flip neighborhood iterator.

Definition at line 53 of file neighborhood-iterator.hh.

5.103.2 Constructor & Destructor Documentation

5.103.2.1 SingleBitFlipIterator()

```
SingleBitFlipIterator (
    int n ) [inline]
```

Constructor.

Parameters

n	Size of bit vectors
-----	---------------------

Definition at line 65 of file neighborhood-iterator.hh.

The documentation for this class was generated from the following files:


- lib/hnco/neighborhoods/neighborhood-iterator.hh
- lib/hnco/neighborhoods/neighborhood-iterator.cc

5.104 SinusSummationCancellation Class Reference

Summation cancellation with sinus.

```
#include <hnco/functions/cancellation.hh>
```

Inheritance diagram for SinusSummationCancellation:

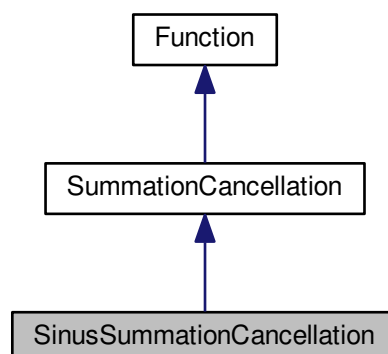

Public Member Functions

- [SinusSummationCancellation](#) (int n)
Constructor.
- double [eval](#) (const [bit_vector_t](#) &x)
Evaluate a bit vector.

Additional Inherited Members

5.104.1 Detailed Description

Summation cancellation with sinus.

Reference:

M. Sebag and M. Schoenauer. 1997. A society of hill-climbers. In Proc. IEEE Int. Conf. on Evolutionary Computation. Indianapolis, 319–324.

Definition at line 104 of file cancellation.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/cancellation.hh
- lib/hnco/functions/cancellation.cc

5.105 SixPeaks Class Reference

Six Peaks.

```
#include <hnco/functions/four-peaks.hh>
```

Inheritance diagram for SixPeaks:



Public Member Functions

- [SixPeaks](#) (int bv_size, int threshold)
Constructor.
- int [get_bv_size](#) ()
Get bit vector size.
- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- bool [has_known_maximum](#) ()
Check for a known maximum.
- double [get_maximum](#) ()
Get the global maximum.

Private Attributes

- int [_bv_size](#)
Bit vector size.
- int [_threshold](#)
Threshold.
- int [_maximum](#)
Maximum.

5.105.1 Detailed Description

Six Peaks.

It is defined by

$$f(x) = \max\{\text{head}(x, 0) + \text{tail}(x, 1) + \text{head}(x, 1) + \text{tail}(x, 0)\} + R(x)$$

where:

- $\text{head}(x, 0)$ is the length of the longest prefix of x made of zeros;
- $\text{head}(x, 1)$ is the length of the longest prefix of x made of ones;
- $\text{tail}(x, 0)$ is the length of the longest suffix of x made of zeros;
- $\text{tail}(x, 1)$ is the length of the longest suffix of x made of ones;
- $R(x)$ is the reward;
- $R(x) = n$ if $(\text{head}(x, 0) > t \text{ and } \text{tail}(x, 1) > t) \text{ or } (\text{head}(x, 1) > t \text{ and } \text{tail}(x, 0) > t)$;
- $R(x) = 0$ otherwise;
- the threshold t is a parameter of the function.

This function has six maxima, of which exactly four are global ones.

For example, if $n = 6$ and $t = 1$:

- $f(111111) = 6$ (local maximum)
- $f(111110) = 5$
- $f(111100) = 10$ (global maximum)

Reference:

J. S. De Bonet, C. L. Isbell, and P. Viola. 1996. MIMIC: finding optima by estimating probability densities. In *Advances in Neural Information Processing Systems*. Vol. 9. MIT Press, Denver.

Definition at line 128 of file four-peaks.hh.

5.105.2 Member Function Documentation

5.105.2.1 `get_maximum()`

```
double get_maximum ( ) [inline], [virtual]
```

Get the global maximum.

Returns

$2 * \text{_bv_size} - \text{_threshold} - 1$

Reimplemented from [Function](#).

Definition at line 159 of file four-peaks.hh.

5.105.2.2 `has_known_maximum()`

```
bool has_known_maximum ( ) [inline], [virtual]
```

Check for a known maximum.

Returns

true

Reimplemented from [Function](#).

Definition at line 155 of file four-peaks.hh.

The documentation for this class was generated from the following files:

- lib/hnco/functions/four-peaks.hh
- lib/hnco/functions/four-peaks.cc

5.106 SpinHerding Class Reference

Herding with spin variables.

```
#include <hnco/algorithms/hea/spin-herding.hh>
```

Public Types

- enum { [SAMPLE_GREEDY](#), [SAMPLE_RLS](#), [SAMPLE_DLS](#), [LAST_SAMPLE](#) }

Public Member Functions

- [SpinHerd](#) (int n)
Constructor.
- void [init](#) ()
Initialization.
- void [sample](#) (const [SpinMoment](#) &target, [bit_vector_t](#) &x)
Sample a bit vector.
- double [error](#) (const [SpinMoment](#) &target)
Compute the error.

Getters

- const [SpinMoment](#) & [get_delta](#) ()
Get delta.

Setters

- void [set_randomize_bit_order](#) (bool x)
Randomize bit order.
- void [set_sampling_method](#) (int x)
Set the sampling method.
- void [set_num_seq_updates](#) (int x)
Set the number of sequential updates per sample.
- void [set_weight](#) (double x)
Set the weight of second order moments.

Protected Member Functions

- void [compute_delta](#) (const [SpinMoment](#) &target)
Compute delta.
- void [sample_greedy](#) ([bit_vector_t](#) &x)
Sample by means of a greedy algorithm.
- double [q_derivative](#) (const [bit_vector_t](#) &x, int i)
Derivative of q.
- double [q_variation](#) (const [bit_vector_t](#) &x, int i)
Variation of q.
- void [sample_rls](#) ([bit_vector_t](#) &x)
Sample by means of random local search.
- void [sample_dls](#) ([bit_vector_t](#) &x)
Sample by means of deterministic local search.

Protected Attributes

- [SpinMoment_delta](#)
Delta moment.
- [SpinMoment_count](#)
Counter moment.
- [permutation_t_permutation](#)
Permutation.
- `std::uniform_int_distribution< int > _choose_bit`
Choose bit.
- `int _time`
Time.

Parameters

- `bool _randomize_bit_order = false`
Randomize bit order.
- `int _sampling_method = SAMPLE_GREEDY`
Sampling method.
- `int _num_seq_updates`
Number of sequential updates per sample.
- `double _weight = 1`
Weight of second order moments.

5.106.1 Detailed Description

Herding with spin variables.

By spin variables, we mean variables taking values 1 or -1, instead of 0 or 1 in the case of binary variables.

Definition at line 37 of file spin-herding.hh.

5.106.2 Member Enumeration Documentation

5.106.2.1 anonymous enum

anonymous enum

Enumerator

<code>SAMPLE_GREEDY</code>	Greedy algorithm.
<code>SAMPLE_RLS</code>	Random local search.
<code>SAMPLE_DLS</code>	Deterministic local search.

Definition at line 97 of file spin-herding.hh.

5.106.3 Constructor & Destructor Documentation

5.106.3.1 SpinHerdin()

```
SpinHerdin (
    int n ) [inline]
```

Constructor.

Parameters

<i>n</i>	Size of bit vectors
----------	---------------------

`_num_seq_updates` is initialized to `n`.

Definition at line 116 of file `spin-herding.hh`.

5.106.4 Member Function Documentation

5.106.4.1 q_variation()

```
double q_variation (
    const bit_vector_t & x,
    int i ) [protected]
```

Variation of `q`.

Up to a positive multiplicative constant. Only the sign of the variation matters to local search.

Definition at line 162 of file `spin-herding.cc`.

The documentation for this class was generated from the following files:

- `lib/hnco/algorithms/hea/spin-herding.hh`
- `lib/hnco/algorithms/hea/spin-herding.cc`

5.107 SpinMoment Struct Reference

Moment for spin variables.

```
#include <hnco/algorithms/hea/spin-moment.hh>
```

Public Member Functions

- [SpinMoment](#) (int n)
Constructor.
- void [uniform](#) ()
Set the moment to that of the uniform distribution.
- void [init](#) ()
Initialize accumulators.
- void [add](#) (const [bit_vector_t](#) &x)
Update accumulators.
- void [average](#) (int count)
Compute average.
- void [update](#) (const [SpinMoment](#) &p, double rate)
Update moment.
- void [bound](#) (double margin)
Bound moment.
- double [distance](#) (const [SpinMoment](#) &p) const
Distance.
- double [norm_2](#) () const
Compute the norm 2.
- double [diameter](#) () const
Compute the diameter.
- size_t [size](#) () const
Size.
- void [display](#) (std::ostream &stream)
Display.

Public Attributes

- std::vector< double > [_first](#)
First moment.
- std::vector< std::vector< double > > [_second](#)
Second moment.
- double [_weight](#) = 1
Weight of second order moments.

5.107.1 Detailed Description

Moment for spin variables.

Definition at line 38 of file spin-moment.hh.

5.107.2 Member Data Documentation

5.107.2.1 `_second`

```
std::vector<std::vector<double> > _second
```

Second moment.

This is a lower triangular matrix with only zeros on the diagonal. Only entries `_second[i][j]` with $j < i$ are considered.

Definition at line 50 of file `spin-moment.hh`.

The documentation for this struct was generated from the following files:


- `lib/hnco/algorithms/hea/spin-moment.hh`
- `lib/hnco/algorithms/hea/spin-moment.cc`

5.108 SteepestAscentHillClimbing Class Reference

Steepest ascent hill climbing.

```
#include <hnco/algorithms/ls/steepest-ascent-hill-climbing.hh>
```

Inheritance diagram for `SteepestAscentHillClimbing`:

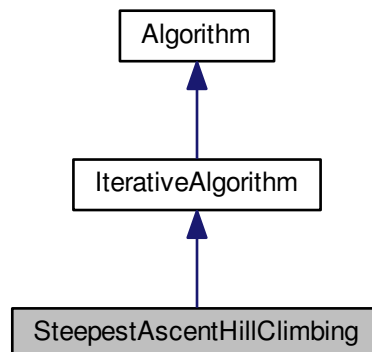

Public Member Functions

- `SteepestAscentHillClimbing` (int n, `neighborhood::NeighborhoodIterator` *neighborhood)
Constructor.
- void `init` ()
Random initialization.
- void `init` (const `bit_vector_t` &x)
Explicit initialization.
- void `init` (const `bit_vector_t` &x, double value)
Explicit initialization.

Protected Member Functions

- void `iterate()`
Single iteration.

Protected Attributes

- `std::vector< bit_vector_t > _candidates`
Potential candidate.
- `neighborhood::NeighborhoodIterator * _neighborhood`
Neighborhood.

5.108.1 Detailed Description

Steepest ascent hill climbing.

Definition at line 39 of file `steepest-ascent-hill-climbing.hh`.

The documentation for this class was generated from the following files:


- `lib/hnco/algorithms/ls/steepest-ascent-hill-climbing.hh`
- `lib/hnco/algorithms/ls/steepest-ascent-hill-climbing.cc`

5.109 StopOnMaximum Class Reference

Stop on maximum.

```
#include <hnco/functions/decorators/function-controller.hh>
```

Inheritance diagram for StopOnMaximum:

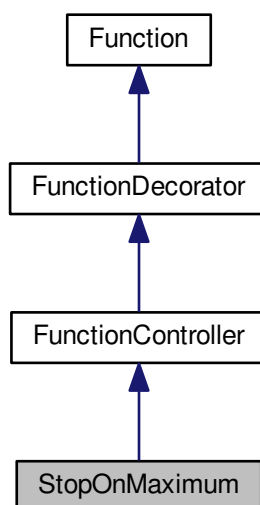

Public Member Functions

- [StopOnMaximum](#) ([Function](#) *function)
Constructor.

Evaluation

- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- double [incremental_eval](#) (const [bit_vector_t](#) &x, double value, const [hnco::sparse_bit_vector_t](#) &flipped↵_bits)
Incremental evaluation.
- void [update](#) (const [bit_vector_t](#) &x, double value)
Update after a safe evaluation.

Additional Inherited Members

5.109.1 Detailed Description

Stop on maximum.

The member function eval throws an exception MaximumReached when its argument maximizes the decorated function.

Warning

The maximum is detected using the equality operator hence the result should be taken with care in case of non integer (floating point) function values.

Definition at line 90 of file function-controller.hh.

5.109.2 Constructor & Destructor Documentation

5.109.2.1 StopOnMaximum()

```
StopOnMaximum (
    Function * function ) [inline]
```

Constructor.

Parameters

<i>function</i>	Decorated function
-----------------	--------------------

Precondition

function->[has_known_maximum\(\)](#)

Definition at line 98 of file function-controller.hh.

5.109.3 Member Function Documentation**5.109.3.1 eval()**

```
double eval (
    const bit\_vector\_t & x ) [virtual]
```

Evaluate a bit vector.

Exceptions

<i>MaximumReached</i>	
-----------------------	--

Implements [Function](#).

Definition at line 31 of file function-controller.cc.

5.109.3.2 incremental_eval()

```
double incremental_eval (
    const bit\_vector\_t & x,
    double value,
    const hnco::sparse\_bit\_vector\_t & flipped_bits ) [virtual]
```

Incremental evaluation.

Exceptions

<i>MaximumReached</i>	
-----------------------	--

Reimplemented from [Function](#).

Definition at line 43 of file function-controller.cc.

5.109.3.3 update()

```
void update (
    const bit\_vector\_t & x,
    double value ) [virtual]
```

Update after a safe evaluation.

Exceptions

<i>MaximumReached</i>	
-----------------------	--

Reimplemented from [Function](#).

Definition at line 55 of file function-controller.cc.

The documentation for this class was generated from the following files:


- lib/hnco/functions/decorators/function-controller.hh
- lib/hnco/functions/decorators/function-controller.cc

5.110 StopOnTarget Class Reference

Stop on target.

```
#include <hnco/functions/decorators/function-controller.hh>
```

Inheritance diagram for StopOnTarget:

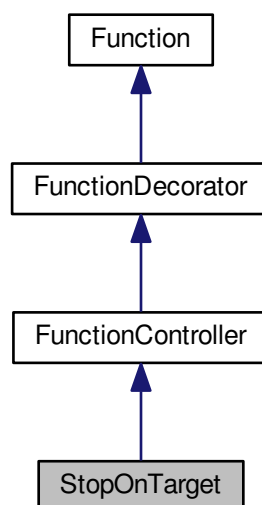

Public Member Functions

- [StopOnTarget](#) ([Function](#) *function, double target)
Constructor.

Evaluation

- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- double [incremental_eval](#) (const [bit_vector_t](#) &x, double value, const [hnco::sparse_bit_vector_t](#) &flipped←
_bits)
Incremental evaluation.
- void [update](#) (const [bit_vector_t](#) &x, double value)
Update after a safe evaluation.

Private Attributes

- double [_target](#)
Target.

Additional Inherited Members

5.110.1 Detailed Description

Stop on target.

The member function eval throws an exception TargetReached when the value of its decorated function reaches a given target.

Warning

The target is detected using the greater or equal operator hence the result should be taken with care in case of non integer (floating point) function values.

Definition at line 134 of file function-controller.hh.

5.110.2 Constructor & Destructor Documentation

5.110.2.1 StopOnTarget()

```
StopOnTarget (
    Function * function,
    double target ) [inline]
```

Constructor.

Parameters

<i>function</i>	Decorated function
<i>target</i>	Target

Definition at line 147 of file function-controller.hh.

5.110.3 Member Function Documentation

5.110.3.1 eval()

```
double eval (
    const bit\_vector\_t & x ) [virtual]
```

Evaluate a bit vector.

Exceptions

<i>TargetReached</i>	
----------------------	--

Implements [Function](#).

Definition at line 66 of file function-controller.cc.

5.110.3.2 incremental_eval()

```
double incremental_eval (
    const bit\_vector\_t & x,
    double value,
    const hnco::sparse\_bit\_vector\_t & flipped_bits ) [virtual]
```

Incremental evaluation.

Exceptions

<i>TargetReached</i>	
----------------------	--

Reimplemented from [Function](#).

Definition at line 76 of file function-controller.cc.

5.110.3.3 update()

```
void update (
    const bit\_vector\_t & x,
    double value ) [virtual]
```

Update after a safe evaluation.

Exceptions

<i>TargetReached</i>	
----------------------	--

Reimplemented from [Function](#).

Definition at line 86 of file function-controller.cc.

The documentation for this class was generated from the following files:

- lib/hnco/functions/decorators/function-controller.hh
- lib/hnco/functions/decorators/function-controller.cc

5.111 StopWatch Class Reference

Stop watch.

```
#include <hnco/stop-watch.hh>
```

Public Member Functions

- void [start](#) ()
Start.
- void [stop](#) ()
Stop.
- double [get_total_time](#) ()
Get total time.

Private Attributes

- double [_total_time](#) = 0
Total time.
- clock_t [_start](#)
Start time.

5.111.1 Detailed Description

Stop watch.

Definition at line 31 of file stop-watch.hh.

The documentation for this class was generated from the following file:


- lib/hnco/stop-watch.hh

5.112 SummationCancellation Class Reference

Summation cancellation.

```
#include <hnco/functions/cancellation.hh>
```

Inheritance diagram for SummationCancellation:

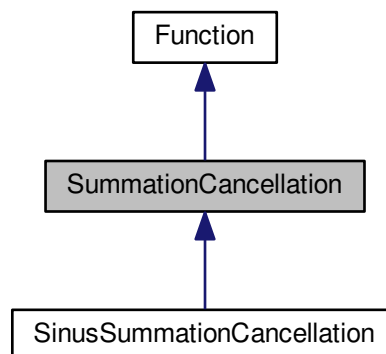

Public Member Functions

- [SummationCancellation](#) (int n)
Constructor.
- int [get_bv_size](#) ()
Get bit vector size.
- double [eval](#) (const [bit_vector_t](#) &x)
Evaluate a bit vector.
- bool [has_known_maximum](#) ()
Check for a known maximum.
- double [get_maximum](#) ()
Get the global maximum.

Protected Member Functions

- void `convert` (const `bit_vector_t` &x)
Convert a bit vector into a real vector.

Protected Attributes

- int `_bv_size`
Bit vector size.
- `std::vector< double > _buffer`
Buffer.

5.112.1 Detailed Description

Summation cancellation.

Encoding of a signed integer:

- bit 0: sign
- bits 1 to 8: two's complement representation

Reference:

S. Baluja and S. Davies. 1997. Using optimal dependency-trees for combinatorial optimization: learning the structure of the search space. Technical Report CMU- CS-97-107. Carnegie-Mellon University.

Definition at line 48 of file `cancellation.hh`.

5.112.2 Constructor & Destructor Documentation

5.112.2.1 SummationCancellation()

```
SummationCancellation (
    int n ) [inline]
```

Constructor.

The bit vector size `n` must be a multiple of 9. The size of `_buffer` is then `n / 9`.

Parameters

<code>n</code>	Size of the bit vector
----------------	------------------------

Definition at line 71 of file `cancellation.hh`.

5.112.3 Member Function Documentation

5.112.3.1 has_known_maximum()

```
bool has_known_maximum ( ) [inline], [virtual]
```

Check for a known maximum.

Returns

true

Reimplemented from [Function](#).

Definition at line 87 of file cancellation.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/cancellation.hh
- lib/hnco/functions/cancellation.cc

5.113 TargetReached Class Reference

target reached

```
#include <hnco/exception.hh>
```

Inheritance diagram for TargetReached:



Public Member Functions

- [TargetReached](#) (const [point_value_t](#) &pv)
Constructor.

Additional Inherited Members

5.113.1 Detailed Description

target reached

Definition at line 62 of file exception.hh.

The documentation for this class was generated from the following file:


- lib/hnco/exception.hh

5.114 TournamentSelection Class Reference

[Population](#) with tournament selection.

```
#include <hnco/algorithms/ea/tournament-selection.hh>
```

Inheritance diagram for TournamentSelection:



Public Member Functions

- [TournamentSelection](#) (int population_size, int n)
Constructor.
- const [bit_vector_t](#) & [select](#) ()
Selection.

Setters

- void [set_tournament_size](#) (int x)
Set the tournament size.

Private Attributes

- `std::uniform_int_distribution< int > _choose_individual`
Random index.

Parameters

- `int _tournament_size = 10`
Tournament size.

Additional Inherited Members

5.114.1 Detailed Description

[Population](#) with tournament selection.

Definition at line 34 of file tournament-selection.hh.

5.114.2 Member Function Documentation

5.114.2.1 select()

```
const bit\_vector\_t & select ( )
```

Selection.

The selection only requires that the population be evaluated, not necessarily sorted.

Precondition

The population must be evaluated.

Definition at line 33 of file tournament-selection.cc.

The documentation for this class was generated from the following files:


- `lib/hnco/algorithms/ea/tournament-selection.hh`
- `lib/hnco/algorithms/ea/tournament-selection.cc`

5.115 Translation Class Reference

[Translation](#).

```
#include <hnco/map.hh>
```

Inheritance diagram for Translation:



Public Member Functions

- void [random](#) (int n)
Random instance.
- void [map](#) (const [bit_vector_t](#) &input, [bit_vector_t](#) &output)
Map.
- int [get_input_size](#) ()
Get input size.
- int [get_output_size](#) ()
Get output size.
- bool [is_surjective](#) ()
Check for surjective map.

Private Member Functions

- template<class Archive >
void [save](#) (Archive &ar, const unsigned int version) const
Save.
- template<class Archive >
void [load](#) (Archive &ar, const unsigned int version)
Load.

Private Attributes

- [bit_vector_t_bv](#)
Translation vector.

Friends

- class `boost::serialization::access`

5.115.1 Detailed Description

[Translation.](#)

A translation is an affine map f from Z_2^n to itself defined by $f(x) = x + b$, where b is an n -dimensional bit vector.

Definition at line 70 of file `map.hh`.

5.115.2 Member Function Documentation

5.115.2.1 `is_surjective()`

```
bool is_surjective ( ) [inline], [virtual]
```

Check for surjective map.

Returns

true

Reimplemented from [Map](#).

Definition at line 121 of file `map.hh`.

The documentation for this class was generated from the following files:


- `lib/hnco/map.hh`
- `lib/hnco/map.cc`

5.116 Trap Class Reference

[Trap.](#)

```
#include <hnco/functions/trap.hh>
```

Inheritance diagram for `Trap`:



Public Member Functions

- [Trap](#) (int *bv_size*, int *num_traps*)
Constructor.
- int [get_bv_size](#) ()
Get bit vector size.
- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- bool [has_known_maximum](#) ()
Check for a known maximum.
- double [get_maximum](#) ()
Get the global maximum.

Private Attributes

- int [_bv_size](#)
Bit vector size.
- int [_num_traps](#)
Number of traps.
- int [_trap_size](#)
Trap size.

5.116.1 Detailed Description

[Trap](#).

Reference:

Kalyanmoy Deb and David E. Goldberg. 1993. Analyzing Deception in Trap Functions. In Foundations of Genetic Algorithms 2, L. Darrell Whitley (Ed.). Morgan Kaufmann, San Mateo, CA, 93–108.

Definition at line 43 of file `trap.hh`.

5.116.2 Constructor & Destructor Documentation

5.116.2.1 [Trap\(\)](#)

```
Trap (
    int bv_size,
    int num_traps ) [inline]
```

Constructor.

Parameters

<i>bv_size</i>	Bit vector size
<i>num_traps</i>	Number of traps

Warning

`bv_size` must be a multiple of `num_traps`

Definition at line 64 of file `trap.hh`.

5.116.3 Member Function Documentation**5.116.3.1 `get_maximum()`**

```
double get_maximum ( ) [inline], [virtual]
```

Get the global maximum.

Returns

`_bv_size`

Reimplemented from [Function](#).

Definition at line 88 of file `trap.hh`.

5.116.3.2 `has_known_maximum()`

```
bool has_known_maximum ( ) [inline], [virtual]
```

Check for a known maximum.

Returns

`true`

Reimplemented from [Function](#).

Definition at line 84 of file `trap.hh`.

The documentation for this class was generated from the following files:


- `lib/hnco/functions/trap.hh`
- `lib/hnco/functions/trap.cc`

5.117 Umda Class Reference

Univariate marginal distribution algorithm.

```
#include <hnco/algorithms/pv/umda.hh>
```

Inheritance diagram for Umda:

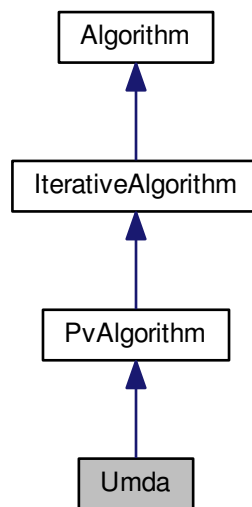

Public Member Functions

- [Umda](#) (int n, int population_size)
Constructor.
- void [init](#) ()
Initialization.

Setters

- void [set_selection_size](#) (int x)
Set the selection size.

Protected Member Functions

- void [iterate](#) ()
Single iteration.

Protected Attributes

- [Population _population](#)
Population.

Parameters

- `int _selection_size = 1`
Selection size.

5.117.1 Detailed Description

Univariate marginal distribution algorithm.

Reference:

H. Mühlenbein. 1997. The equation for response to selection and its use for prediction. *Evolutionary Computation* 5, 3 (1997), 303–346.

Definition at line 41 of file `umda.hh`.

The documentation for this class was generated from the following files:


- `lib/hnco/algorithms/pv/umda.hh`
- `lib/hnco/algorithms/pv/umda.cc`

5.118 UniformCrossover Class Reference

Uniform crossover.

```
#include <hnco/algorithms/ea/crossover.hh>
```

Inheritance diagram for `UniformCrossover`:



Public Member Functions

- void [breed](#) (const [bit_vector_t](#) &parent1, const [bit_vector_t](#) &parent2, [bit_vector_t](#) &offspring)
Breed.

5.118.1 Detailed Description

Uniform crossover.

Definition at line 56 of file crossover.hh.

5.118.2 Member Function Documentation

5.118.2.1 breed()

```
void breed (
    const bit\_vector\_t & parent1,
    const bit\_vector\_t & parent2,
    bit\_vector\_t & offspring ) [virtual]
```

Breed.

The offspring is the uniform crossover of two parents.

Parameters

<i>parent1</i>	First parent
<i>parent2</i>	Second parent
<i>offspring</i>	Offspring

Implements [Crossover](#).

Definition at line 30 of file crossover.cc.

The documentation for this class was generated from the following files:


- lib/hnco/algorithms/ea/crossover.hh
- lib/hnco/algorithms/ea/crossover.cc

5.119 WalshExpansion Class Reference

Walsh expansion.

```
#include <hnco/functions/walsh/walsh-expansion.hh>
```

Inheritance diagram for WalshExpansion:



Public Member Functions

- [WalshExpansion](#) ()
Constructor.
- int [get_bv_size](#) ()
Get bit vector size.
- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- void [display](#) (std::ostream &stream)
Display.
- void [set_terms](#) (const std::vector< [Function::WalshTransformTerm](#) > terms)
Set terms.

Instance generators

- template<class Generator >
void [generate](#) (int n, int num_features, Generator generator)
Instance generator.
- void [random](#) (int n, int num_features)
Random instance.

Private Member Functions

- template<class Archive >
void [serialize](#) (Archive &ar, const unsigned int version)
Save.

Private Attributes

- std::vector< [Function::WalshTransformTerm](#) > [_terms](#)
Terms.

Friends

- class **boost::serialization::access**

5.119.1 Detailed Description

Walsh expansion.

Its expression is of the form

$$f(x) = \sum_u a_u (-1)^{x \cdot u}$$

where the sum is over a subset of $\{0, 1\}^n$ and $x \cdot u = \sum_i x_i u_i$ is mod 2. The real numbers a_u are the coefficients of the expansion and the bit vectors u are its feature vectors.

Definition at line 53 of file walsh-expansion.hh.

5.119.2 Member Function Documentation

5.119.2.1 generate()

```
void generate (
    int n,
    int num_features,
    Generator generator ) [inline]
```

Instance generator.

Parameters

<i>n</i>	Size of bit vectors
<i>num_features</i>	Number of feature vectors
<i>generator</i>	Coefficient generator

Definition at line 87 of file walsh-expansion.hh.

5.119.2.2 random()

```
void random (
    int n,
    int num_features ) [inline]
```

Random instance.

The coefficients are sampled from the normal distribution.

Parameters

<i>n</i>	Size of bit vector
<i>num_features</i>	Number of feature vectors

Definition at line 113 of file walsh-expansion.hh.

The documentation for this class was generated from the following files:


- lib/hnco/functions/walsh/walsh-expansion.hh
- lib/hnco/functions/walsh/walsh-expansion.cc

5.120 WalshExpansion1 Class Reference

Walsh expansion of degree 1.

```
#include <hnco/functions/walsh/walsh-expansion-1.hh>
```

Inheritance diagram for WalshExpansion1:



Public Member Functions

- [WalshExpansion1](#) ()
Constructor.

Instance generators

- `template<class Generator >`
void [generate](#) (int n, Generator generator)
Instance generator.
- void [random](#) (int n)
Random instance.

Evaluation

- double [eval](#) (const [bit_vector_t](#) &)
Evaluate a bit vector.
- double [incremental_eval](#) (const [bit_vector_t](#) &x, double v, const [hnco::sparse_bit_vector_t](#) &flipped_bits)
Incremental evaluation.

Information about the function

- int [get_bv_size](#) ()
Get bit vector size.
- double [get_maximum](#) ()
Get the global maximum.
- bool [has_known_maximum](#) ()
Check for a known maximum.
- bool [provides_incremental_evaluation](#) ()
Check whether the function provides incremental evaluation.

Private Member Functions

- `template<class Archive >`
`void serialize (Archive &ar, const unsigned int version)`
Serialize.

Private Attributes

- `std::vector< double > _linear`
Linear part.

Friends

- class **`boost::serialization::access`**

5.120.1 Detailed Description

Walsh expansion of degree 1.

Its expression is of the form

$$f(x) = \sum_i a_i (1 - 2x_i)$$

or equivalently

$$f(x) = \sum_i a_i (-1)^{x_i}$$

Definition at line 50 of file walsh-expansion-1.hh.

5.120.2 Member Function Documentation

5.120.2.1 `generate()`

```
void generate (
    int n,
    Generator generator ) [inline]
```

Instance generator.

Parameters

<i>n</i>	Size of bit vectors
<i>generator</i>	Weight generator

Definition at line 83 of file walsh-expansion-1.hh.

5.120.2.2 has_known_maximum()

```
bool has_known_maximum ( ) [inline], [virtual]
```

Check for a known maximum.

Returns

true

Reimplemented from [Function](#).

Definition at line 130 of file walsh-expansion-1.hh.

5.120.2.3 provides_incremental_evaluation()

```
bool provides_incremental_evaluation ( ) [inline], [virtual]
```

Check whether the function provides incremental evaluation.

Returns

true

Reimplemented from [Function](#).

Definition at line 135 of file walsh-expansion-1.hh.

5.120.2.4 random()

```
void random (
    int n ) [inline]
```

Random instance.

The weights are sampled from the normal distribution.

Parameters

n	Size of bit vectors
-----	---------------------

Definition at line 97 of file walsh-expansion-1.hh.

The documentation for this class was generated from the following files:


- `lib/hnco/functions/walsh/walsh-expansion-1.hh`
- `lib/hnco/functions/walsh/walsh-expansion-1.cc`

5.121 WalshExpansion2 Class Reference

Walsh expansion of degree 2.

```
#include <hnco/functions/walsh/walsh-expansion-2.hh>
```

Inheritance diagram for WalshExpansion2:



Public Member Functions

- `WalshExpansion2 ()`
Constructor.
- `int get_bv_size ()`
Get bit vector size.
- `double eval (const bit_vector_t &)`
Evaluate a bit vector.

Instance generators

- `template<class LinearGen , class QuadraticGen >`
`void generate (int n, LinearGen linear_gen, QuadraticGen quadratic_gen)`
Instance generators.
- `void random (int n)`
Instance generator.
- `void generate_ising1_long_range (int n, double alpha)`
Generate one dimensional Ising model with long range interactions.
- `void generate_ising1_long_range_periodic (int n, double alpha)`
Generate one dimensional Ising model with long range interactions and periodic boundary conditions.

Private Member Functions

- `template<class Archive >`
`void serialize (Archive &ar, const unsigned int version)`
Serialize.
- `void resize (int n)`
Resize data structures.

Private Attributes

- `std::vector< double > _linear`
Linear part.
- `std::vector< std::vector< double > > _quadratic`
Quadratic part.

Friends

- class `boost::serialization::access`

5.121.1 Detailed Description

Walsh expansion of degree 2.

Its expression is of the form

$$f(x) = \sum_i a_i (1 - 2x_i) + \sum_{i < j} a_{ij} (1 - 2x_i)(1 - 2x_j)$$

or equivalently

$$f(x) = \sum_i a_i (-1)^{x_i} + \sum_{i < j} a_{ij} (-1)^{x_i + x_j}$$

Definition at line 50 of file `walsh-expansion-2.hh`.

5.121.2 Member Function Documentation

5.121.2.1 generate()

```
void generate (
    int n,
    LinearGen linear_gen,
    QuadraticGen quadratic_gen ) [inline]
```

Instance generators.

Parameters

<i>n</i>	Size of bit vectors
<i>linear_gen</i>	Generator for the linear part
<i>quadratic_gen</i>	Generator for the quadratic part

Definition at line 95 of file `walsh-expansion-2.hh`.

5.121.2.2 generate_ising1_long_range()

```
void generate_ising1_long_range (
    int n,
    double alpha )
```

Generate one dimensional Ising model with long range interactions.

Similar to a Dyson-Ising model except for the finite, instead of infinite, linear chain of spins.

Its expression is of the form

$$f(x) = \sum_{ij} J(d_{ij})(1 - 2x_i)(1 - 2x_j)$$

or equivalently

$$f(x) = \sum_{ij} J(d_{ij})(-1)^{x_i + x_j}$$

where $J(d_{ij})$ is the interaction between sites i and j, $d_{ij} = |i - j|$, and $J(n) = n^{-\alpha}$.

Since we are maximizing f or minimizing -f, the expression of f is compatible with what can be found in physics textbooks.

Parameters

<i>n</i>	Size of bit vectors
<i>alpha</i>	Exponential decay parameter

Definition at line 82 of file walsh-expansion-2.cc.

5.121.2.3 generate_ising1_long_range_periodic()

```
void generate_ising1_long_range_periodic (
    int n,
    double alpha )
```

Generate one dimensional Ising model with long range interactions and periodic boundary conditions.

Similar to a Dyson-Ising model except for the finite, instead of infinite, linear chain of spins.

Its expression is of the form

$$f(x) = \sum_{ij} J(d_{ij})(1 - 2x_i)(1 - 2x_j)$$

or equivalently

$$f(x) = \sum_{ij} J(d_{ij})(-1)^{x_i + x_j}$$

where $J(d_{ij})$ is the interaction between sites i and j, $d_{ij} = \min\{|i - j|, n - |i - j|\}$, and $J(n) = n^{-\alpha}$.

Since we are maximizing f or minimizing -f, the expression of f is compatible with what can be found in physics textbooks.

Parameters

<i>n</i>	Size of bit vectors
<i>alpha</i>	Exponential decay parameter

Definition at line 103 of file walsh-expansion-2.cc.

5.121.2.4 random()

```
void random (
    int n ) [inline]
```

Instance generator.

The weights are sampled from the normal distribution.

Parameters

<i>n</i>	Size of bit vector
----------	--------------------

Definition at line 117 of file walsh-expansion-2.hh.

5.121.3 Member Data Documentation

5.121.3.1 _quadratic

```
std::vector<std::vector<double> > _quadratic [private]
```

Quadratic part.

Represented as a lower triangular matrix (without its diagonal).

Definition at line 73 of file walsh-expansion-2.hh.

The documentation for this class was generated from the following files:

- lib/hnco/functions/walsh/walsh-expansion-2.hh
- lib/hnco/functions/walsh/walsh-expansion-2.cc

5.122 Function::WalshTransformTerm Struct Reference

Walsh transform term.

```
#include <hnco/functions/function.hh>
```

Public Member Functions

- `template<class Archive >`
`void serialize (Archive &ar, const unsigned int version)`
Serialize.

Public Attributes

- `std::vector< bool > feature`
Feature.
- `double coefficient`
Coefficient.

5.122.1 Detailed Description

Walsh transform term.

Definition at line 46 of file `function.hh`.

5.122.2 Member Data Documentation

5.122.2.1 `feature`

```
std::vector<bool> feature
```

Feature.

Implemented with a vector bool instead of a `bit_vector_t` to reduce the memory consumption.

Definition at line 53 of file `function.hh`.

The documentation for this struct was generated from the following file:

- `lib/hnco/functions/function.hh`

Index

- `_compare_index_value`
 - `_expression`
 - `_functions`
 - `_lookup`
 - `_q`
 - `_quadratic`
 - `_second`
- AbstractLabs, 31
- AbstractMaxSat, 32
- AdditiveGaussianNoise, 34
- AffineMap, 35
- Algorithm, 37
-
- bernoulli_trials
 - BernoulliProcess, 40
 - BiasedCrossover, 43
- bit_t
 - BitHerding, 44
- BitMoment, 46
- bm_add_rows
 - bm_identity
 - bm_invert
 - bm_multiply
 - bm_rank
 - bm_row_echelon_form
 - bm_solve
 - bm_solve_upper_triangular
 - BmPbil, 47
- breed
 - bv_from_vector_bool
 - bv_to_vector_bool
 -
- Cache, 51
 - CallCounter, 53
- comma_selection
 - CompactGa, 54
- CompleteSearch, 56
- compute_walsh_transform
 - Crossover, 57
-
- DeceptiveJump, 58
- DyadicRealRepresentation, 60
 -
- EqualProducts, 62
- Error, 65
- eval
 - Exception, 66
-
- Factorization, 67
 - feature
 - FirstAscentHillClimbing, 69
- FourPeaks, 71
- Function, 73
- Function::WalshTransformTerm, 253
- FunctionController, 78
- FunctionDecorator, 79
- FunctionMapComposition, 80
 - FunctionModifier, 83
- FunctionPlugin, 84
 -
- generate
 -

- hnco::function::NearestNeighborIsingModel1, 146
 - hnco::function::NearestNeighborIsingModel2, 149
 - hnco::function::NkLandscape, 160
 - hnco::function::WalshExpansion, 246
 - hnco::function::WalshExpansion1, 248
 - hnco::function::WalshExpansion2, 251
- generate_ising1_long_range
 - hnco::function::WalshExpansion2, 251
- generate_ising1_long_range_periodic
 - hnco::function::WalshExpansion2, 252
- GeneticAlgorithm, 85
 - hnco::algorithm::GeneticAlgorithm, 87
- get_best_bv
 - hnco::algorithm::Population, 185, 186
- get_best_value
 - hnco::algorithm::Population, 187
- get_last_improvement
 - hnco::function::ProgressTracker, 194
- get_maximum
 - hnco::function::DeceptiveJump, 59
 - hnco::function::FourPeaks, 72
 - hnco::function::Function, 76
 - hnco::function::FunctionMapComposition, 82
 - hnco::function::Hiff, 100
 - hnco::function::Jump, 109
 - hnco::function::LeadingOnes, 113
 - hnco::function::LongPath, 122
 - hnco::function::Needle, 152
 - hnco::function::OneMax, 167
 - hnco::function::Plateau, 181
 - hnco::function::PriorNoise, 191
 - hnco::function::Ridge, 212
 - hnco::function::SixPeaks, 220
 - hnco::function::Trap, 241
- get_worst_bv
 - hnco::algorithm::Population, 187, 188
- HammingBall, 88
 - hnco::neighborhood::HammingBall, 89
- HammingSphere, 90
 - hnco::neighborhood::HammingSphere, 91
- HammingSphereIterator, 91
 - hnco::neighborhood::HammingSphereIterator, 93
- has_known_maximum
 - hnco::function::DeceptiveJump, 59
 - hnco::function::FourPeaks, 72
 - hnco::function::FunctionMapComposition, 82
 - hnco::function::Hiff, 100
 - hnco::function::Jump, 109
 - hnco::function::LeadingOnes, 113
 - hnco::function::LinearFunction, 116
 - hnco::function::LongPath, 123
 - hnco::function::Needle, 152
 - hnco::function::OneMax, 167
 - hnco::function::Plateau, 181
 - hnco::function::PriorNoise, 191
 - hnco::function::Ridge, 212
 - hnco::function::SixPeaks, 220
 - hnco::function::SummationCancellation, 235
 - hnco::function::Trap, 241
 - hnco::function::WalshExpansion1, 249
- Hboa, 93
- Hea
 - hnco::algorithm::hea::Hea, 97
- Hea< Moment, Herding >, 94
- Hiff, 99
- hnco, 13
 - bit_t, 17
 - bm_add_rows, 17
 - bm_identity, 18
 - bm_invert, 18
 - bm_multiply, 19
 - bm_rank, 19
 - bm_row_echelon_form, 19
 - bm_solve, 19
 - bm_solve_upper_triangular, 20
 - bv_from_vector_bool, 21
 - bv_to_vector_bool, 21
 - perm_identity, 21
 - perm_random, 21
 - sbm_multiply, 22
 - sparse_bit_matrix_t, 17
 - sparse_bit_vector_t, 17
- hnco::AffineMap
 - is_surjective, 36
 - random, 36
- hnco::Injection
 - Injection, 103
- hnco::LinearMap
 - is_surjective, 118
 - random, 118
- hnco::Map
 - is_surjective, 125
- hnco::MapComposition
 - is_surjective, 127
 - MapComposition, 127
- hnco::Permutation
 - is_surjective, 179
- hnco::Projection
 - is_surjective, 197
 - Projection, 196
- hnco::Translation
 - is_surjective, 239
- hnco::algorithm, 22
- hnco::algorithm::Algorithm
 - _functions, 40
 - set_solution, 39
 - update_solution, 39
- hnco::algorithm::BiasedCrossover
 - breed, 43
- hnco::algorithm::Crossover
 - breed, 58
- hnco::algorithm::GeneticAlgorithm
 - GeneticAlgorithm, 87
 - set_allow_stay, 88
- hnco::algorithm::IterativeAlgorithm
 - IterativeAlgorithm, 105

- maximize, 106
- set_num_iterations, 106
- hnco::algorithm::MuCommaLambdaEa
 - MuCommaLambdaEa, 138
 - set_allow_stay, 139
- hnco::algorithm::MuPlusLambdaEa
 - MuPlusLambdaEa, 143
 - set_allow_stay, 143
- hnco::algorithm::OnePlusLambdaCommaLambdaGa
 - OnePlusLambdaCommaLambdaGa, 169
- hnco::algorithm::OnePlusOneEa
 - OnePlusOneEa, 171
 - set_allow_stay, 172
 - set_num_iterations, 172
- hnco::algorithm::Population
 - _compare_index_value, 189
 - _lookup, 189
 - comma_selection, 185
 - get_best_bv, 185, 186
 - get_best_value, 187
 - get_worst_bv, 187, 188
 - plus_selection, 188
- hnco::algorithm::RandomLocalSearch
 - set_patience, 203
- hnco::algorithm::SimulatedAnnealing
 - init_beta, 214
- hnco::algorithm::TournamentSelection
 - select, 237
- hnco::algorithm::UniformCrossover
 - breed, 244
- hnco::algorithm::bm_pbil, 25
- hnco::algorithm::bm_pbil::BmPbil
 - set_selection_size, 50
- hnco::algorithm::hea, 25
- hnco::algorithm::hea::Hea
 - Hea, 97
 - set_reset_period, 98
 - set_selection_size, 98
- hnco::algorithm::hea::SpinHerding
 - q_variation, 223
 - SpinHerding, 223
- hnco::algorithm::hea::SpinMoment
 - _second, 224
- hnco::exception, 26
- hnco::function, 26
- hnco::function::AbstractMaxSat
 - _expression, 33
 - load, 33
- hnco::function::Cache
 - Cache, 52
 - provides_incremental_evaluation, 52
- hnco::function::DeceptiveJump
 - get_maximum, 59
 - has_known_maximum, 59
- hnco::function::EqualProducts
 - generate, 63
 - random, 63
- hnco::function::Factorization
 - Factorization, 68
 - load, 69
- hnco::function::FourPeaks
 - get_maximum, 72
 - has_known_maximum, 72
- hnco::function::Function
 - compute_walsh_transform, 75
 - get_maximum, 76
 - incremental_eval, 76
 - provides_incremental_evaluation, 77
 - safe_eval, 77
- hnco::function::Function::WalshTransformTerm
 - feature, 254
- hnco::function::FunctionController
 - provides_incremental_evaluation, 79
- hnco::function::FunctionMapComposition
 - FunctionMapComposition, 81
 - get_maximum, 82
 - has_known_maximum, 82
- hnco::function::FunctionPlugin
 - FunctionPlugin, 85
- hnco::function::Hiff
 - get_maximum, 100
 - has_known_maximum, 100
- hnco::function::Jump
 - get_maximum, 109
 - has_known_maximum, 109
- hnco::function::LeadingOnes
 - get_maximum, 113
 - has_known_maximum, 113
- hnco::function::LinearFunction
 - generate, 116
 - has_known_maximum, 116
 - provides_incremental_evaluation, 116
 - random, 116
- hnco::function::LongPath
 - get_maximum, 122
 - has_known_maximum, 123
- hnco::function::MaxNae3Sat
 - load, 129
- hnco::function::MaxSat
 - random, 131
- hnco::function::NearestNeighborIsingModel1
 - eval, 146
 - generate, 146
 - provides_incremental_evaluation, 146
 - random, 146
- hnco::function::NearestNeighborIsingModel2
 - eval, 149
 - generate, 149
 - provides_incremental_evaluation, 150
 - random, 150
- hnco::function::Needle
 - get_maximum, 152
 - has_known_maximum, 152
- hnco::function::Negation
 - provides_incremental_evaluation, 154
- hnco::function::NkLandscape

- generate, 160
- random, 161
- random_structure, 161
- hnco::function::OnBudgetFunction
 - eval, 164
 - incremental_eval, 164
 - update, 165
- hnco::function::OneMax
 - get_maximum, 167
 - has_known_maximum, 167
 - provides_incremental_evaluation, 167
- hnco::function::ParsedModifier
 - ParsedModifier, 175
- hnco::function::Plateau
 - get_maximum, 181
 - has_known_maximum, 181
- hnco::function::PriorNoise
 - get_maximum, 191
 - has_known_maximum, 191
 - provides_incremental_evaluation, 191
- hnco::function::ProgressTracker
 - get_last_improvement, 194
- hnco::function::Qubo
 - _q, 201
 - load, 200
- hnco::function::Ridge
 - get_maximum, 212
 - has_known_maximum, 212
- hnco::function::SixPeaks
 - get_maximum, 220
 - has_known_maximum, 220
- hnco::function::StopOnMaximum
 - eval, 228
 - incremental_eval, 228
 - StopOnMaximum, 227
 - update, 228
- hnco::function::StopOnTarget
 - eval, 231
 - incremental_eval, 231
 - StopOnTarget, 230
 - update, 231
- hnco::function::SummationCancellation
 - has_known_maximum, 235
 - SummationCancellation, 234
- hnco::function::Trap
 - get_maximum, 241
 - has_known_maximum, 241
 - Trap, 240
- hnco::function::WalshExpansion
 - generate, 246
 - random, 246
- hnco::function::WalshExpansion1
 - generate, 248
 - has_known_maximum, 249
 - provides_incremental_evaluation, 249
 - random, 249
- hnco::function::WalshExpansion2
 - _quadratic, 253
- generate, 251
- generate_ising1_long_range, 251
- generate_ising1_long_range_periodic, 252
- random, 253
- hnco::function::real, 29
- hnco::function::real::DyadicRealRepresentation
 - DyadicRealRepresentation, 61
- hnco::function::real::ParsedRealMultivariateFunction
 - ParsedRealMultivariateFunction, 176
- hnco::function::real::RealMultivariateFunctionAdapter
 - RealMultivariateFunctionAdapter, 208
- hnco::neighborhood, 29
- hnco::neighborhood::BernoulliProcess
 - BernoulliProcess, 41, 42
 - set_allow_stay, 42
 - set_probability, 42
- hnco::neighborhood::HammingBall
 - HammingBall, 89
- hnco::neighborhood::HammingSphere
 - HammingSphere, 91
- hnco::neighborhood::HammingSphereIterator
 - HammingSphereIterator, 93
- hnco::neighborhood::MultiBitFlip
 - bernoulli_trials, 140
 - MultiBitFlip, 140
 - reservoir_sampling, 141
- hnco::neighborhood::Neighborhood
 - map, 157
 - mutate, 157
 - Neighborhood, 156
- hnco::neighborhood::NeighborhoodIterator
 - NeighborhoodIterator, 158
- hnco::neighborhood::SingleBitFlipIterator
 - SingleBitFlipIterator, 217
- hnco::random, 30
- HncoEvaluator, 100
- HypercubeIterator, 101
- incremental_eval
 - hnco::function::Function, 76
 - hnco::function::OnBudgetFunction, 164
 - hnco::function::StopOnMaximum, 228
 - hnco::function::StopOnTarget, 231
- init_beta
 - hnco::algorithm::SimulatedAnnealing, 214
- Injection, 102
 - hnco::Injection, 103
- is_surjective
 - hnco::AffineMap, 36
 - hnco::LinearMap, 118
 - hnco::Map, 125
 - hnco::MapComposition, 127
 - hnco::Permutation, 179
 - hnco::Projection, 197
 - hnco::Translation, 239
- IterativeAlgorithm, 104
 - hnco::algorithm::IterativeAlgorithm, 105
- Iterator, 107

- Jump, 108
- Labs, 110
- LabsMeritFactor, 111
- LastEvaluation, 112
- LeadingOnes, 112
- LinearFunction, 114
- LinearMap, 117
- load
 - hnco::function::AbstractMaxSat, 33
 - hnco::function::Factorization, 69
 - hnco::function::MaxNae3Sat, 129
 - hnco::function::Qubo, 200
- LocalMaximum, 119
- LogContext, 120
- LongPath, 121
- Ltga, 123
- Map, 124
- map
 - hnco::neighborhood::Neighborhood, 157
- MapComposition, 126
 - hnco::MapComposition, 127
- MaxNae3Sat, 129
- MaxSat, 130
- maximize
 - hnco::algorithm::IterativeAlgorithm, 106
- MaximumReached, 128
- Mimic, 132
- Mmas, 134
- Model, 135
- ModelParameters, 136
- MuCommaLambdaEa, 137
 - hnco::algorithm::MuCommaLambdaEa, 138
- MuPlusLambdaEa, 141
 - hnco::algorithm::MuPlusLambdaEa, 143
- MultiBitFlip, 139
 - hnco::neighborhood::MultiBitFlip, 140
- mutate
 - hnco::neighborhood::Neighborhood, 157
- NearestNeighborIsingModel1, 144
- NearestNeighborIsingModel2, 147
- Needle, 151
- Negation, 153
- Neighborhood, 155
 - hnco::neighborhood::Neighborhood, 156
- NeighborhoodIterator, 158
 - hnco::neighborhood::NeighborhoodIterator, 158
- NkLandscape, 159
- NpsPbil, 161
- OnBudgetFunction, 163
- OneMax, 165
- OnePlusLambdaCommaLambdaGa, 168
 - hnco::algorithm::OnePlusLambdaCommaLambdaGa, 169
- OnePlusOneEa, 170
 - hnco::algorithm::OnePlusOneEa, 171
- ParameterLessPopulationPyramid, 172
- ParsedModifier, 174
 - hnco::function::ParsedModifier, 175
- ParsedRealMultivariateFunction, 175
 - hnco::function::real::ParsedRealMultivariateFunction, 176
- Pbil, 177
- perm_identity
 - hnco, 21
- perm_random
 - hnco, 21
- Permutation, 178
- Plateau, 180
- plus_selection
 - hnco::algorithm::Population, 188
- PointValueException, 182
- Population, 183
- PriorNoise, 190
- ProgressTracker, 192
- ProgressTracker::Event, 66
- ProgressTrackerContext, 194
- Projection, 195
 - hnco::Projection, 196
- provides_incremental_evaluation
 - hnco::function::Cache, 52
 - hnco::function::Function, 77
 - hnco::function::FunctionController, 79
 - hnco::function::LinearFunction, 116
 - hnco::function::NearestNeighborIsingModel1, 146
 - hnco::function::NearestNeighborIsingModel2, 150
 - hnco::function::Negation, 154
 - hnco::function::OneMax, 167
 - hnco::function::PriorNoise, 191
 - hnco::function::WalshExpansion1, 249
- PvAlgorithm, 197
- q_variation
 - hnco::algorithm::hea::SpinHerding, 223
- Qubo, 199
- Random, 201
- random
 - hnco::AffineMap, 36
 - hnco::LinearMap, 118
 - hnco::function::EqualProducts, 63
 - hnco::function::LinearFunction, 116
 - hnco::function::MaxSat, 131
 - hnco::function::NearestNeighborIsingModel1, 146
 - hnco::function::NearestNeighborIsingModel2, 150
 - hnco::function::NkLandscape, 161
 - hnco::function::WalshExpansion, 246
 - hnco::function::WalshExpansion1, 249
 - hnco::function::WalshExpansion2, 253
- random_structure
 - hnco::function::NkLandscape, 161
- RandomLocalSearch, 202
- RandomSearch, 204
- RandomWalk, 205
- RealMultivariateFunction, 206

- RealMultivariateFunctionAdapter, [207](#)
 - hnco::function::real::RealMultivariateFunction↔
Adapter, [208](#)
- RealRepresentation, [209](#)
- reservoir_sampling
 - hnco::neighborhood::MultiBitFlip, [141](#)
- Restart, [210](#)
- Ridge, [211](#)
- safe_eval
 - hnco::function::Function, [77](#)
- sbm_multiply
 - hnco, [22](#)
- select
 - hnco::algorithm::TournamentSelection, [237](#)
- set_allow_stay
 - hnco::algorithm::GeneticAlgorithm, [88](#)
 - hnco::algorithm::MuCommaLambdaEa, [139](#)
 - hnco::algorithm::MuPlusLambdaEa, [143](#)
 - hnco::algorithm::OnePlusOneEa, [172](#)
 - hnco::neighborhood::BernoulliProcess, [42](#)
- set_num_iterations
 - hnco::algorithm::IterativeAlgorithm, [106](#)
 - hnco::algorithm::OnePlusOneEa, [172](#)
- set_patience
 - hnco::algorithm::RandomLocalSearch, [203](#)
- set_probability
 - hnco::neighborhood::BernoulliProcess, [42](#)
- set_reset_period
 - hnco::algorithm::hea::Hea, [98](#)
- set_selection_size
 - hnco::algorithm::bm_pbil::BmPbil, [50](#)
 - hnco::algorithm::hea::Hea, [98](#)
- set_solution
 - hnco::algorithm::Algorithm, [39](#)
- SimulatedAnnealing, [213](#)
- SingleBitFlip, [215](#)
- SingleBitFlipIterator, [216](#)
 - hnco::neighborhood::SingleBitFlipIterator, [217](#)
- SinusSummationCancellation, [217](#)
- SixPeaks, [218](#)
- sparse_bit_matrix_t
 - hnco, [17](#)
- sparse_bit_vector_t
 - hnco, [17](#)
- SpinHerdng, [220](#)
 - hnco::algorithm::hea::SpinHerdng, [223](#)
- SpinMoment, [223](#)
- SteepestAscentHillClimbing, [225](#)
- StopOnMaximum, [226](#)
 - hnco::function::StopOnMaximum, [227](#)
- StopOnTarget, [229](#)
 - hnco::function::StopOnTarget, [230](#)
- StopWatch, [232](#)
- SummationCancellation, [233](#)
 - hnco::function::SummationCancellation, [234](#)
- TargetReached, [235](#)
- TournamentSelection, [236](#)
- Translation, [238](#)
- Trap, [239](#)
 - hnco::function::Trap, [240](#)
- Umda, [242](#)
- UniformCrossover, [243](#)
- update
 - hnco::function::OnBudgetFunction, [165](#)
 - hnco::function::StopOnMaximum, [228](#)
 - hnco::function::StopOnTarget, [231](#)
- update_solution
 - hnco::algorithm::Algorithm, [39](#)
- WalshExpansion, [244](#)
- WalshExpansion1, [247](#)
- WalshExpansion2, [250](#)