

Getting started with R

Alexandre Courtiol @rdataberlin

Leibniz Institute of Zoo and Wildlife Research

December 2019



**Leibniz Institute for Zoo
and Wildlife Research**

IN THE FORSCHUNGSVERBUND BERLIN E.V.



What is R?

R is a programming language and software environment for statistical computing & graphics

What is R?

R is a programming language and software environment for statistical computing & graphics

Key points (for this course):

- R includes **long-established parametric and non-parametric tests**, as well as cutting edge statistical methods

What is R?

R is a programming language and software environment for statistical computing & graphics

Key points (general):

- interactive (you can explore each step of your workflow in details)

What is R?

R is a programming language and software environment for statistical computing & graphics

Key points (general):

- interactive (you can explore each step of your workflow in details)
- flexible (you can create your own functions)

What is R?

R is a programming language and software environment for statistical computing & graphics

Key points (general):

- interactive (you can explore each step of your workflow in details)
- flexible (you can create your own functions)
- transparent (you use scripts which allows for reproducible research)

What is R?

R is a programming language and software environment for statistical computing & graphics

Key points (general):

- interactive (you can explore each step of your workflow in details)
- flexible (you can create your own functions)
- transparent (you use scripts which allows for reproducible research)
- free (<https://www.r-project.org/COPYING>)

What is R?

R is a programming language and software environment for statistical computing & graphics

Key points (general):

- interactive (you can explore each step of your workflow in details)
- flexible (you can create your own functions)
- transparent (you use scripts which allows for reproducible research)
- free (<https://www.r-project.org/COPYING>)
- open (<https://github.com/wch/r-source>)

What is R?

R is a programming language and software environment for statistical computing & graphics

Key points (general):

- interactive (you can explore each step of your workflow in details)
- flexible (you can create your own functions)
- transparent (you use scripts which allows for reproducible research)
- free (<https://www.r-project.org/COPYING>)
- open (<https://github.com/wch/r-source>)
- honest (<https://bugs.r-project.org/bugzilla>)

What is R?

R is a programming language and software environment for statistical computing & graphics

Key points (general):

- interactive (you can explore each step of your workflow in details)
- flexible (you can create your own functions)
- transparent (you use scripts which allows for reproducible research)
- free (<https://www.r-project.org/COPYING>)
- open (<https://github.com/wch/r-source>)
- honest (<https://bugs.r-project.org/bugzilla>)
- scalable (laptop/supercomputer; local/remote; Windows/MacOS/Linux/Unix)

What is R?

R is a programming language and software environment for statistical computing & graphics

Key points (general):

- interactive (you can explore each step of your workflow in details)
- flexible (you can create your own functions)
- transparent (you use scripts which allows for reproducible research)
- free (<https://www.r-project.org/COPYING>)
- open (<https://github.com/wch/r-source>)
- honest (<https://bugs.r-project.org/bugzilla>)
- scalable (laptop/supercomputer; local/remote; Windows/MacOS/Linux/Unix)
- rich (<https://rdrr.io>; <https://www.rdocumentation.org>)

What is R?

R is a programming language and software environment for statistical computing & graphics

Key points (general):

- interactive (you can explore each step of your workflow in details)
- flexible (you can create your own functions)
- transparent (you use scripts which allows for reproducible research)
- free (<https://www.r-project.org/COPYING>)
- open (<https://github.com/wch/r-source>)
- honest (<https://bugs.r-project.org/bugzilla>)
- scalable (laptop/supercomputer; local/remote; Windows/MacOS/Linux/Unix)
- rich (<https://rdrr.io>; <https://www.rdocumentation.org>)
- up to date (<http://dirk.eddelbuettel.com/cranberries/cran/updated>)

What is R?

R is a programming language and software environment for statistical computing & graphics

Key points (general):

- interactive (you can explore each step of your workflow in details)
- flexible (you can create your own functions)
- transparent (you use scripts which allows for reproducible research)
- free (<https://www.r-project.org/COPYING>)
- open (<https://github.com/wch/r-source>)
- honest (<https://bugs.r-project.org/bugzilla>)
- scalable (laptop/supercomputer; local/remote; Windows/MacOS/Linux/Unix)
- rich (<https://rdrr.io>; <https://www.rdocumentation.org>)
- up to date (<http://dirk.eddelbuettel.com/cranberries/cran/updated>)
- friendly (more on that later)

Is R good for you?

R is good for:

- data manipulation
- statistical analyses
- plotting
- programming around data

Is R good for you?

R is good for:

- data manipulation
- statistical analyses
- plotting
- programming around data

R is not optimal for:

- data entry
- formal algebra
- general-purpose programming
- beginners (yet, getting easier)

Getting started with R

- 1 Installation
- 2 RStudio
- 3 Basics of the language
- 4 Packages
- 5 Manipulating data
- 6 Importing data
- 7 Plotting
- 8 Programming
- 9 Housekeeping
- 10 Learning on your own

Getting started with R

1 Installation

2 RStudio

3 Basics of the language

4 Packages

5 Manipulating data

6 Importing data

7 Plotting

8 Programming

9 Housekeeping

10 Learning on your own

Installation steps

- ① connect to the WIFI network `izw-gast` (check password on blackboard)
- ② set the internet proxy: `192.168.2.2:3128` (necessary at IZW, but usually not)
- ③ check that you do get internet access
- ④ install **R**: <https://cran.r-project.org/>
- ⑤ install RStudio: <https://www.rstudio.com/products/rstudio/download/>
- ⑥ open RStudio

Getting started with R

- 1 Installation
- 2 RStudio
- 3 Basics of the language
- 4 Packages
- 5 Manipulating data
- 6 Importing data
- 7 Plotting
- 8 Programming
- 9 Housekeeping
- 10 Learning on your own

The RStudio Integrated Desktop Environment (IDE)

The screenshot shows the RStudio IDE interface. The top menu bar includes File, Edit, Code, View, Plots, Session, Build, Debug, Profile, Tools, Window, and Help. The title bar indicates the project is "My_first_project".

Code Editor: The main window displays an R script named "Untitled1". The code includes R Markdown syntax, such as `#` for comments and `##` for section headers, and an R code chunk with `echo = TRUE`.

```

1 * ---
2 # title: "My_first_R_script"
3 # author: "Alexandre Courtiol"
4 # date: "5/15/2019"
5 # output: html_document
6 ---
7
8 ```{r setup, include=FALSE}
9 knitr::opts_chunk$set(echo = TRUE)
10
11
12 ## R Markdown
13
14 This is an R Markdown document. Markdown is a simple formatting syntax for
authoring HTML, PDF, and MS Word documents. For more details on using R Markdown
see <http://rmarkdown.rstudio.com>.
15
16 When you click the **Knit** button a document will be generated that includes both
content as well as the output of any embedded R code chunks within the document.

```

Console: The right panel shows the R environment. It displays the R version information, the license, natural language support, and information about R being a collaborative project.

```

R version 3.6.0 (2019-04-26) -- "Planting of a Tree"
Copyright (C) 2019 The R Foundation for Statistical Computing
Platform: x86_64-apple-darwin15.6.0 (64-bit)

R is free software and comes with ABSOLUTELY NO WARRANTY.
You are welcome to redistribute it under certain conditions.
Type 'license()' or 'licence()' for distribution details.

Natural language support but running in an English locale

R is a collaborative project with many contributors.
Type 'contributors()' for more information and
'citation()' on how to cite R or R packages in publications.

Type 'demo()' for some demos, 'help()' for on-line help, or
'help.start()' for an HTML browser interface to help.
Type 'q()' to quit R.

```

File Browser: The bottom right panel shows the file structure of the project. It contains a folder named "My_first_project" which includes an Rproj file.

Name	Size	Modified
My_first_project.Rproj	204 B	May 15, 2019, 5:51 PM

Why using RStudio?

You can use **R** without RStudio, but RStudio is:

- provided with more functionalities than the official **R** IDE
- integrated with several packages developed by RStudio (e.g. {readr})
- suitable for both desktop and remote computers (web server)
- free and open source

Overall structure

- Top menu
- Tool bar (small subset from the top menu)
- 4 visible panes

The top menu

File Edit Code View Plots Session Build Debug Profile Tools Window Help

10 most useful items:

- File → New File
- File → New Project...
- File → Import Dataset
- File → Save
- Edit → Undo
- Edit → Clear console
- Code → Comment/Uncomment Lines
- Tools → Global Options...
- Help → Check for Updates (for updating RStudio, not **R**, nor **R** packages)
- Help → Cheatsheets

Practice


- ① create a new project
- ② create a new **R** Script file
- ③ save the created **R** Script file into the project folder directory
- ④ have a look at the RStudio cheatsheet

NB:

- a project is defined by a simple (text) file. Its main benefit is to open RStudio with the correct working directory set (that is, the one where the project file is)
- an **R** Script file is a (text) file where we can write **R** code


My tips about the global options

1. I never save or restore the workspace and so should you (default settings are DANGEROUS)

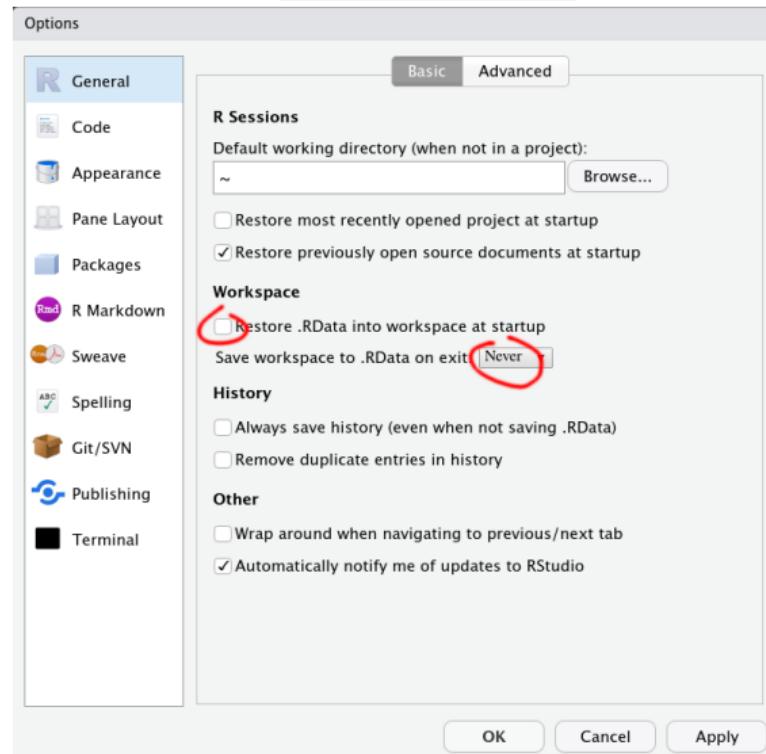


My tips about the global options

2. I don't like parentheses and quotes auto-completion, but you may

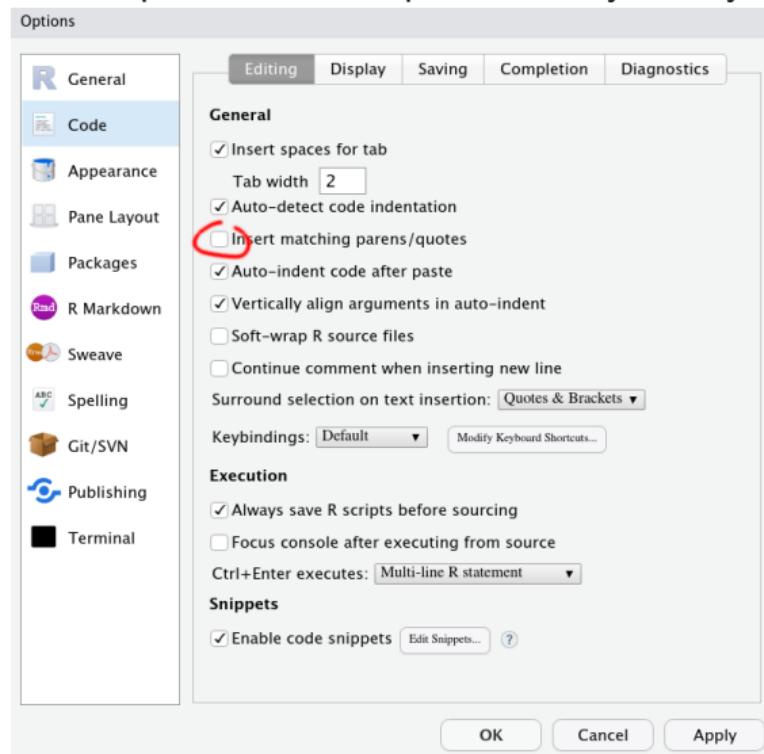


My tips about the global options

3. I activate all the code diagnostics offered by RStudio!

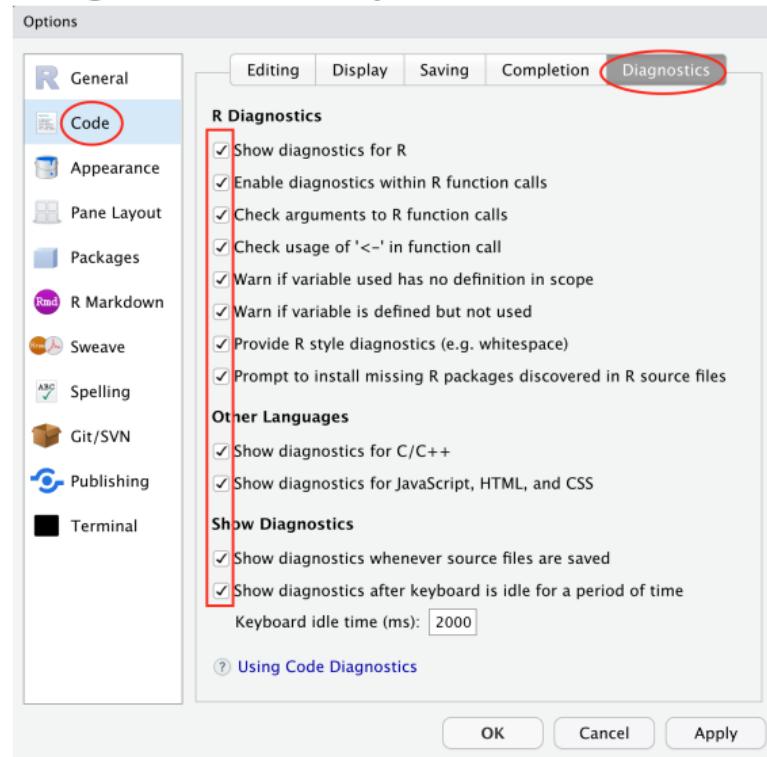


My tips about the global options

4. I use a black theme except when using a video projector (do as you please)

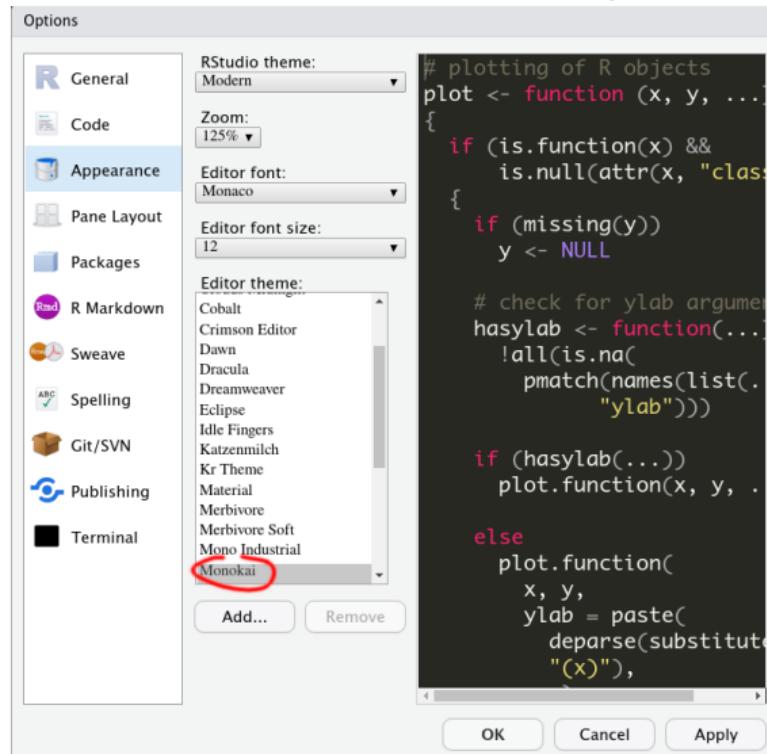

My tips about the global options

5. I like to put the source and the console panes side-by-side to give them more vertical space on the screen

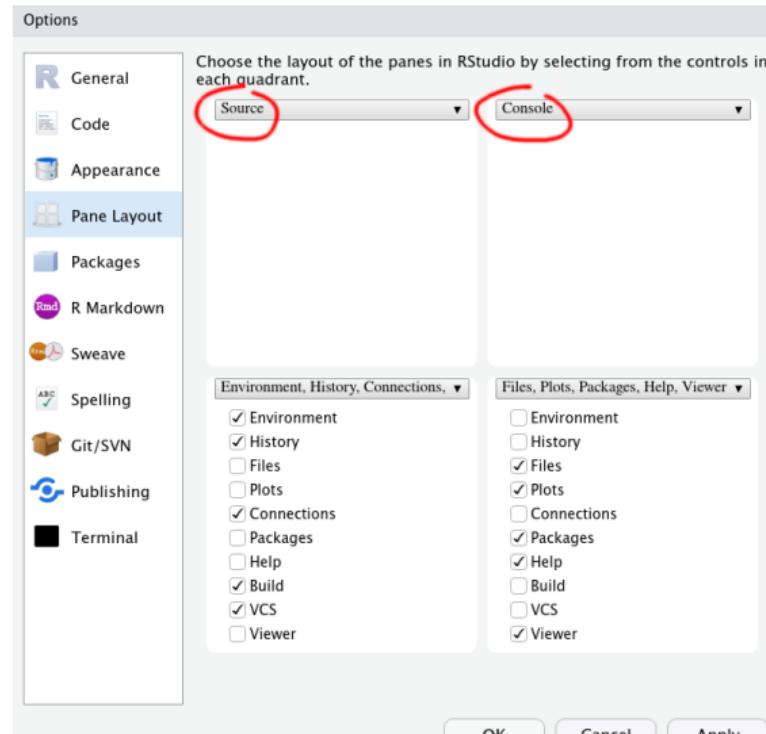

The Source pane

This is where you type the code you want to keep

A screenshot of the RStudio interface. The top menu bar includes File, Edit, Code, View, Plots, Session, Build, Debug, Profile, Tools, Window, Help, and a status bar showing the path ~/Desktop/My_first_project - RStudio, battery level at 17%, signal strength, and the date and time Wed 17:53. The main window has several panes:

- Source pane (highlighted with a red border):** Contains R code for a Markdown document. The code includes a YAML header with title, author, and date, followed by R Markdown syntax for setup, chunk options, and content. It also contains a note about R Markdown and a warning about Knit output.
- Console pane:** Displays the R startup message, including the version (3.6.0), copyright (2019), platform (x86_64-apple-darwin15.6.0 (64-bit)), and a note about no warranty.
- Terminal pane:** Shows the R command 'R' being run, which outputs the R startup message.
- Environment pane:** Shows the global environment is empty.
- Files pane:** Shows the project directory structure with a file named My_first_project.Rproj.

The Console pane

This is where you can run R code directly

The screenshot shows the RStudio interface with several panes visible. The top navigation bar includes File, Edit, Code, View, Plots, Session, Build, Debug, Profile, Tools, Window, and Help. The title bar indicates the current project is "My_first_project".

The left pane contains the code editor for "Untitled1.R" (renamed from "Untitled1.Rmd"). The code is an R Markdown script:

```
1 ---  
2 title: "My_first_R_script"  
3 author: "Alexandre Courtial"  
4 date: "5/15/2019"  
5 output: html_document  
6 ---  
7 ~  
8 ---{r setup, include=FALSE}  
9 knitr::opts_chunk$set(echo = TRUE)  
10 ---  
11 ~  
12 ## R Markdown  
13 ~  
14 This is an R Markdown document. Markdown is a simple formatting syntax for  
authoring HTML, PDF, and MS Word documents. For more details on using R Markdown  
see http://rmarkdown.rstudio.com.  
15 ~  
16 When you click the Knit button a document will be generated that includes both  
content as well as the output of any embedded R code chunks within the document.  
2:1 My_first_R_script
```

The right pane, which is highlighted with a red border, is the "Console" pane. It displays the R startup message and help text:

```
R version 3.6.0 (2019-04-26) -- "Planting of a Tree"  
Copyright (C) 2019 The R Foundation for Statistical Computing  
Platform: x86_64-apple-darwin15.6.0 (64-bit)  
  
R is free software and comes with ABSOLUTELY NO WARRANTY.  
You are welcome to redistribute it under certain conditions.  
Type 'license()' or 'licence()' for distribution details.  
  
Natural language support but running in an English locale  
  
R is a collaborative project with many contributors.  
Type 'contributors()' for more information and  
'citation()' on how to cite R or R packages in publications.  
  
Type 'demo()' for some demos, 'help()' for on-line help, or  
'help.start()' for an HTML browser interface to help.  
Type 'q()' to quit R.
```

The bottom right pane is the "Files" viewer, showing the project structure:

Name	Size	Modified
My_first_project.Rproj	204 B	May 15, 2019, 5:51 PM

The other panes

This is where everything else is

A screenshot of the RStudio interface illustrating the "Environment" pane. The "Environment" tab is highlighted with a red box. The pane displays the message "Environment is empty". Other tabs visible include "History" and "Connections". In the bottom right corner of the RStudio window, there is a small red box highlighting the "Files" tab of the global navigation bar.

Console Terminal ~ /Desktop/My_first_project/

R version 3.6.0 (2019-04-26) -- "Planting of a Tree"
Copyright (C) 2019 The R Foundation for Statistical Computing
Platform: x86_64-apple-darwin15.6.0 (64-bit)

R is free software and comes with ABSOLUTELY NO WARRANTY.
You are welcome to redistribute it under certain conditions.
Type 'license()' or 'licence()' for distribution details.

Natural language support but running in an English locale

R is a collaborative project with many contributors.
Type 'contributors()' for more information and
'citation()' on how to cite R or R packages in publications.

Type 'demo()' for some demos, 'help()' for on-line help, or
'help.start()' for an HTML browser interface to help.
Type 'q()' to quit R.

2:1 My_first_R_script R Markdown

Environment History Connections

New Folder Delete Rename More

Name Size Modified

..

Home > Desktop > My_first_project

My_first_project.Rproj 204 B May 15, 2019, 5:51 PM

Tips

- ① only use the Console pane to mess around
- ② write proper **R** code in the Source pane
- ③ start your script with `rm(list = ls())`
- ④ comment thoroughly your **R** script using `#` signs
- ⑤ re-run frequently your entire script to make sure that it works

Getting started with R

- 1 Installation
- 2 RStudio
- 3 Basics of the language
- 4 Packages
- 5 Manipulating data
- 6 Importing data
- 7 Plotting
- 8 Programming
- 9 Housekeeping
- 10 Learning on your own

Arithmetic & Logic

R can perform basic arithmetic:

```
1 + 1
## [1] 2
1 - 1
## [1] 0
2 * pi
## [1] 6.283185
3 / 2
## [1] 1.5
5^2
## [1] 25
5^(2 + 1)
## [1] 125
Inf/Inf
## [1] NaN
```

Arithmetic & Logic

R can perform basic arithmetic:

```
1 + 1  
## [1] 2  
  
1 - 1  
## [1] 0  
  
2 * pi  
## [1] 6.283185  
  
3 / 2  
## [1] 1.5  
  
5^2  
## [1] 25  
  
5^(2 + 1)  
## [1] 125  
  
Inf/Inf  
## [1] NaN
```

R can perform logical operations:

```
1 == 1  
## [1] TRUE  
  
(1 == 1) & (1 == 2)  
## [1] FALSE  
  
(1 == 1) | (1 == 2)  
## [1] TRUE  
  
1 != 2  
## [1] TRUE  
  
!(1 == 2)  
## [1] TRUE  
  
2 >= 1  
## [1] TRUE  
  
2 < 1  
## [1] FALSE
```

Arithmetic & Logic

R can perform basic arithmetic:

```
1 + 1  
## [1] 2  
  
1 - 1  
## [1] 0  
  
2 * pi  
## [1] 6.283185  
  
3 / 2  
## [1] 1.5  
  
5^2  
## [1] 25  
  
5^(2 + 1)  
## [1] 125  
  
Inf/Inf  
## [1] NaN
```

R can perform logical operations:

```
1 == 1  
## [1] TRUE  
  
(1 == 1) & (1 == 2)  
## [1] FALSE  
  
(1 == 1) | (1 == 2)  
## [1] TRUE  
  
1 != 2  
## [1] TRUE  
  
!(1 == 2)  
## [1] TRUE  
  
2 >= 1  
## [1] TRUE  
  
2 < 1  
## [1] FALSE
```

As for most other programming languages, avoid equality tests for floating-point numbers!

```
0.8 - 0.3 - 0.5 == 0.8 - 0.5 - 0.3  
## [1] FALSE  
  
## check later ?all.equal() and ?dplyr::near()
```

Practice

Compute $\sqrt{\frac{2^{3+1}}{4} - 20}$

Creating objects

Objects are being assigned using the “arrow” operator:

```
one_plus_one <- 1 + 1 ## storing the result
```

Creating objects

Objects are being assigned using the “arrow” operator:

```
one_plus_one <- 1 + 1 ## storing the result
```

Objects are being used through their name (that is the whole point):

```
one_plus_one ## displaying the result
## [1] 2
one_plus_one_plus_one <- one_plus_one + 1
one_plus_one_plus_one
## [1] 3
```

Creating objects

Objects are being assigned using the “arrow” operator:

```
one_plus_one <- 1 + 1 ## storing the result
```

Objects are being used through their name (that is the whole point):

```
one_plus_one ## displaying the result  
## [1] 2  
one_plus_one_plus_one <- one_plus_one + 1  
one_plus_one_plus_one  
## [1] 3
```

Tips:

```
(one_times_two <- 1 * 2) ## storing and displaying the result at once  
## [1] 2
```

Creating objects

Objects are being assigned using the “arrow” operator:

```
one_plus_one <- 1 + 1 ## storing the result
```

Objects are being used through their name (that is the whole point):

```
one_plus_one ## displaying the result  
## [1] 2  
one_plus_one_plus_one <- one_plus_one + 1  
one_plus_one_plus_one  
## [1] 3
```

Tips:

```
(one_times_two <- 1 * 2) ## storing and displaying the result at once  
## [1] 2
```

- \rightarrow works too (if you switch the lefthand side and the righthand side)

Creating objects

Objects are being assigned using the “arrow” operator:

```
one_plus_one <- 1 + 1 ## storing the result
```

Objects are being used through their name (that is the whole point):

```
one_plus_one ## displaying the result  
## [1] 2  
one_plus_one_plus_one <- one_plus_one + 1  
one_plus_one_plus_one  
## [1] 3
```

Tips:

```
(one_times_two <- 1 * 2) ## storing and displaying the result at once  
## [1] 2
```

- `->` works too (if you switch the lefthand side and the righthand side)
- “`_`” and “`.`” are OK but avoid spaces & other weird characters in names

Creating objects

Objects are being assigned using the “arrow” operator:

```
one_plus_one <- 1 + 1 ## storing the result
```

Objects are being used through their name (that is the whole point):

```
one_plus_one ## displaying the result  
## [1] 2  
one_plus_one_plus_one <- one_plus_one + 1  
one_plus_one_plus_one  
## [1] 3
```

Tips:

```
(one_times_two <- 1 * 2) ## storing and displaying the result at once  
## [1] 2
```

- `->` works too (if you switch the lefthand side and the righthand side)
- “_” and “.” are OK but avoid spaces & other weird characters in names
- names are case sensitive

Creating objects

Objects are being assigned using the “arrow” operator:

```
one_plus_one <- 1 + 1 ## storing the result
```

Objects are being used through their name (that is the whole point):

```
one_plus_one ## displaying the result  
## [1] 2  
one_plus_one_plus_one <- one_plus_one + 1  
one_plus_one_plus_one  
## [1] 3
```

Tips:

```
(one_times_two <- 1 * 2) ## storing and displaying the result at once  
## [1] 2
```

- `->` works too (if you switch the lefthand side and the righthand side)
- “`_`” and “`.`” are OK but avoid spaces & other weird characters in names
- names are case sensitive
- use `<-` for assignments, not `=`

Functions

```
citation() ## function showing how to cite R

##
## To cite R in publications use:
##
##   R Core Team (2019). R: A language and environment for statistical computing. R
##   Foundation for Statistical Computing, Vienna, Austria. URL https://www.R-project.org/.
##
## A BibTeX entry for LaTeX users is
##
##   @Manual{,
##     title = {R: A Language and Environment for Statistical Computing},
##     author = {{R Core Team}},
##     organization = {R Foundation for Statistical Computing},
##     address = {Vienna, Austria},
##     year = {2019},
##     url = {https://www.R-project.org/},
##   }
##
## We have invested a lot of time and effort in creating R, please cite it when using it for
## data analysis. See also 'citation("pkgname")' for citing R packages.
```

Functions

```
citation() ## function showing how to cite R

##
## To cite R in publications use:
##
##   R Core Team (2019). R: A language and environment for statistical computing. R
##   Foundation for Statistical Computing, Vienna, Austria. URL https://www.R-project.org/.
##
## A BibTeX entry for LaTeX users is
##
##   @Manual{,
##     title = {R: A Language and Environment for Statistical Computing},
##     author = {{R Core Team}},
##     organization = {R Foundation for Statistical Computing},
##     address = {Vienna, Austria},
##     year = {2019},
##     url = {https://www.R-project.org/},
##   }
##
## We have invested a lot of time and effort in creating R, please cite it when using it for
## data analysis. See also 'citation("pkgname")' for citing R packages.
```

```
help(citation) ## getting help for this function
```

```
?citation() ## same but shorter (syntactic sugar)
```

Functions

```
citation() ## function showing how to cite R

## To cite R in publications use:
## R Core Team (2019). R: A language and environment for statistical computing. R
## Foundation for Statistical Computing, Vienna, Austria. URL https://www.R-project.org/.
## A BibTeX entry for LaTeX users is
## @Manual{,
##   title = {R: A Language and Environment for Statistical Computing},
##   author = {{R Core Team}},
##   organization = {R Foundation for Statistical Computing},
##   address = {Vienna, Austria},
##   year = {2019},
##   url = {https://www.R-project.org/},
## }
## We have invested a lot of time and effort in creating R, please cite it when using it for
## data analysis. See also 'citation("pkgname")' for citing R packages.
```

```
help(citation) ## getting help for this function
```

```
?citation() ## same but shorter (syntactic sugar)
```

NB: best to look at the help before using a function new to you!

Practice

Display the path of any file you want using `file.choose()`

Syntax for functions that take arguments

Basic syntax:

```
sign(x = -5)
## [1] -1
sign(-5)
## [1] -1
```

Syntax for functions that take arguments

Basic syntax:

```
sign(x = -5)
## [1] -1
sign(-5)
## [1] -1
```

Both are synonymous, but:

- the first syntax is safer
- the second syntax removes visual clutter

Functions

```
mean()
```

```
?mean()
```

Usage:

```
mean(x, ...)  
## Default S3 method:  
mean(x, trim = 0, na.rm = FALSE, ...)
```

Arguments:

x: An R object. Currently there are methods for numeric/logical vectors and date, date-time and time interval objects, and for data frames all of whose columns have a method. Complex vectors are allowed for ‘trim = 0’, only.

trim: the fraction (0 to 0.5) of observations to be trimmed from each end of ‘x’ before the mean is computed. Values of trim outside that range are taken as the nearest endpoint.

na.rm: a logical value indicating whether ‘NA’ values should be stripped before the computation proceeds.

[...]

Functions

All these calls are similar:

```
mean(x = c(1, 5, 3, 4))  
## [1] 3.25
```

```
mean(c(1, 5, 3, 4))  
## [1] 3.25
```

```
vector.of.numbers <- c(1, 5, 3, 4)  
mean(x = vector.of.numbers)  
## [1] 3.25
```

```
mean(vector.of.numbers)  
## [1] 3.25
```

Practice

```
new.vector <- c(1, 2, 3, NA, 5)
```

Try to compute the mean of new.vector using mean()!

Finding functions


To find the name of the function you are looking for, you may try:

```
??"linear model" ## if you want something that fits a linear model
```

or

```
help.search(pattern = "linear model", package = "stats") ## if you know where to look for
```

or

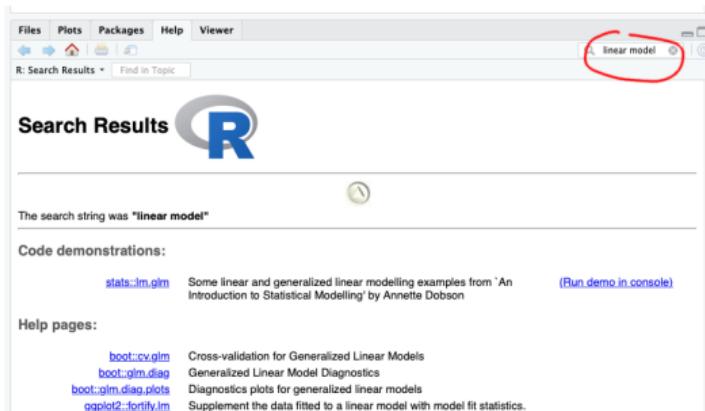

NB: this is failing on some 1.2.xxx versions of RStudio

Getting started with R

- 1 Installation
- 2 RStudio
- 3 Basics of the language
- 4 Packages
- 5 Manipulating data
- 6 Importing data
- 7 Plotting
- 8 Programming
- 9 Housekeeping
- 10 Learning on your own

The concept of an R package

Packages extend **R** functionalities:

- for most users; e.g. `{dplyr}`, `{ggplot2}`
- for specific users; e.g. `{IsoriX}`, `{hyenaR}`
- for developers; e.g. `{devtools}`, `{Rcpp}`

The concept of an R package

Packages extend **R** functionalities:

- for most users; e.g. {dplyr}, {ggplot2}
- for specific users; e.g. {IsoriX}, {hyenaR}
- for developers; e.g. {devtools}, {Rcpp}

Key facts about packages:

- a package is just a folder (often compressed) containing functions, data & documentation
- a library is the installed version of the package (also a folder)
- there are tons of packages out there:
<https://rdrr.io>; <https://www.rdocumentation.org>

Installing a package

In general, the installation procedure depends on:

- where the package is being hosted (local, CRAN, bioconductor, GitHub, other)
- if the package contains sources in another language that have been compiled or not

Installing a package

In general, the installation procedure depends on:

- where the package is being hosted (local, CRAN, bioconductor, GitHub, other)
- if the package contains sources in another language that have been compiled or not


Tip: in order to be able to install packages that require compilation (and thus have access to more or newer versions of packages), you need to install:

- Rtools if you use Windows (<https://cran.r-project.org/bin/windows/Rtools>)
- clang and gfortran (<https://cran.r-project.org/bin/macosx/tools>) or Xcode (<https://developer.apple.com/xcode>) if you use macOS
- if you use Linux or Unix-based system, you should already have everything you need

Installing a package

Simple situation: the package is available as a binary file prepared for your system on CRAN


You can use RStudio:

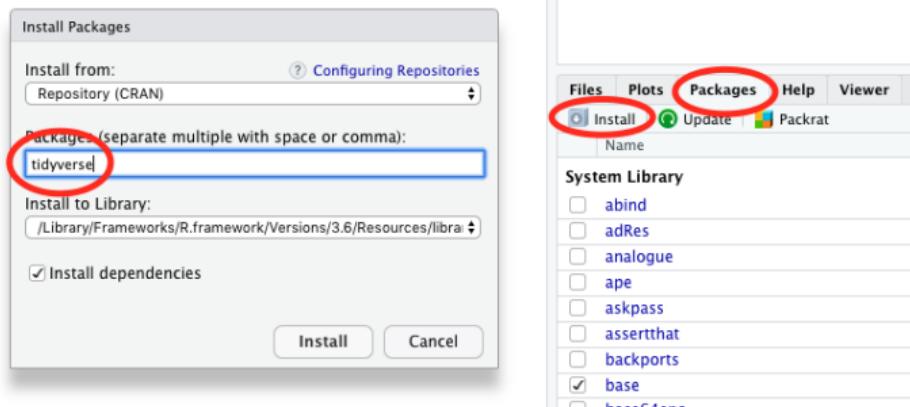

Installing a package

Simple situation: the package is available as a binary file prepared for your system on CRAN

You can use RStudio:

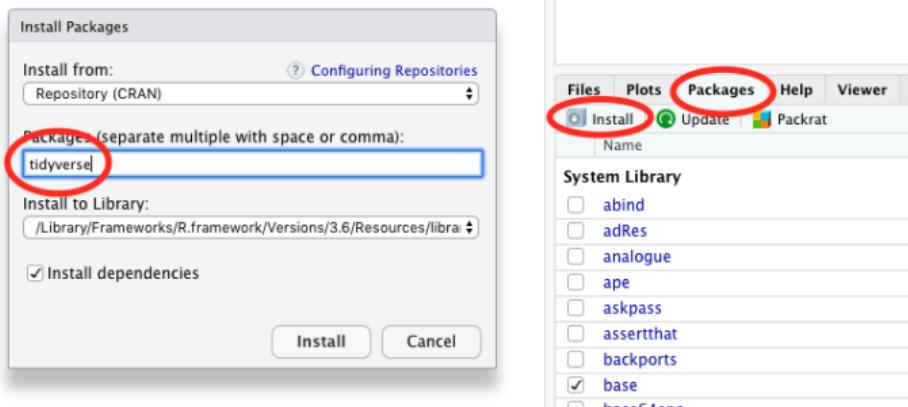

or you can type in the Console pane:

```
install.packages("tidyverse") ## install {tidyverse}
```

Installing a package behind the IZW proxy

Try to install the {tidyverse} as shown previously

Installing a package behind the IZW proxy

Try to install the `{tidyverse}` as shown previously

If the installation procedure does not start, abort, do the following, and then try installing the package again!

- create or edit the file `.Renvironment`:

```
file.edit("~/Renvironment")
```

- add to this file the following lines:

```
http_proxy=http://192.168.2.2:3128/  
https_proxy=http://192.168.2.2:3128/
```

Installing a package behind the IZW proxy

Try to install the {tidyverse} as shown previously

If the installation procedure does not start, abort, do the following, and then try installing the package again!

- create or edit the file .Renvironment:

```
file.edit("~/Renvironment")
```

- add to this file the following lines:

```
http_proxy=http://192.168.2.2:3128/
```

```
https_proxy=http://192.168.2.2:3128/
```

Note: if you do this, at home, you will have to comment the lines inside the file for R to be able to access internet

Loading a library

That is always simple:

```
library(tidyverse)
## - Attaching packages ----- tidyverse 1.2.1.9000 -
## v ggplot2 3.2.1           v purrrr  0.3.3
## v tibble   2.99.99.9010  v dplyr    0.8.99.9000
## v tidyverse 1.0.0          v stringr  1.4.0
## v readr    1.3.1          vforcats  0.4.0
## - Conflicts ----- tidyverse_conflicts() -
## x dplyr::filter() masks stats::filter()
## x dplyr::lag()   masks stats::lag()
```

Contrary to the installation that is only needed once per **R** installation, loading the libraries you need must be done each time you open an **R** session!

Getting started with R

- 1 Installation
- 2 RStudio
- 3 Basics of the language
- 4 Packages
- 5 Manipulating data
- 6 Importing data
- 7 Plotting
- 8 Programming
- 9 Housekeeping
- 10 Learning on your own

The iris dataset

The iris dataset is readily available in R; it is often used to illustrate statistical procedures (https://en.wikipedia.org/wiki/Iris_flower_data_set)



Iris setosa

©Miya.m



Iris versicolor

©D.G.E. Robertson



Iris virginica

©F. Mayfield

```
colnames(iris) ## shows the column names of the iris dataset
## [1] "Sepal.Length" "Sepal.Width"   "Petal.Length"  "Petal.Width"   "Species"
```

Data representation in R

The most common class of objects used for storing data in R is the data frame!

Data representation in R

The most common class of objects used for storing data in R is the data frame!

Example: the *iris* dataset

```
iris
##   Sepal.Length Sepal.Width Petal.Length Petal.Width   Species
## 1         5.1       3.5        1.4       0.2    setosa
## 2         4.9       3.0        1.4       0.2    setosa
## 3         4.7       3.2        1.3       0.2    setosa
## 4         4.6       3.1        1.5       0.2    setosa
## 5         5.0       3.6        1.4       0.2    setosa
## 6         5.4       3.9        1.7       0.4    setosa
## 7         4.6       3.4        1.4       0.3    setosa
## 8         5.0       3.4        1.5       0.2    setosa
## 9         4.4       2.9        1.4       0.2    setosa
## 10        4.9       3.1        1.5       0.1    setosa
## 11        5.4       3.7        1.5       0.2    setosa
## 12        4.8       3.4        1.6       0.2    setosa
## 13        4.8       3.0        1.4       0.1    setosa
## 14        4.3       3.0        1.1       0.1    setosa
## 15        5.8       4.0        1.2       0.2    setosa
## 16        5.7       4.4        1.5       0.4    setosa
## 17        5.4       3.9        1.3       0.4    setosa
## 18        5.1       3.5        1.4       0.3    setosa
```

Data representation in R

The most common class of objects used for storing data in R is the data frame!

Example: the `iris` dataset

```
head(iris)
##   Sepal.Length Sepal.Width Petal.Length Petal.Width Species
## 1          5.1         3.5          1.4         0.2  setosa
## 2          4.9         3.0          1.4         0.2  setosa
## 3          4.7         3.2          1.3         0.2  setosa
## 4          4.6         3.1          1.5         0.2  setosa
## 5          5.0         3.6          1.4         0.2  setosa
## 6          5.4         3.9          1.7         0.4  setosa
```

Data representation in R

The most common class of objects used for storing data in R is the data frame!

Example: the `iris` dataset

```
str(iris)
## 'data.frame': 150 obs. of  5 variables:
## $ Sepal.Length: num  5.1 4.9 4.7 4.6 5 5.4 4.6 5 4.4 4.9 ...
## $ Sepal.Width : num  3.5 3 3.2 3.1 3.6 3.9 3.4 3.4 2.9 3.1 ...
## $ Petal.Length: num  1.4 1.4 1.3 1.5 1.4 1.7 1.4 1.5 1.4 1.5 ...
## $ Petal.Width : num  0.2 0.2 0.2 0.2 0.2 0.4 0.3 0.2 0.2 0.1 ...
## $ Species      : Factor w/ 3 levels "setosa","versicolor",...: 1 1 1 1 1 1 1 1 1 1 ...
```

Data representation in R

The most common class of objects used for storing data in R is the data frame!

- each column is a variable, usually corresponding to a vector (a series of elements of 1 type)
- all columns have the same length (rectangular format)
- contains column names (usually informative) and row names (usually not informative)

Data frames come in 2 flavours

original data frames (class `data.frame`)

- perfectly fine to work with
- don't rely on extra packages

modern data frames: tibbles (class `tbl_df`)

- improved display (see `?formatting`)
- lazier & safer (see `?`tbl_df-class``)
- more flexible (work well with groupings)

Data frames come in 2 flavours

original data frames (class `data.frame`)

- perfectly fine to work with
- don't rely on extra packages

modern data frames: tibbles (class `tbl_df`)

- improved display (see `?formatting`)
- lazier & safer (see `?`tbl_df-class``)
- more flexible (work well with groupings)

Tip: if some function struggle with tibble, try using original data frames

Tibbles

You can easily turn an original data frame into a tibble

```
library(tidyverse)
iris_tbl <- as_tibble(iris) ## as.data.frame() does the opposite: tbl -> df
iris_tbl
## # A tibble: 150 x 5
##   Sepal.Length Sepal.Width Petal.Length Petal.Width Species
##       <dbl>      <dbl>      <dbl>      <dbl> <fct>
## 1         5.1        3.5        1.4        0.2  setosa
## 2         4.9        3.0        1.4        0.2  setosa
## 3         4.7        3.2        1.3        0.2  setosa
## # ... with 147 more rows
```

Tibbles

You can easily turn an original data frame into a tibble

```
library(tidyverse)
iris_tbl <- as_tibble(iris) ## as.data.frame() does the opposite: tbl -> df
iris_tbl
## # A tibble: 150 x 5
##   Sepal.Length Sepal.Width Petal.Length Petal.Width Species
##       <dbl>      <dbl>      <dbl>      <dbl> <fct>
## 1         5.1        3.5        1.4        0.2  setosa
## 2         4.9        3.0        1.4        0.2  setosa
## 3         4.7        3.2        1.3        0.2  setosa
## # ... with 147 more rows
```

Note: the tidyverse is a meta package that loads several packages we are going to use

Working with data frames

There are two competing paradigms for manipulating data in R:

Working with data frames

There are two competing paradigms for manipulating data in R:

Vector-focussed

- easier for developers
- more error prone, but easier to debug
- more efficient (often)
- dominant paradigm for first generations of R users

Working with data frames

There are two competing paradigms for manipulating data in R:

Vector-focussed

- easier for developers
- more error prone, but easier to debug
- more efficient (often)
- dominant paradigm for first generations of R users

Data frame-focussed

- easier for users
- closer to Excel, SPSS, ...
- *functional programming* friendly
- dominant paradigm for new generations of R users

Vector based approach

Goal: computing the mean and sd of sepal length in mm for per species

```
## create a new column storing the sepal length in mm
iris$Sepal.Length.mm <- iris$Sepal.Length * 10

## create data frame to store results
results <- data.frame(Species = unique(iris$Species))

## compute the means and SD per species
for (sp in results$Species) {
  results$meanSL[results$Species == sp] <- mean(iris$Sepal.Length.mm[iris$Species == sp])
  results$sdSL[results$Species == sp]   <- sd(iris$Sepal.Length.mm[iris$Species == sp])
}

## display the result
results
##      Species  meanSL    sdSL
## 1    setosa  50.06 3.524897
## 2 versicolor  59.36 5.161711
## 3  virginica  65.88 6.358796
```

Data frame based approach

Goal: computing the mean and sd of sepal length in mm for per species

```
## create a new column storing the sepal length in mm
iris <- mutate(iris, Sepal.Length.mm = Sepal.Length * 10)

## declare that you will perform operations within species
iris <- group_by(iris, Species)

## compute the means and SD per species
results <- summarise(iris, meanSL = mean(Sepal.Length.mm),
                      sdSL    = sd(Sepal.Length.mm))

## display the result
results

## # A tibble: 3 x 3
##   Species     meanSL    sdSL
##   <fct>      <dbl> <dbl>
## 1 setosa      50.1   3.52
## 2 versicolor  59.4   5.16
## 3 virginica   65.9   6.36
```

The {tidyverse}

The tidyverse packages (<https://www.tidyverse.org>) are developed by RStudio

There are 8 core tidyverse packages:



The {tidyverse}

The tidyverse packages (<https://www.tidyverse.org>) are developed by RStudio

There are 8 core tidyverse packages:



- philosophy: making **R** more accessible and more modern
- more functions, more focussed: 1 function = 1 action = 1 verb
- backward compatibility is not the absolute priority
- financed and controlled by RStudio

Data frame based approach with pipes (%>%) from {magrittr}

Goal: computing the mean and sd of sepal length in mm for per species

```
iris %>%
  mutate(Sepal.Length.mm = Sepal.Length * 10) %>%
  group_by(Species) %>%
  summarise(meanSL = mean(Sepal.Length.mm),
            sdSL = sd(Sepal.Length.mm)) -> results
results
## # A tibble: 3 x 3
##   Species     meanSL    sdSL
##   <fct>      <dbl> <dbl>
## 1 setosa      50.1  3.52
## 2 versicolor  59.4  5.16
## 3 virginica   65.9  6.36
```

Data frame based approach with pipes (%>%) from {magrittr}

Goal: computing the mean and sd of sepal length in mm for per species

```
iris %>%
  mutate(Sepal.Length.mm = Sepal.Length * 10) %>%
  group_by(Species) %>%
  summarise(meanSL = mean(Sepal.Length.mm),
            sdSL = sd(Sepal.Length.mm)) -> results
results
## # A tibble: 3 x 3
##   Species     meanSL    sdSL
##   <fct>       <dbl>   <dbl>
## 1 setosa      50.1    3.52
## 2 versicolor  59.4    5.16
## 3 virginica   65.9    6.36
```

Note: pipes capture what is on their left and forward this as the first argument of the function that comes on their right

Manipulating data frames with {dplyr}

You can do a lot with 5 functions:

Manipulating data frames with {dplyr}

You can do a lot with 5 functions:

- `select()` to keep or discard columns
- `group_by()` to define groups of rows for the following verbs
- `filter()` to keep or discard rows
- `mutate()` to create new columns
- `summarise()` to compute summary statistics

Manipulating data frames with {dplyr}

You can do a lot with 5 functions:

- `select()` to keep or discard columns
- `group_by()` to define groups of rows for the following verbs
- `filter()` to keep or discard rows
- `mutate()` to create new columns
- `summarise()` to compute summary statistics

Note: this is much more than that in {dplyr}

select()

Keep columns using `select()`:

```
iris_tbl %>%
  select(Sepal.Length, Sepal.Width)
## # A tibble: 150 x 2
##   Sepal.Length Sepal.Width
##       <dbl>      <dbl>
## 1         5.1      3.5
## 2         4.9      3.0
## 3         4.7      3.2
## # ... with 147 more rows
```

select()

Keep columns using `select()`:

```
iris_tbl %>%
  select(Sepal.Length, Sepal.Width)
## # A tibble: 150 x 2
##   Sepal.Length Sepal.Width
##       <dbl>      <dbl>
## 1         5.1      3.5
## 2         4.9      3
## 3         4.7      3.2
## # ... with 147 more rows
```

Discard columns using `select()`:

```
iris_tbl %>%
  select(-Sepal.Length, -Sepal.Width)
## # A tibble: 150 x 3
##   Petal.Length Petal.Width Species
##       <dbl>      <dbl> <fct>
## 1         1.4      0.2  setosa
## 2         1.4      0.2  setosa
## 3         1.3      0.2  setosa
## # ... with 147 more rows
```

filter()

Keep rows using filter():

```
iris_tbl %>% filter(Sepal.Length > 7, Sepal.Width > 3)
## # A tibble: 4 x 5
##   Sepal.Length Sepal.Width Petal.Length Petal.Width Species
##       <dbl>      <dbl>      <dbl>      <dbl> <fct>
## 1         7.2      3.6       6.1       2.5 virginica
## 2         7.7      3.8       6.7       2.2 virginica
## 3         7.2      3.2        6        1.8 virginica
## # ... with 1 more row
```

filter()

Keep rows using filter():

```
iris_tbl %>% filter(Sepal.Length > 7, Sepal.Width > 3)
## # A tibble: 4 x 5
##   Sepal.Length Sepal.Width Petal.Length Petal.Width Species
##       <dbl>      <dbl>      <dbl>      <dbl> <fct>
## 1         7.2      3.6       6.1       2.5 virginica
## 2         7.7      3.8       6.7       2.2 virginica
## 3         7.2      3.2        6        1.8 virginica
## # ... with 1 more row
```

Keep rows using group_by() %>% filter():

```
iris_tbl %>% group_by(Species) %>% filter(Sepal.Length == max(Sepal.Length)) %>% group_by()
## # A tibble: 3 x 5
##   Sepal.Length Sepal.Width Petal.Length Petal.Width Species
##       <dbl>      <dbl>      <dbl>      <dbl> <fct>
## 1         5.8        4       1.2       0.2 setosa
## 2         7        3.2       4.7       1.4 versicolor
## 3        7.9       3.8       6.4        2 virginica
```

filter()

Keep rows using filter():

```
iris_tbl %>% filter(Sepal.Length > 7, Sepal.Width > 3)
## # A tibble: 4 x 5
##   Sepal.Length Sepal.Width Petal.Length Petal.Width Species
##       <dbl>      <dbl>      <dbl>      <dbl> <fct>
## 1         7.2      3.6       6.1       2.5 virginica
## 2         7.7      3.8       6.7       2.2 virginica
## 3         7.2      3.2        6        1.8 virginica
## # ... with 1 more row
```

Keep rows using group_by() %>% filter():

```
iris_tbl %>% group_by(Species) %>% filter(Sepal.Length == max(Sepal.Length)) %>% group_by()
## # A tibble: 3 x 5
##   Sepal.Length Sepal.Width Petal.Length Petal.Width Species
##       <dbl>      <dbl>      <dbl>      <dbl> <fct>
## 1         5.8        4       1.2       0.2 setosa
## 2         7        3.2       4.7       1.4 versicolor
## 3        7.9       3.8       6.4        2 virginica
```

Tip: ungrouping prevents further (unwanted) grouped operations

mutate()

Create a column using `mutate()`:

```
iris_tbl %>% mutate(Sepal.Length.mm = Sepal.Length * 10)
## # A tibble: 150 x 6
##   Sepal.Length Sepal.Width Petal.Length Petal.Width Species Sepal.Length.mm
##       <dbl>      <dbl>      <dbl>      <dbl> <fct>        <dbl>
## 1         5.1      3.5       1.4      0.2  setosa        51
## 2         4.9      3.0       1.4      0.2  setosa        49
## 3         4.7      3.2       1.3      0.2  setosa        47
## # ... with 147 more rows
```

mutate()

Create a column using `mutate()`:

```
iris_tbl %>% mutate(Sepal.Length.mm = Sepal.Length * 10)
## # A tibble: 150 x 6
##   Sepal.Length Sepal.Width Petal.Length Petal.Width Species Sepal.Length.mm
##       <dbl>      <dbl>      <dbl>      <dbl> <fct>        <dbl>
## 1         5.1        3.5       1.4       0.2  setosa        51
## 2         4.9        3.0       1.4       0.2  setosa        49
## 3         4.7        3.2       1.3       0.2  setosa        47
## # ... with 147 more rows
```

Create a column using `group_by() %>% mutate()`:

```
iris_tbl %>% group_by(Species) %>% mutate(Sepal.Length.max = max(Sepal.Length)) %>% group_by()
## # A tibble: 150 x 6
##   Sepal.Length Sepal.Width Petal.Length Petal.Width Species Sepal.Length.max
##       <dbl>      <dbl>      <dbl>      <dbl> <fct>        <dbl>
## 1         5.1        3.5       1.4       0.2  setosa        5.8
## 2         4.9        3.0       1.4       0.2  setosa        5.8
## 3         4.7        3.2       1.3       0.2  setosa        5.8
## # ... with 147 more rows
```

mutate()

Create a column using `mutate()`:

```
iris_tbl %>% mutate(Sepal.Length.mm = Sepal.Length * 10)
## # A tibble: 150 x 6
##   Sepal.Length Sepal.Width Petal.Length Petal.Width Species Sepal.Length.mm
##       <dbl>      <dbl>      <dbl>      <dbl> <fct>        <dbl>
## 1         5.1        3.5       1.4       0.2  setosa        51
## 2         4.9        3.0       1.4       0.2  setosa        49
## 3         4.7        3.2       1.3       0.2  setosa        47
## # ... with 147 more rows
```

Create a column using `group_by() %>% mutate()`:

```
iris_tbl %>% group_by(Species) %>% mutate(Sepal.Length.max = max(Sepal.Length)) %>% group_by()
## # A tibble: 150 x 6
##   Sepal.Length Sepal.Width Petal.Length Petal.Width Species Sepal.Length.max
##       <dbl>      <dbl>      <dbl>      <dbl> <fct>        <dbl>
## 1         5.1        3.5       1.4       0.2  setosa        5.8
## 2         4.9        3.0       1.4       0.2  setosa        5.8
## 3         4.7        3.2       1.3       0.2  setosa        5.8
## # ... with 147 more rows
```

Note: `mutate()` only accepts functions that return a vector of length 1 or of length suitable to create a new column

summarise()

Compute summary statistics using `summarise()`:

```
iris_tbl %>% summarise(Sepal.Length.max = max(Sepal.Length), N = n())
## # A tibble: 1 x 2
##   Sepal.Length.max     N
##             <dbl> <int>
## 1             7.9     150
```

summarise()

Compute summary statistics using summarise():

```
iris_tbl %>% summarise(Sepal.Length.max = max(Sepal.Length), N = n())
## # A tibble: 1 x 2
##   Sepal.Length.max     N
##             <dbl> <int>
## 1              7.9    150
```

Compute summary statistics using group_by() %>% summarise():

```
iris_tbl %>% group_by(Species) %>% summarise(Sepal.Length.max = max(Sepal.Length), N = n())
## # A tibble: 3 x 3
##   Species   Sepal.Length.max     N
##   <fct>           <dbl> <int>
## 1 setosa            5.8    50
## 2 versicolor        7       50
## 3 virginica         7.9    50
```

summarise()

Compute summary statistics using summarise():

```
iris_tbl %>% summarise(Sepal.Length.max = max(Sepal.Length), N = n())
## # A tibble: 1 x 2
##   Sepal.Length.max     N
##             <dbl> <int>
## 1             7.9     150
```

Compute summary statistics using group_by() %>% summarise():

```
iris_tbl %>% group_by(Species) %>% summarise(Sepal.Length.max = max(Sepal.Length), N = n())
## # A tibble: 3 x 3
##   Species   Sepal.Length.max     N
##   <fct>           <dbl> <int>
## 1 setosa            5.8     50
## 2 versicolor        7       50
## 3 virginica         7.9     50
```

Note: summarise() only accepts functions that return a vector of length 1

Tip: summarise() ungroup automatically

Practice

Assuming petals are square, compute:

- the mean...
- the median...
- the minimum...
- the maximum...

... area of petals for each species

Lists

Lists allow for the organisation of any set of entities into a single R object:

```
iris %>% filter(Species %in% c("setosa", "versicolor")) -> iris2sp  
test <- t.test(Sepal.Length ~ Species, data = iris2sp)
```

Lists

Lists allow for the organisation of any set of entities into a single R object:

```
iris %>% filter(Species %in% c("setosa", "versicolor")) -> iris2sp
test <- t.test(Sepal.Length ~ Species, data = iris2sp)
```

```
str(test)
## List of 10
## $ statistic : Named num -10.5
##   ..- attr(*, "names")= chr "t"
## $ parameter : Named num 86.5
##   ..- attr(*, "names")= chr "df"
## $ p.value   : num 3.75e-17
## $ conf.int   : num [1:2] -1.106 -0.754
##   ..- attr(*, "conf.level")= num 0.95
## $ estimate   : Named num [1:2] 5.01 5.94
##   ..- attr(*, "names")= chr [1:2] "mean in group setosa" "mean in group versicolor"
## $ null.value : Named num 0
##   ..- attr(*, "names")= chr "difference in means"
## $ stderr     : num 0.0884
## $ alternative: chr "two.sided"
## $ method     : chr "Welch Two Sample t-test"
## $ data.name   : chr "Sepal.Length by Species"
## - attr(*, "class")= chr "htest"
```

Lists

Lists allow for the organisation of any set of entities into a single R object:

```
iris %>% filter(Species %in% c("setosa", "versicolor")) -> iris2sp
test <- t.test(Sepal.Length ~ Species, data = iris2sp)
```

```
str(test)
## List of 10
## $ statistic : Named num -10.5
##   ..- attr(*, "names")= chr "t"
## $ parameter : Named num 86.5
##   ..- attr(*, "names")= chr "df"
## $ p.value   : num 3.75e-17
## $ conf.int  : num [1:2] -1.106 -0.754
##   ..- attr(*, "conf.level")= num 0.95
## $ estimate   : Named num [1:2] 5.01 5.94
##   ..- attr(*, "names")= chr [1:2] "mean in group setosa" "mean in group versicolor"
## $ null.value : Named num 0
##   ..- attr(*, "names")= chr "difference in means"
## $ stderr     : num 0.0884
## $ alternative: chr "two.sided"
## $ method     : chr "Welch Two Sample t-test"
## $ data.name  : chr "Sepal.Length by Species"
## - attr(*, "class")= chr "htest"
```

There are different ways to extract an element from a list:

```
test[["p.value"]]
## [1] 3.746743e-17
test$p.value
## [1] 3.746743e-17
pluck(test, "p.value") # {purrr}
## [1] 3.746743e-17
```

Lists

Lists allow for the organisation of any set of entities into a single R object:

```
iris %>% filter(Species %in% c("setosa", "versicolor")) -> iris2sp
test <- t.test(Sepal.Length ~ Species, data = iris2sp)
```

```
str(test)
## List of 10
## $ statistic : Named num -10.5
##   ..- attr(*, "names")= chr "t"
## $ parameter : Named num 86.5
##   ..- attr(*, "names")= chr "df"
## $ p.value   : num 3.75e-17
## $ conf.int  : num [1:2] -1.106 -0.754
##   ..- attr(*, "conf.level")= num 0.95
## $ estimate   : Named num [1:2] 5.01 5.94
##   ..- attr(*, "names")= chr [1:2] "mean in group setosa" "mean in group versicolor"
## $ null.value : Named num 0
##   ..- attr(*, "names")= chr "difference in means"
## $ stderr     : num 0.0884
## $ alternative: chr "two.sided"
## $ method     : chr "Welch Two Sample t-test"
## $ data.name  : chr "Sepal.Length by Species"
## - attr(*, "class")= chr "htest"
```

There are different ways to extract an element from a list:

```
test[["p.value"]]
## [1] 3.746743e-17
test$p.value
## [1] 3.746743e-17
pluck(test, "p.value") # {purrr}
## [1] 3.746743e-17
```

"mean in group versicolor"

Note: lists are necessary because, in R, functions cannot output several objects at once

Getting started with R

- 1 Installation
- 2 RStudio
- 3 Basics of the language
- 4 Packages
- 5 Manipulating data
- 6 Importing data
- 7 Plotting
- 8 Programming
- 9 Housekeeping
- 10 Learning on your own

Importing data in R

R can read (and write) many formats storing data:


- tabulated text files (*.csv, *.txt, ...) → no pkg or {readr}
- MS Excel files (*.xlsx) → {readxl}
- binary R files (*.rda, *.RData, *.rds) → no pkg

... as well as many other formats (*.feather, *.html, *.json, *.sav, *.zip, ...)

Importing *.csv tabulated data with {readr}

TIP:

- ① use the GUI

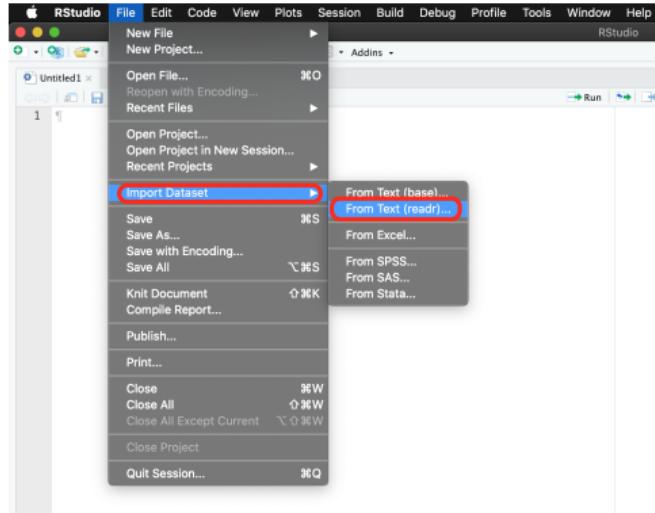

- ② copy and paste the R code automatically generated into your script

NB:

- the same apply for many other file formats!
- if you don't see "From Text (readr)" then you must install {readr}

Practice

Create a dataframe using your favourite spreadsheet software
and import it in R!

Getting started with R

- 1 Installation
- 2 RStudio
- 3 Basics of the language
- 4 Packages
- 5 Manipulating data
- 6 Importing data
- 7 Plotting
- 8 Programming
- 9 Housekeeping
- 10 Learning on your own

Plotting systems

There are many plotting systems in **R**, such as:

- `{graphics}` (build-in system): most efficient for small jobs, but difficult for complex tasks
- `{lattice}`: difficult, but efficient for complex tasks
- `{ggplot2}`: easy and efficient for most tasks (but a little verbose)

Practice: R Graph Gallery

Browse <https://www.r-graph-gallery.com> and try to reproduce one plot you like!

 UseR!

Hadley Wickham



ggplot2

Elegant Graphics for Data Analysis

Second Edition

The grammar of graphics

All plots are composed of:

- Data that you want to visualise

Note: the word in **bold** font correspond to main functions of {ggplot2}

The grammar of graphics

All plots are composed of:

- Data that you want to visualise
- A set of **aesthetic** mappings describing which variables are mapped to which aesthetics

Note: the word in **bold** font correspond to main functions of {ggplot2}

The grammar of graphics

All plots are composed of:

- Data that you want to visualise
- A set of **aesthetic** mappings describing which variables are mapped to which aesthetics
- Layers made up of geometric elements (or **geoms**)

Note: the word in **bold** font correspond to main functions of {ggplot2}

The grammar of graphics

All plots are composed of:

- Data that you want to visualise
- A set of **aesthetic** mappings describing which variables are mapped to which aesthetics
- Layers made up of geometric elements (or **geoms**)
- **Scales** describing how values in the data space are mapped to values in an aesthetic space

Note: the word in **bold** font correspond to main functions of {ggplot2}

The grammar of graphics

All plots are composed of:

- Data that you want to visualise
- A set of **aesthetic** mappings describing which variables are mapped to which aesthetics
- Layers made up of geometric elements (or **geoms**)
- **Scales** describing how values in the data space are mapped to values in an aesthetic space
- A **coordinate** system describing how data coordinates are mapped to the plotted plane

Note: the word in **bold** font correspond to main functions of {ggplot2}

The grammar of graphics

All plots are composed of:

- Data that you want to visualise
- A set of **aesthetic** mappings describing which variables are mapped to which aesthetics
- Layers made up of geometric elements (or **geoms**)
- **Scales** describing how values in the data space are mapped to values in an aesthetic space
- A **coordinate** system describing how data coordinates are mapped to the plotted plane
- A **faceting** specification describing how data are dispatched into sub-plots

Note: the word in **bold** font correspond to main functions of {ggplot2}

The grammar of graphics

All plots are composed of:


- Data that you want to visualise
- A set of **aesthetic** mappings describing which variables are mapped to which aesthetics
- Layers made up of geometric elements (or **geoms**)
- **Scales** describing how values in the data space are mapped to values in an aesthetic space
- A **coordinate** system describing how data coordinates are mapped to the plotted plane
- A **faceting** specification describing how data are dispatched into sub-plots
- A **theme** that controls the details of the display (font size, background colour...)

Note: the word in **bold** font correspond to main functions of {ggplot2}

Building a plot

We build a plot by adding components together:


```
ggplot(iris) + ## the data
  aes(x = Sepal.Length, y = Sepal.Width, colour = Species) + ## the aesthetic mappings
  geom_point() ## a layer
```

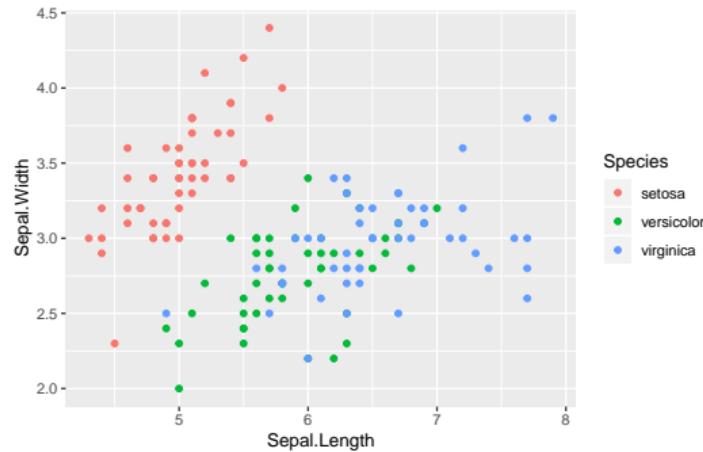

Building a plot

We build a plot by adding components together:

```
ggplot(iris) + ## the data  
  aes(x = Sepal.Length, y = Sepal.Width, colour = Species) +  ## the aesthetic mappings  
  geom_point()  ## a layer
```

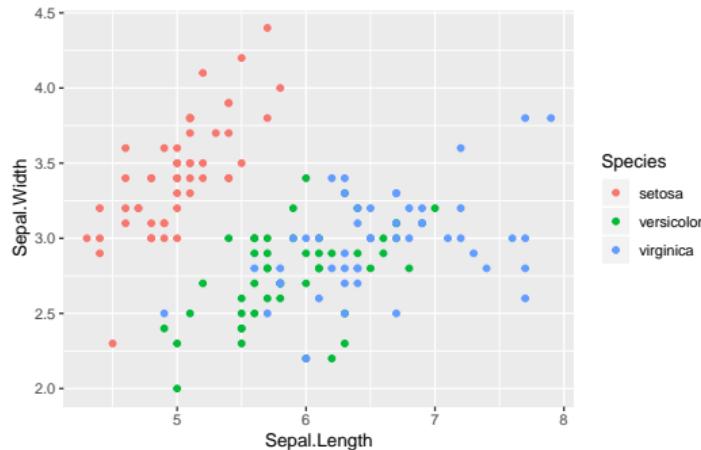


Note: here, we use the default settings for the scales, coordinate system, faceting specification, and the theme – so they don't need to be explicitly set

Building a plot: 3 main steps

Step 1: we specify the data (a tidy data frame) using `ggplot()`:

```
ggplot(iris) ## it calls the plotting device
```



Note: you can also write: `iris %>% ggplot()`

Building a plot: 3 main steps

Step 2: we specify the aesthetic mappings between the data and aesthetics using `aes()`:

```
aes(x = Sepal.Length, y = Sepal.Width, colour = Species) ## US spelling (here, color) also works!
## Aesthetic mapping:
## * `x`      -> `Sepal.Length`
## * `y`      -> `Sepal.Width`
## * `colour` -> `Species`
```

Note: sometimes more terms will be present to map other aesthetics to the data

Building a plot: 3 main steps

Step 3: we specify one or multiple layer(s) using a `geom_*`() function:


```
geom_point()  
## geom_point: na.rm = FALSE  
## stat_identity: na.rm = FALSE  
## position_identity
```

Note: all `geom_*`() have a default statistic and position, which you can override

Layers: generalities

Changing the `geom_*`() call changes how the data are being represented!


```
ggplot(iris) +  
  aes(x = Sepal.Length, y = Sepal.Width) +  
  geom_point()
```

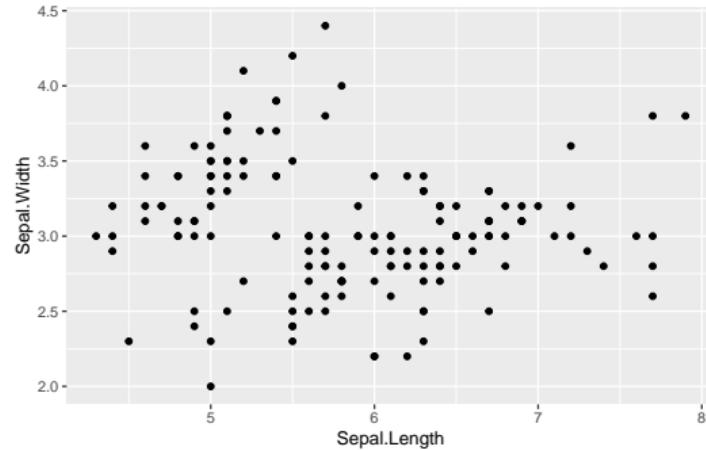

Layers: generalities

Changing the `geom_*`() call changes how the data are being represented!

```
ggplot(iris) +  
  aes(x = Sepal.Length, y = Sepal.Width) +  
  geom_line()
```

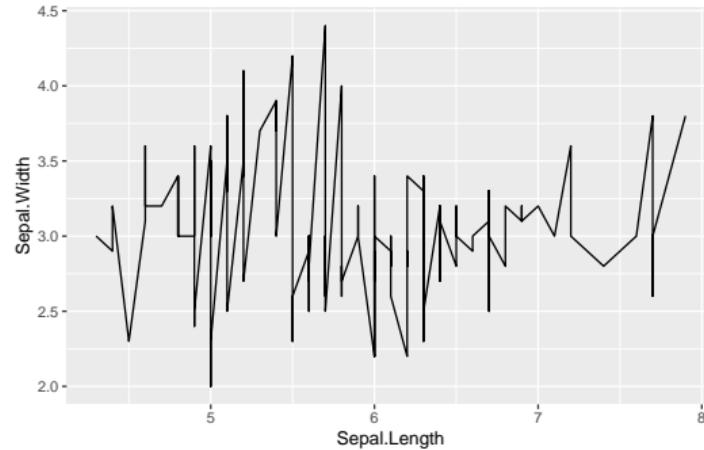

Practice


Plot the distribution of the sepal length of each species of iris using:

- `geom_boxplot()`
- `geom_violin()`
- `geom_jitter()`

Layers: statistics

Overriding the `geom_*`() default statistic is sometimes useful:


```
ggplot(iris) +  
  aes(x = Sepal.Length, colour = Species) +  
  geom_line(stat = "ecdf")
```

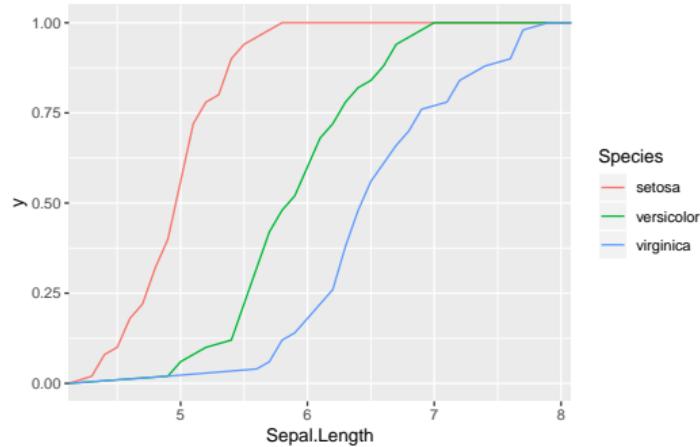

Layers: statistics

Overriding the `geom_*`() default statistic is sometimes useful:

```
ggplot(iris) +  
  aes(x = Sepal.Length, colour = Species) +  
  geom_line(stat = "ecdf")
```

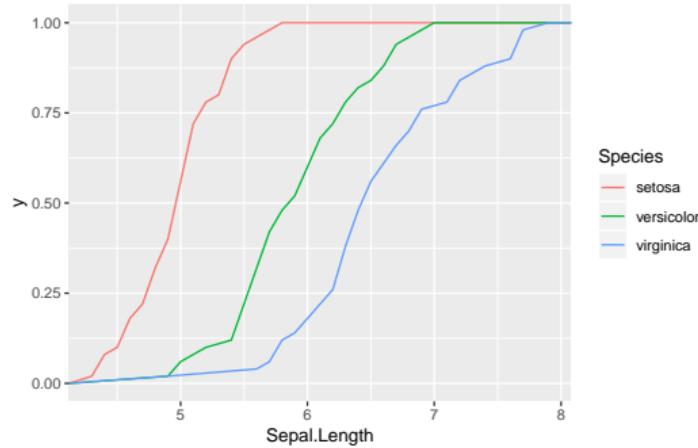


Note: plotting the Empirical Cumulative Distribution Function allows for deriving information from the distribution of the data (more on that later!)

Multiple layers

Several `geom_*`() call can be used one after another:


```
ggplot(iris) +  
  aes(x = Sepal.Length, y = Sepal.Width) +  
  geom_point() +  
  geom_line() +  
  geom_rug(sides = "r") ## r for right!
```

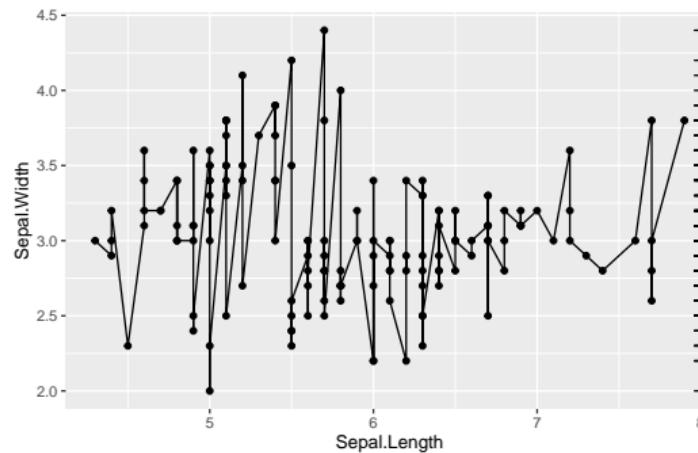

Multiple layers

Several `geom_*`() call can be used one after another:

```
ggplot(iris) +  
  aes(x = Sepal.Length, y = Sepal.Width) +  
  geom_point() +  
  geom_line() +  
  geom_rug(sides = "r") ## r for right!
```

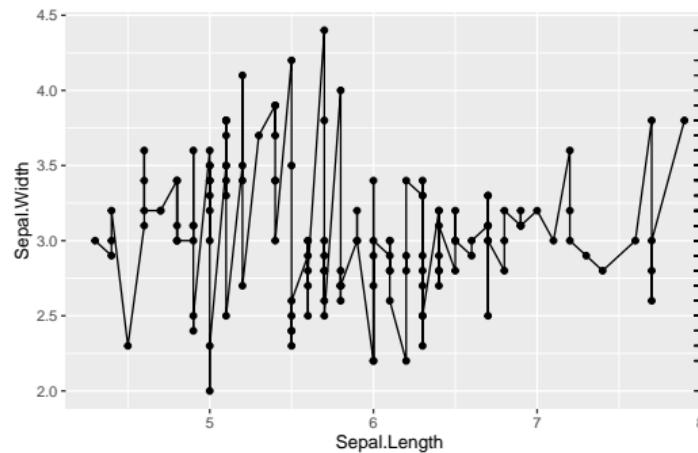

Note: the order can matter since the layers are drawn from top to bottom

Aesthetics attributes: generalities

The `geom_*`() functions rely on aesthetics attributes.

Some aesthetics are compulsory, others are optional.

Examples of aesthetics:

- position: x, y, xmin, xmax, ymin, ymax...
- colours: colour and fill
- transparency: alpha
- sizes: size and width
- shape: shape and linetype

Aesthetics attributes: generalities

The `geom_*`() functions rely on aesthetics attributes.

Some aesthetics are compulsory, others are optional.

Examples of aesthetics:


- position: x, y, xmin, xmax, ymin, ymax...
- colours: colour and fill
- transparency: alpha
- sizes: size and width
- shape: shape and linetype

Tip: check the help of the geoms you want to use to know which aesthetics can be used!

Aesthetics: where to provide the aesthetic mappings?

If the aes() call is outside a function, it applies to all geoms:


```
ggplot(iris) +  
  aes(x = Sepal.Length, y = Sepal.Width, colour = Species) +  
  geom_point() +  
  geom_line()
```

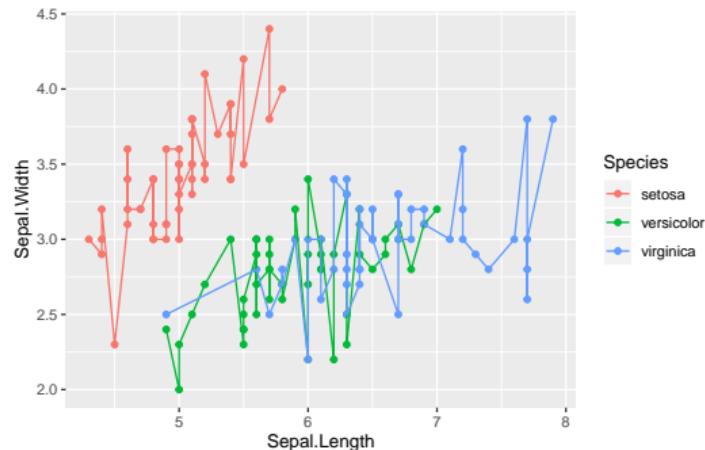

Aesthetics: where to provide the aesthetic mappings?

You can split the definition of global and local aesthetic mappings:


```
ggplot(iris) +  
  aes(x = Sepal.Length, y = Sepal.Width) +  
  geom_point() +  
  geom_line(aes(colour = Species))
```

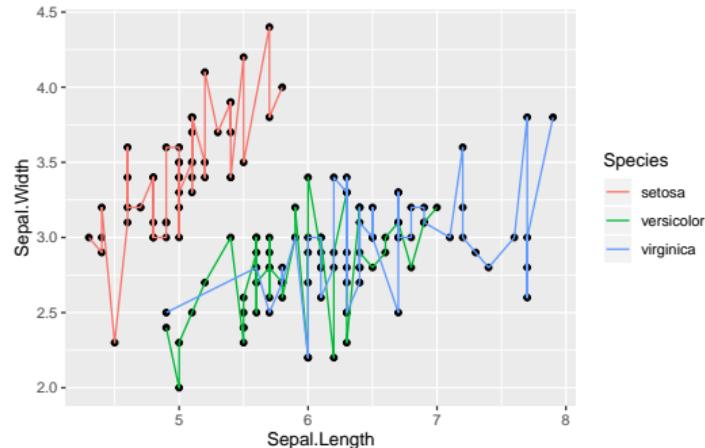

Aesthetics: where to provide the aesthetic mappings?

Aesthetics not mapped to the data should not be part of any aes() call!


```
ggplot(iris) +  
  aes(x = Sepal.Length, y = Sepal.Width) +  
  geom_point(colour = "blue")
```

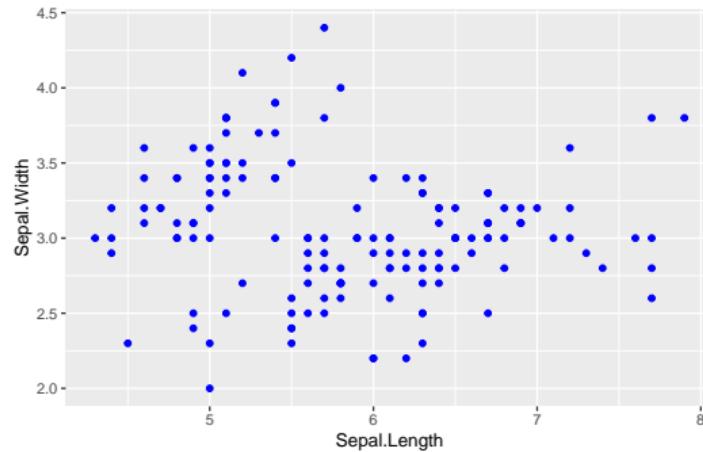

Scales

You can use `scale_*`() to change properties of each aesthetic attribute; e.g.:


```
ggplot(iris) +  
  aes(x = Sepal.Length, y = Sepal.Width, colour = Species) +  
  geom_point() +  
  scale_x_continuous(breaks = c(5, 6, 7), labels = c("<- small", "<- medium ->", "large ->")) +  
  scale_colour_manual(values = c("red", "orange", "purple"))
```

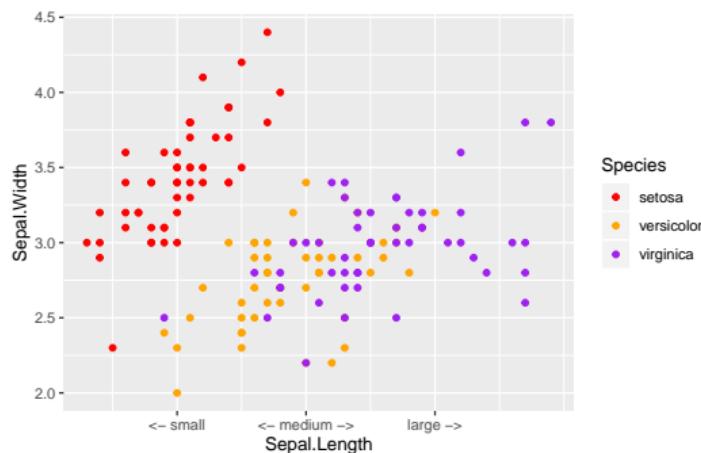

Coordinates

You can use `coord_*`() to modify how graphical elements are projected on a plan; e.g.:


```
ggplot(iris) +  
  aes(x = Sepal.Length, y = Sepal.Width, colour = Species) +  
  geom_point() +  
  coord_trans(y = "log10", limy = c(1.5, 5))
```

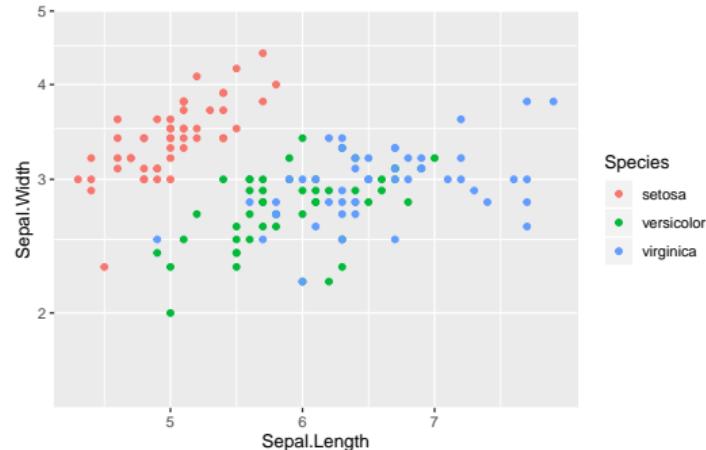

Facets

You can use `facet_*`() to shows different subset of the data separately; e.g.:

```
ggplot(iris) +  
  aes(x = Sepal.Length, y = Sepal.Width) +  
  geom_point() +  
  facet_wrap(~ Species)
```

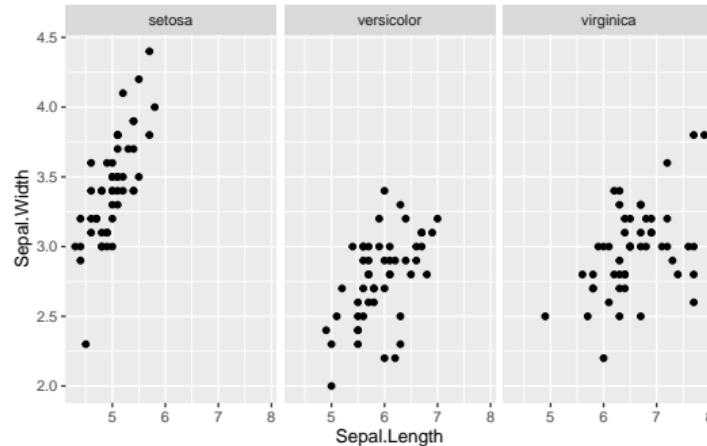

Themes: generalities

Themes control the display of all elements of the plot that do not depend on your data:

- titles
- labels
- fonts
- background
- gridlines
- legends
- ...

Note: see `?theme()` for an exhaustive list of all that can be changed

Themes: pre-defined themes


There are many predefined themes in `{ggplot2}` and companion packages (e.g. `{ggthemes}`):

```
ggplot(iris) +  
  aes(x = Sepal.Length, y = Sepal.Width, colour = Species) +  
  geom_point() -> myplot
```


```
myplot +  
  theme_void()
```



```
myplot +  
  theme_dark()
```

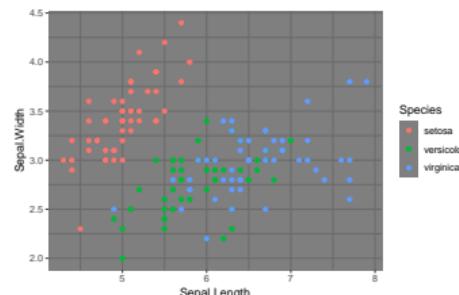

```
myplot +  
  theme_minimal(base_size = 20)
```

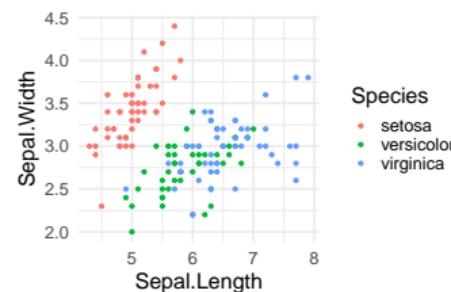

Themes: pre-defined themes


There are many predefined themes in `{ggplot2}` and companion packages (e.g. `{ggthemes}`):

```
ggplot(iris) +
  aes(x = Sepal.Length, y = Sepal.Width, colour = Species) +
  geom_point() -> myplot
```


```
myplot +
  theme_void()
```



```
myplot +
  theme_dark()
```

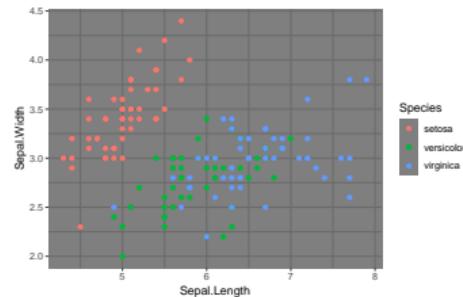

```
myplot +
  theme_minimal(base_size = 20)
```

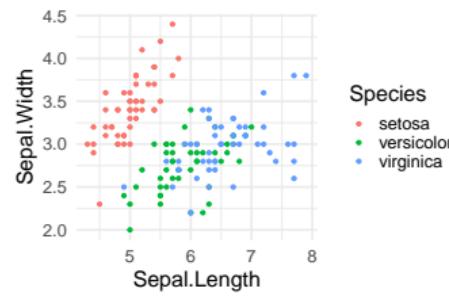

Tip: `base_size` controls the base font size for any theme

Themes: modifying themes

To modify the theme yourself, use `theme()` in combination with `element_*`:


```
ggplot(iris) +  
  aes(x = Sepal.Length, y = Sepal.Width, colour = Species) +  
  geom_point() +  
  theme(axis.text = element_text(size = 15, face = "bold", colour = "red"),  
        axis.title = element_text(face = "italic", hjust = 1),  
        panel.grid.major.x = element_line(linetype = "dotted", colour = "black"),  
        panel.background = element_rect(fill = "lightgreen"),  
        plot.background = element_rect(fill = "dodgerblue", colour = "goldenrod", size = 10))
```



Adding labels

You can set all the labels easily using `labs()`:

```
ggplot(iris) +  
  aes(x = Sepal.Length, y = Sepal.Width) +  
  geom_point() +  
  labs(x = "Length", y = "Width",  
       title = "Sepal morphology", subtitle = "a short analysis of the iris dataset",  
       caption = "Dataset provided by R",  
       tag = "A.")
```

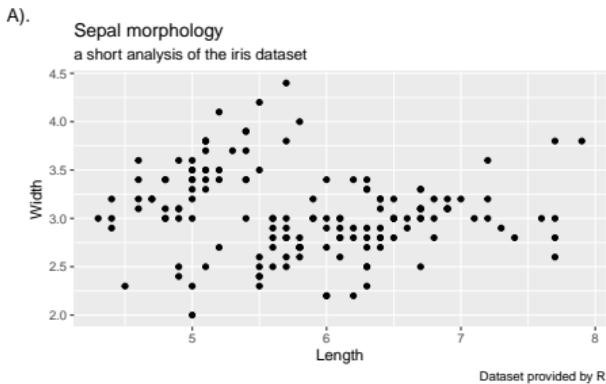

Saving plots

You can export your plots using `ggsave()`:

```
ggplot(iris) +  
  aes(x = Sepal.Length, y = Sepal.Width, colour = Species) +  
  geom_point()  
  
ggsave("my_first_plot.pdf", width = 15, height = 10, units = "cm")
```

Note: by default, the plot is saved in your project directory

Getting started with R

- 1 Installation
- 2 RStudio
- 3 Basics of the language
- 4 Packages
- 5 Manipulating data
- 6 Importing data
- 7 Plotting
- 8 Programming
- 9 Housekeeping
- 10 Learning on your own

Usual programming commands exist in R

```
for (i in 1:4) {  
  if (i == 2) {  
    print(x = "found 2!")  
  } else {  
    print(x = "found something other than 2")  
  }  
}  
  
## [1] "found something other than 2"  
## [1] "found 2!"  
## [1] "found something other than 2"  
## [1] "found something other than 2"
```

Usual programming commands exist in R

```
for (i in 1:4) {  
  if (i == 2) {  
    print(x = "found 2!")  
  } else {  
    print(x = "found something other than 2")  
  }  
}  
  
## [1] "found something other than 2"  
## [1] "found 2!"  
## [1] "found something other than 2"  
## [1] "found something other than 2"
```

You can check the help files for such functions as follow:

```
?“for”
```

Note: the quotes are necessary because the parser considers that such words are special

You can create your own R functions!

```
OddRatio <- function(proba.x, proba.y) {  
  odd.x <- proba.x/(1 - proba.x)  
  odd.y <- proba.y/(1 - proba.y)  
  odd.x/odd.y  
}
```

You can create your own R functions!

```
OddRatio <- function(proba.x, proba.y) {  
  odd.x <- proba.x/(1 - proba.x)  
  odd.y <- proba.y/(1 - proba.y)  
  odd.x/odd.y  
}
```

Then you can use them as any other functions:

```
OddRatio(0.1, 0.01)  
## [1] 11
```

Getting started with R

- 1 Installation
- 2 RStudio
- 3 Basics of the language
- 4 Packages
- 5 Manipulating data
- 6 Importing data
- 7 Plotting
- 8 Programming
- 9 Housekeeping
- 10 Learning on your own

What should you do?

- update your R packages frequently → at least once a month

```
update.packages(ask = FALSE) ## or use RStudio menus
```

NB:

you can check what is being changed in NEWS files

What should you do?

- update your **R** packages frequently → at least once a month

```
update.packages(ask = FALSE) ## or use RStudio menus
```

- update **R** from time to time → at least once a year in spring
do it manually, or try {InstallR} on Windows, or {UpdateR} on macOS

NB:

you can check what is being changed in NEWS files

What should you do?

- update your **R** packages frequently → at least once a month

```
update.packages(ask = FALSE) ## or use RStudio menus
```

- update **R** from time to time → at least once a year in spring
do it manually, or try {InstallR} on Windows, or {UpdateR} on macOS
- update RStudio from time to time → at least after each update of **R**

NB:

you can check what is being changed in NEWS files

Getting started with R

- 1 Installation
- 2 RStudio
- 3 Basics of the language
- 4 Packages
- 5 Manipulating data
- 6 Importing data
- 7 Plotting
- 8 Programming
- 9 Housekeeping
- 10 Learning on your own

Useful resources

RStudio cheatsheets; e.g.:

Base R Cheat Sheet

Getting Help

- Accessing the help files
- Topic**: Get help of a particular function.
- help.search("weighted.mean")**: Search the help files for a word or phrase.
- help(package = "dplyr")**: Find help for a package.
- More about an object**

Using Packages

- install.packages("dplyr")**: Download and install a package from CRAN.
- library(dplyr)**: Load the package into the session, making all its functions available to use.
- dplyr::select**: Use a particular function from a package.
- data(titanic)**: Load a built-in dataset into the environment.

Working Directory

- getwd()**: Find the current working directory (where inputs are found and outputs are sent).
- setwd("C:/file/path")**: Change the current working directory.
- Use projects in RStudio to set the working directory to the folder you are working in.**

Vectors

Creating Vectors

<code>c(2, 4, 6)</code>	2 4 6	All elements have a vector
<code>2:6</code>	2 3 4 5 6	A sequence longer than one element
<code>seq(2, 1, by=0.5)</code>	2.0 2.5 3.0	A complex sequence
<code>rep(1:2, times=3)</code>	1 2 1 2 1 2	Repeat a vector
<code>rep(1:2, each=3)</code>	1 1 1 2 2 2	Repeat elements of a vector

Programming

For Loop

```
for (variable in sequence){
  Do something
}
```

While Loop

```
while (condition){
  Do something
}
```

Vector Functions

sort(x)	Returns sorted.	rev(x)	Returns reversed.
table(x)	See counts of values.	unique(x)	See unique values.

If Statements

```
if (condition){
  Do something
} else {
  Do something different
}
```

Functions

```
function_name <- function(var){
  Do something
  return(new_variables)
}
```

Selecting Vector Elements

By Position

<code>x[4]</code>	The fourth element.
<code>x[-4]</code>	All but the fourth.
<code>x[2:4]</code>	Elements two to four.

By Value

<code>x[x == 10]</code>	Elements which are equal to 10.
<code>x[x < 0]</code>	All elements less than zero.
<code>x[x %in% c(1, 2, 5)]</code>	Elements in the set 1, 2, 5.

Named Vectors

<code>x["apple"]</code>	Element with name "apple".
-------------------------	----------------------------

Reading and Writing Data

Also see the [readr package](#).

Input	Output	Description
<code>df <- read.table("file.txt")</code>	<code>write.table(df, "file.txt")</code>	Read and write a delimited text file.
<code>df <- read.csv("file.csv")</code>	<code>write.csv(df, "file.csv")</code>	Read and write a comma-separated values. This is a special case of readTable/writeTable.
<code>load("file.RData")</code>	<code>save(df, file = "file.RData")</code>	Read and write an R data file, a file type special for R.

Conditions

<code>a == b</code>	Are equal	<code>a > b</code>	Greater than	<code>a >= b</code>	Greater than or equal to
<code>a != b</code>	Not equal	<code>a < b</code>	Less than	<code>a <= b</code>	Less than or equal to

NB: there are many cheatsheets covering many aspects of R and several packages!

Useful resources

Official documentation:


- the help files: every single (exported) function has a help file associated with it!
- official manuals: <https://cran.r-project.org/manuals.html>

Useful resources


Official documentation:

- the help files: every single (exported) function has a help file associated with it!
- official manuals: <https://cran.r-project.org/manuals.html>


Best books for you (roughly sorted by amount of conceptual content):

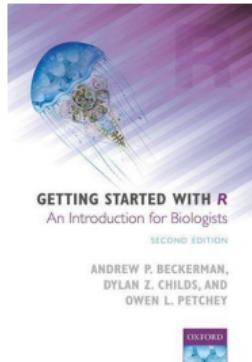


~ 30 €

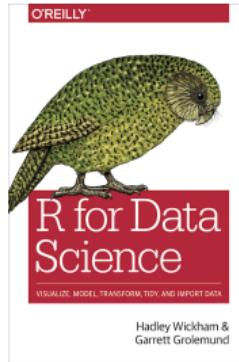


~ 60 €

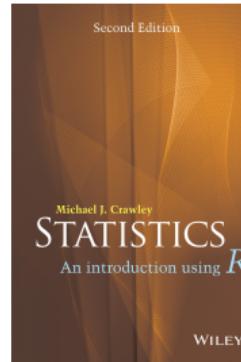

~ 35 €

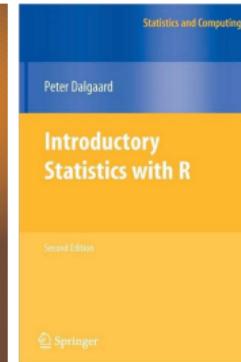

~ 40 €

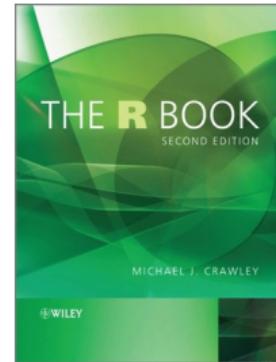






~ 60 €

Useful resources

Official documentation:

- the help files: every single (exported) function has a help file associated with it!
- official manuals: <https://cran.r-project.org/manuals.html>

Best books for you (roughly sorted by amount of conceptual content):

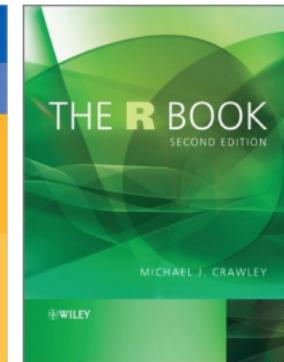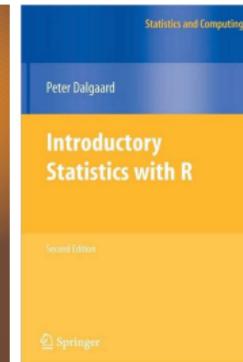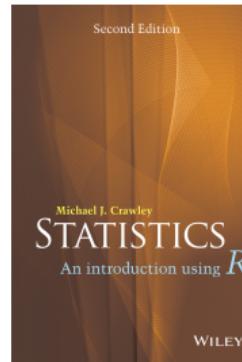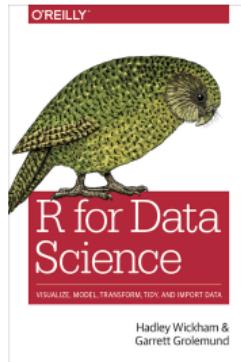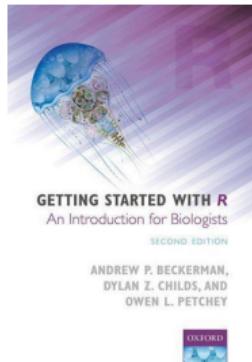

~ 30 €

~ 60 €

~ 35 €

~ 40 €

~ 60 €

Journal of Statistical Software, R Journal, Journal of Open Source Software ...

Become part of the R community!

- face-to-face interactions:

- Meetup Berlin R Users Group
- Meetup R-Ladies Berlin
- SATRDAYS
(<https://satrdays.org/events>)
- European R Users Meeting
(<https://erum.io>)
- `rstudio::conf`
(<https://www.rstudio.com/conference>)
- useR! (@useR2020stl)

Become part of the R community!

- face-to-face interactions:

- Meetup Berlin R Users Group
- Meetup R-Ladies Berlin
- SATRDAYS
(<https://satrdays.org/events>)
- European R Users Meeting
(<https://erum.io>)
- `rstudio::conf`
(<https://www.rstudio.com/conference>)
- useR! (@useR2020stl)

- websites:

- <https://stackoverflow.com/questions/tagged/r>
- <https://community.rstudio.com>
- <https://www.r-bloggers.com>

Become part of the R community!

- face-to-face interactions:

- Meetup Berlin R Users Group
- Meetup R-Ladies Berlin
- SATRDAYS
(<https://satrdays.org/events>)
- European R Users Meeting
(<https://erum.io>)
- `rstudio::conf`
(<https://www.rstudio.com/conference>)
- useR! (@useR2020stl)

- websites:

- <https://stackoverflow.com/questions/tagged/r>
- <https://community.rstudio.com>
- <https://www.r-bloggers.com>

- mailing lists:

- <https://www.r-project.org/mail.html>

Become part of the R community!

- face-to-face interactions:

- Meetup Berlin R Users Group
- Meetup R-Ladies Berlin
- SATRDAYS
(<https://satrdays.org/events>)
- European R Users Meeting
(<https://erum.io>)
- `rstudio::conf`
(<https://www.rstudio.com/conference>)
- useR! (@useR2020stl)

- websites:

- <https://stackoverflow.com/questions/tagged/r>
- <https://community.rstudio.com>
- <https://www.r-bloggers.com>

- mailing lists:

- <https://www.r-project.org/mail.html>

- twitter:

- `#rstats`
- `#tidyverse`
- @hadleywickham (>92K followers)
- @dataandme (>40K)
- @drob (>39K)
- @rdpeng (>38K)
- @JennyBryan (>27K)
- @statgarrett (>17K)
- @RStudio (>84K)
- @Rbloggers (>74K)
- @RLangTip (>64K)
- @rstudiotips (>53K)
- @R_Programming (>31K)
- @WeAreRLadies & @RLadiesGlobal (2× >13K)
- @rstatstweet & @rstats4ds (bot like)
- @rdataberlin (new!)

The best person who can teach you **R** may be yourself

Once you know some basics, you should be able to start learning on your own
by simply performing experiments in your **R** console!