
Training under author semantics

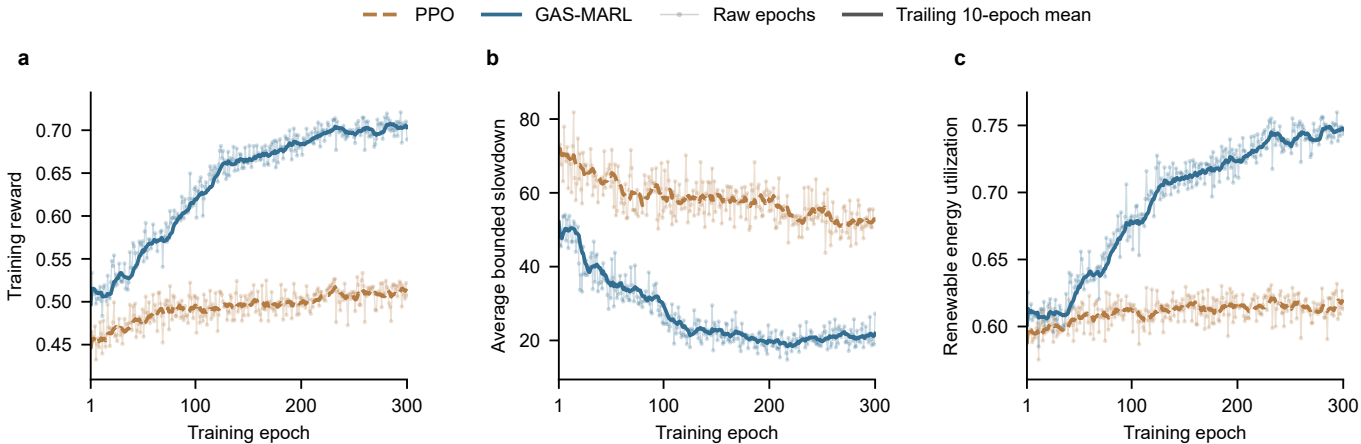

One independently trained seed per algorithm; all 300 raw epochs retained.

Trailing mean uses available history for epochs 1–9; no uncertainty bands.