CS315 · ALGORITHMS ANALYSIS & DESIGN

Midterm 461 تدريب

ميد 461 · 25 درجة

محارب

01 عن الميد

ميد الترم 461، خمسة أسئلة من 25 درجة. الأسئلة منقولة من صور ورقة طالب، وأجوبته مغطاة في أغلب الصور.

Question	1	2	3	4	5	Total
Marks	3	6	5	6	5	25

عن الحل

ما عندي نموذج إجابة رسمي. في Q2 اختيارات الطالب ظاهرة في الصور، وراجعتها وطلعت كلها صحيحة. باقي الأسئلة من حلي، والجداول محسوبة بكود.

الأسئلة 02

Q1 TRUE / FALSE · 3 PTS

Choose True or False by putting a check mark (✓):

1) An algorithm is a disorganized, unordered set of steps to solve a problem in an unspecified amount of time.

2) The running time of an algorithm typically grows with the input size.

3) Insertion Sort is an algorithm that correctly sorts an arbitrary n-element of an array in time about n.

4) The main operations of a dictionary ADT are searching, inserting, and deleting items.

5) Fractional knapsack problem can be solved in time O(n)

6) In any problem there can be many optimal solutions but there is only one feasible solution

MCQ · 6 PTS **Q2**

Choose the correct answer by putting a check mark beside the correct answer:

1) When we apply the Merge sort algorithm to the sentence S=(F,I,N,A,L,E,X,A,M) to sort it into increasing order, the first two sub-problems are:

- ☐ (F,I,N) and (A,L,E,X,A,M)
- ☐ (F,A,L,E,I) and (N,X,A,M)
- ☐ (F,I,N,A,L) and (E,X,A,M)
- ☐ (F,I,N,A) and (L,E,X,A,M)

2) In the Dictionary ADT, the log file is most effective when:

- ☐ Only searches are frequently performed
- ☐ Searches and insertions are equally common
- ☐ Both insertions and removals are frequent
- ☐ Insertions are frequent and searches are rare

3) What is the first step in developing a dynamic-programming algorithm?

- ☐ Compute the value of an optimal solution
- ☐ Characterize the structure of an optimal solution
- ☐ Construct an optimal solution from computed information
- ☐ Recursively define the value of an optimal solution


4) Given two strings: s1="AGGTAB" and s2="GXTXAYB", the Longest Common Subsequence (LCS) using dynamic programming is:

☐ 3 ☐ 4 ☐ 5 ☐ 6

5) What is the running time of the Huffman encoding algorithm?

☐ O(log n) ☐ O(n) ☐ O(n log n) ☐ O(n^2)

6) From the following given tree, what is the code word for the character 'J'? (a left edge is 0 and a right edge is 1)

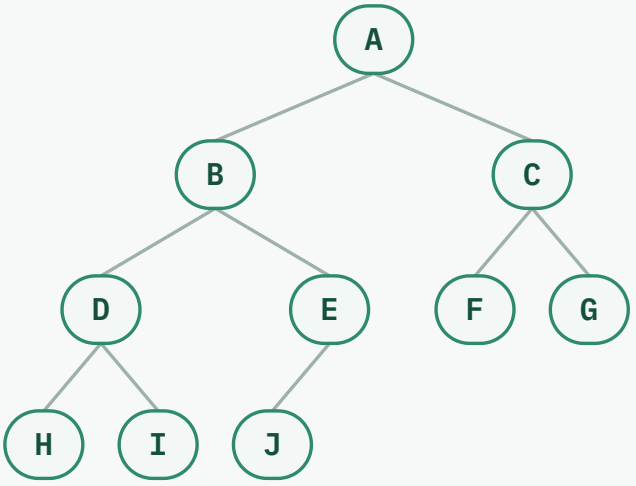

☐ 101 ☐ 110 ☐ 010 ☐ 001

DOUBLE HASHING · 5 PTS

Q3

Consider a hash table with size 10, show the hash table after all items have been inserted.

- The primary hash function is h(k) = k mod 10.
- The collision resolution strategy is double hashing.
- The secondary hash function is d(k) = k mod 9.
- Key to insert {19, 16, 90, 18, 60, 89, 70}

K	H(k)	D(k)	Probes
19			
16			
90			
18			
60			
89			
70			

0	1	2	3	4	5	6	7	8	9

MATRIX CHAIN · 6 PTS **Q4**

Apply the Dynamic programming algorithm and give the optimal solution to the matrix chain multiplication ABC where the order for matrix,

A = 5 × 10, B = 10 × 3, C = 3 × 12.

Note: Provide the best order of matrix multiplication and the number of operations.

Minimum operations = _____ Best order of multiplication: _____

	A	B	C
A			
B			
C			

FRACTIONAL KNAPSACK · 5 PTS

Q5

Given items as {value, weight} pairs {{40,20},{30,10},{20,5}}. The capacity of knapsack=20. Find the maximum value output assuming items to be divisible.

The maximum value = _____