

Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | -15 < delta < -6% | N=6899

Distributions and residual correlations; raw residuals, no display shifts; statistics include tails


xptar residual

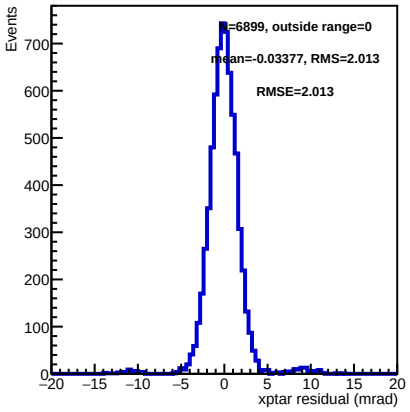


ytar residual

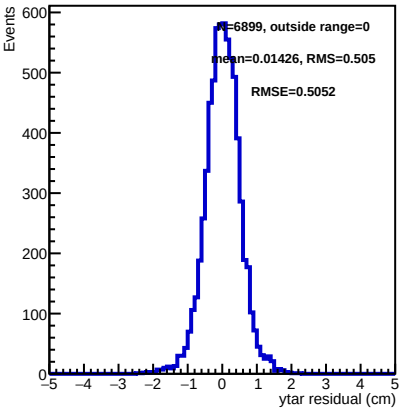


yptar residual

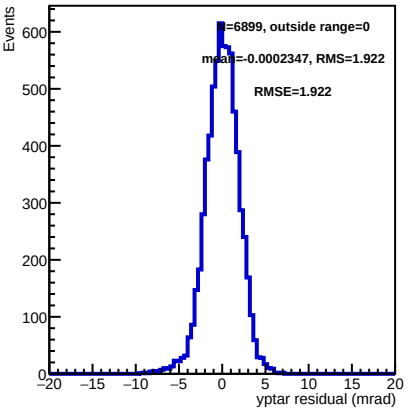


xptar residual versus target

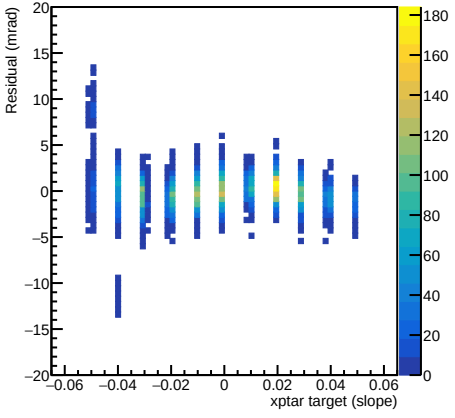

ytar residual versus target

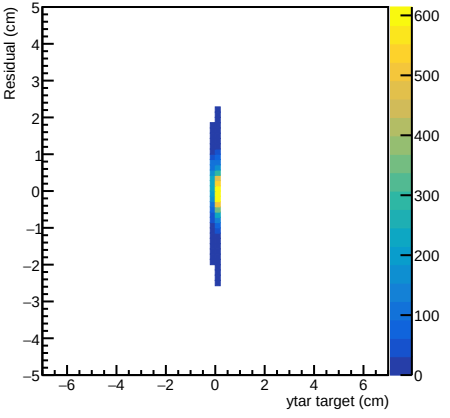


yptar residual versus target

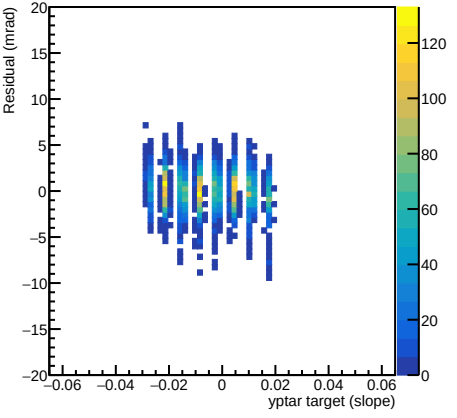


Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | -15 < delta < -6% | N=6899
xptar residual distributions by x sieve column; empty columns shown explicitly


Sieve column -5 (-12.5 cm)




Sieve column -4 (-10 cm)




Sieve column -3 (-7.5 cm)




Sieve column -2 (-5 cm)




Sieve column -1 (-2.5 cm)




Sieve column +0 (0 cm)




Sieve column +1 (2.5 cm)




Sieve column +2 (5 cm)




Sieve column +3 (7.5 cm)



Sieve column +4 (10 cm)




Sieve column +5 (12.5 cm)




Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | -15 < delta < -6% | N=6899
ytar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)




Sieve column +5 (8.2 cm)




Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | -15 < delta < -6% | N=6899
yptar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)





Sieve column +5 (8.2 cm)





Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | -15 < delta < -6% | N=6899

Sieve reconstruction and residuals versus delta; fixed geometric xtar, not an iterative replay

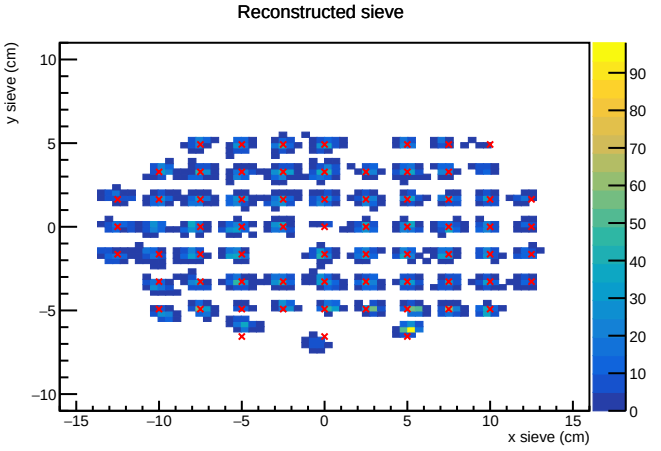

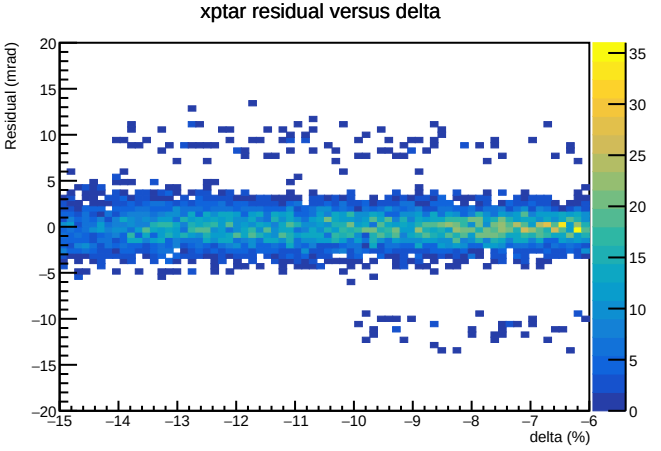

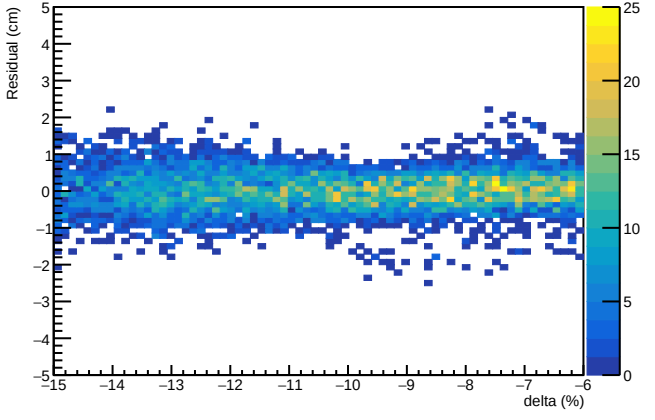


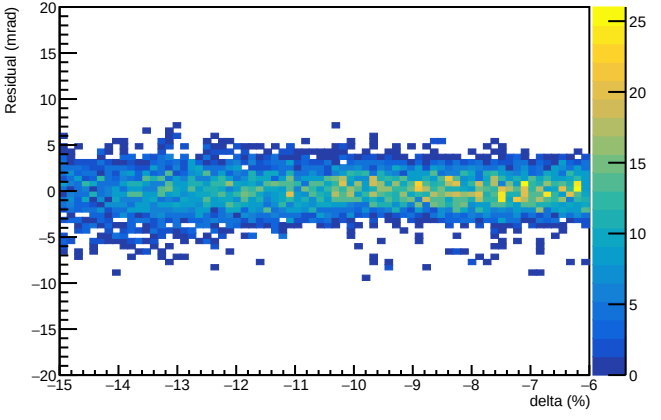


Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | -6 <= delta < -2% | N=5513

Distributions and residual correlations; raw residuals, no display shifts; statistics include tails


xptar residual

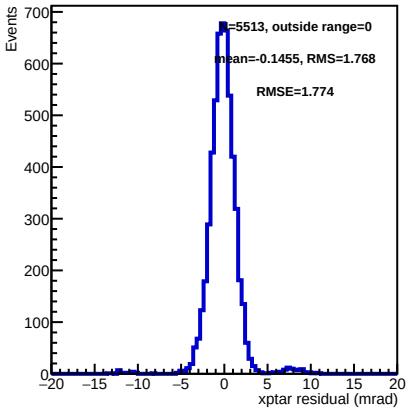


ytar residual

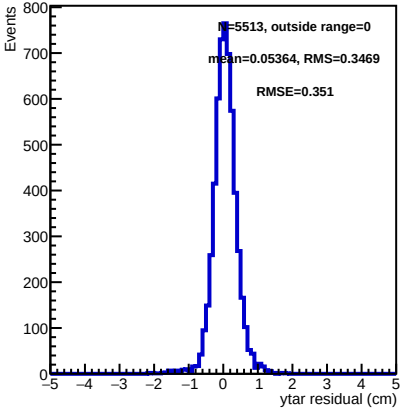


yptar residual

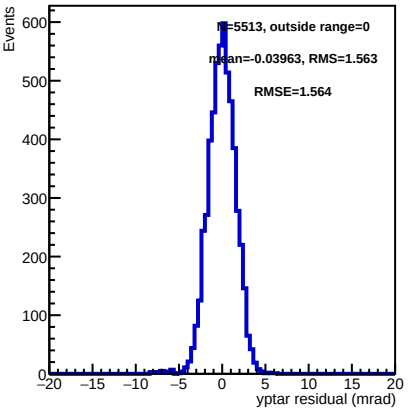


xptar residual versus target

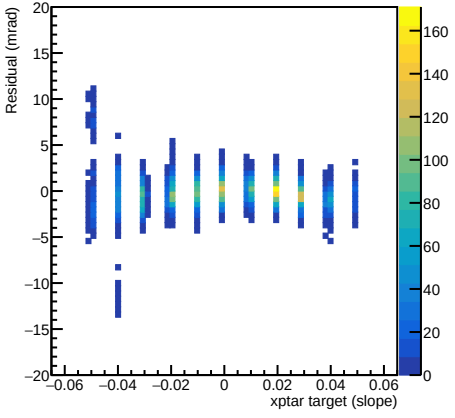

ytar residual versus target

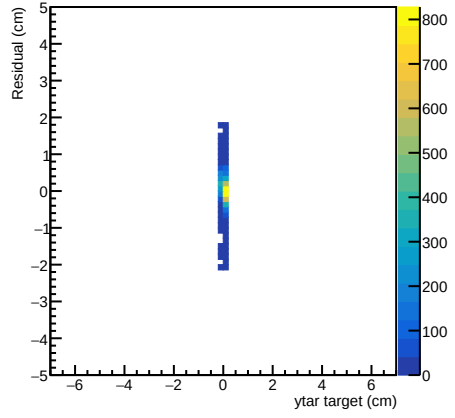


yptar residual versus target

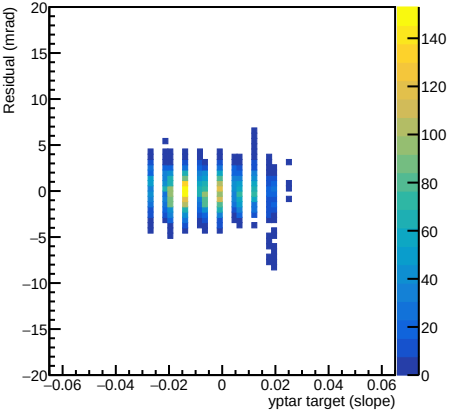


Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | -6 <= delta < -2% | N=5513

xptar residual distributions by x sieve column; empty columns shown explicitly


Sieve column -5 (-12.5 cm)




Sieve column -4 (-10 cm)




Sieve column -3 (-7.5 cm)




Sieve column -2 (-5 cm)




Sieve column -1 (-2.5 cm)




Sieve column +0 (0 cm)




Sieve column +1 (2.5 cm)




Sieve column +2 (5 cm)




Sieve column +3 (7.5 cm)



Sieve column +4 (10 cm)




Sieve column +5 (12.5 cm)




Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | -6 <= delta < -2% | N=5513
ytar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)




Sieve column +5 (8.2 cm)




Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | -6 <= delta < -2% | N=5513
yptar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)




Sieve column +5 (8.2 cm)




Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | -6 <= delta < -2% | N=5513

Sieve reconstruction and residuals versus delta; fixed geometric xtar, not an iterative replay


Reconstructed sieve

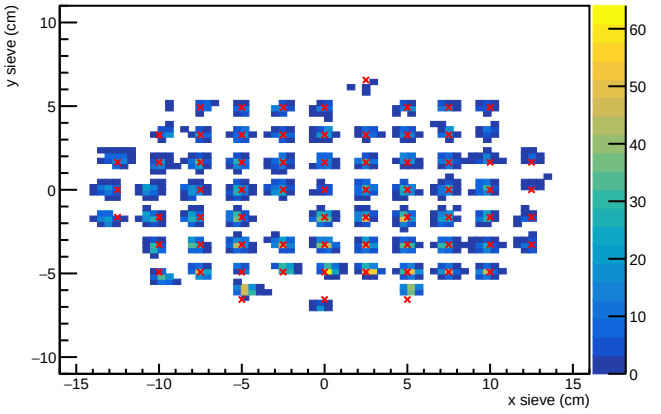


xptar residual versus delta

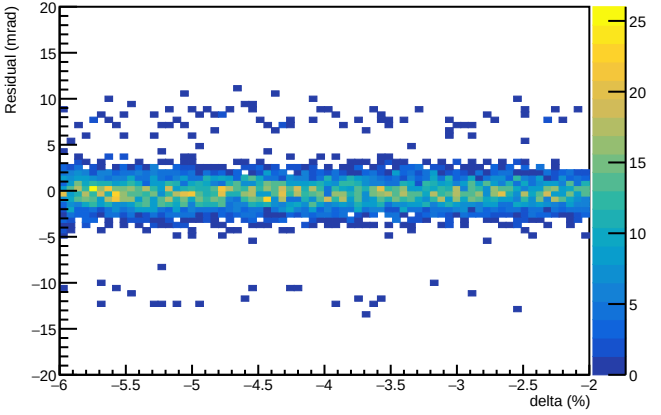

ytar residual versus delta

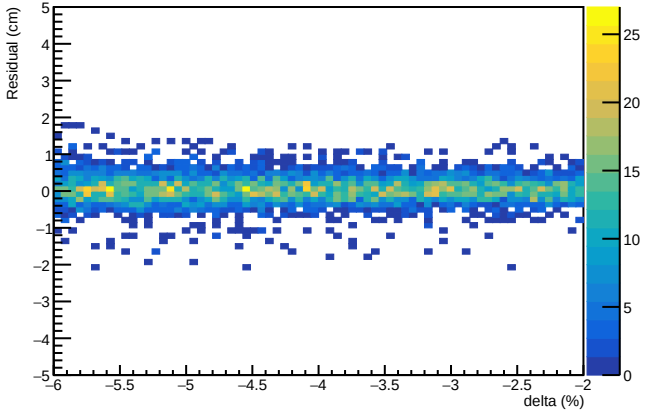


yptar residual versus delta

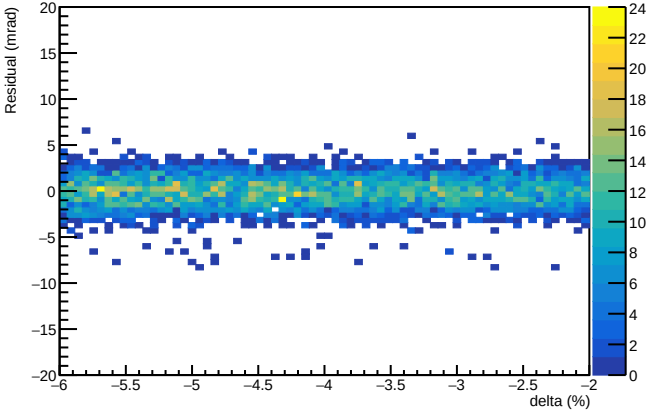


Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | -2 <= delta < 2% | N=4199

Distributions and residual correlations; raw residuals, no display shifts; statistics include tails


xptar residual

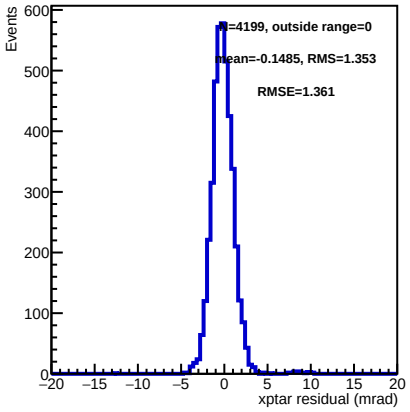


ytar residual

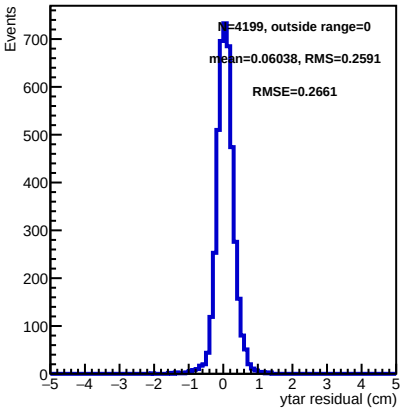


yptar residual

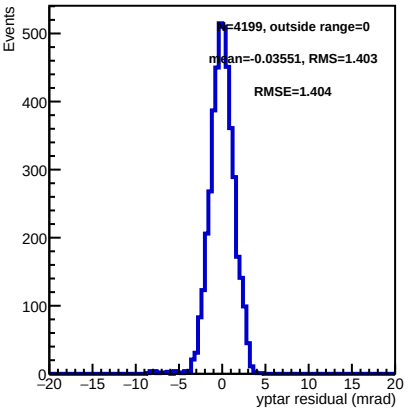


xptar residual versus target

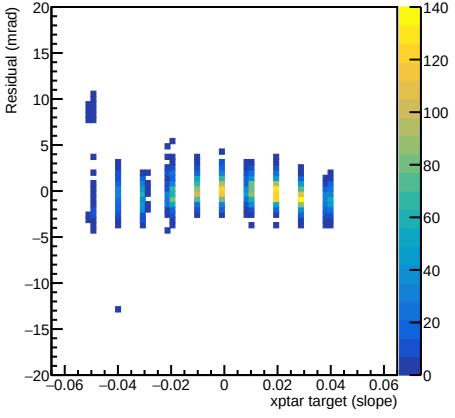

ytar residual versus target

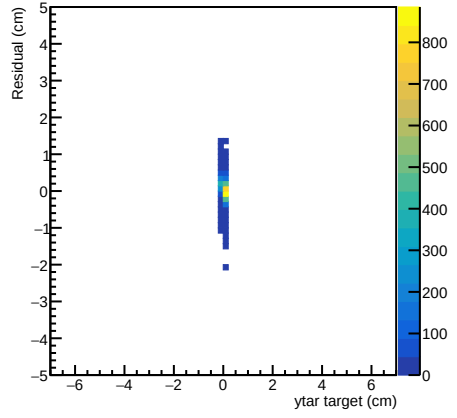


yptar residual versus target

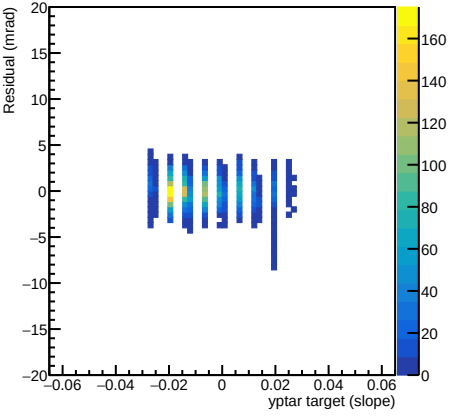


Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | -2 <= delta < 2% | N=4199
xptar residual distributions by x sieve column; empty columns shown explicitly


Sieve column -5 (-12.5 cm)




Sieve column -4 (-10 cm)




Sieve column -3 (-7.5 cm)




Sieve column -2 (-5 cm)




Sieve column -1 (-2.5 cm)




Sieve column +0 (0 cm)




Sieve column +1 (2.5 cm)




Sieve column +2 (5 cm)




Sieve column +3 (7.5 cm)



Sieve column +4 (10 cm)




Sieve column +5 (12.5 cm)




Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | -2 <= delta < 2% | N=4199
ytar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)




Sieve column +5 (8.2 cm)




Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | -2 <= delta < 2% | N=4199
yptar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)




Sieve column +5 (8.2 cm)




Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | -2 <= delta < 2% | N=4199

Sieve reconstruction and residuals versus delta; fixed geometric xtar, not an iterative replay


Reconstructed sieve

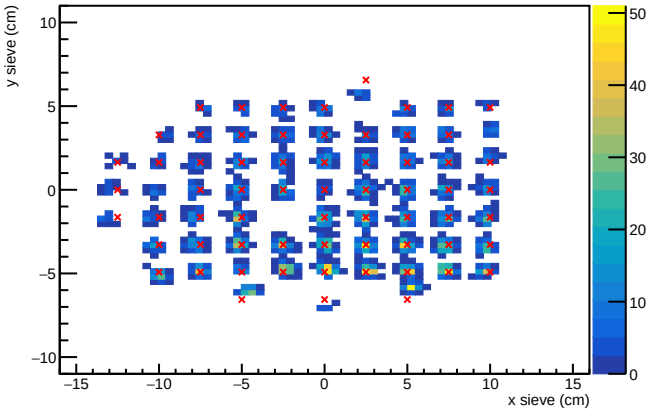


xptar residual versus delta

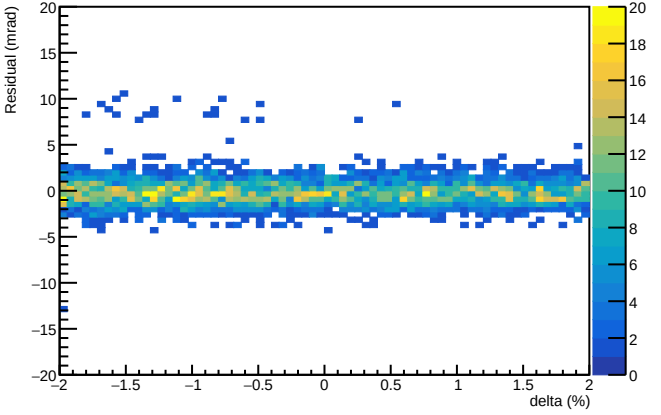

ytar residual versus delta

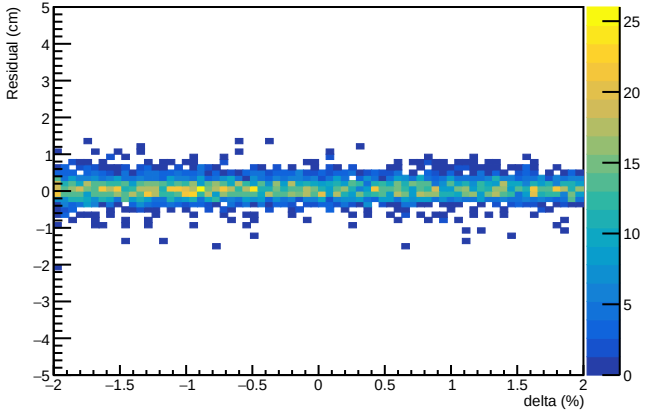


yptar residual versus delta

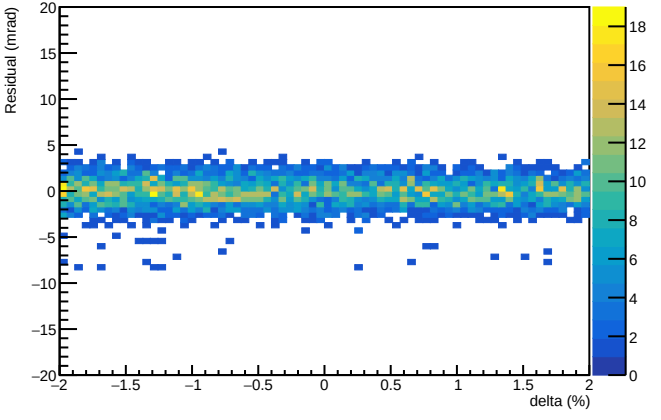


Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | 2 <= delta < 6% | N=3149

Distributions and residual correlations; raw residuals, no display shifts; statistics include tails


xptar residual

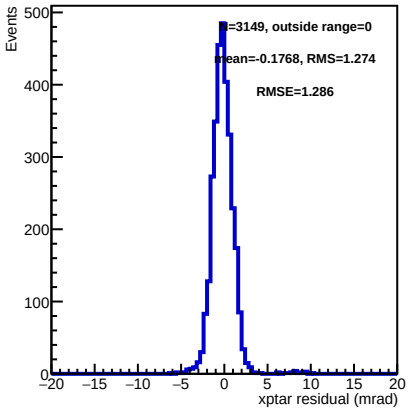


ytar residual

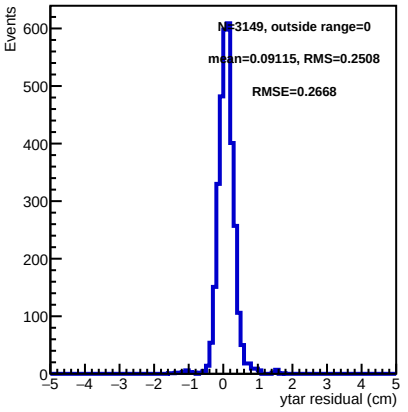


yptar residual

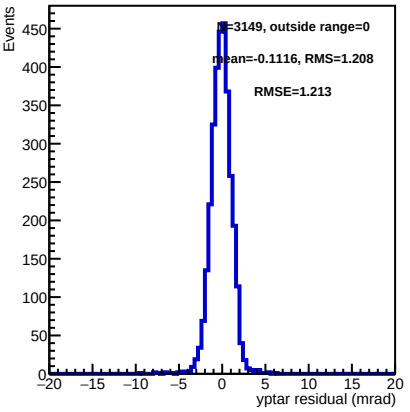


xptar residual versus target

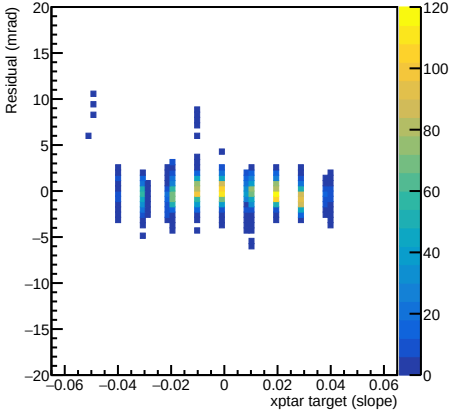

ytar residual versus target

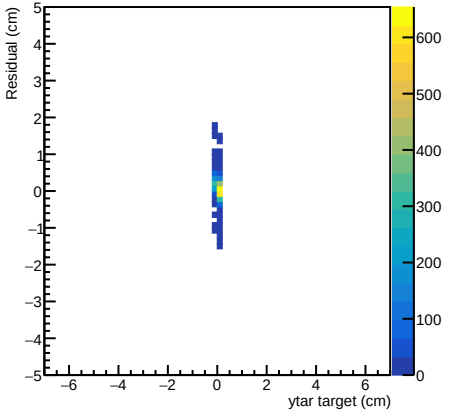


yptar residual versus target

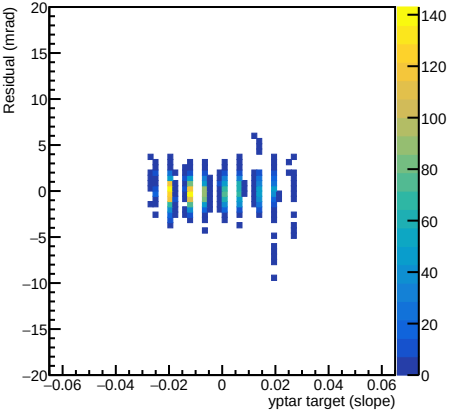


Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | 2 <= delta < 6% | N=3149
xptar residual distributions by x sieve column; empty columns shown explicitly


Sieve column -5 (-12.5 cm)




Sieve column -4 (-10 cm)




Sieve column -3 (-7.5 cm)




Sieve column -2 (-5 cm)




Sieve column -1 (-2.5 cm)




Sieve column +0 (0 cm)




Sieve column +1 (2.5 cm)




Sieve column +2 (5 cm)




Sieve column +3 (7.5 cm)



Sieve column +4 (10 cm)




Sieve column +5 (12.5 cm)




Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | 2 <= delta < 6% | N=3149
ytar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)




Sieve column +5 (8.2 cm)




Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | 2 <= delta < 6% | N=3149

yptar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)




Sieve column +5 (8.2 cm)




Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | 2 <= delta < 6% | N=3149

Sieve reconstruction and residuals versus delta; fixed geometric xtar, not an iterative replay


Reconstructed sieve

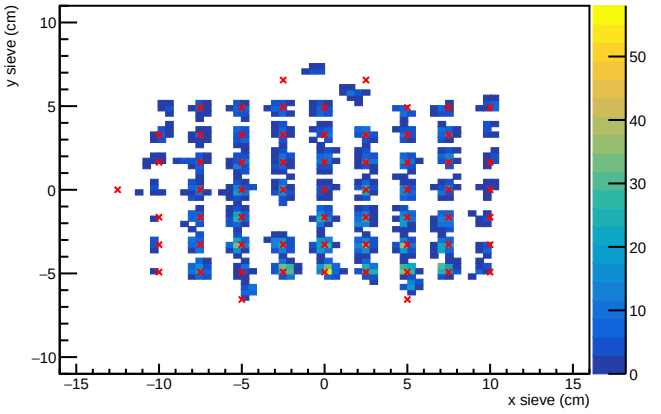


xptar residual versus delta

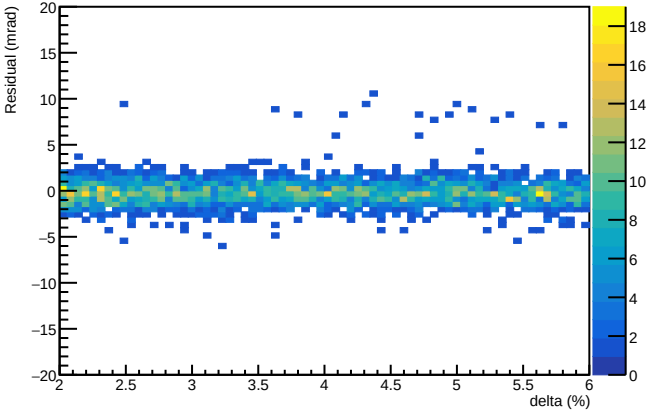

ytar residual versus delta

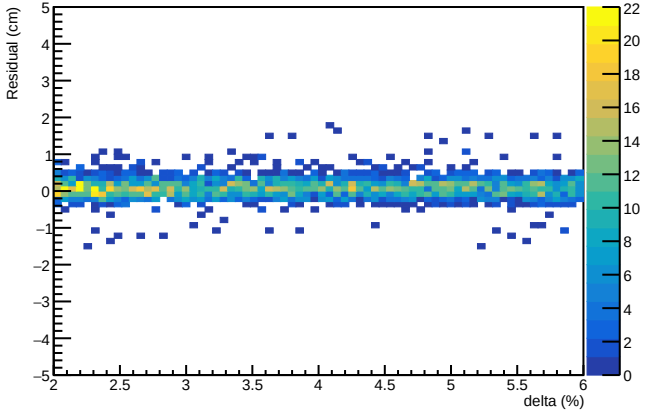



yptar residual versus delta

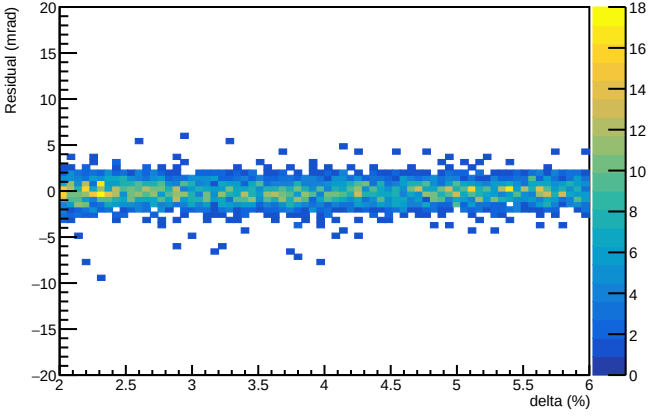



Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | 6 <= delta < 10% | N=2095


Distributions and residual correlations; raw residuals, no display shifts; statistics include tails

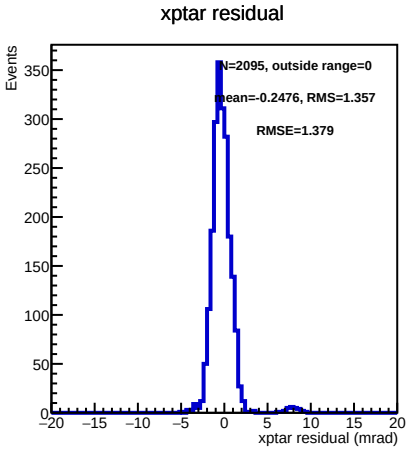


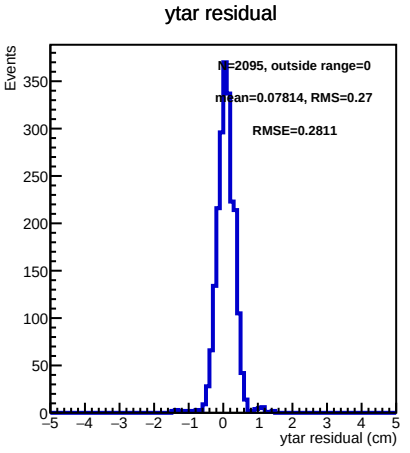

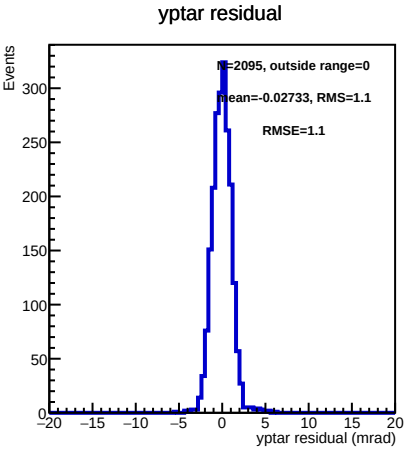

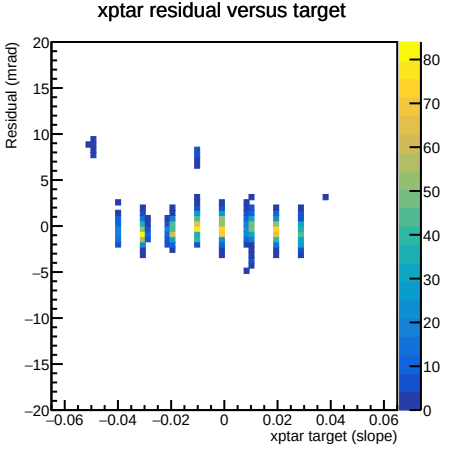


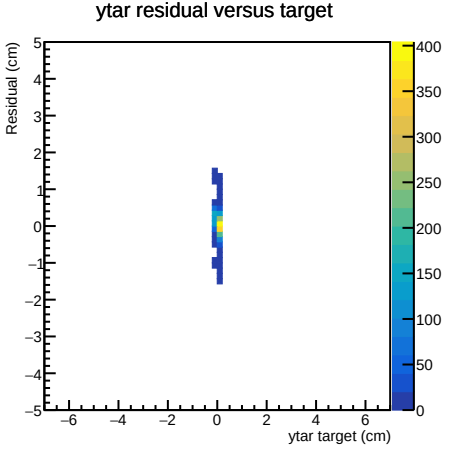

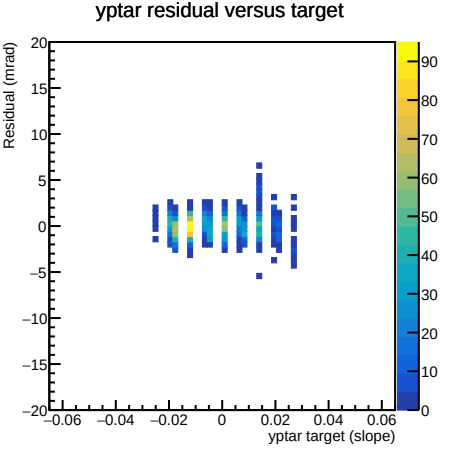


Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | 6 <= delta < 10% | N=2095
xptar residual distributions by x sieve column; empty columns shown explicitly


Sieve column -5 (-12.5 cm)




Sieve column -4 (-10 cm)




Sieve column -3 (-7.5 cm)




Sieve column -2 (-5 cm)




Sieve column -1 (-2.5 cm)




Sieve column +0 (0 cm)




Sieve column +1 (2.5 cm)




Sieve column +2 (5 cm)




Sieve column +3 (7.5 cm)



Sieve column +4 (10 cm)




Sieve column +5 (12.5 cm)




Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | 6 <= delta < 10% | N=2095
ytar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)




Sieve column +5 (8.2 cm)




Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | 6 <= delta < 10% | N=2095
yptar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)




Sieve column +5 (8.2 cm)




Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | 6 <= delta < 10% | N=2095

Sieve reconstruction and residuals versus delta; fixed geometric xtar, not an iterative replay


Reconstructed sieve

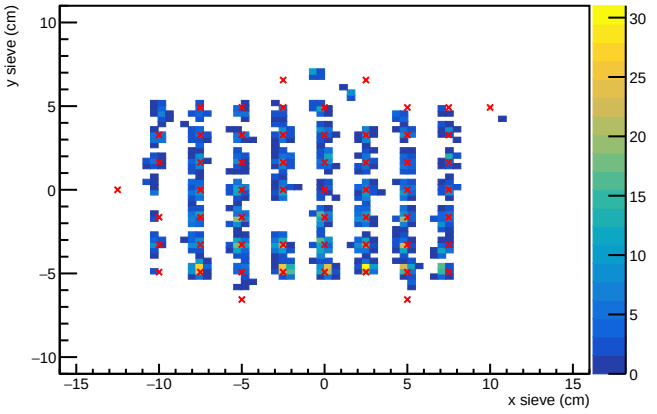


xptar residual versus delta

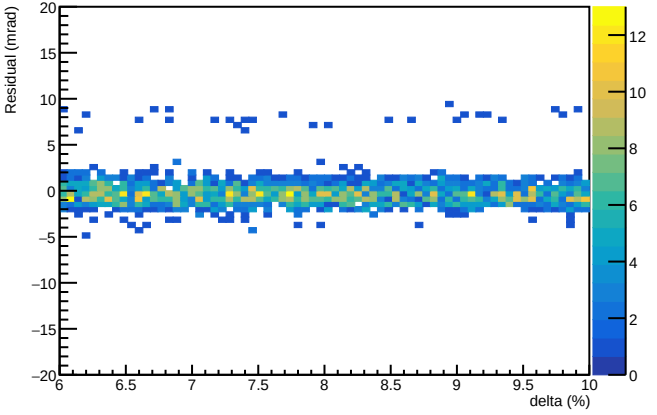

ytar residual versus delta

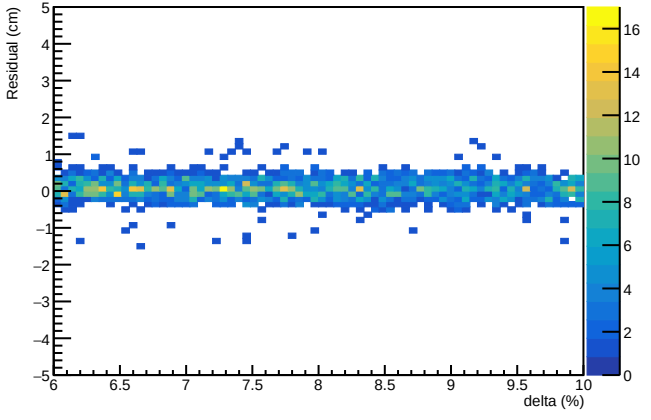


yptar residual versus delta

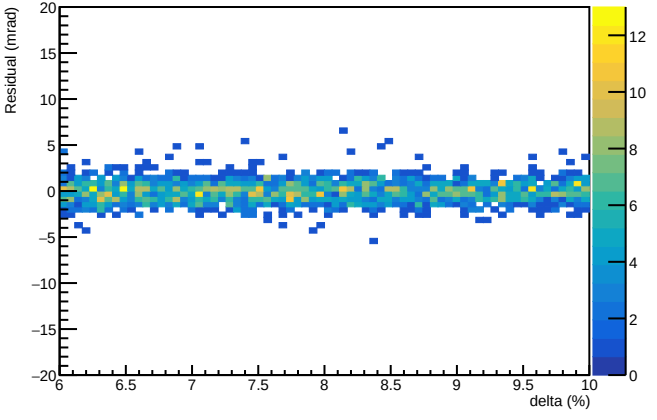


Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | 10 <= delta < 22% | N=2541

Distributions and residual correlations; raw residuals, no display shifts; statistics include tails


xptar residual

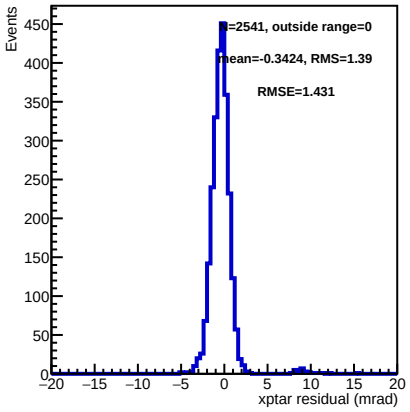


ytar residual

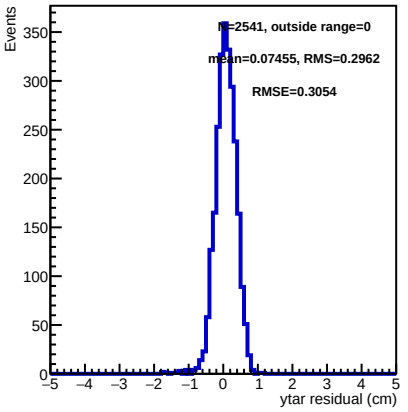


yptar residual

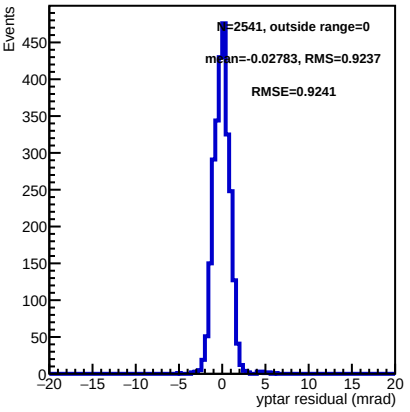


xptar residual versus target

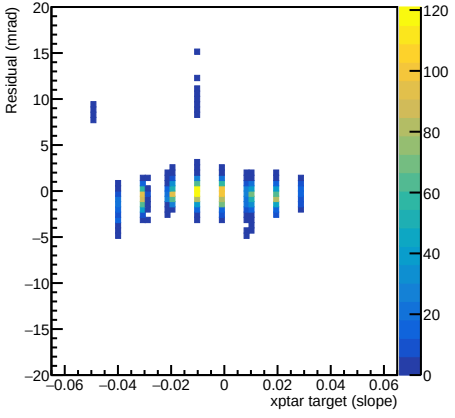

ytar residual versus target

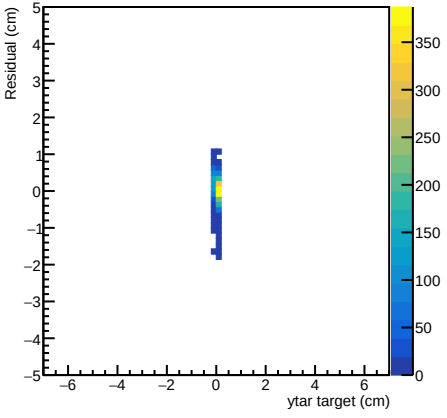


yptar residual versus target

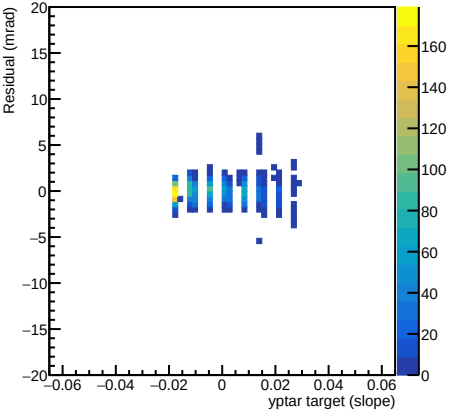


Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | 10 <= delta < 22% | N=2541
xptar residual distributions by x sieve column; empty columns shown explicitly


Sieve column -5 (-12.5 cm)




Sieve column -4 (-10 cm)




Sieve column -3 (-7.5 cm)




Sieve column -2 (-5 cm)




Sieve column -1 (-2.5 cm)




Sieve column +0 (0 cm)




Sieve column +1 (2.5 cm)




Sieve column +2 (5 cm)




Sieve column +3 (7.5 cm)



Sieve column +4 (10 cm)




Sieve column +5 (12.5 cm)




Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | 10 <= delta < 22% | N=2541
ytar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)




Sieve column +5 (8.2 cm)




Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | 10 <= delta < 22% | N=2541
yptar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)




Sieve column +5 (8.2 cm)




Unweighted legacy fit | NEW matrix | foil 1, z=+0 cm | 10 <= delta < 22% | N=2541

Sieve reconstruction and residuals versus delta; fixed geometric xtar, not an iterative replay


Reconstructed sieve

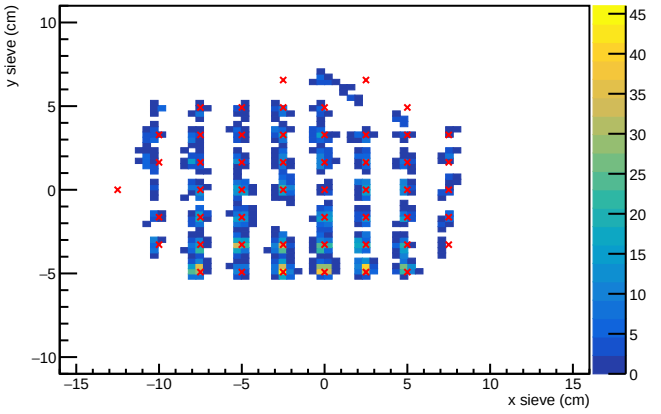

xptar residual versus delta

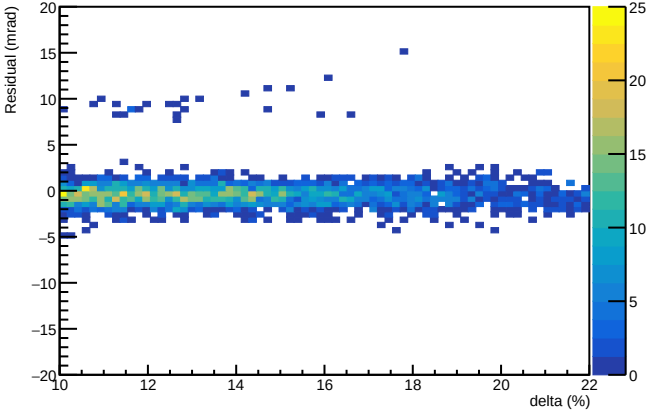

ytar residual versus delta

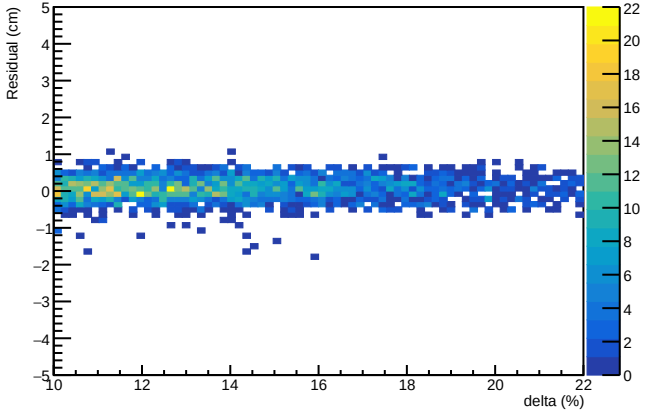

yptar residual versus delta

