

Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | -15 < delta < -6% | N=6948

Distributions and residual correlations; raw residuals, no display shifts; statistics include tails


xptar residual

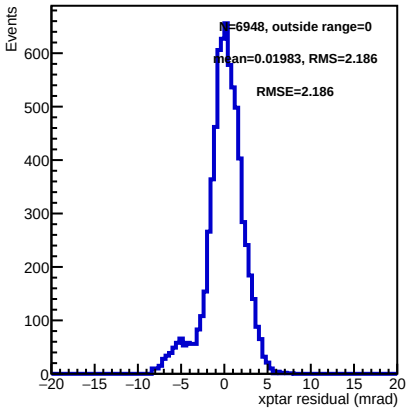


ytar residual

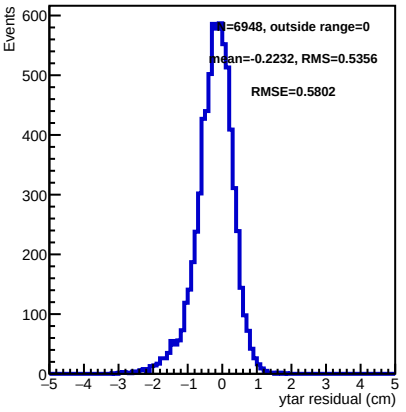


yptar residual

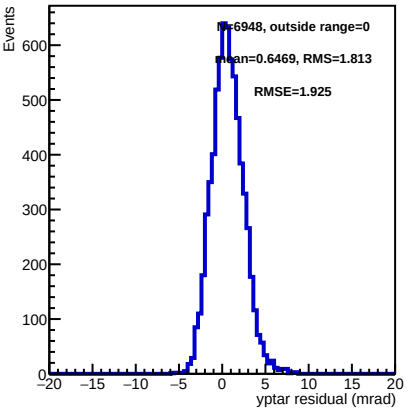


xptar residual versus target

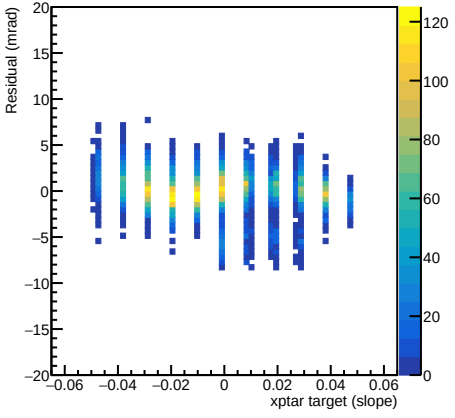

ytar residual versus target

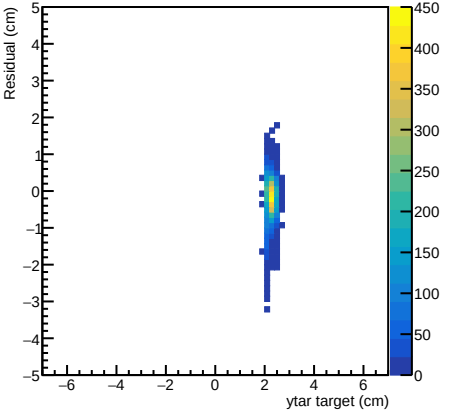


yptar residual versus target

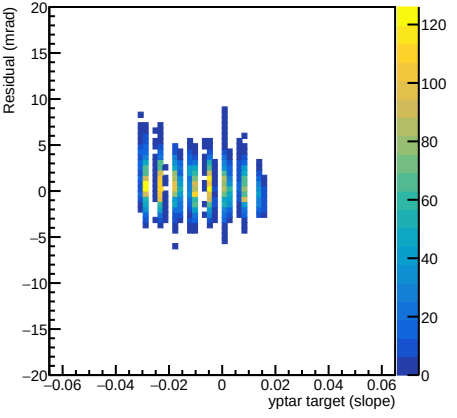


Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | -15 < delta < -6% | N=6948
xptar residual distributions by x sieve column; empty columns shown explicitly


Sieve column -5 (-12.5 cm)




Sieve column -4 (-10 cm)




Sieve column -3 (-7.5 cm)




Sieve column -2 (-5 cm)




Sieve column -1 (-2.5 cm)




Sieve column +0 (0 cm)




Sieve column +1 (2.5 cm)




Sieve column +2 (5 cm)




Sieve column +3 (7.5 cm)



Sieve column +4 (10 cm)




Sieve column +5 (12.5 cm)




Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | -15 < delta < -6% | N=6948
ytar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)




Sieve column +5 (8.2 cm)




Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | -15 < delta < -6% | N=6948
yptar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)





Sieve column +5 (8.2 cm)





Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | -15 < delta < -6% | N=6948

Sieve reconstruction and residuals versus delta; fixed geometric xtar, not an iterative replay

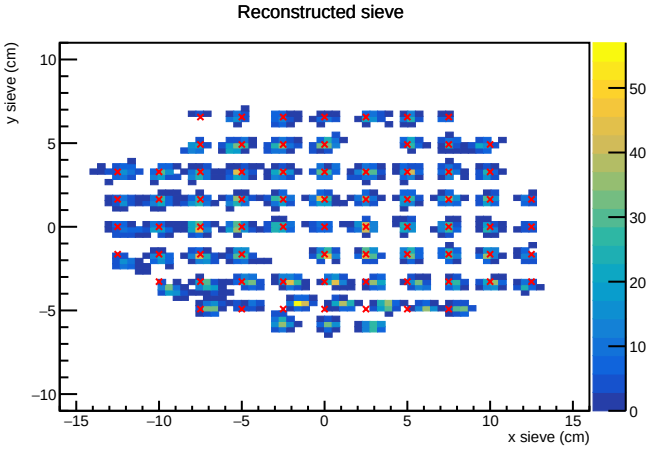

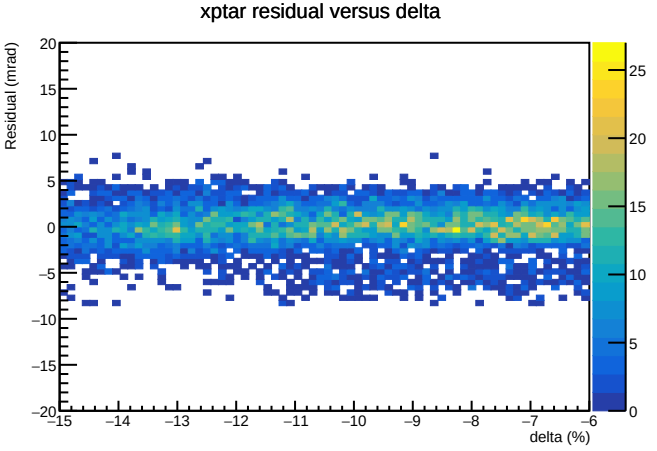

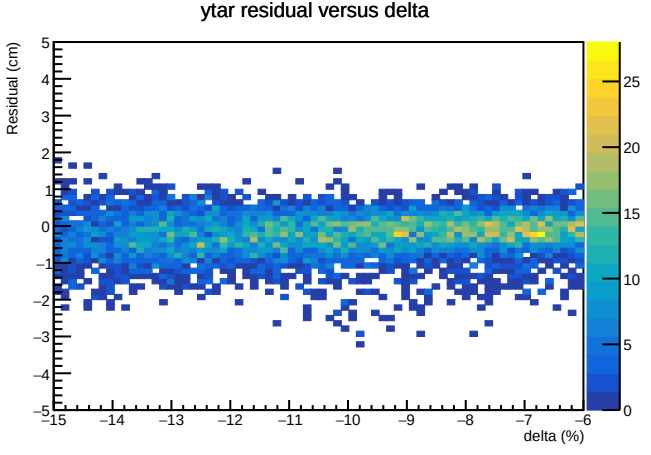


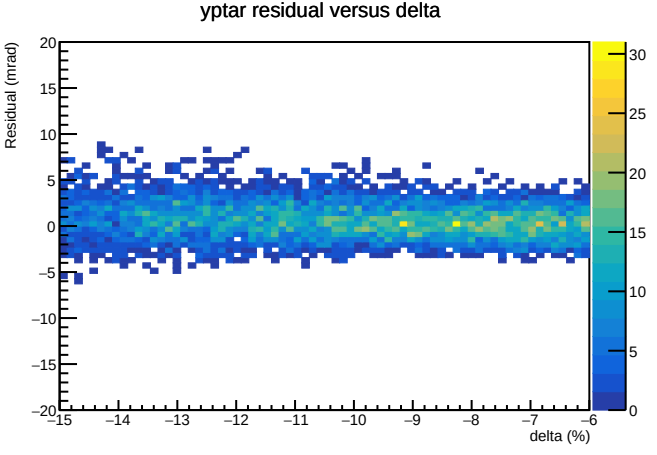


Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | -6 <= delta < -2% | N=5294

Distributions and residual correlations; raw residuals, no display shifts; statistics include tails


xptar residual

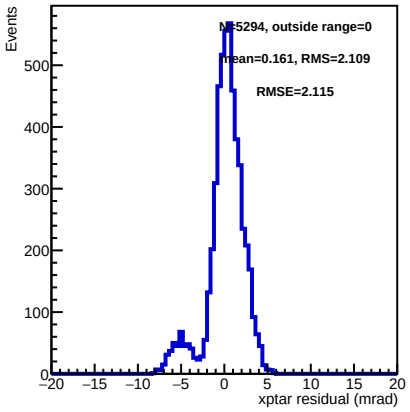


ytar residual

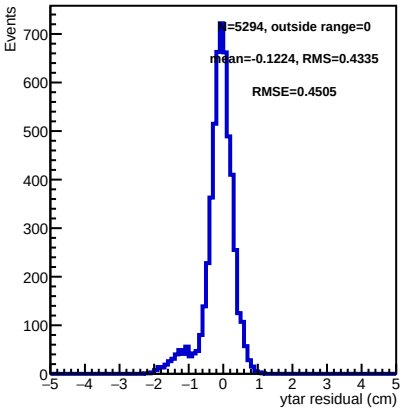


yptar residual

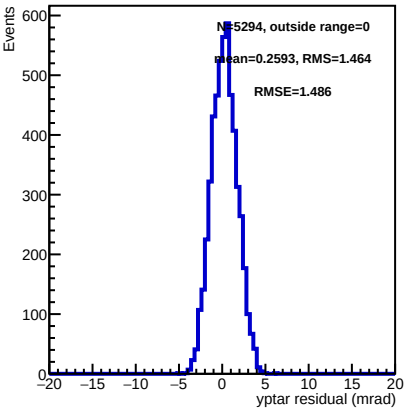


xptar residual versus target

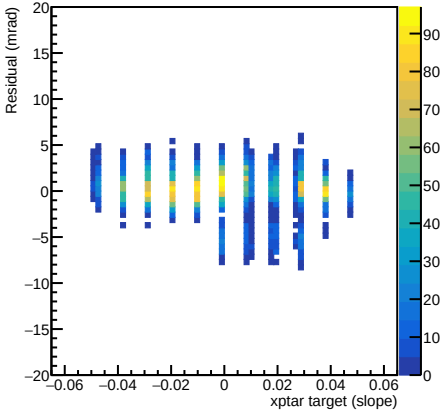

ytar residual versus target

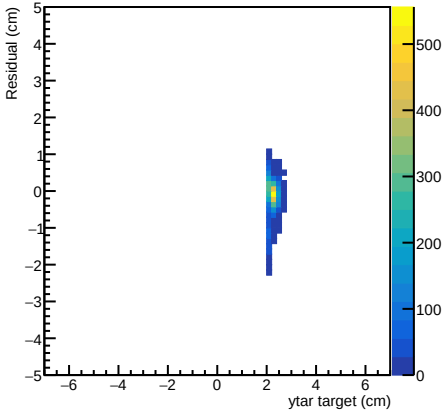


yptar residual versus target

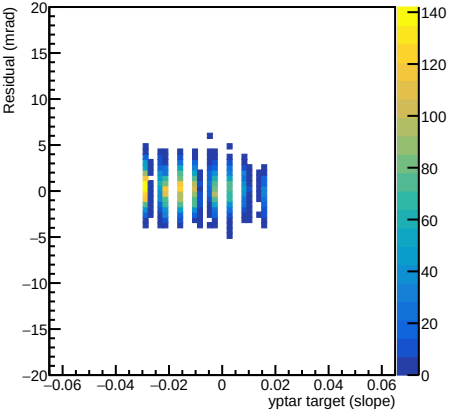


Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | -6 <= delta < -2% | N=5294
xptar residual distributions by x sieve column; empty columns shown explicitly


Sieve column -5 (-12.5 cm)




Sieve column -4 (-10 cm)




Sieve column -3 (-7.5 cm)




Sieve column -2 (-5 cm)




Sieve column -1 (-2.5 cm)




Sieve column +0 (0 cm)




Sieve column +1 (2.5 cm)




Sieve column +2 (5 cm)




Sieve column +3 (7.5 cm)



Sieve column +4 (10 cm)




Sieve column +5 (12.5 cm)




Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | -6 <= delta < -2% | N=5294
ytar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)




Sieve column +5 (8.2 cm)




Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | -6 <= delta < -2% | N=5294
yptar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)




Sieve column +5 (8.2 cm)




Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | -6 <= delta < -2% | N=5294

Sieve reconstruction and residuals versus delta; fixed geometric xtar, not an iterative replay


Reconstructed sieve

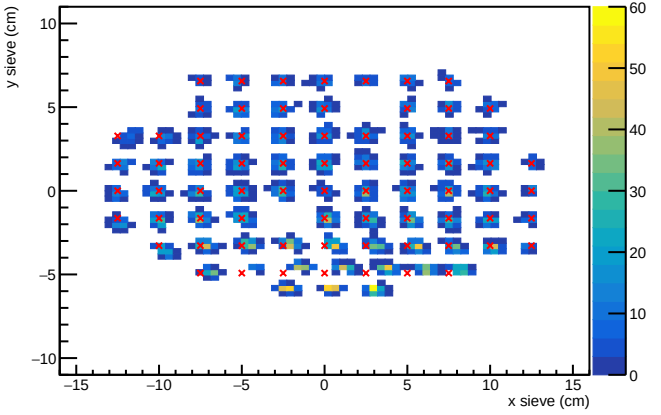


xptar residual versus delta

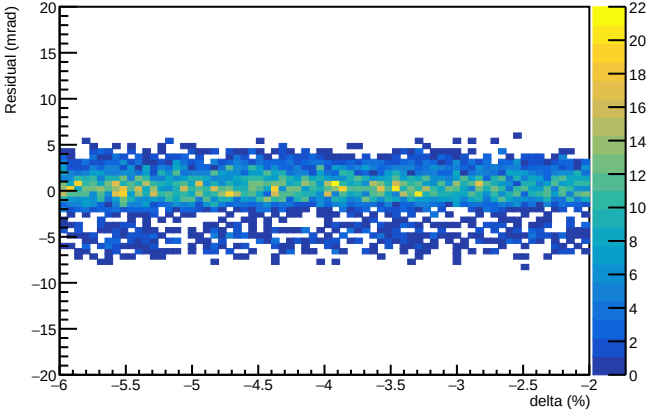

ytar residual versus delta

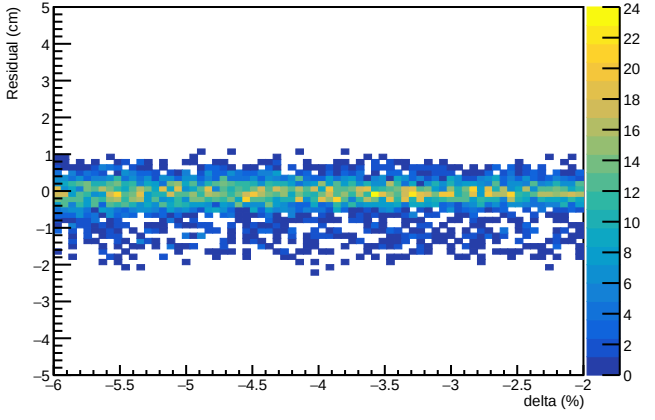


yptar residual versus delta

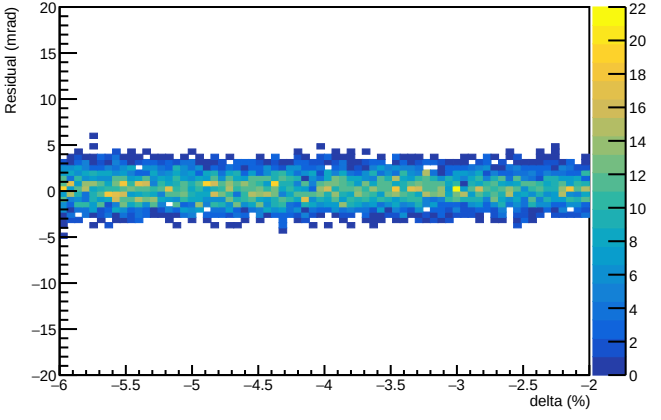


Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | -2 <= delta < 2% | N=3551

Distributions and residual correlations; raw residuals, no display shifts; statistics include tails


xptar residual

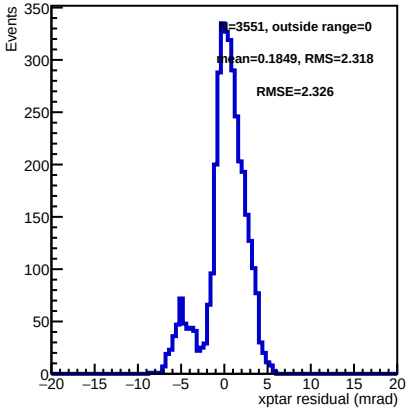


ytar residual

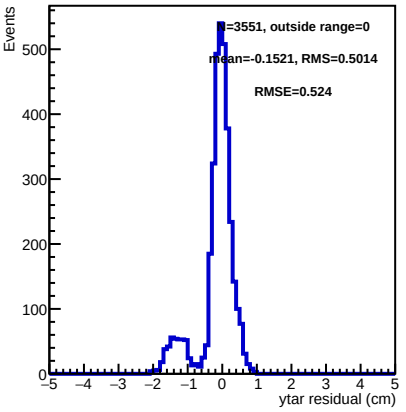


yptar residual

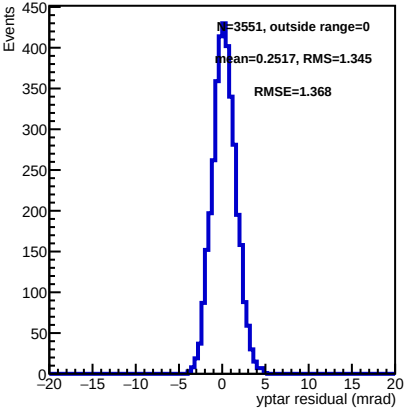


xptar residual versus target

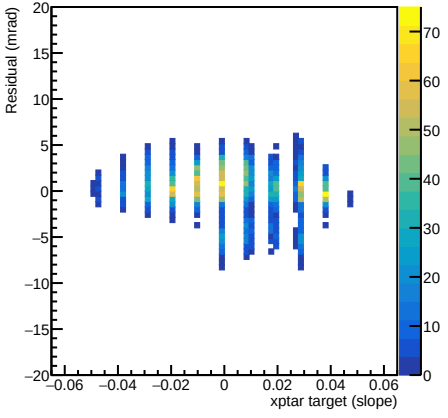

ytar residual versus target

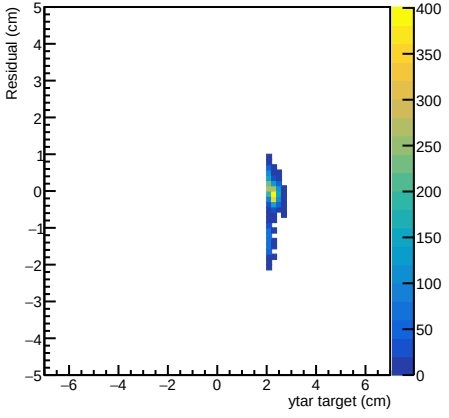


yptar residual versus target

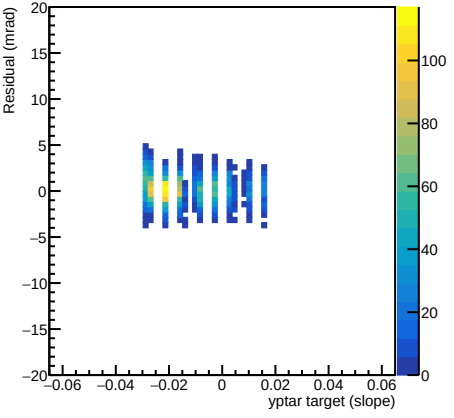


Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | -2 <= delta < 2% | N=3551
xptar residual distributions by x sieve column; empty columns shown explicitly


Sieve column -5 (-12.5 cm)




Sieve column -4 (-10 cm)




Sieve column -3 (-7.5 cm)




Sieve column -2 (-5 cm)




Sieve column -1 (-2.5 cm)




Sieve column +0 (0 cm)




Sieve column +1 (2.5 cm)




Sieve column +2 (5 cm)




Sieve column +3 (7.5 cm)



Sieve column +4 (10 cm)




Sieve column +5 (12.5 cm)




Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | -2 <= delta < 2% | N=3551
ytar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)




Sieve column +5 (8.2 cm)




Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | -2 <= delta < 2% | N=3551
yptar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)





Sieve column +5 (8.2 cm)





Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | -2 <= delta < 2% | N=3551

Sieve reconstruction and residuals versus delta; fixed geometric xtar, not an iterative replay

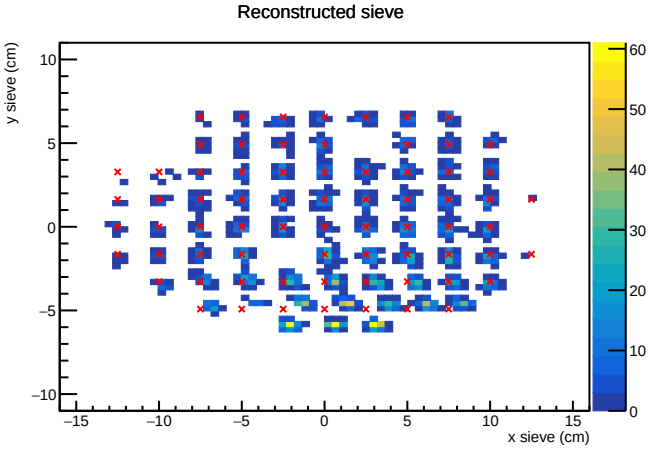

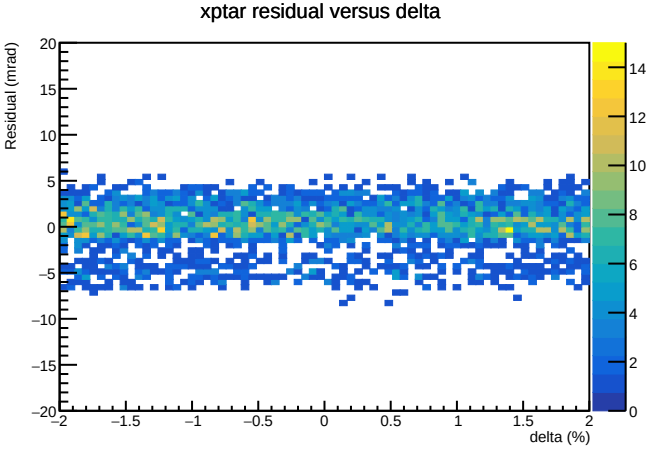

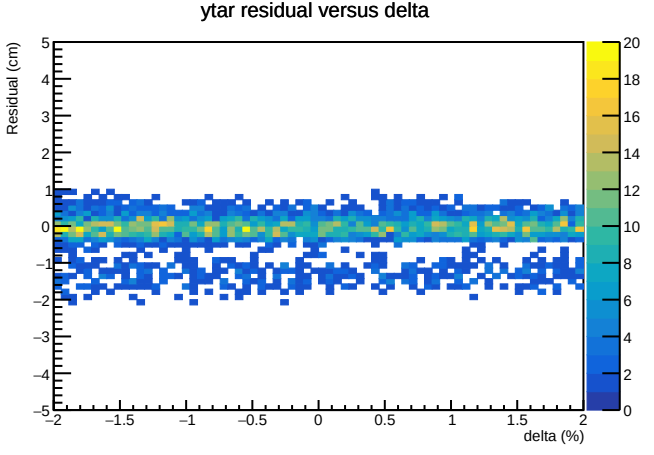


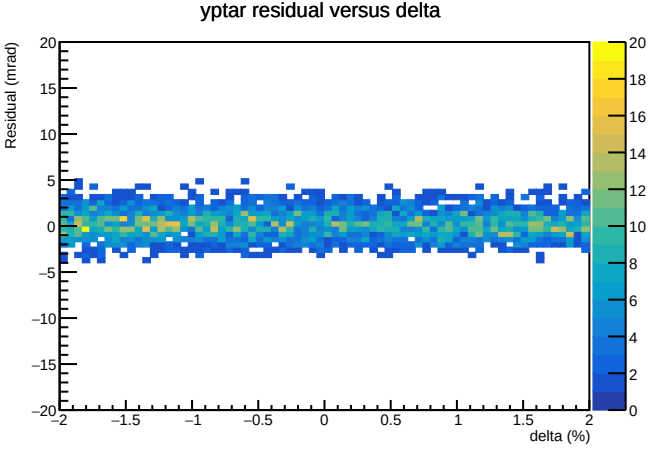


Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | 2 <= delta < 6% | N=3207

Distributions and residual correlations; raw residuals, no display shifts; statistics include tails


xptar residual

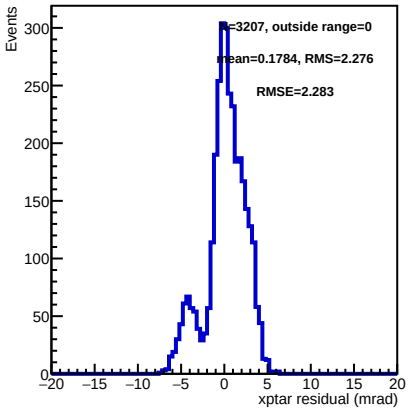


ytar residual

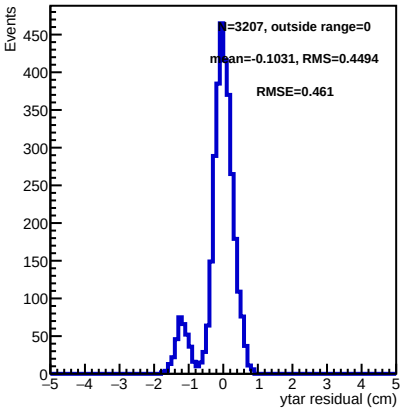


yptar residual

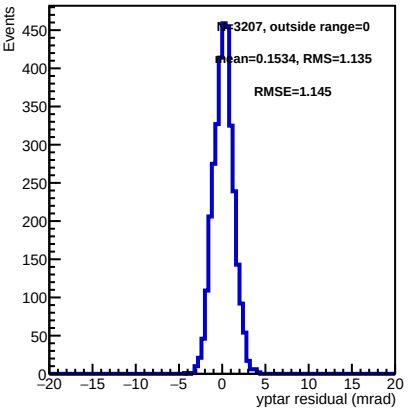


xptar residual versus target

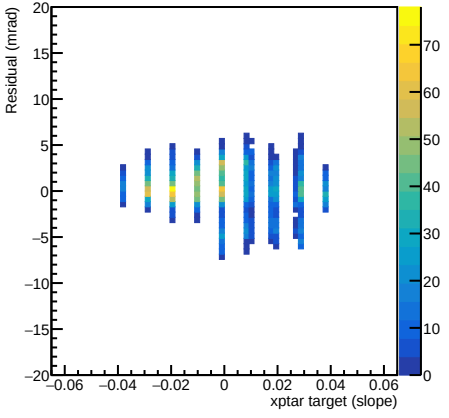

ytar residual versus target

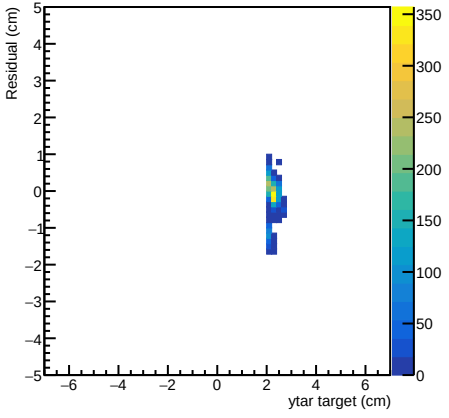


yptar residual versus target

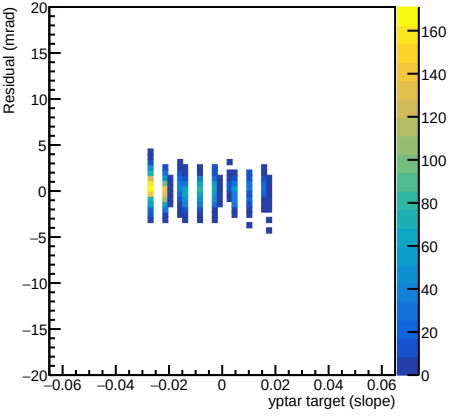


Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | 2 <= delta < 6% | N=3207
xptar residual distributions by x sieve column; empty columns shown explicitly


Sieve column -5 (-12.5 cm)




Sieve column -4 (-10 cm)




Sieve column -3 (-7.5 cm)




Sieve column -2 (-5 cm)




Sieve column -1 (-2.5 cm)




Sieve column +0 (0 cm)




Sieve column +1 (2.5 cm)




Sieve column +2 (5 cm)




Sieve column +3 (7.5 cm)



Sieve column +4 (10 cm)




Sieve column +5 (12.5 cm)




Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | 2 <= delta < 6% | N=3207
ytar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)




Sieve column +5 (8.2 cm)




Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | 2 <= delta < 6% | N=3207
yptar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)





Sieve column +5 (8.2 cm)





Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | 2 <= delta < 6% | N=3207

Sieve reconstruction and residuals versus delta; fixed geometric xtar, not an iterative replay

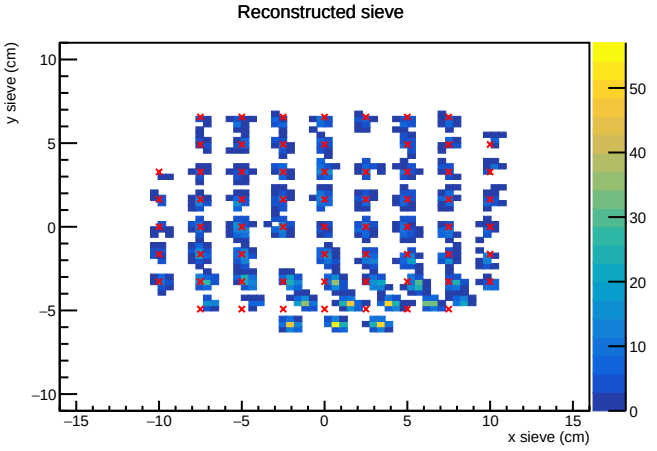

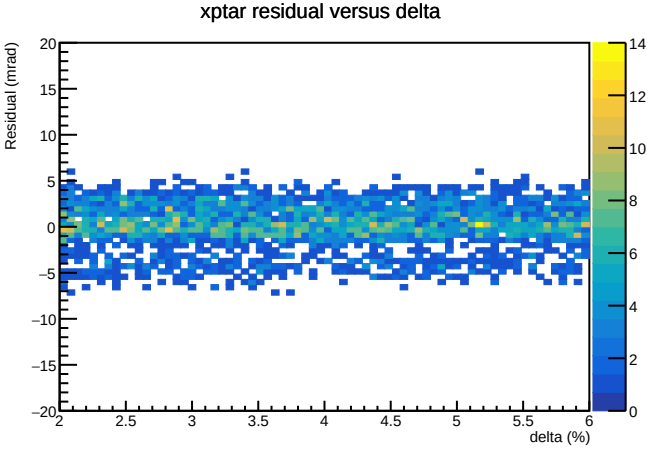

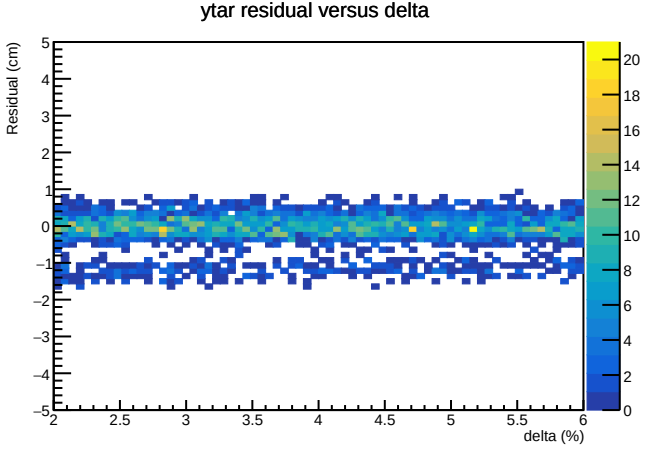


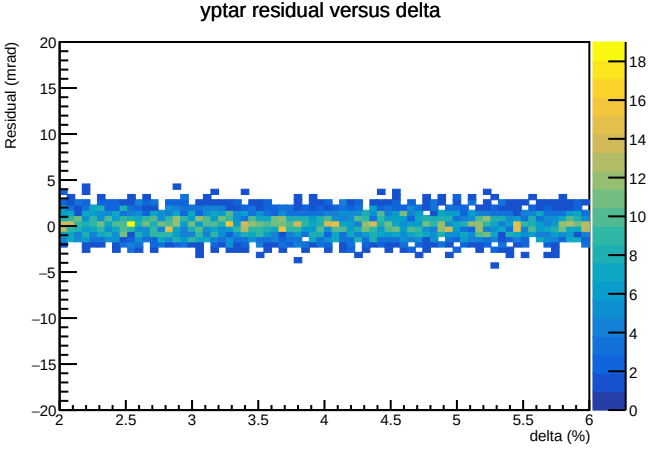


Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | 6 <= delta < 10% | N=2414

Distributions and residual correlations; raw residuals, no display shifts; statistics include tails


xptar residual

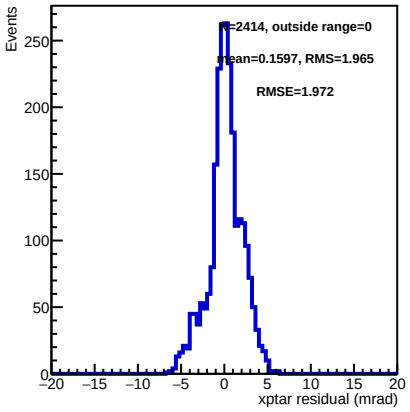


ytar residual

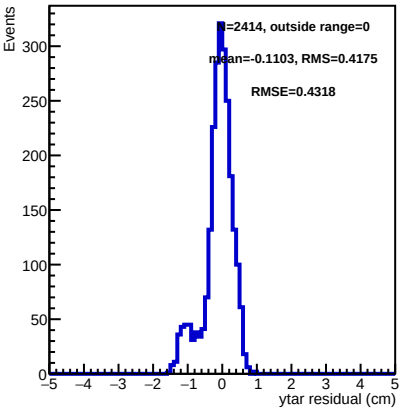


yptar residual

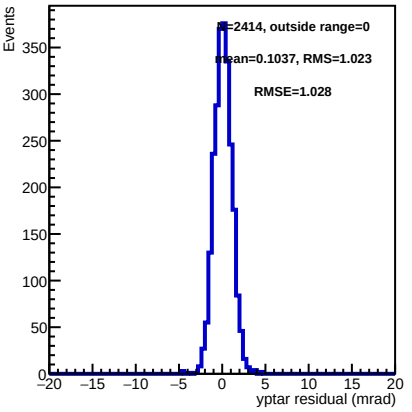


xptar residual versus target

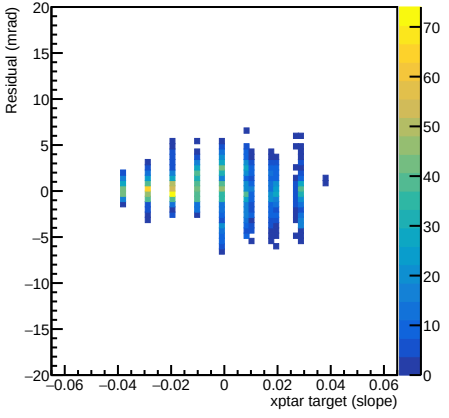

ytar residual versus target

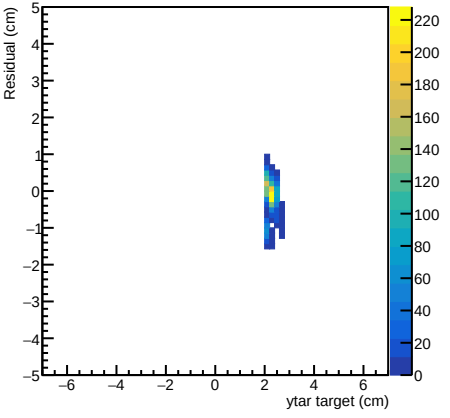


yptar residual versus target

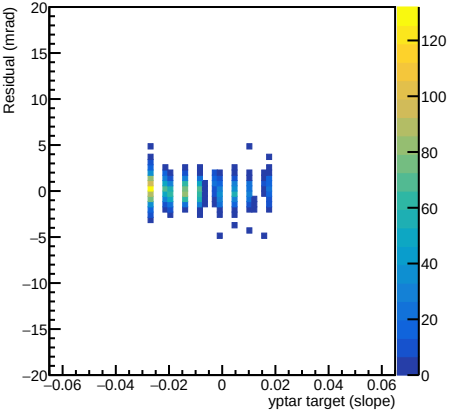


Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | 6 <= delta < 10% | N=2414
xptar residual distributions by x sieve column; empty columns shown explicitly


Sieve column -5 (-12.5 cm)




Sieve column -4 (-10 cm)




Sieve column -3 (-7.5 cm)




Sieve column -2 (-5 cm)




Sieve column -1 (-2.5 cm)




Sieve column +0 (0 cm)




Sieve column +1 (2.5 cm)




Sieve column +2 (5 cm)




Sieve column +3 (7.5 cm)



Sieve column +4 (10 cm)




Sieve column +5 (12.5 cm)




Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | 6 <= delta < 10% | N=2414
ytar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)




Sieve column +5 (8.2 cm)




Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | 6 <= delta < 10% | N=2414
yptar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)




Sieve column +5 (8.2 cm)




Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | 6 <= delta < 10% | N=2414

Sieve reconstruction and residuals versus delta; fixed geometric xtar, not an iterative replay


Reconstructed sieve

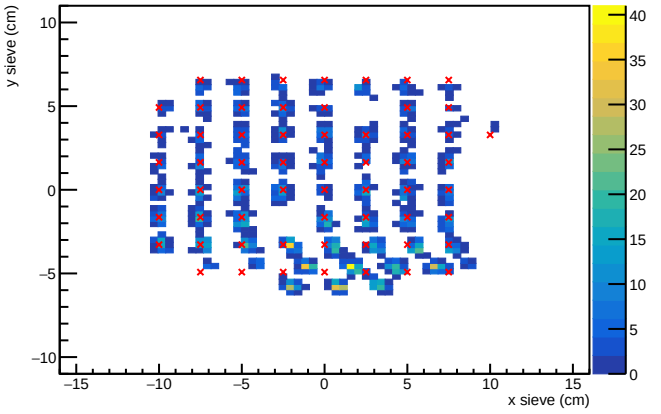


xptar residual versus delta

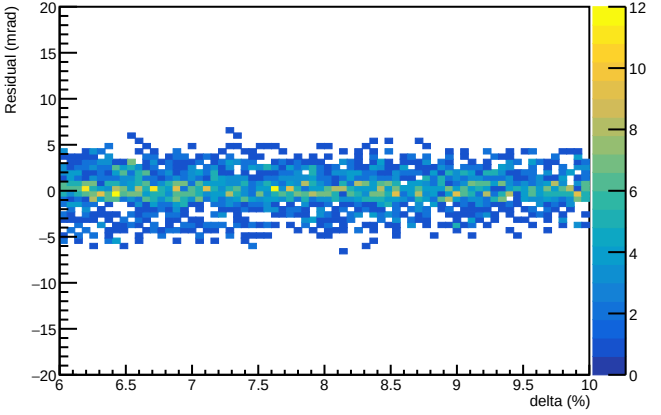

ytar residual versus delta

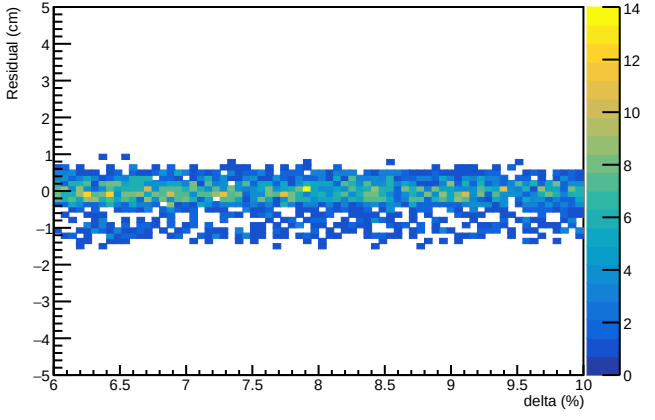


yptar residual versus delta

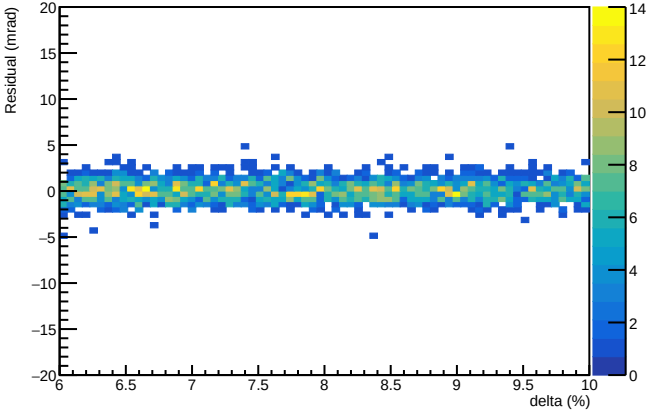


Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | 10 <= delta < 22% | N=2982

Distributions and residual correlations; raw residuals, no display shifts; statistics include tails


xptar residual

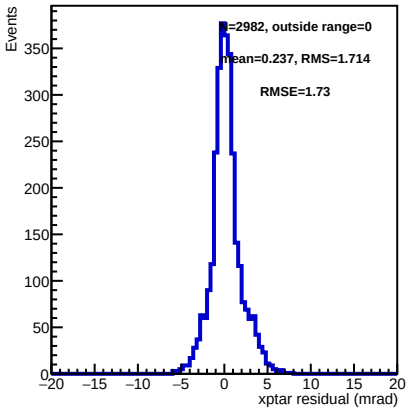


ytar residual

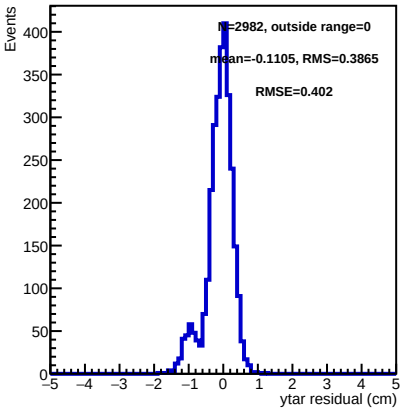


yptar residual

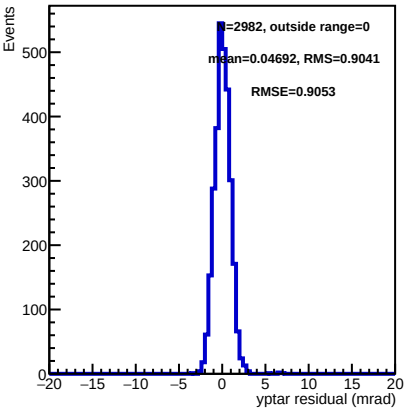


xptar residual versus target

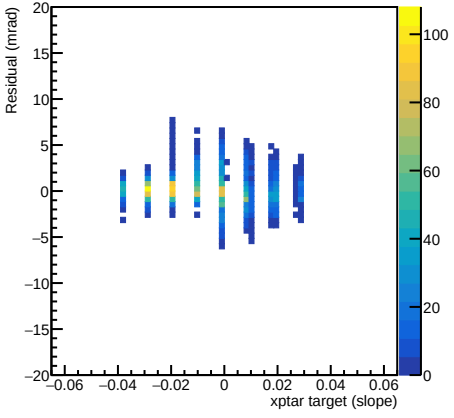

ytar residual versus target

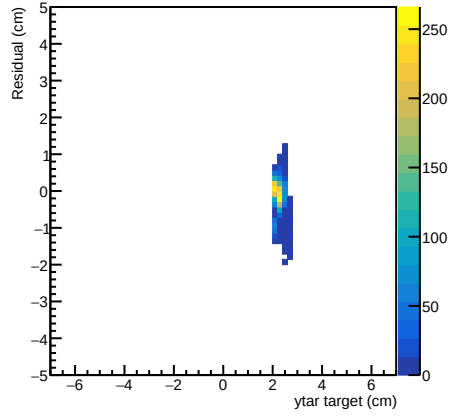


yptar residual versus target

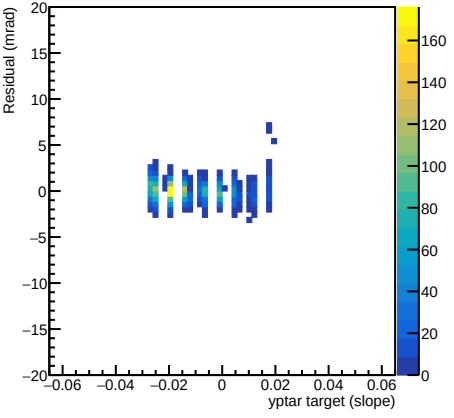


Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | 10 <= delta < 22% | N=2982
xptar residual distributions by x sieve column; empty columns shown explicitly


Sieve column -5 (-12.5 cm)




Sieve column -4 (-10 cm)




Sieve column -3 (-7.5 cm)




Sieve column -2 (-5 cm)




Sieve column -1 (-2.5 cm)




Sieve column +0 (0 cm)




Sieve column +1 (2.5 cm)




Sieve column +2 (5 cm)




Sieve column +3 (7.5 cm)



Sieve column +4 (10 cm)




Sieve column +5 (12.5 cm)




Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | 10 <= delta < 22% | N=2982
ytar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)




Sieve column +5 (8.2 cm)




Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | 10 <= delta < 22% | N=2982
yptar residual distributions by y sieve column; empty columns shown explicitly


Sieve column -5 (-8.2 cm)




Sieve column -4 (-6.56 cm)




Sieve column -3 (-4.92 cm)




Sieve column -2 (-3.28 cm)




Sieve column -1 (-1.64 cm)




Sieve column +0 (0 cm)




Sieve column +1 (1.64 cm)




Sieve column +2 (3.28 cm)




Sieve column +3 (4.92 cm)



Sieve column +4 (6.56 cm)




Sieve column +5 (8.2 cm)




Unweighted legacy fit | NEW matrix | foil 2, z=-10 cm | 10 <= delta < 22% | N=2982

Sieve reconstruction and residuals versus delta; fixed geometric xtar, not an iterative replay


Reconstructed sieve

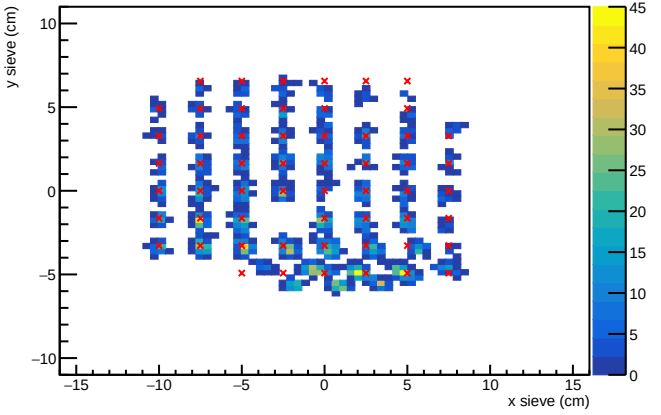

xptar residual versus delta

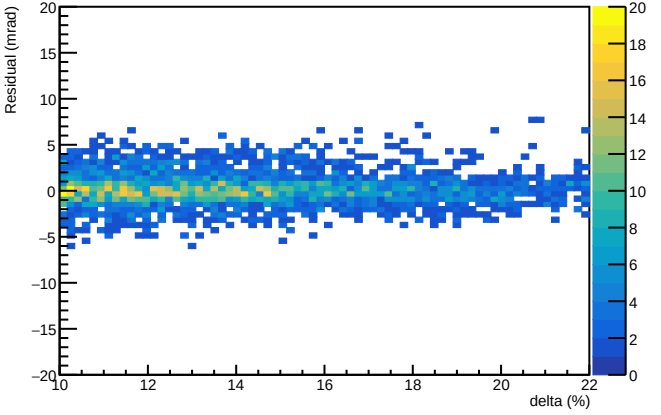

ytar residual versus delta

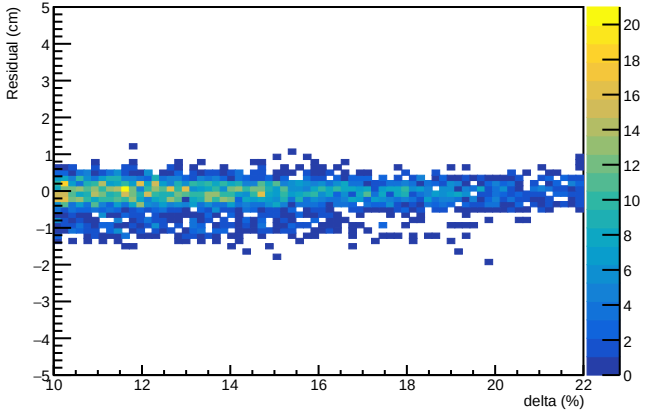

yptar residual versus delta

