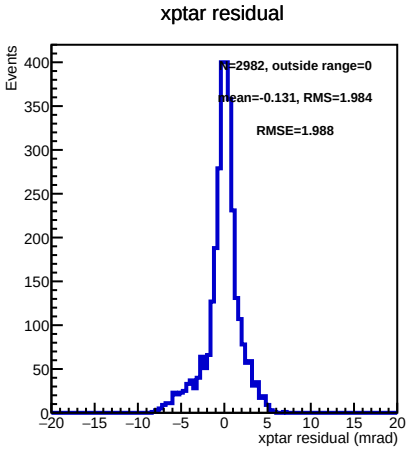
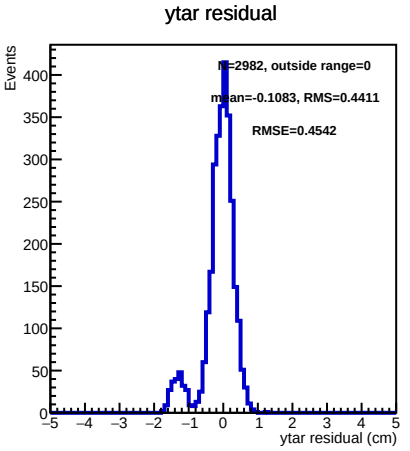
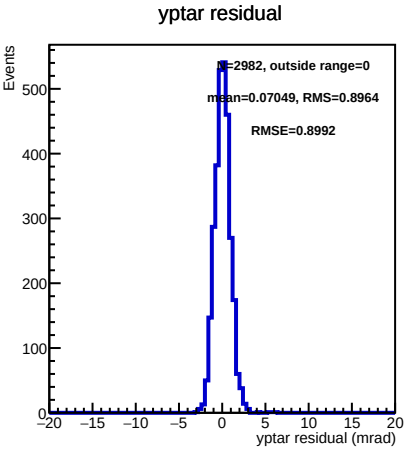
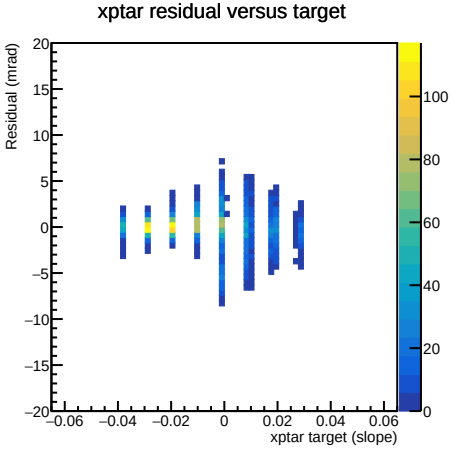
**Supplied weights | NEW matrix | foil 2, z=-10 cm | 10 <= delta < 22% | N=2982**

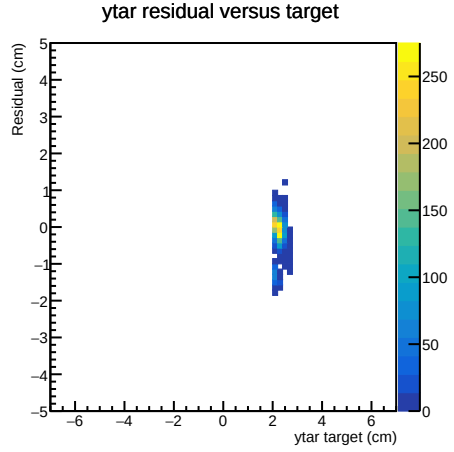
**Distributions and residual correlations; raw residuals, no display shifts; statistics include tails**

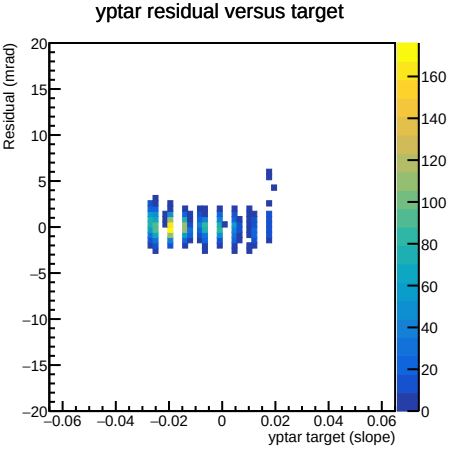










# Supplied weights | NEW matrix | foil 2, z=-10 cm | 10 <= delta < 22% | N=2982
## xptar residual distributions by x sieve column; empty columns shown explicitly


Sieve column -5 (-12.5 cm)





Sieve column -4 (-10 cm)





Sieve column -3 (-7.5 cm)





Sieve column -2 (-5 cm)





Sieve column -1 (-2.5 cm)





Sieve column +0 (0 cm)





Sieve column +1 (2.5 cm)





Sieve column +2 (5 cm)





Sieve column +3 (7.5 cm)




Sieve column +4 (10 cm)





Sieve column +5 (12.5 cm)




**Supplied weights | NEW matrix | foil 2, z=-10 cm | 10 <= delta < 22% | N=2982**

**ytar residual distributions by y sieve column; empty columns shown explicitly**


Sieve column -5 (-8.2 cm)





Sieve column -4 (-6.56 cm)





Sieve column -3 (-4.92 cm)





Sieve column -2 (-3.28 cm)





Sieve column -1 (-1.64 cm)





Sieve column +0 (0 cm)





Sieve column +1 (1.64 cm)





Sieve column +2 (3.28 cm)





Sieve column +3 (4.92 cm)




Sieve column +4 (6.56 cm)





Sieve column +5 (8.2 cm)




**Supplied weights | NEW matrix | foil 2, z=-10 cm | 10 <= delta < 22% | N=2982**

**yptar residual distributions by y sieve column; empty columns shown explicitly**


Sieve column -5 (-8.2 cm)





Sieve column -4 (-6.56 cm)





Sieve column -3 (-4.92 cm)





Sieve column -2 (-3.28 cm)





Sieve column -1 (-1.64 cm)





Sieve column +0 (0 cm)





Sieve column +1 (1.64 cm)





Sieve column +2 (3.28 cm)





Sieve column +3 (4.92 cm)




Sieve column +4 (6.56 cm)



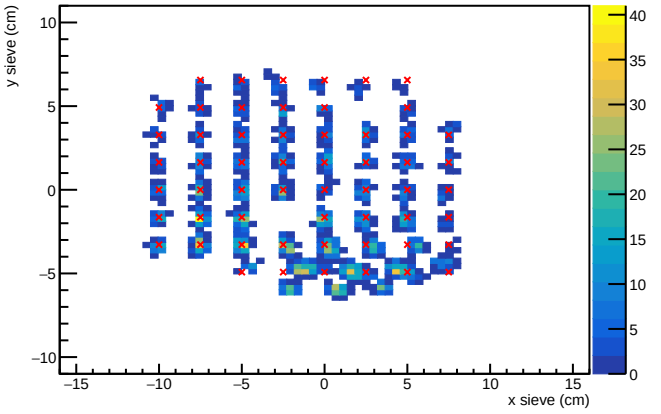

Sieve column +5 (8.2 cm)



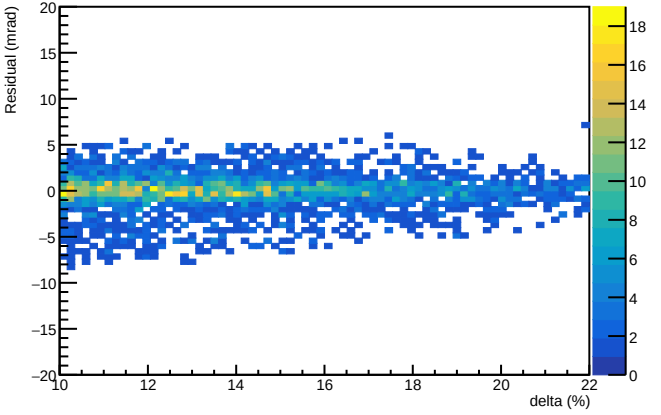
**Supplied weights | NEW matrix | foil 2, z=-10 cm | 10 <= delta < 22% | N=2982**

**Sieve reconstruction and residuals versus delta; fixed geometric xtar, not an iterative replay**

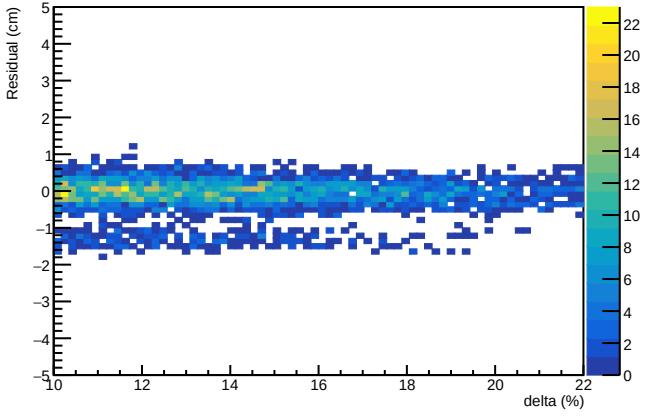
Reconstructed sieve




xptar residual versus delta




ytar residual versus delta




yptar residual versus delta

