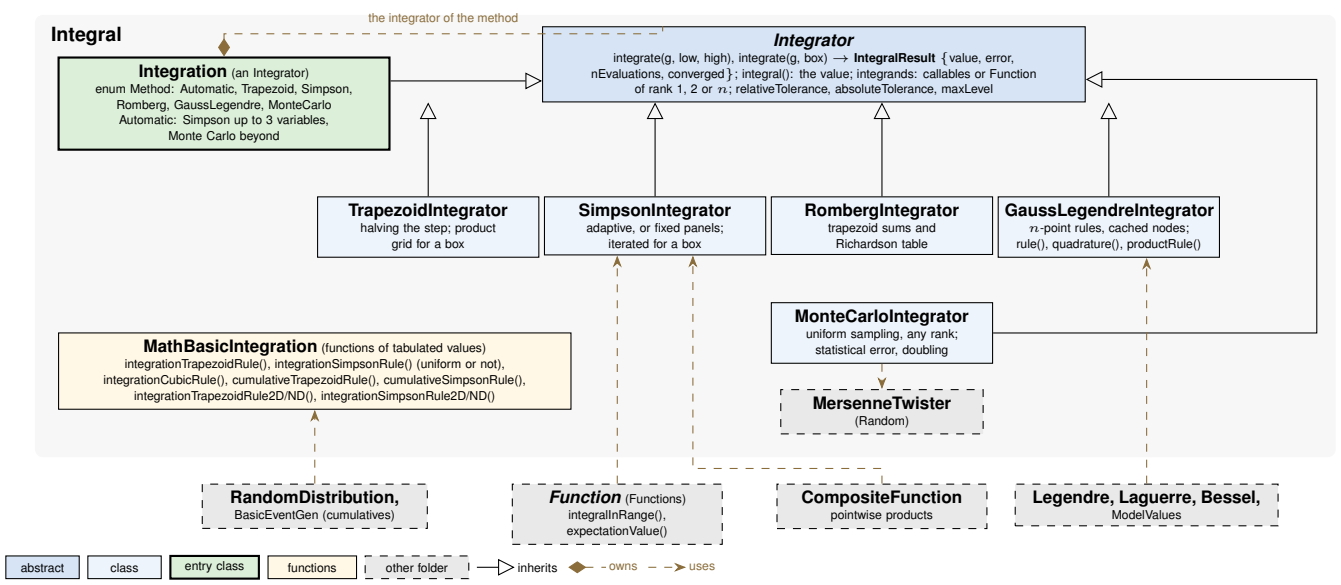
Integral
the integrator of the method
Integrator
integrate(g, low, high), integrate(g, box) → IntegralResult {value, error, nEvaluations, converged}; integral(): the value; integrands: callables or Function of rank 1, 2 or n; relativeTolerance, absoluteTolerance, maxLevel
Integration (an Integrator)
enum Method: Automatic, Trapezoid, Simpson, Romberg, GaussLegendre, MonteCarlo
Automatic: Simpson up to 3 variables, Monte Carlo beyond
TrapezoidIntegrator
halving the step; product grid for a box
SimpsonIntegrator
adaptive, or fixed panels; iterated for a box
RombergIntegrator
trapezoid sums and Richardson table
GaussLegendreIntegrator
n-point rules, cached nodes; rule(), quadrature(), productRule()
MonteCarloIntegrator
uniform sampling, any rank; statistical error, doubling
MersenneTwister
(Random)
MathBasicIntegration (functions of tabulated values)
integrationTrapezoidRule(), integrationSimpsonRule() (uniform or not), integrationCubicRule(), cumulativeTrapezoidRule(), cumulativeSimpsonRule(), integrationTrapezoidRule2D/ND(), integrationSimpsonRule2D/ND()
RandomDistribution,
BasicEventGen (cumulatives)
Function (Functions)
integralInRange(), expectationValue()
CompositeFunction
pointwise products
Legendre, Laguerre, Bessel,
ModelValues
abstract
class
entry class
functions
other folder
inherits
owns
uses