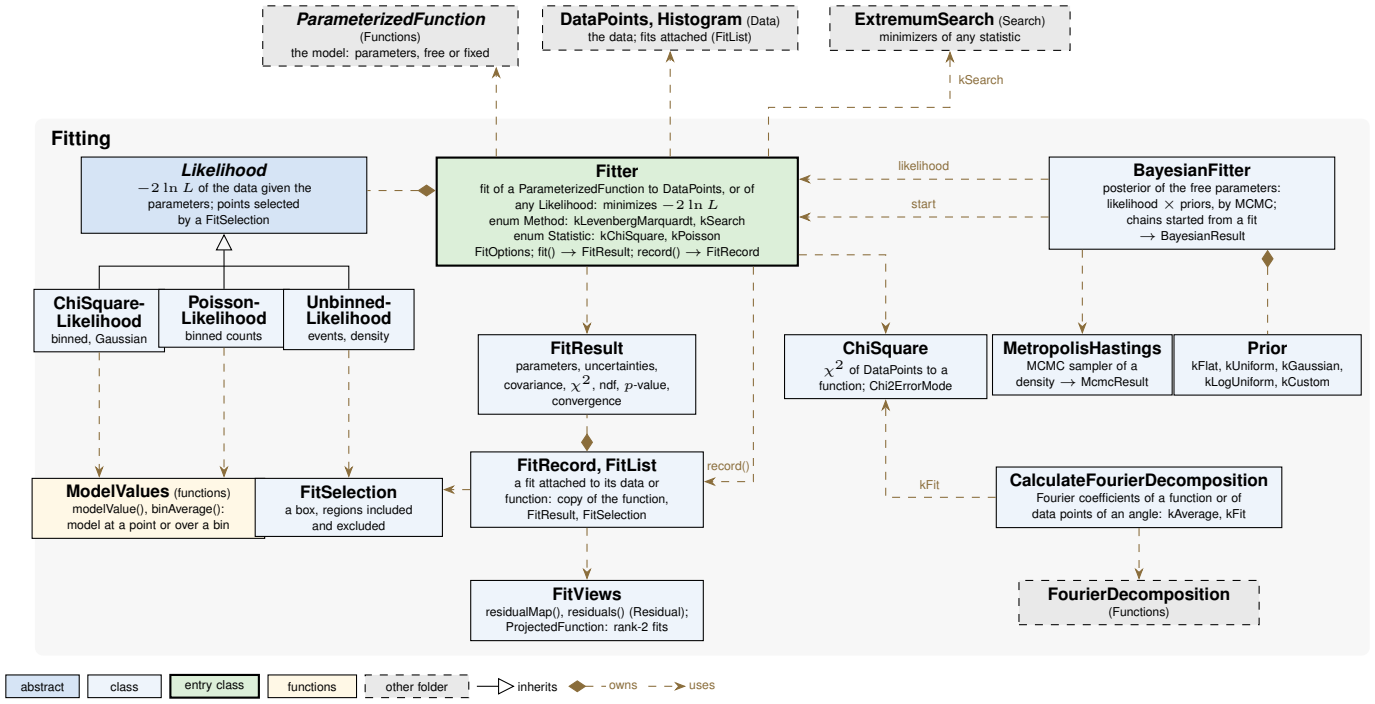

ParameterizedFunction
(Functions)
the model: parameters, free or fixed
DataPoints, Histogram (Data)
the data; fits attached (FitList)
ExtremumSearch (Search)
minimizers of any statistic
kSearch
Fitting
Likelihood
$-2 \ln L$ of the data given the parameters; points selected by a FitSelection
Fitter
fit of a ParameterizedFunction to DataPoints, or of any Likelihood: minimizes $-2 \ln L$
enum Method: kLevenbergMarquardt, kSearch
enum Statistic: kChiSquare, kPoisson
FitOptions; fit() → FitResult; record() → FitRecord
likelihood
start
BayesianFitter
posterior of the free parameters: likelihood × priors, by MCMC; chains started from a fit
→ BayesianResult
ChiSquare-Likelihood
binned, Gaussian
Poisson-Likelihood
binned counts
Unbinned-Likelihood
events, density
FitResult
parameters, uncertainties, covariance, χ^2, ndf, p-value, convergence
ChiSquare
χ^2 of DataPoints to a function; Chi2ErrorMode
MetropolisHastings
MCMC sampler of a density → McmcResult
Prior
kFlat, kUniform, kGaussian, kLogUniform, kCustom
ModelValues (functions)
modelValue(), binAverage(): model at a point or over a bin
FitSelection
a box, regions included and excluded
FitRecord, FitList
a fit attached to its data or function: copy of the function, FitResult, FitSelection
record()
kFit
CalculateFourierDecomposition
Fourier coefficients of a function or of data points of an angle: kAverage, kFit
FitViews
residualMap(), residuals() (Residual); ProjectedFunction: rank-2 fits
FourierDecomposition
(Functions)
abstract
class
entry class
functions
other folder
inherits
owns
uses