

cquict2025 / coit20246y26t1-project-coit20246-sydb1-masoodjazib-1

🔍 Type / to search

+

<> Code

Issues

Pull requests

Agents

Actions

Projects

Wiki

Security and quality

Insights

Settings

coit20246y26t1-project-coit20246-sydb1-masoodjazib-1 / network.md

jazib1709

Update network.md

afa87cf · 17 minutes ago

History

Preview

Code

Blame

Raw

Network Setup

Assumptions

The project is developed on a small professional services business called Sydney TaxCare Services. The company is based in Sydney, Australia and offers accounting, tax return, bookkeeping and business advisory services to local businesses. The small office network used by the business serves as the staff workstations, internet connectivity, router/firewall services, and a basic business site.

Assumption	Description
Business name	Sydney TaxCare Services
Location	Sydney, Australia
Business type	Accounting and tax consultancy
Number of staff	8 staff members

Assumption	Description
Staff roles	1 manager, 4 accounting consultants, 2 administrative staff, and 1 part-time IT support officer
Website information	Business profile, accounting services, tax services, bookkeeping services, contact details, and opening hours

OpenWRT and VirtualBox Setup


The network of labs utilizes an OpenWRT virtual machine within the VirtualBox. OpenWRT is the Linux router, firewall and web server. The OpenWRT site is accessed through the Windows host and the behaviour of the firewall is configured and screenshots taken. We verified the OpenWRT interface settings with the help of the `ip addr` command.


The OpenWRT interface configuration was checked using the `ip addr` command.

```
root@OpenWrt:/# ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel master br-mng
state UP qlen 1000
    link/ether 08:00:27:4d:3c:5c brd ff:ff:ff:ff:ff:ff
3: eth1: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP qlen
1000
    link/ether 08:00:27:cf:b5:43 brd ff:ff:ff:ff:ff:ff
    inet 10.0.3.15/24 brd 10.0.3.255 scope global eth1
        valid_lft forever preferred_lft forever
    inet6 fe80::a00:27ff:fe4d:3c5c/64 scope link
        valid_lft forever preferred_lft forever
4: br-mng: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP qle
n 1000
    link/ether 08:00:27:4d:3c:5c brd ff:ff:ff:ff:ff:ff
    inet 192.168.56.2/24 brd 192.168.56.255 scope global br-mng
        valid_lft forever preferred_lft forever
    inet6 fe80::a00:27ff:fe4d:3c5c/64 scope link
        valid_lft forever preferred_lft forever
root@OpenWrt:/#
```


Interface	IP Address	Purpose
lo	127.0.0.1/8	Local loopback interface
eth0	No direct IP address	Member of the management bridge br-mng
eth1	10.0.3.15/24	NAT-side interface used for external connectivity
br-mng	192.168.56.2/24	Management bridge used by the Windows host to access OpenWRT

The VirtualBox adapter settings were checked to confirm the lab network configuration.

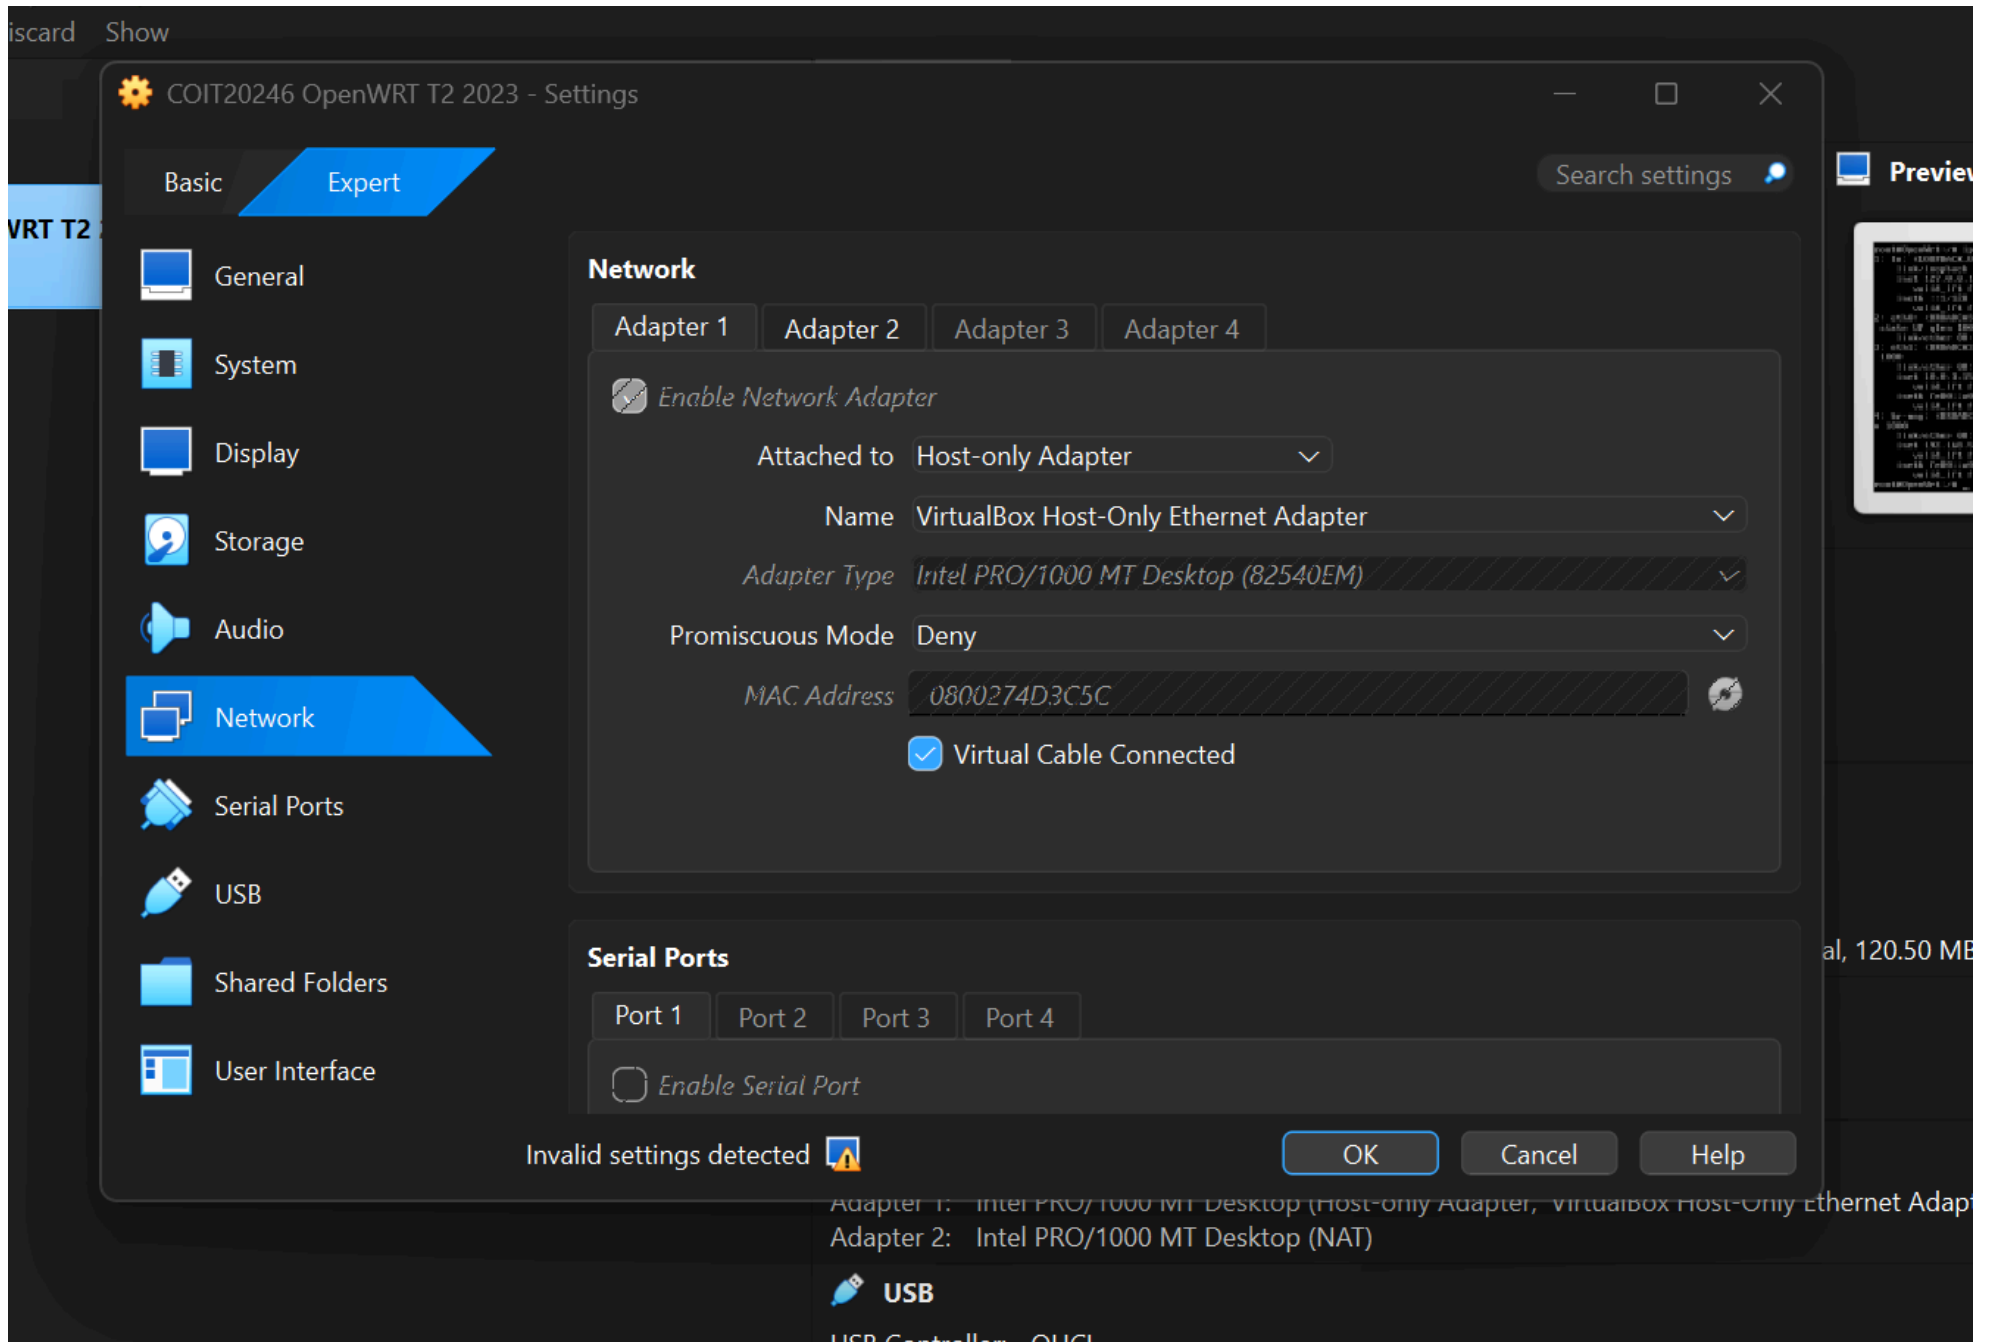

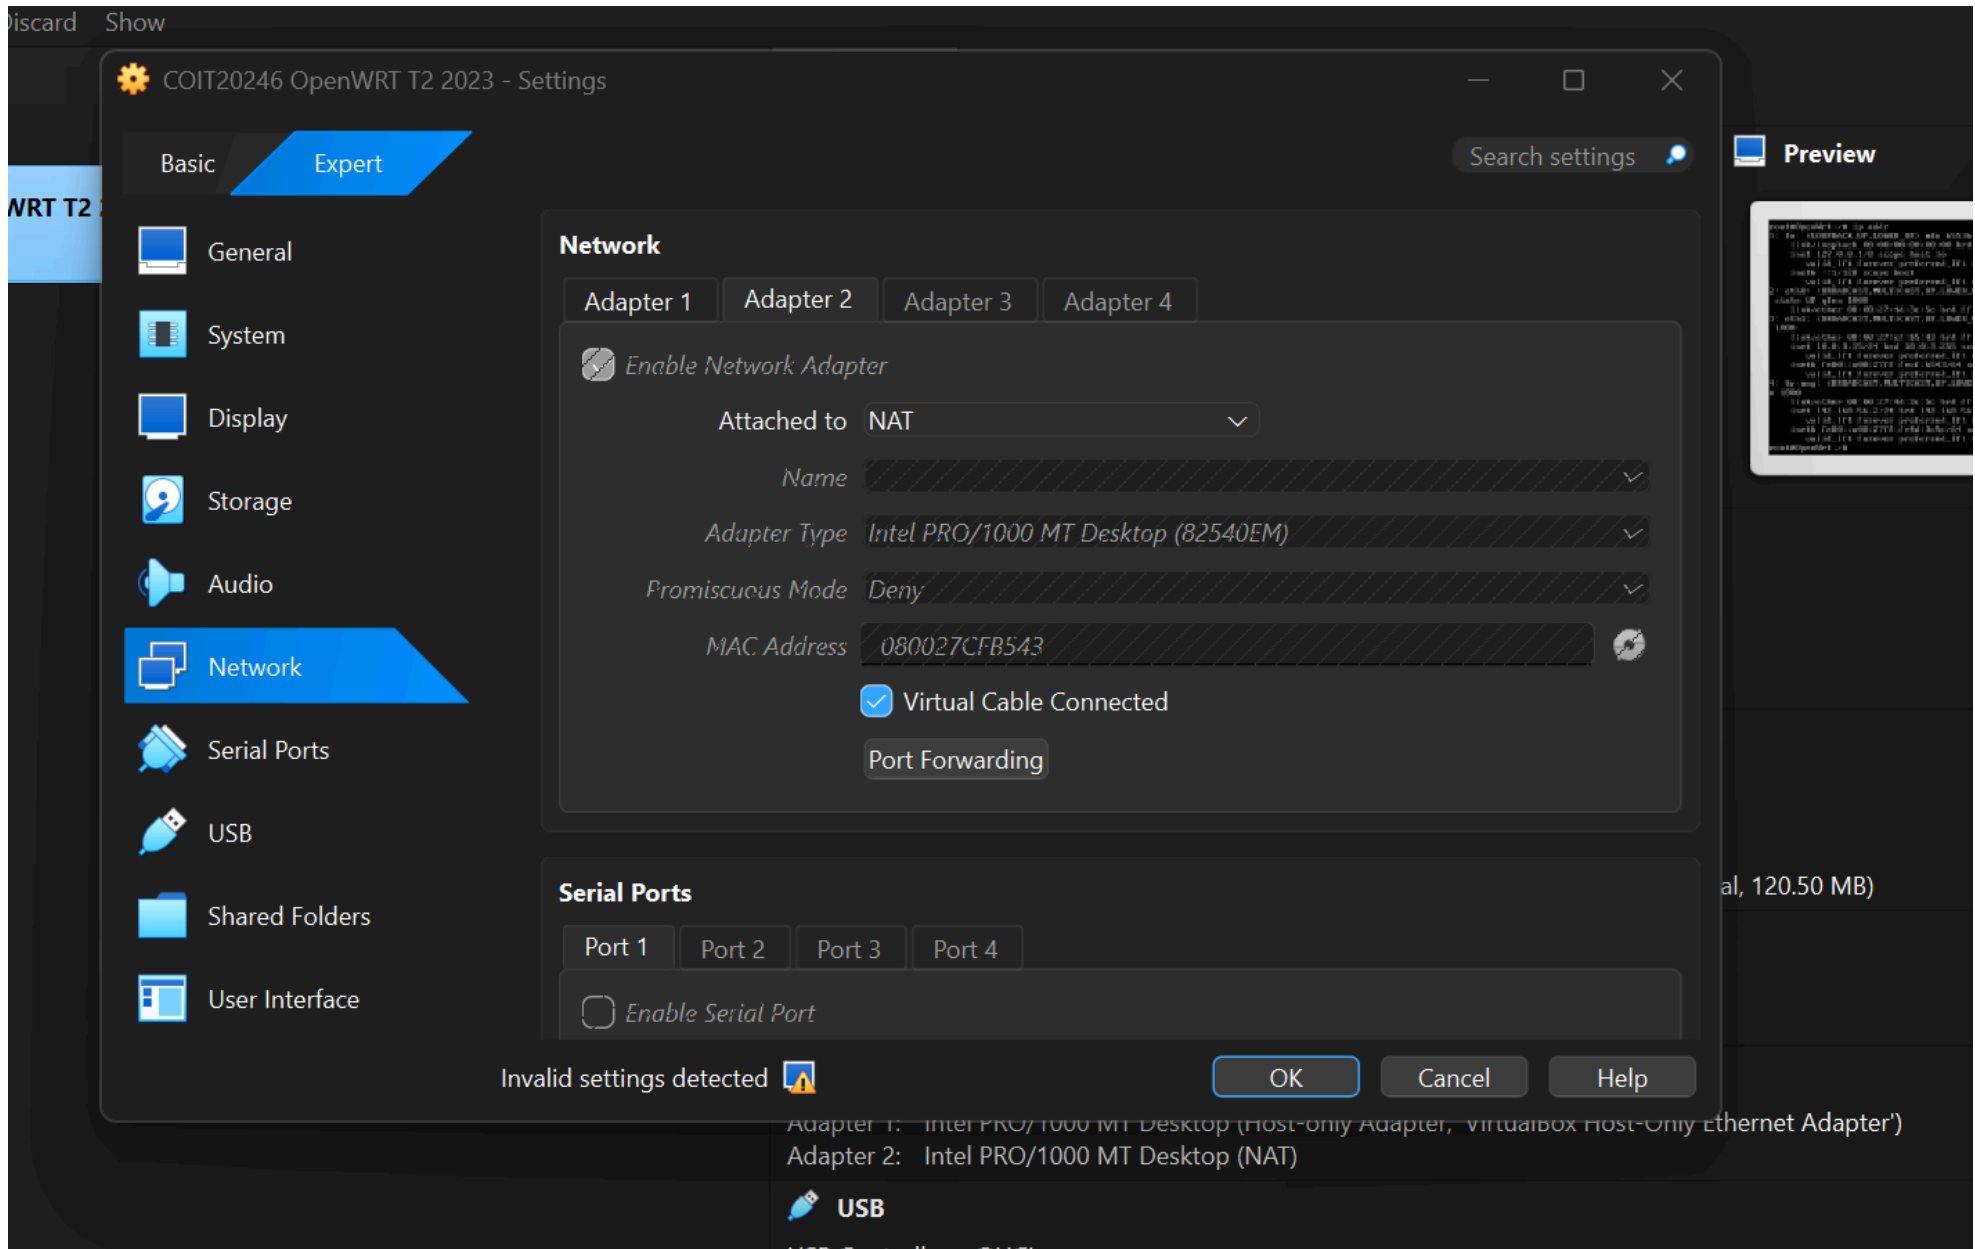

The Windows host connects to OpenWRT through the host-only management network. Connectivity was tested by pinging the OpenWRT management IP address from Windows.

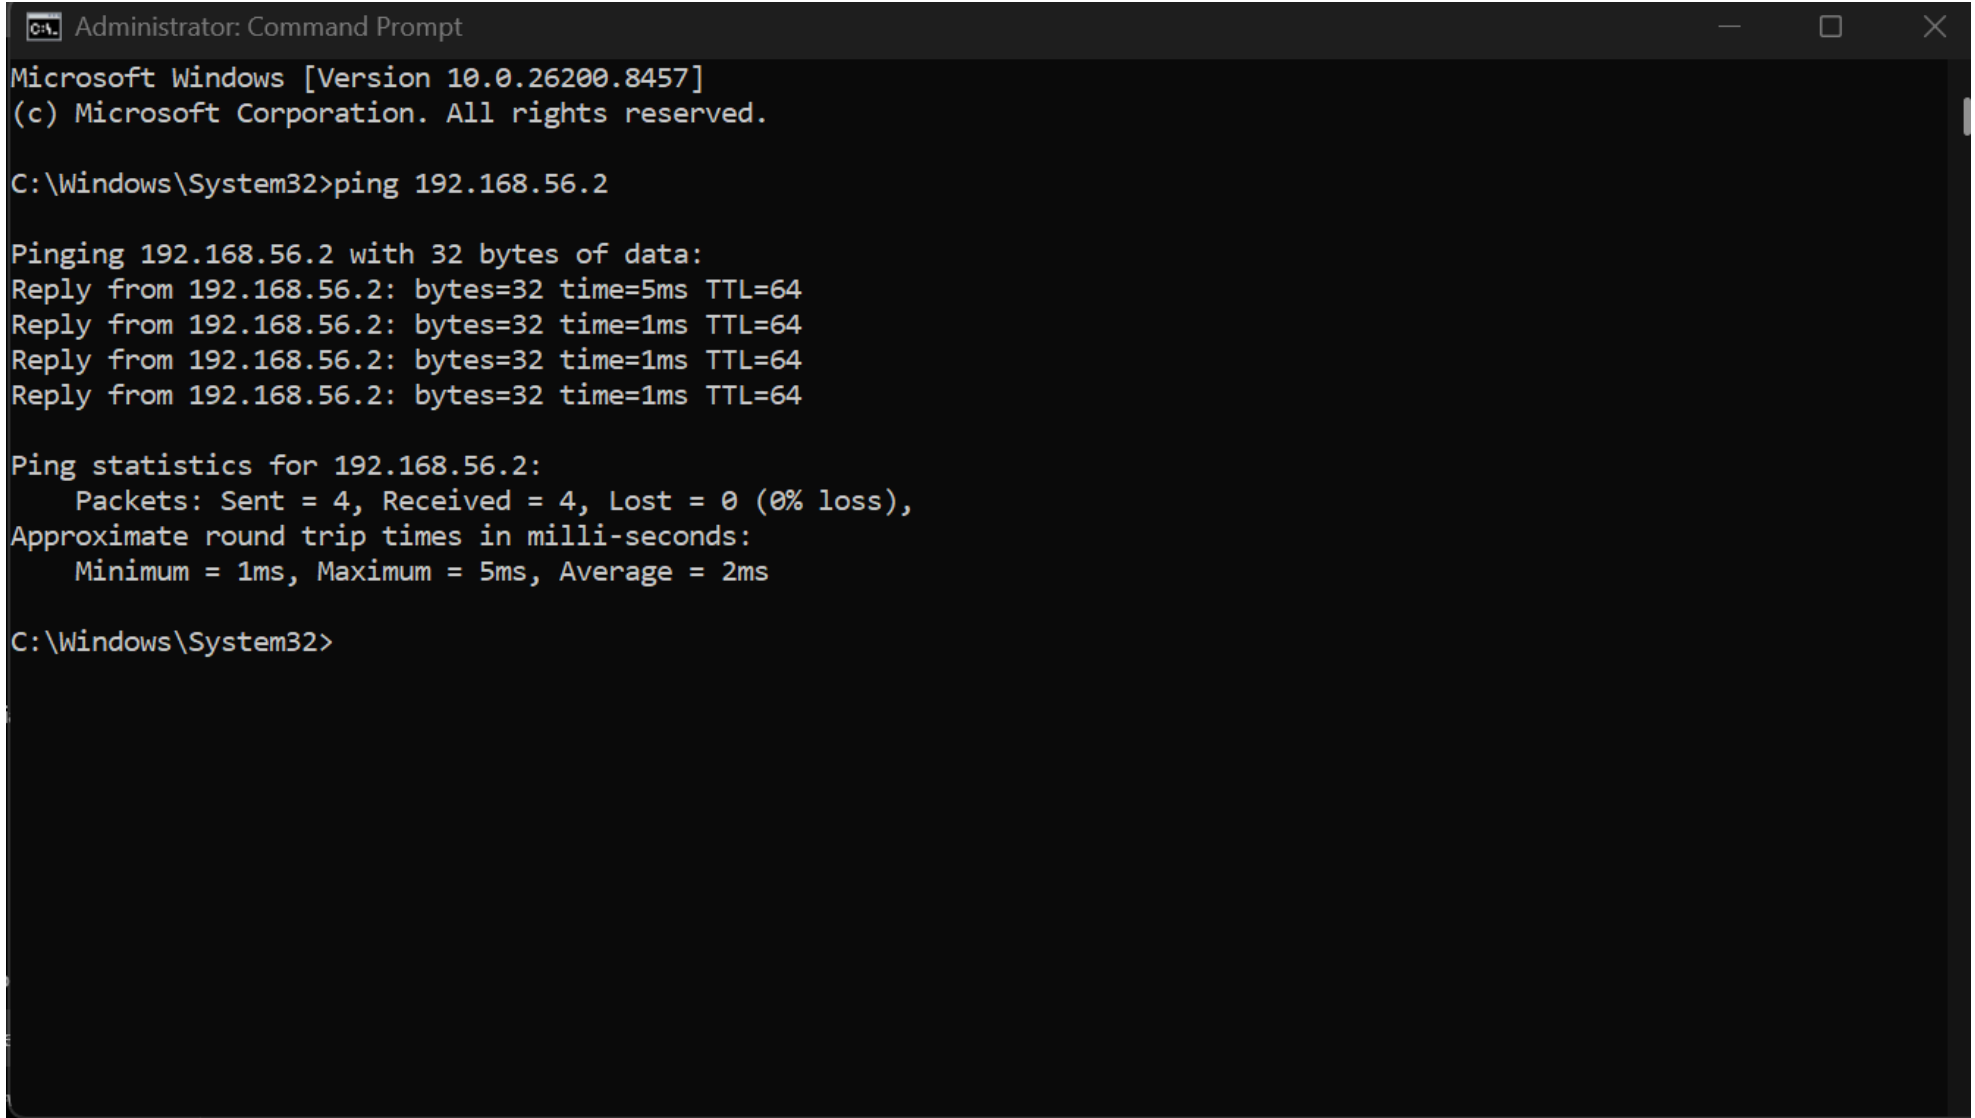A screenshot of a Windows Command Prompt window titled "Administrator: Command Prompt". The window shows the output of a ping command. The text is as follows:
Microsoft Windows [Version 10.0.26200.8457]
(c) Microsoft Corporation. All rights reserved.

C:\Windows\System32>ping 192.168.56.2

Pinging 192.168.56.2 with 32 bytes of data:
Reply from 192.168.56.2: bytes=32 time=5ms TTL=64
Reply from 192.168.56.2: bytes=32 time=1ms TTL=64
Reply from 192.168.56.2: bytes=32 time=1ms TTL=64
Reply from 192.168.56.2: bytes=32 time=1ms TTL=64

Ping statistics for 192.168.56.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 5ms, Average = 2ms


C:\Windows\System32>

The successful ping confirms that the Windows host can communicate with OpenWRT through the lab network.

Test Website Setup

A test website was created on OpenWRT to represent the website of Sydney TaxCare Services. The active website file was stored as `/srv/www/index.html`.

The website includes the business name, business type, location, services, both student names, both student IDs, group number, campus, tutor name, and project date.

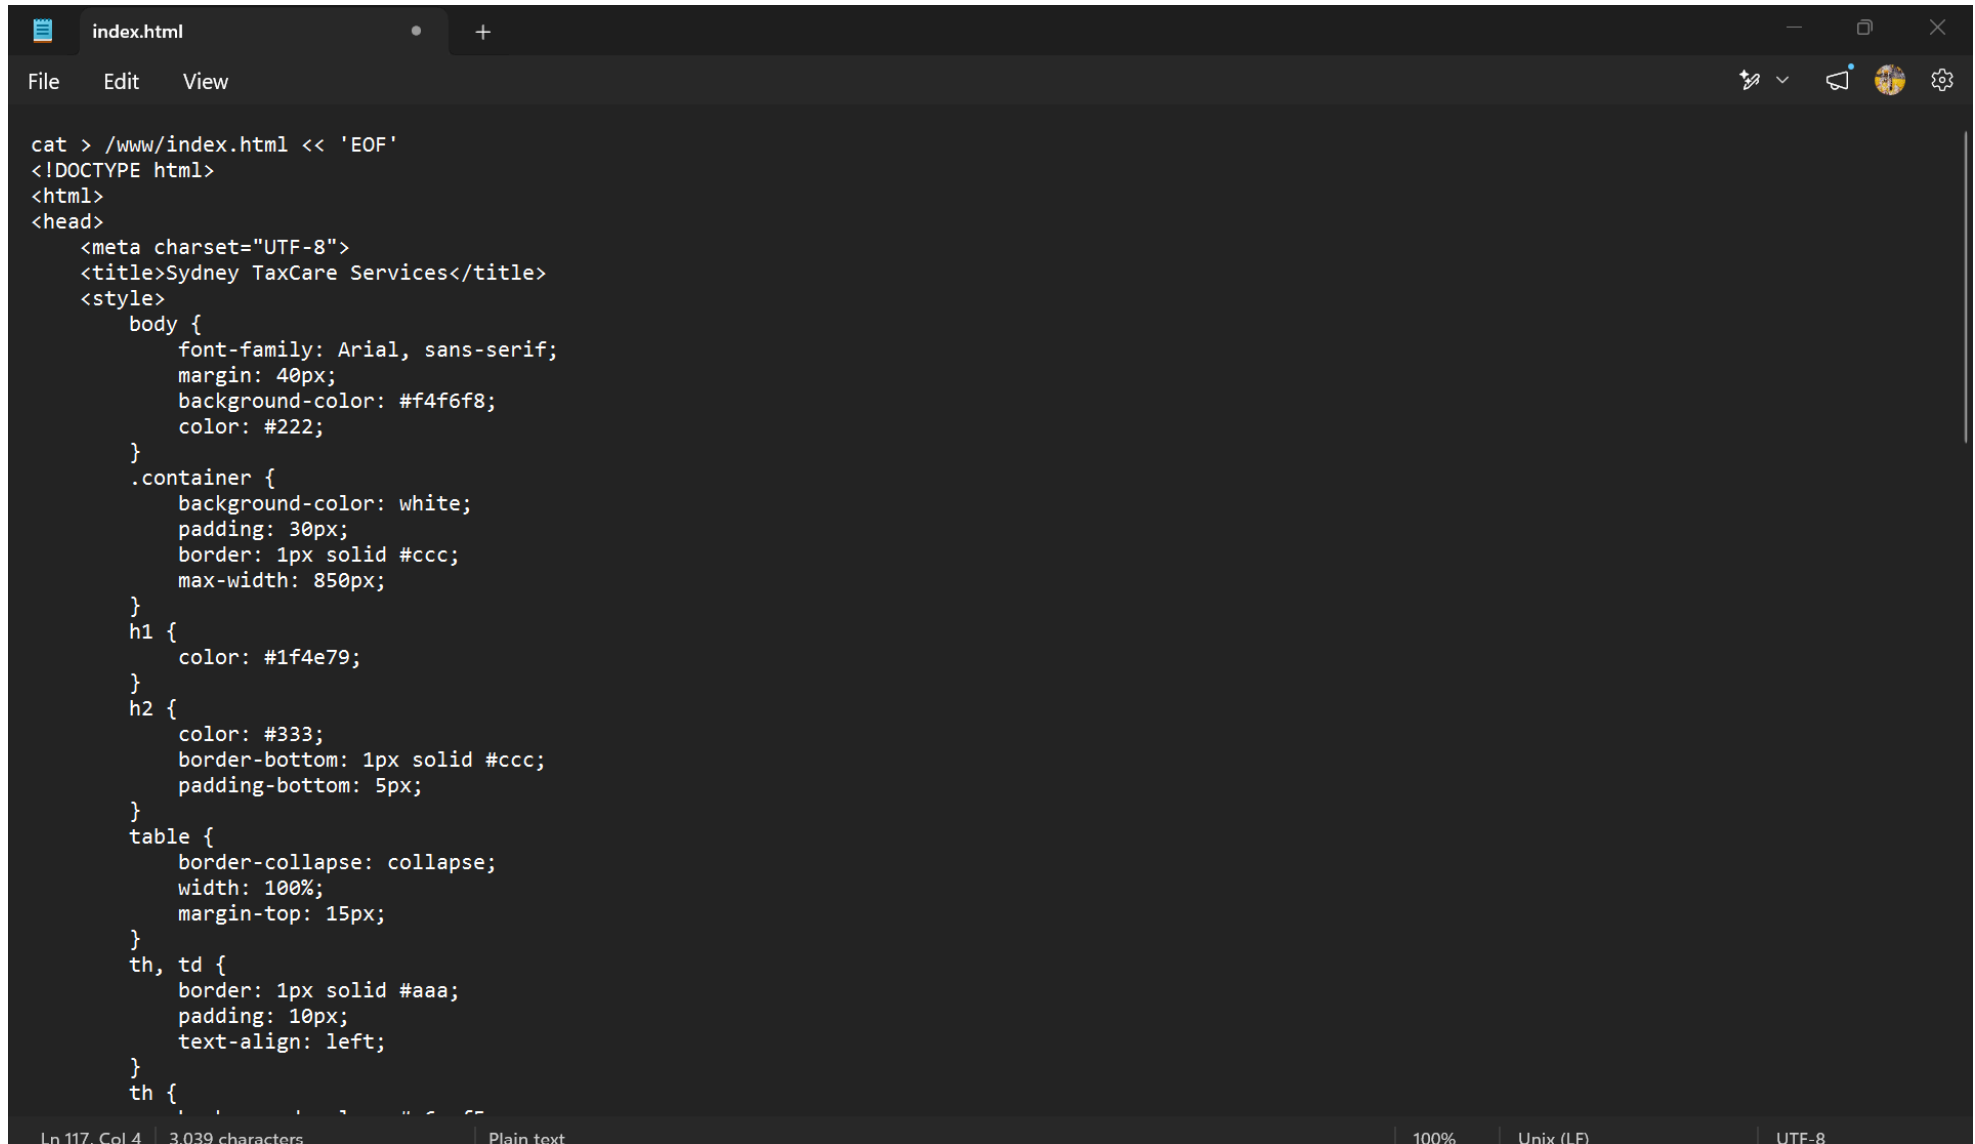A screenshot of a code editor window titled 'index.html'. The editor shows the following HTML and CSS code:

```
cat > /www/index.html << 'EOF'
<!DOCTYPE html>
<html>
<head>
  <meta charset="UTF-8">
  <title>Sydney TaxCare Services</title>
  <style>
    body {
      font-family: Arial, sans-serif;
      margin: 40px;
      background-color: #f4f6f8;
      color: #222;
    }
    .container {
      background-color: white;
      padding: 30px;
      border: 1px solid #ccc;
      max-width: 850px;
    }
    h1 {
      color: #1f4e79;
    }
    h2 {
      color: #333;
      border-bottom: 1px solid #ccc;
      padding-bottom: 5px;
    }
    table {
      border-collapse: collapse;
      width: 100%;
      margin-top: 15px;
    }
    th, td {
      border: 1px solid #aaa;
      padding: 10px;
      text-align: left;
    }
    th {
```

The status bar at the bottom indicates 'Ln 117, Col 4', '3,039 characters', 'Plain text', '100%', 'Unix (LF)', and 'UTF-8'.

```
inet6 ::1/128 scope host
    valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel master br-mng
state UP qlen 1000
    link/ether 08:00:27:4d:3c:5c brd ff:ff:ff:ff:ff:ff
3: eth1: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP qlen
1000
    link/ether 08:00:27:cf:b5:43 brd ff:ff:ff:ff:ff:ff
    inet 10.0.3.15/24 brd 10.0.3.255 scope global eth1
        valid_lft forever preferred_lft forever
    inet6 fe80::a00:27ff:fe4d:b543/64 scope link
        valid_lft forever preferred_lft forever
4: br-mng: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP qle
n 1000
    link/ether 08:00:27:4d:3c:5c brd ff:ff:ff:ff:ff:ff
    inet 192.168.56.2/24 brd 192.168.56.255 scope global br-mng
        valid_lft forever preferred_lft forever
    inet6 fe80::a00:27ff:fe4d:3c5c/64 scope link
        valid_lft forever preferred_lft forever
root@OpenWrt:/# ls /www
cgi-bin      index.html   luci-static
root@OpenWrt:/# cp /www/index.html /www/index-backup.html 2>/dev/null
root@OpenWrt:/# ls /www
cgi-bin      index-backup.html  index.html        luci-static
root@OpenWrt:/# _
```




The OpenWRT web server status was checked after the website file was created.


```
state UP qlen 1000
    link/ether 08:00:27:4d:3c:5c brd ff:ff:ff:ff:ff:ff
3: eth1: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP qlen
1000
    link/ether 08:00:27:cf:b5:43 brd ff:ff:ff:ff:ff:ff
    inet 10.0.3.15/24 brd 10.0.3.255 scope global eth1
        valid_lft forever preferred_lft forever
    inet6 fe80::a00:27ff:fecf:b543/64 scope link
        valid_lft forever preferred_lft forever
4: br-mng: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP qle
n 1000
    link/ether 08:00:27:4d:3c:5c brd ff:ff:ff:ff:ff:ff
    inet 192.168.56.2/24 brd 192.168.56.255 scope global br-mng
        valid_lft forever preferred_lft forever
    inet6 fe80::a00:27ff:fe4d:3c5c/64 scope link
        valid_lft forever preferred_lft forever
root@OpenWrt:/# ls /www
cgi-bin      index.html   luci-static
root@OpenWrt:/# cp /www/index.html /www/index-backup.html 2>/dev/null
root@OpenWrt:/# ls /www
cgi-bin      index-backup.html  index.html         luci-static
root@OpenWrt:/# /etc/init.d/uhttpd restart
root@OpenWrt:/# /etc/init.d/uhttpd status
running
root@OpenWrt:/# _
```



The website was accessed successfully from the Windows host browser using:

```
http://192.168.56.2
```

 192.168.56.2



Sydney TaxCare Services

This is the test website for Sydney TaxCare Services, a small accounting and tax consultancy located in Sydney, Australia.

Business Information

Item	Details
Business Name	Sydney TaxCare Services
Business Type	Accounting and tax consultancy
Location	Sydney, Australia
Website Purpose	Service information, contact details, opening hours, and business profile

Services

- Individual tax return support
- Small business accounting
- Bookkeeping services
- Business advisory support

Project Students

Student	Name	Student ID
Student 1	Jazib Hussain Syed	12311998
Student 2	Masood Ali Syed	12316372


Group Number: 13

This confirms that the Windows host can access the test website hosted on OpenWRT.

Lab Network Diagram

The lab network diagram was created in draw.io. It shows the Windows host, OpenWRT VM, VirtualBox adapter types, OpenWRT interfaces, IP addresses, and hosted website.

COIT20246 Lab Network Setup - OpenWRT and VirtualBox

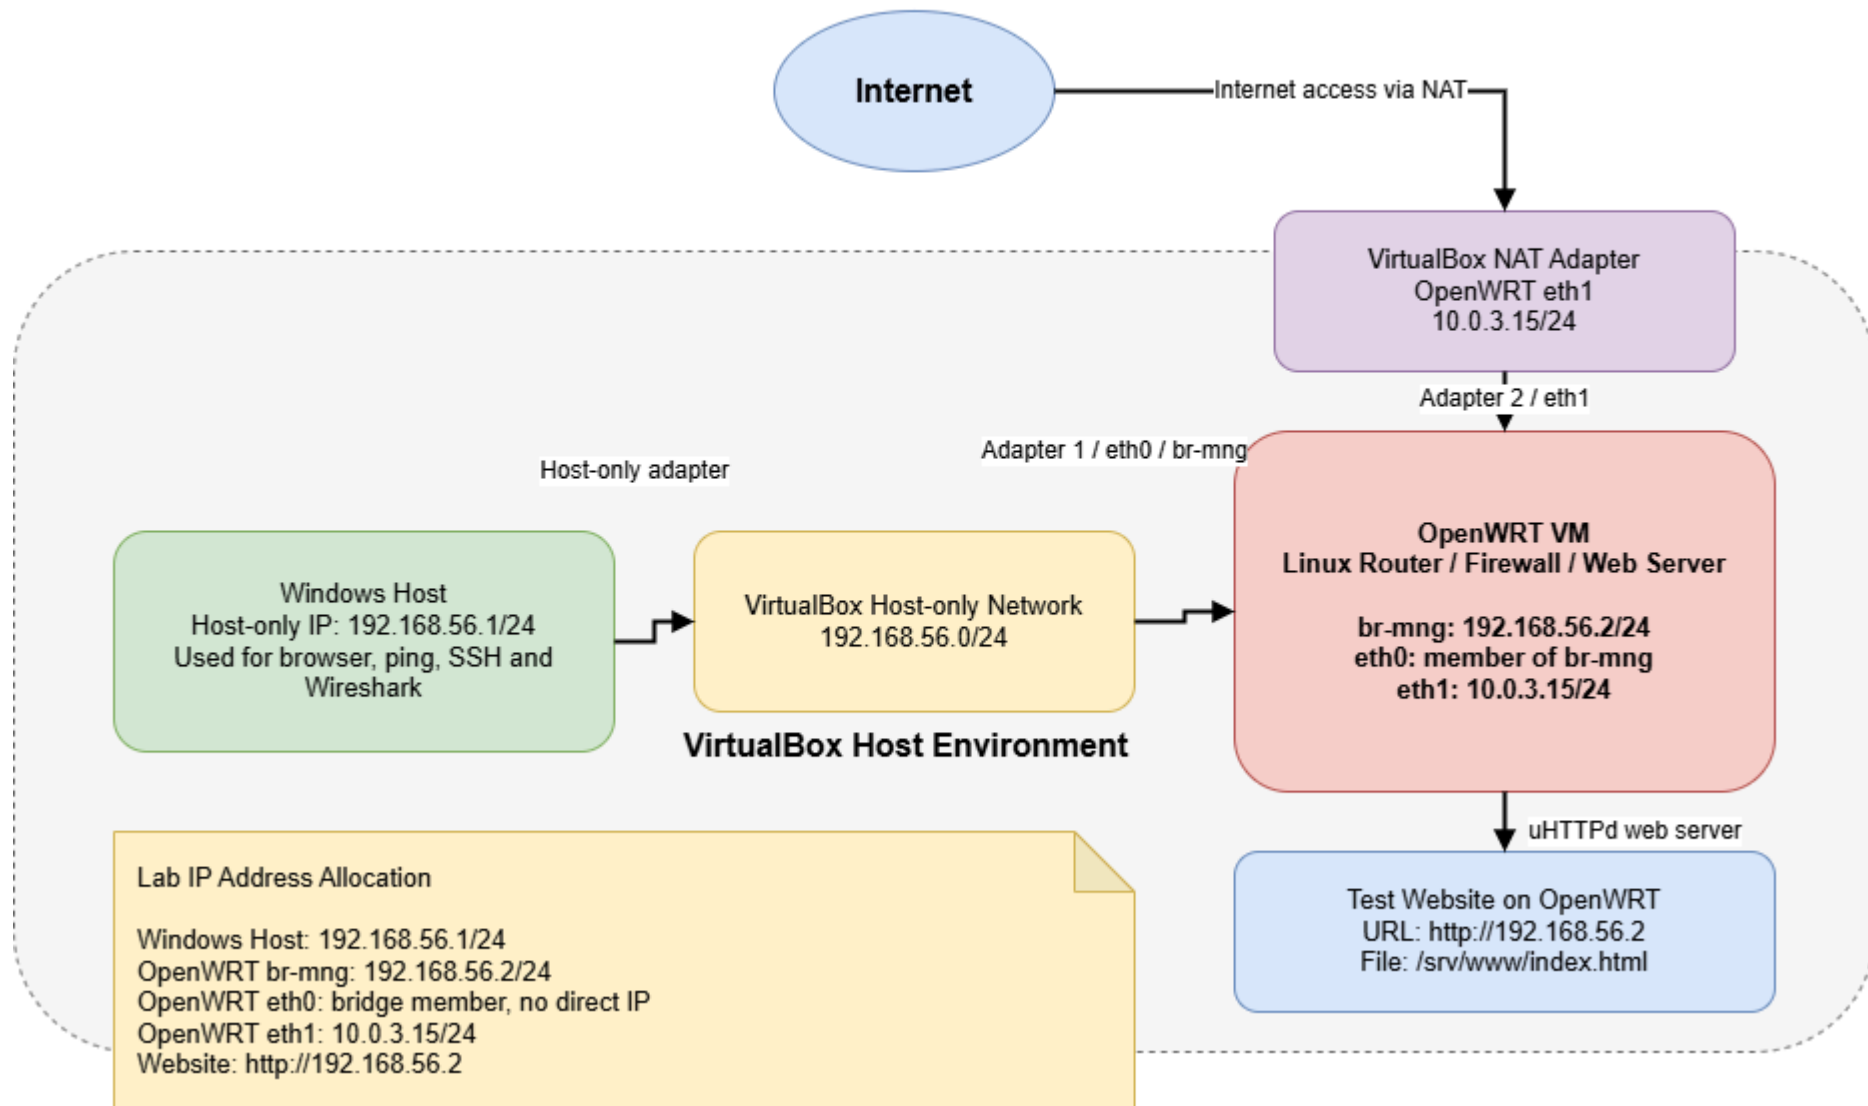

Draw.io source file: [lab-network.drawio](https://draw.io/~u?x=192&y=168&z=56&t=1)

The Windows host uses `192.168.56.1/24` and connects to OpenWRT through the host-only network. OpenWRT uses `br-mng` with `192.168.56.2/24` for management and website access. OpenWRT also uses `eth1` with `10.0.3.15/24` for NAT-side connectivity.

Firewall Configuration

Firewall rules were configured and tested on OpenWRT. Each rule was tested using before-and-after evidence to show that the firewall configuration changed the network behaviour.

HTTP Block and Allow

HTTP access was first tested by opening the Sydney TaxCare Services website from the Windows host browser. Before the block rule was applied, the website was accessible.

←

→

↺

⚠ Not secure

192.168.56.2

🔍

☆

📁

☐☐

Sydney TaxCare Services

This is the test website for Sydney TaxCare Services, a small accounting and tax consultancy located in Sydney, Australia.

Business Information

Item	Details
Business Name	Sydney TaxCare Services
Business Type	Accounting and tax consultancy
Location	Sydney, Australia
Website Purpose	Service information, contact details, opening hours, and business profile

Services

- Individual tax return support
- Small business accounting
- Bookkeeping services
- Business advisory support


Project Students

Student	Name	Student ID
Student 1	Jazib Hussain Syed	12311998
Student 2	Masood Ali Syed	12316372


A firewall rule was then configured on OpenWRT to block HTTP traffic on port 80.

```
root@OpenWrt:/# uci add firewall rule
cfg0e92bd
root@OpenWrt:/# uci set firewall.@rule[-1].name='Block HTTP Web Server'
root@OpenWrt:/# uci set firewall.@rule[-1].src='*'
root@OpenWrt:/# uci set firewall.@rule[-1].proto='tcp'
root@OpenWrt:/# uci set firewall.@rule[-1].dest_port='80'
root@OpenWrt:/# uci set firewall.@rule[-1].target='REJECT'
root@OpenWrt:/# uci commit firewall
root@OpenWrt:/# /etc/init.d/firewall restart
root@OpenWrt:/# uci show firewall | grep "Block HTTP Web Server"
firewall.@rule[9].name='Block HTTP Web Server'
root@OpenWrt:/# _
```

After the block rule was applied, the website was no longer accessible from the Windows host.

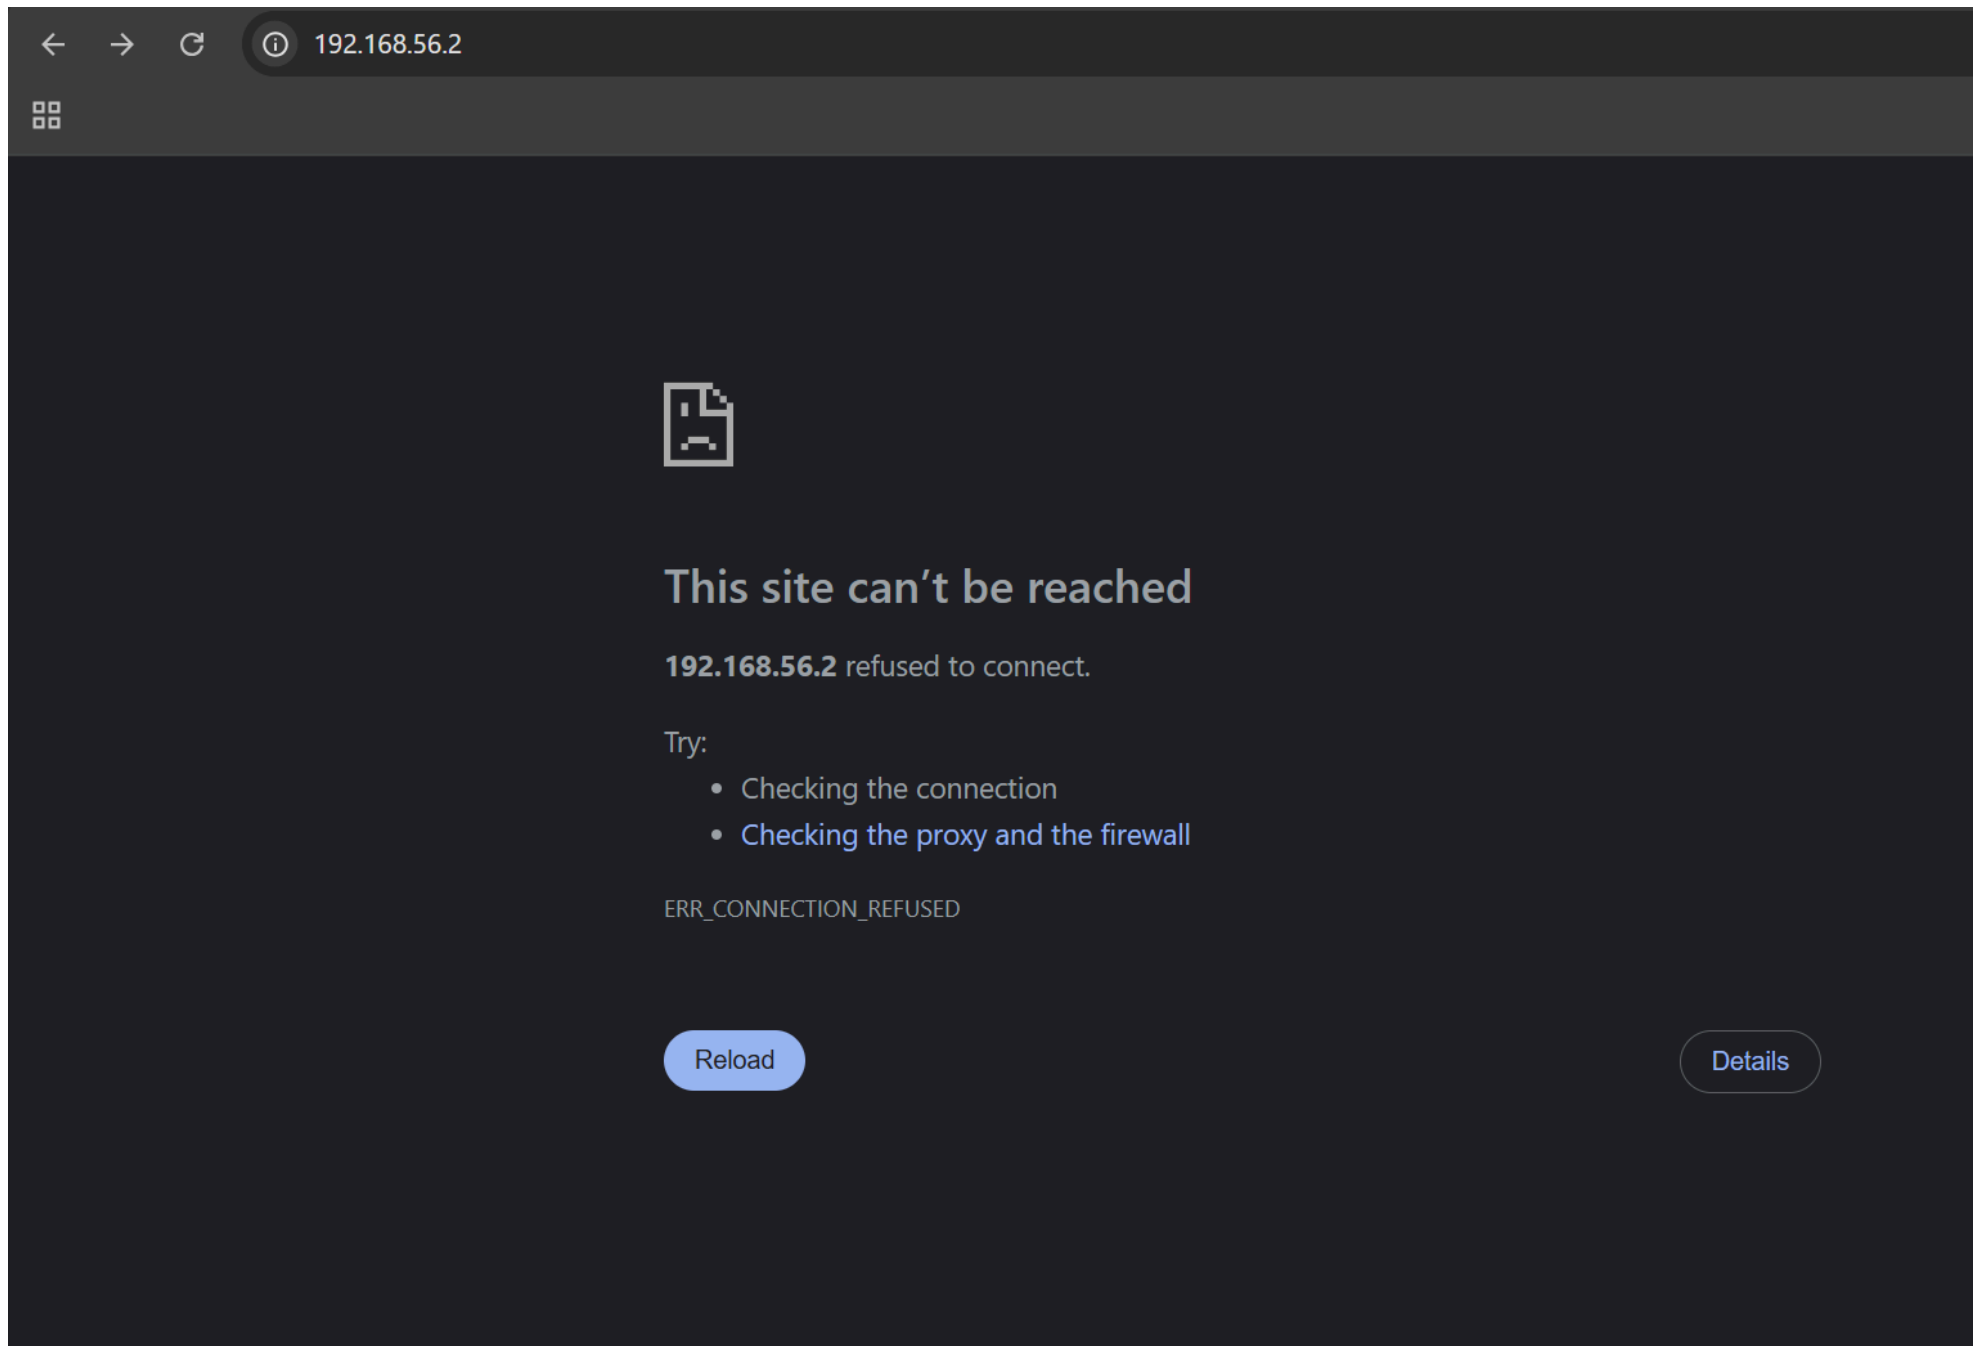

The HTTP block rule was then removed to allow HTTP traffic again.

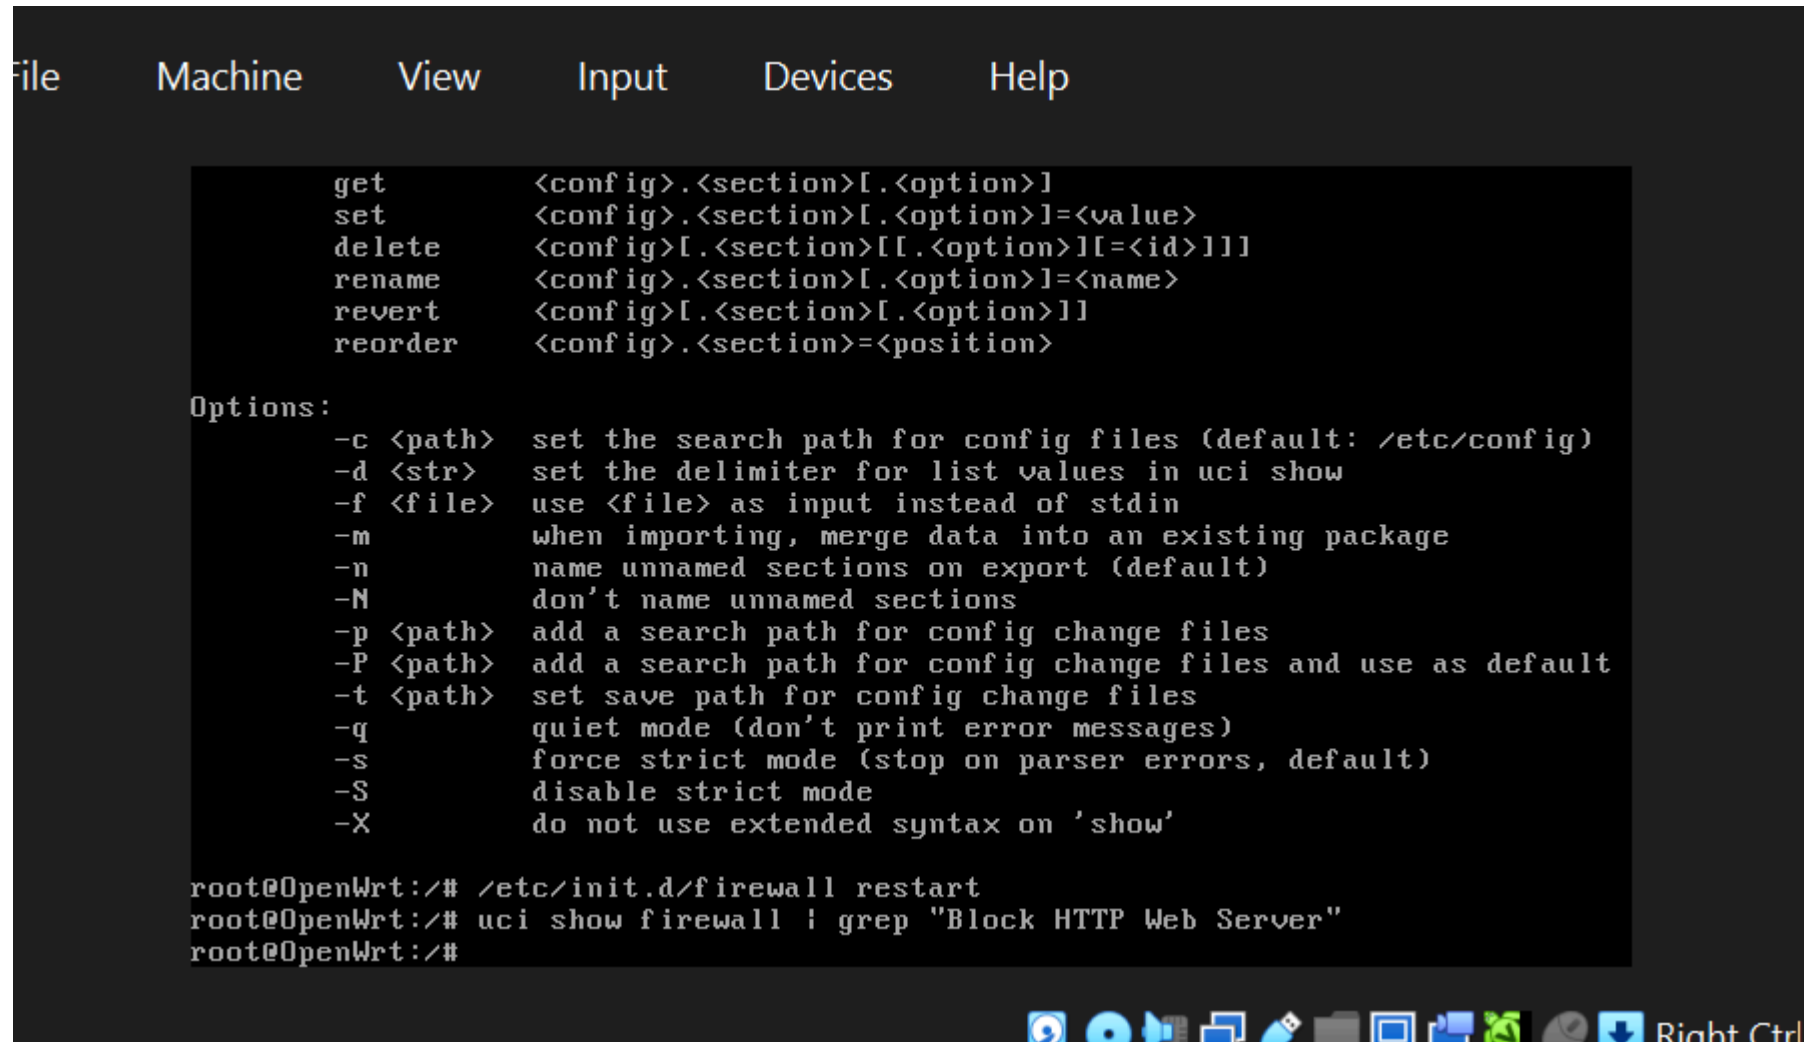


```
File Machine View Input Devices Help

get      <config>.<section>[.<option>]
set      <config>.<section>[.<option>]=<value>
delete   <config>[.<section>[[.<option>]][=<id>]]]
rename   <config>.<section>[.<option>]=<name>
revert   <config>[.<section>[.<option>]]
reorder  <config>.<section>=<position>

Options:
-c <path>  set the search path for config files (default: /etc/config)
-d <str>   set the delimiter for list values in uci show
-f <file>  use <file> as input instead of stdin
-m        when importing, merge data into an existing package
-n        name unnamed sections on export (default)
-N        don't name unnamed sections
-p <path>  add a search path for config change files
-P <path>  add a search path for config change files and use as default
-t <path>  set save path for config change files
-q        quiet mode (don't print error messages)
-s        force strict mode (stop on parser errors, default)
-S        disable strict mode
-X        do not use extended syntax on 'show'

root@OpenWrt:/# /etc/init.d/firewall restart
root@OpenWrt:/# uci show firewall | grep "Block HTTP Web Server"
root@OpenWrt:/#
```

After HTTP traffic was allowed again, the website loaded successfully from the Windows host browser.

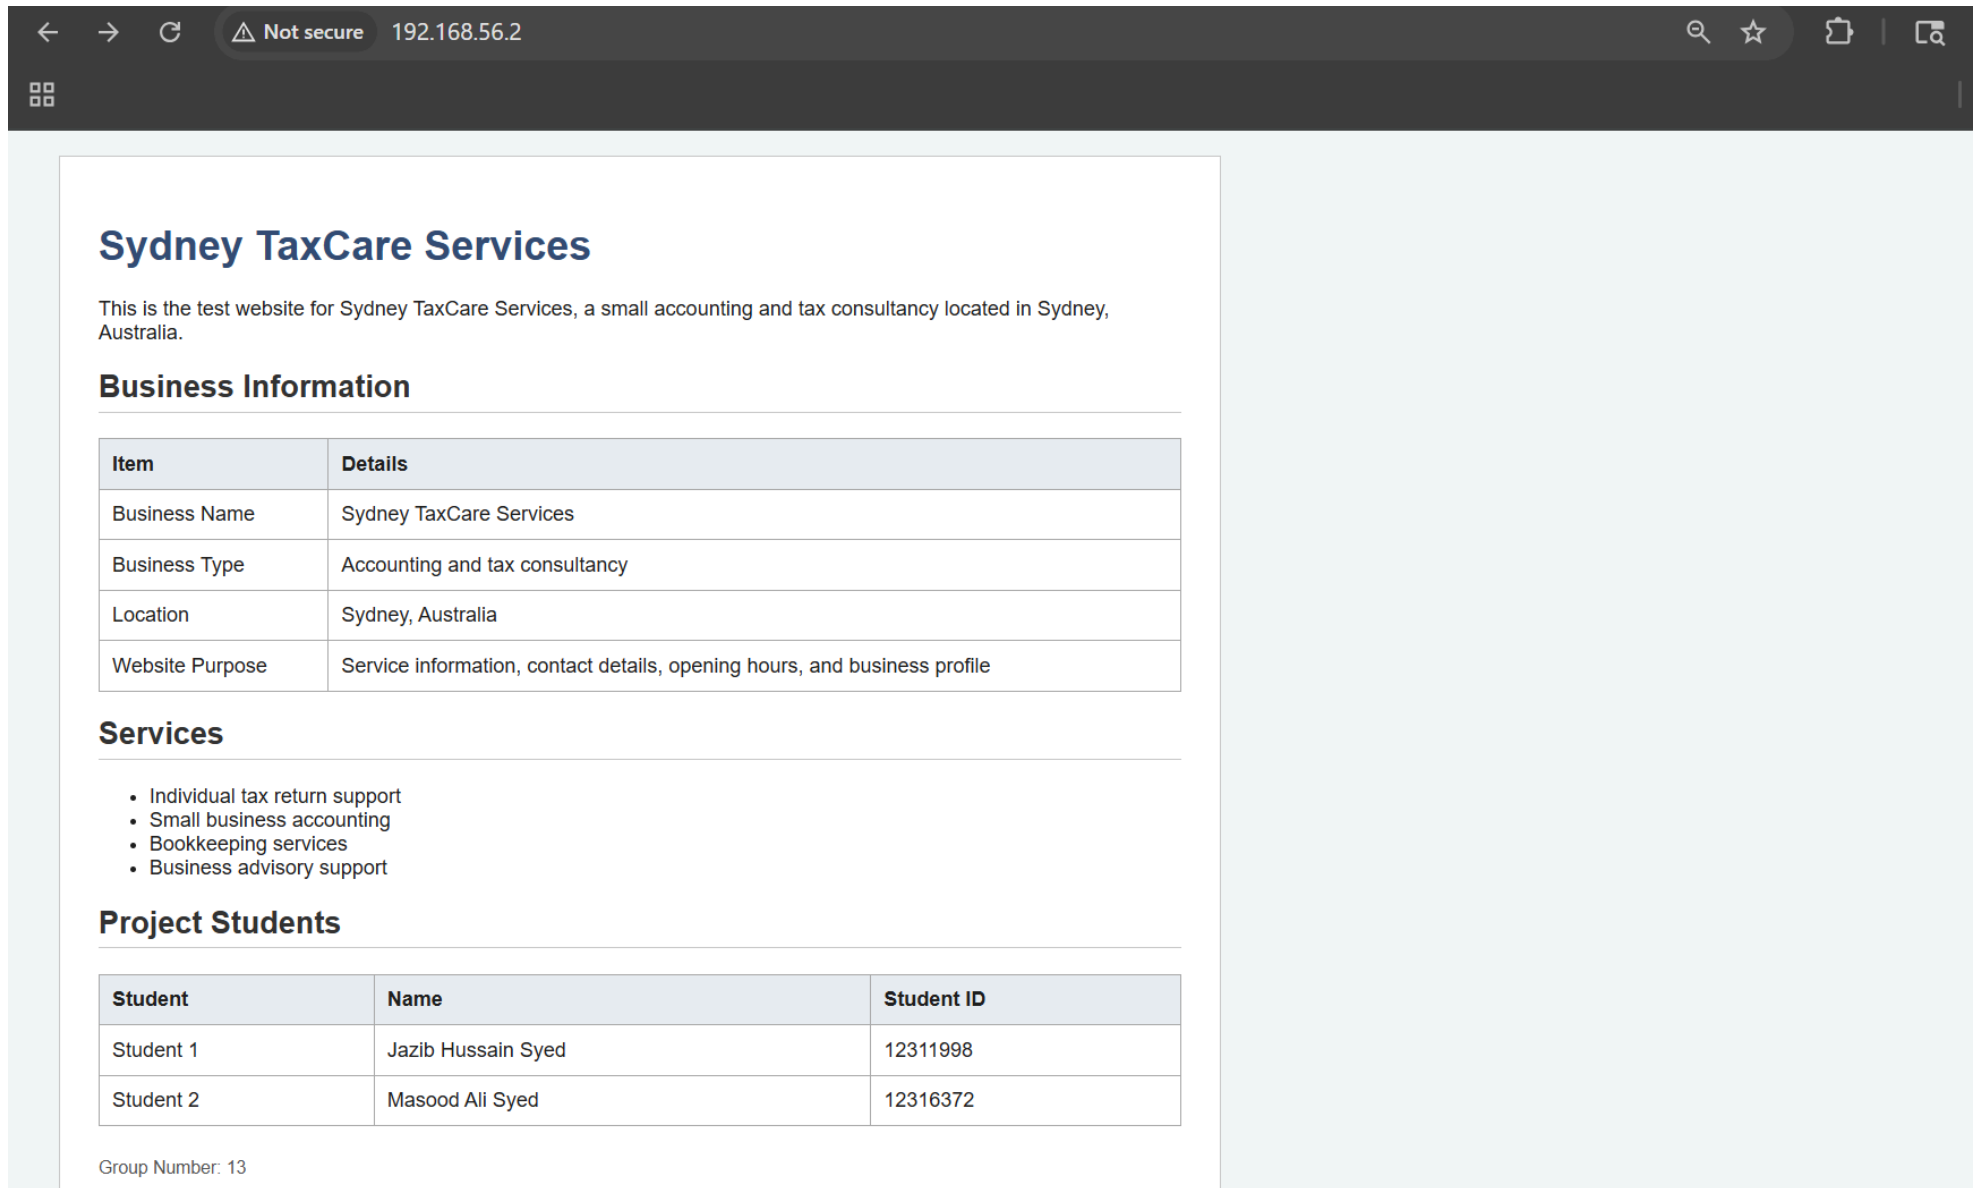

Sydney TaxCare Services

This is the test website for Sydney TaxCare Services, a small accounting and tax consultancy located in Sydney, Australia.

Business Information

Item	Details
Business Name	Sydney TaxCare Services
Business Type	Accounting and tax consultancy
Location	Sydney, Australia
Website Purpose	Service information, contact details, opening hours, and business profile

Services

- Individual tax return support
- Small business accounting
- Bookkeeping services
- Business advisory support

Project Students


Student	Name	Student ID
Student 1	Jazib Hussain Syed	12311998
Student 2	Masood Ali Syed	12316372

Group Number: 13

This rule shows how firewall filtering can control access to a web service. Blocking HTTP prevents access to the website, while allowing HTTP makes the website reachable again.

ICMP Block and Allow

ICMP was tested using the `ping` command from the Windows host to the OpenWRT management IP address. Before blocking ICMP, the ping test succeeded.

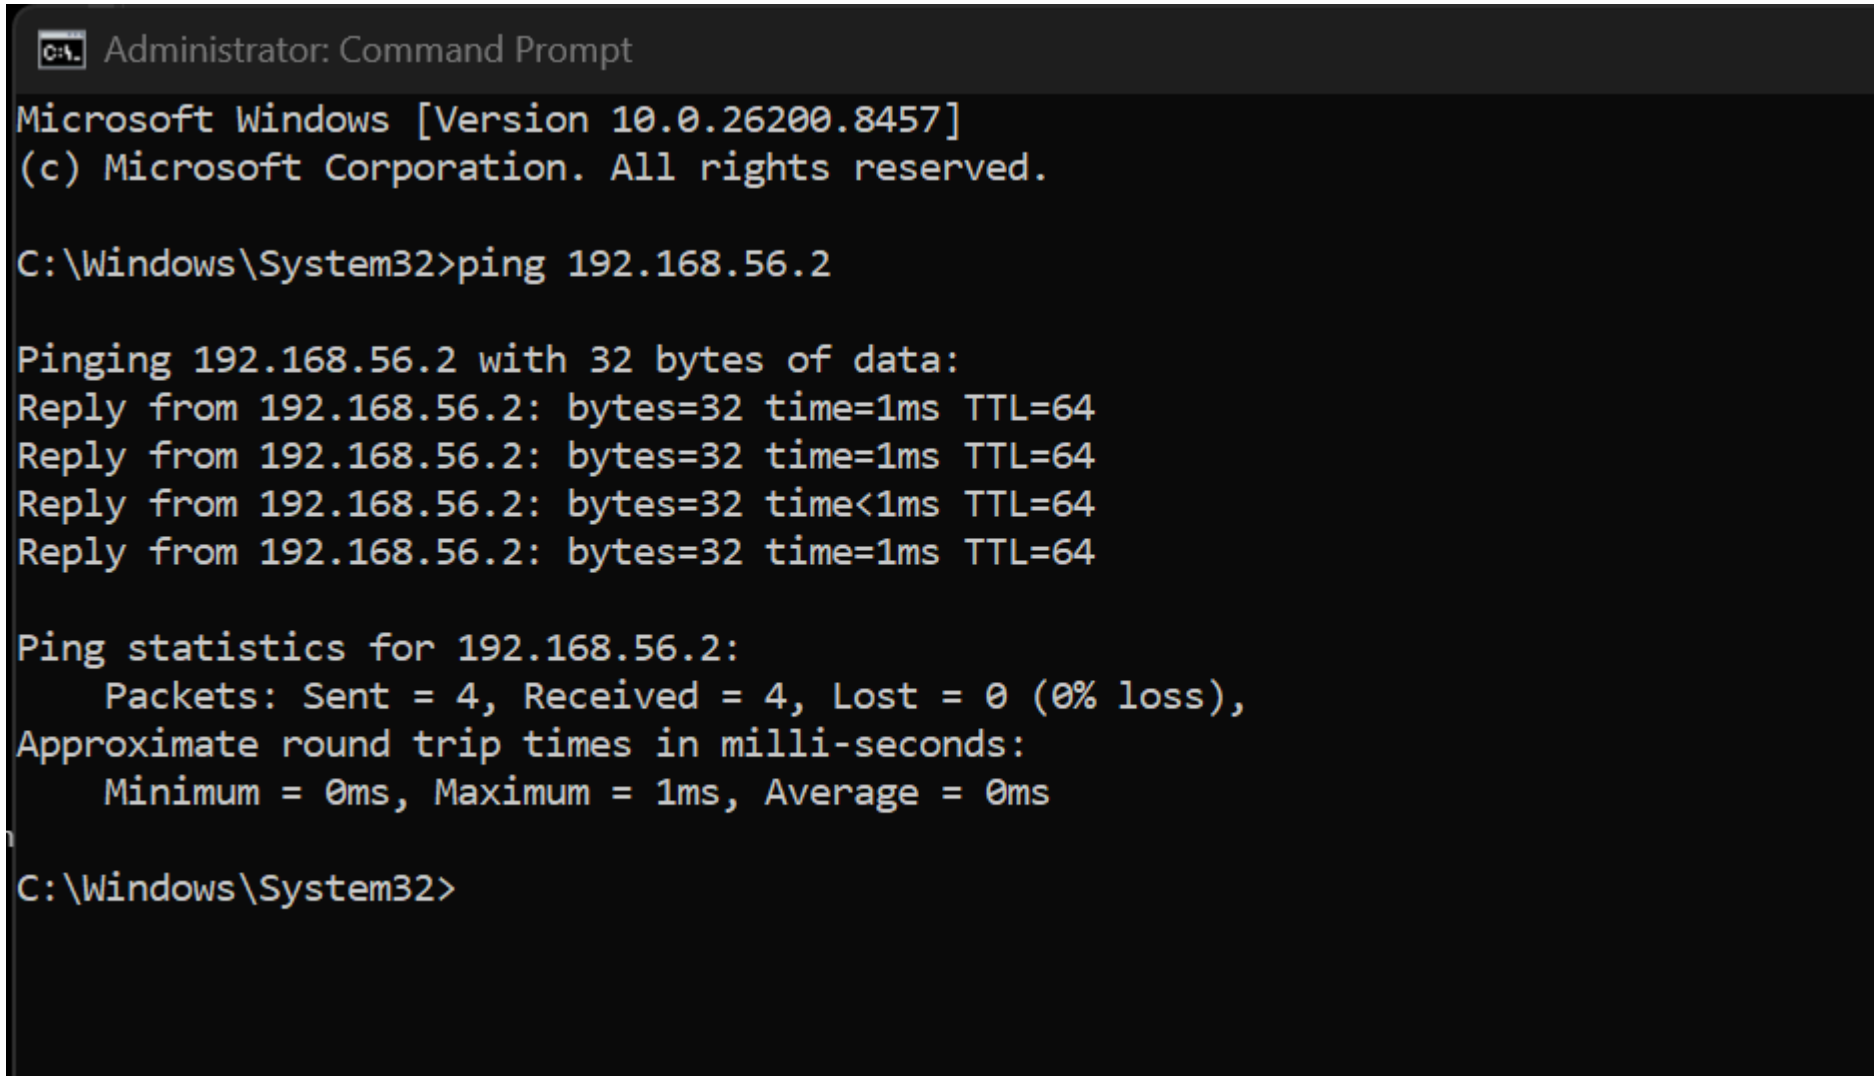A screenshot of a Windows Command Prompt window titled "Administrator: Command Prompt". The window shows the output of a ping command. The text is as follows:

```
C:\Windows\System32>ping 192.168.56.2

Pinging 192.168.56.2 with 32 bytes of data:
Reply from 192.168.56.2: bytes=32 time=1ms TTL=64
Reply from 192.168.56.2: bytes=32 time=1ms TTL=64
Reply from 192.168.56.2: bytes=32 time<1ms TTL=64
Reply from 192.168.56.2: bytes=32 time=1ms TTL=64


Ping statistics for 192.168.56.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Windows\System32>
```

A firewall rule was then configured to block ICMP traffic.

```
root@OpenWrt:/# uci add firewall rule
cfg0f92bd
root@OpenWrt:/# uci set firewall.@rule[-1].name='Block ICMP Ping'
root@OpenWrt:/# uci set firewall.@rule[-1].src='*'
root@OpenWrt:/# uci set firewall.@rule[-1].proto='icmp'
root@OpenWrt:/# uci set firewall.@rule[-1].target='REJECT'
```



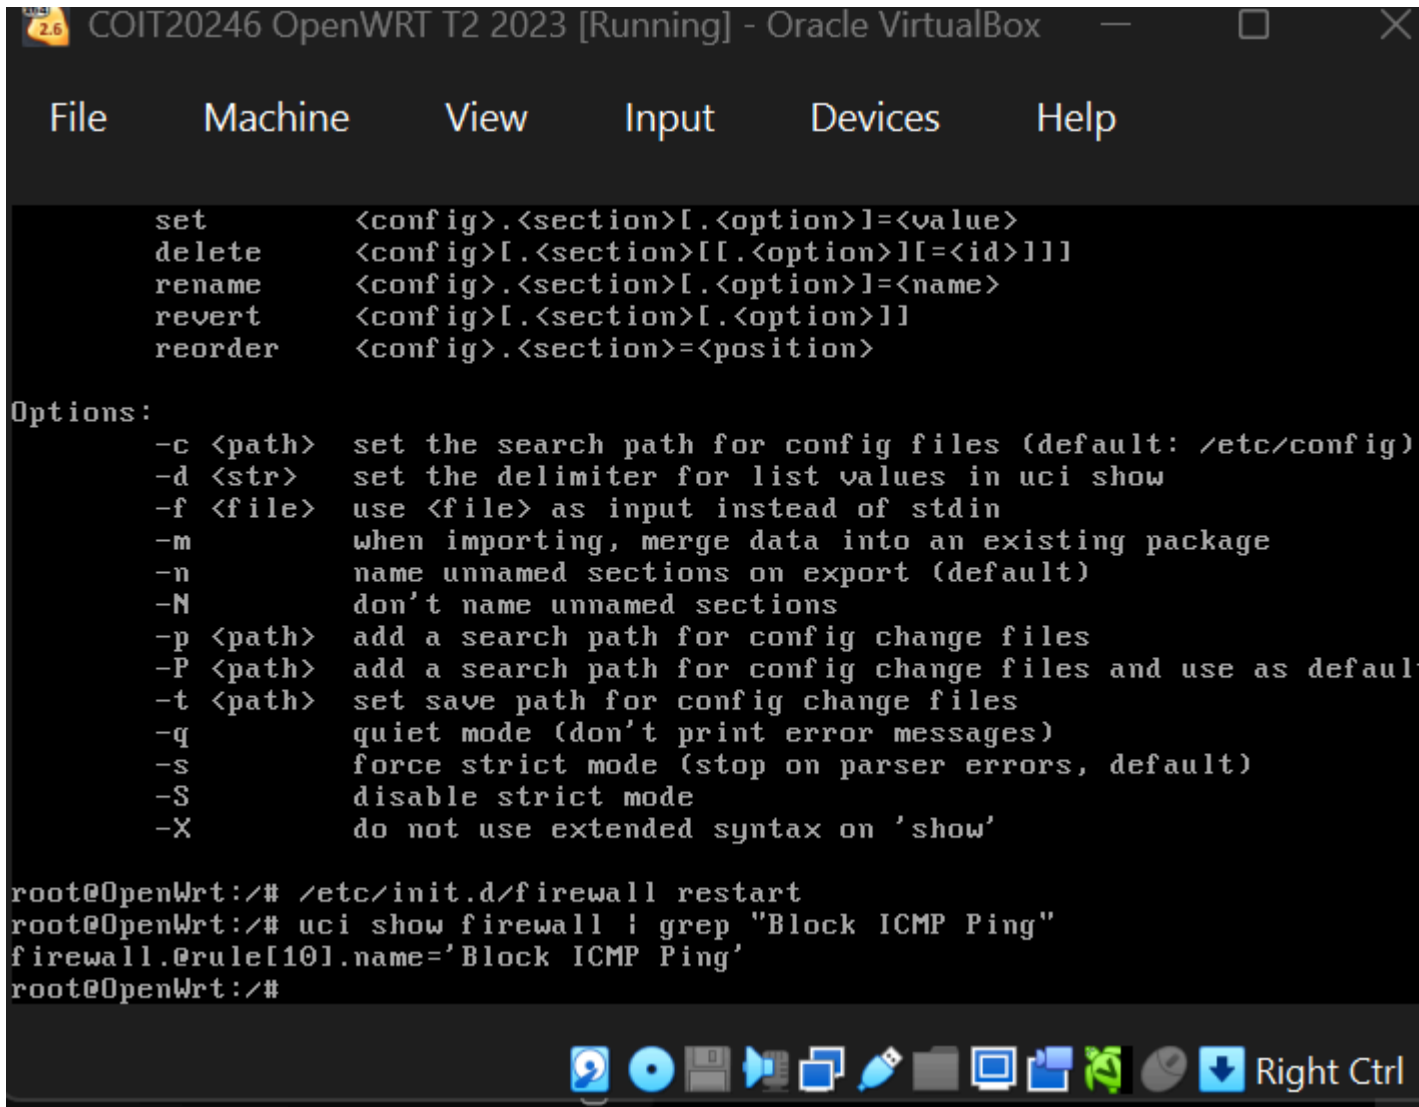

```
COIT20246 OpenWRT T2 2023 [Running] - Oracle VirtualBox

File Machine View Input Devices Help

set      <config>.<section>[.<option>]=<value>
delete   <config>[.<section>[[.<option>][=<id>]]]
rename   <config>.<section>[.<option>]=<name>
revert   <config>[.<section>[.<option>]]
reorder  <config>.<section>=<position>

Options:
-c <path> set the search path for config files (default: /etc/config)
-d <str>  set the delimiter for list values in uci show
-f <file> use <file> as input instead of stdin
-m        when importing, merge data into an existing package
-n        name unnamed sections on export (default)
-N        don't name unnamed sections
-p <path> add a search path for config change files
-P <path> add a search path for config change files and use as default
-t <path> set save path for config change files
-q        quiet mode (don't print error messages)
-s        force strict mode (stop on parser errors, default)
-S        disable strict mode
-X        do not use extended syntax on 'show'

root@OpenWrt:/# /etc/init.d/firewall restart
root@OpenWrt:/# uci show firewall | grep "Block ICMP Ping"
firewall.@rule[10].name='Block ICMP Ping'
root@OpenWrt:/#
```

After ICMP was blocked, ping from the Windows host failed.

```
C:\Windows\System32>ping 192.168.56.2

Pinging 192.168.56.2 with 32 bytes of data:
Reply from 192.168.56.2: Destination port unreachable.
Reply from 192.168.56.2: Destination port unreachable.
Reply from 192.168.56.2: Destination port unreachable.
Reply from 192.168.56.2: Destination port unreachable.

Ping statistics for 192.168.56.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

C:\Windows\System32>
```

ICMP was then allowed again, and the ping test succeeded.

```
C:\Windows\System32>ping 192.168.56.2

Pinging 192.168.56.2 with 32 bytes of data:
Reply from 192.168.56.2: Destination port unreachable.
Reply from 192.168.56.2: Destination port unreachable.
Reply from 192.168.56.2: Destination port unreachable.
Reply from 192.168.56.2: Destination port unreachable.

Ping statistics for 192.168.56.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

C:\Windows\System32>ping 192.168.56.2

Pinging 192.168.56.2 with 32 bytes of data:
Reply from 192.168.56.2: bytes=32 time=1ms TTL=64
Reply from 192.168.56.2: bytes=32 time<1ms TTL=64
Reply from 192.168.56.2: bytes=32 time<1ms TTL=64
Reply from 192.168.56.2: bytes=32 time<1ms TTL=64

Ping statistics for 192.168.56.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Windows\System32>
```

This rule shows how ICMP can be controlled. Blocking ICMP can reduce simple network visibility, while allowing ICMP is useful for troubleshooting connectivity.


SSH Access and Port Change


SSH access was first tested on the default SSH port, port 22. The successful connection confirmed that SSH administration was available from the Windows host.


```
C:\> root@OpenWrt: ~  
Microsoft Windows [Version 10.0.26200.8457]  
(c) Microsoft Corporation. All rights reserved.  
  
C:\Windows\System32>ssh root@192.168.56.2  
root@192.168.56.2's password:  
  
BusyBox v1.35.0 (2023-01-03 00:24:21 UTC) built-in shell (ash)  
  
 _ _ | W I R E L E S S   F R E E D O M  
-----  
OpenWrt 22.03.3, r20028-43d71ad93e  
-----  
root@OpenWrt:~#
```

The SSH service was then changed from port 22 to port 2222.

```
root@OpenWrt:/# /etc/init.d/firewall restart
root@OpenWrt:/# uci set dropbear.@dropbear[0].Port='2222'
root@OpenWrt:/# uci commit dropbear
```

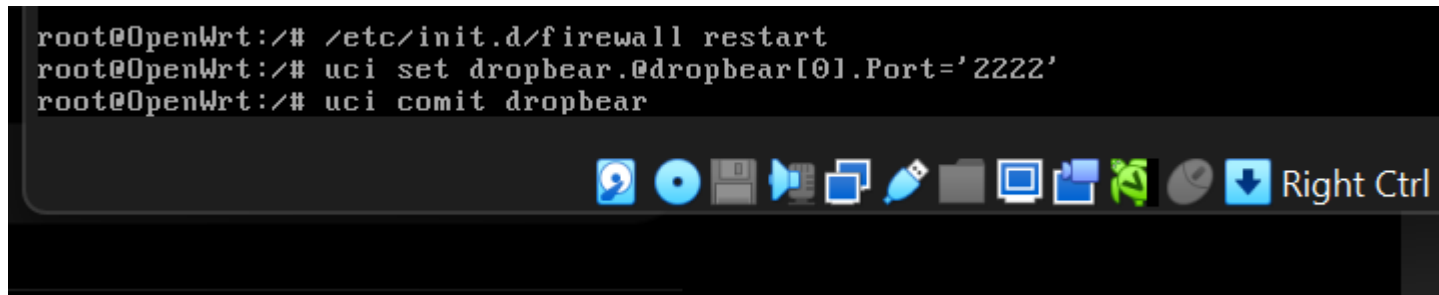A terminal window with a dark background. The text shows three commands being executed in a root shell on an OpenWrt system. Below the terminal text is a horizontal bar containing several colorful icons: a blue square with a white swirl, a blue circle, a grey floppy disk, a blue speaker, a blue square with a white 'X', a blue USB drive, a grey folder, a blue square with a white 'X', a blue square with a white 'X', a green alien-like figure, a grey circle, and a blue square with a white 'X'. To the right of these icons is the text 'Right Ctrl'.

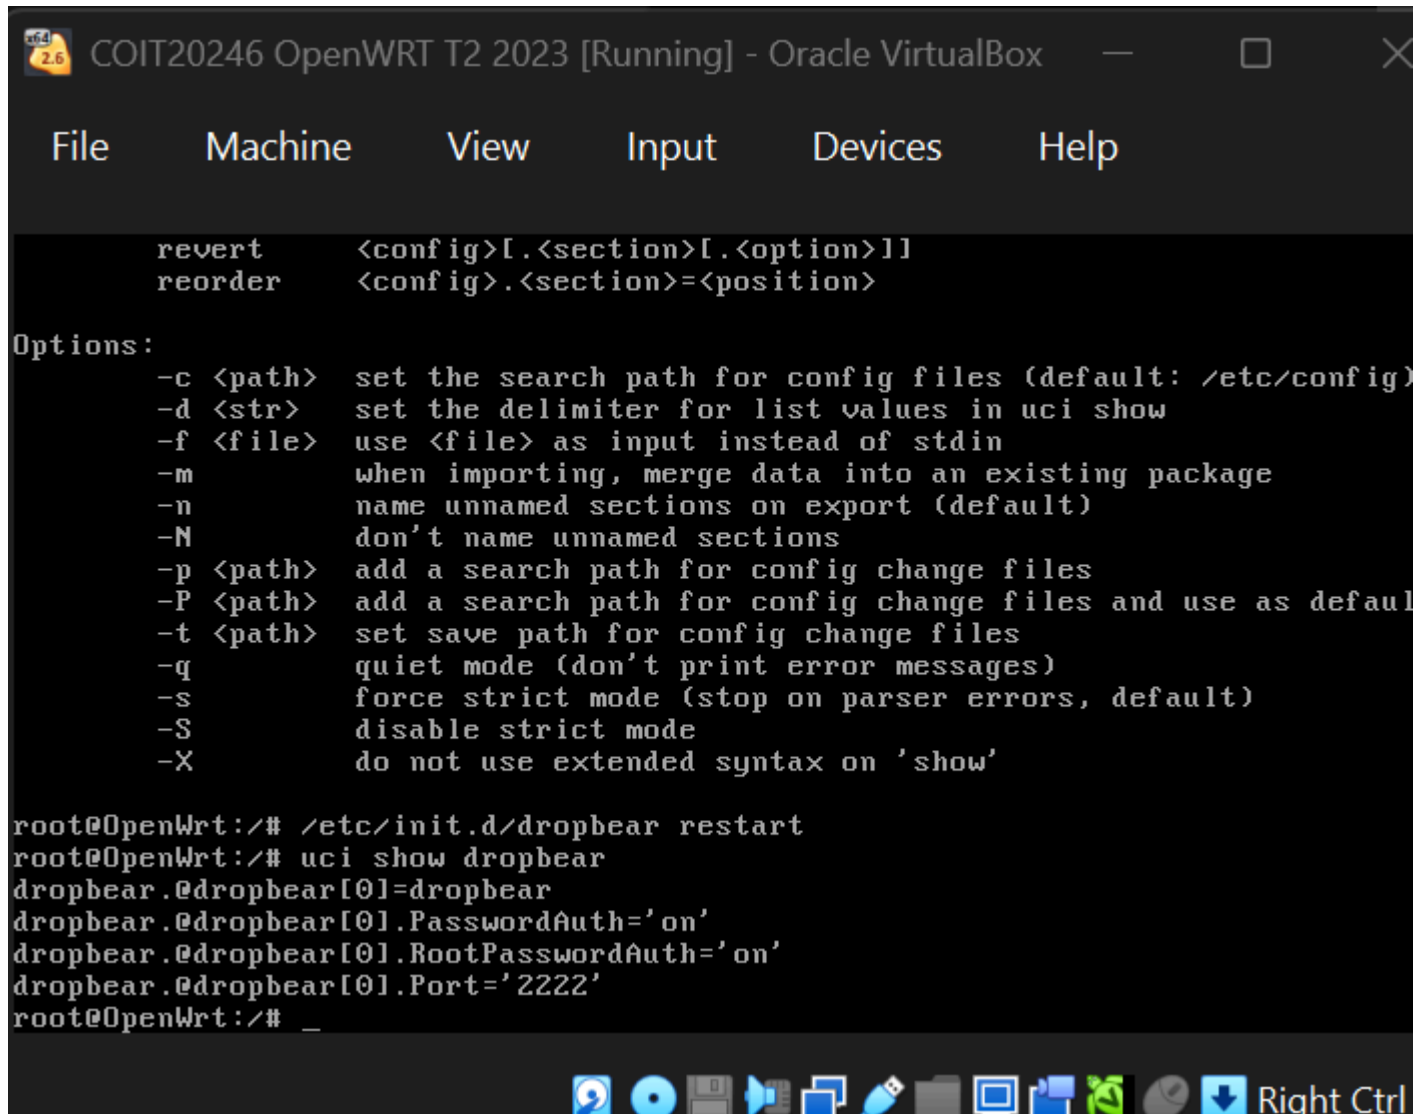


```
revert      <config>[.<section>[.<option>]]
reorder     <config>.<section>=<position>

Options:
-c <path>   set the search path for config files (default: /etc/config)
-d <str>    set the delimiter for list values in uci show
-f <file>   use <file> as input instead of stdin
-m         when importing, merge data into an existing package
-n         name unnamed sections on export (default)
-N         don't name unnamed sections
-p <path>   add a search path for config change files
-P <path>   add a search path for config change files and use as default
-t <path>   set save path for config change files
-q         quiet mode (don't print error messages)
-s         force strict mode (stop on parser errors, default)
-S         disable strict mode
-X         do not use extended syntax on 'show'

root@OpenWrt:/# /etc/init.d/dropbear restart
root@OpenWrt:/# uci show dropbear
dropbear.@dropbear[0]=dropbear
dropbear.@dropbear[0].PasswordAuth='on'
dropbear.@dropbear[0].RootPasswordAuth='on'
dropbear.@dropbear[0].Port='2222'
root@OpenWrt:/# _
```

After this change, SSH access on port 22 no longer worked.

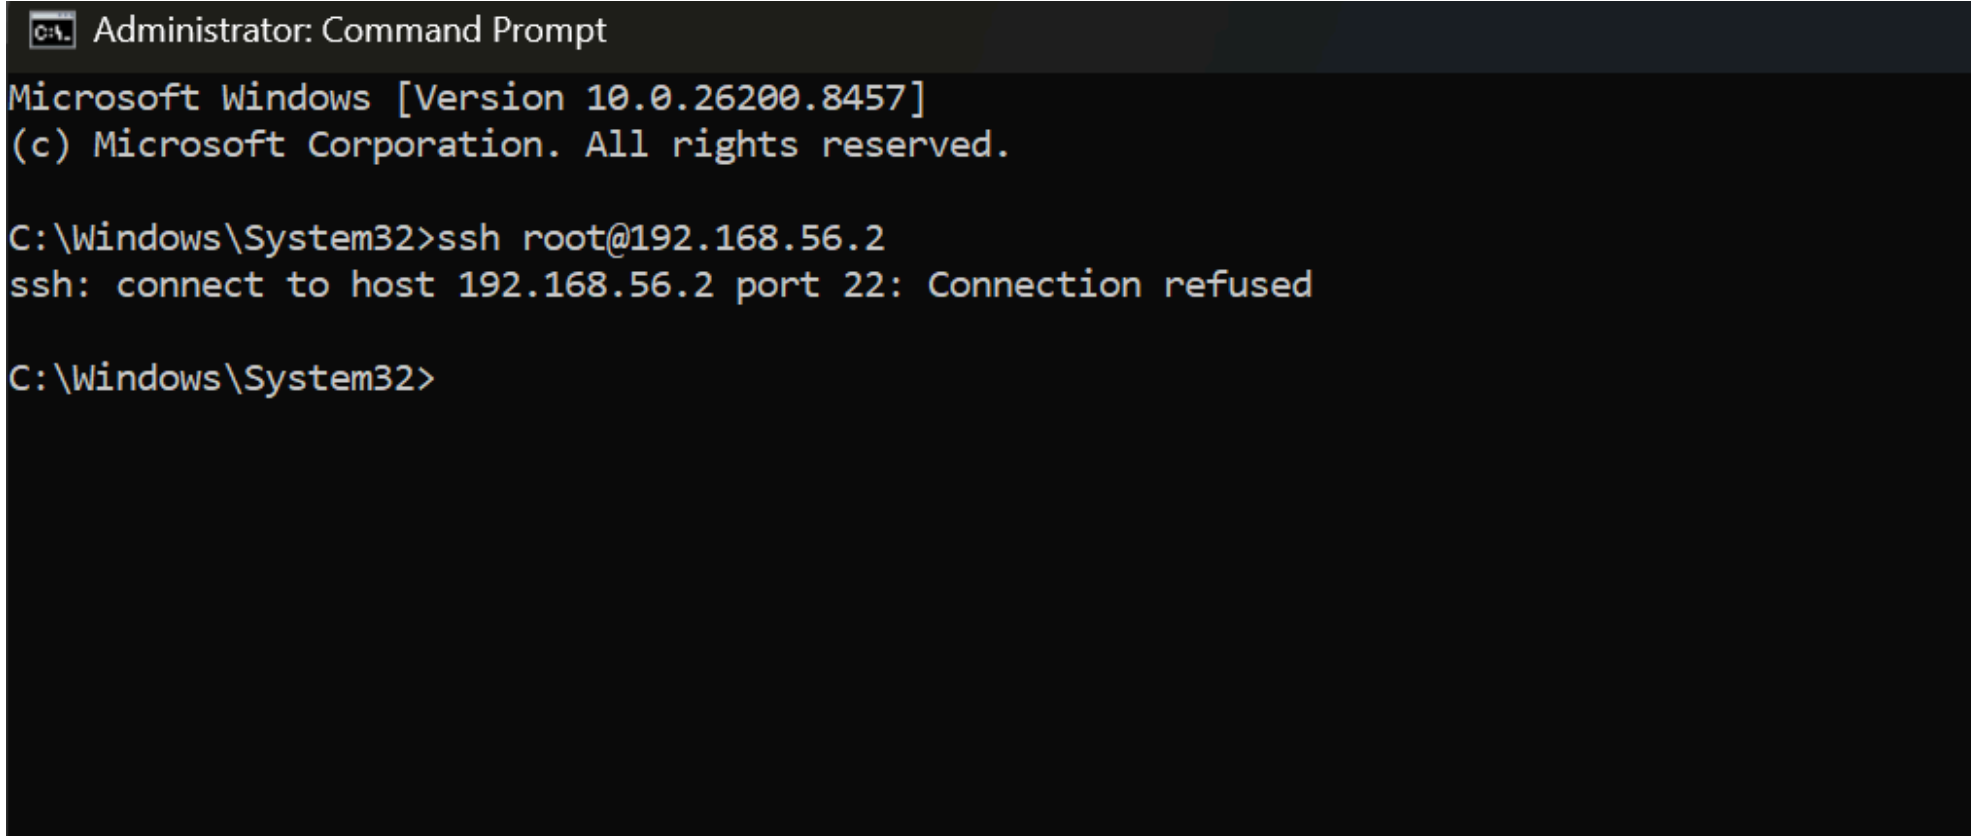

Administrator: Command Prompt

```
Microsoft Windows [Version 10.0.26200.8457]  
(c) Microsoft Corporation. All rights reserved.  
  
C:\Windows\System32>ssh root@192.168.56.2  
ssh: connect to host 192.168.56.2 port 22: Connection refused  
  
C:\Windows\System32>
```


SSH access was then tested successfully using port 2222.

```
C:\ root@OpenWrt: ~  
Microsoft Windows [Version 10.0.26200.8457]  
(c) Microsoft Corporation. All rights reserved.  
  
C:\Windows\System32>ssh root@192.168.56.2  
ssh: connect to host 192.168.56.2 port 22: Connection refused  
  
C:\Windows\System32>ssh -p 2222 root@192.168.56.2  
root@192.168.56.2's password:  
  
BusyBox v1.35.0 (2023-01-03 00:24:21 UTC) built-in shell (ash)  
  
 _ _ _ _ _ . _ _ _ _ . _ _ _ _ . _ _ _ _ . _ _ _ _ .  
| | | | | | | | | | | | | | | | | | | | | | | | | |  
|_| W I R E L E S S F R E E D O M  
-----  
OpenWrt 22.03.3, r20028-43d71ad93e  
-----  
root@OpenWrt:~#
```

Reconfiguring SSH can minimize the vulnerability to simple automated scans over port 22. It is not a substitute of strong authentication but it provides an additional administrative protection.

Management Interface Restriction

Access to the OpenWRT management interface on port 81 was tested before applying the restriction rule.

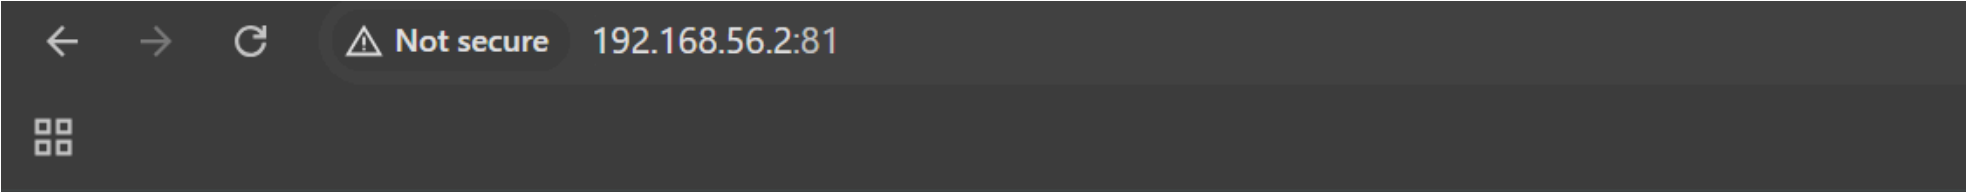

Index of /


1.	../	modified: Wed, 27 May 2026 18:13:43 GMT	directory - 4.00 kbyte
2.	cgi-bin/	modified: Tue, 03 Jan 2023 00:24:21 GMT	directory - 4.00 kbyte
3.	luci-static/	modified: Tue, 03 Jan 2023 00:24:21 GMT	directory - 4.00 kbyte
4.	12311998.html	modified: Wed, 27 May 2026 18:35:45 GMT	text/html - 2.97 kbyte
5.	index-backup.html	modified: Wed, 27 May 2026 18:01:22 GMT	text/html - 0.66 kbyte
6.	index-old.html	modified: Wed, 27 May 2026 18:10:53 GMT	text/html - 2.97 kbyte

A firewall rule was then set up to limit access to the OpenWRT management port 81 interface.


```

root@OpenWrt:/# uci set firewall.@rule[-1].name='Restrict management Port 81'
root@OpenWrt:/# uci set firewall.@rule[-1].src='*'
root@OpenWrt:/# uci set firewall.@rule[-1].proto='tcp'
root@OpenWrt:/# uci set dropbear.@dropbear[0].Port='81'
root@OpenWrt:/# uci set firewall.@rule[-1].target='REJECT'
root@OpenWrt:/# _

```

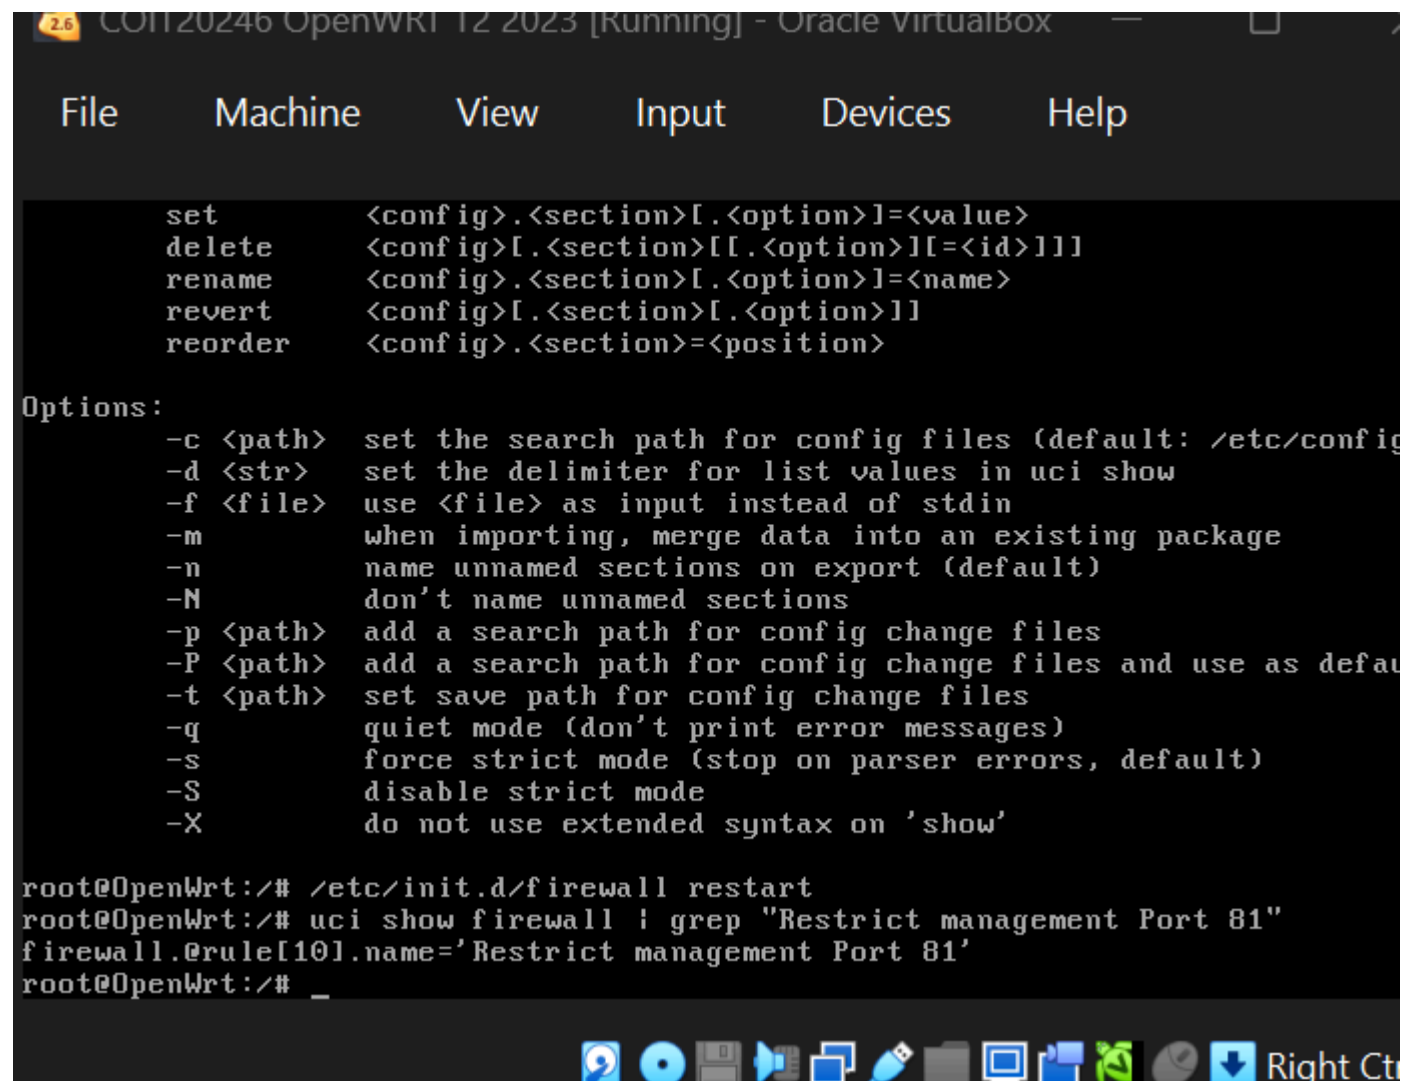

Once the rule was implemented, the management interface could not be accessed on the Windows host.

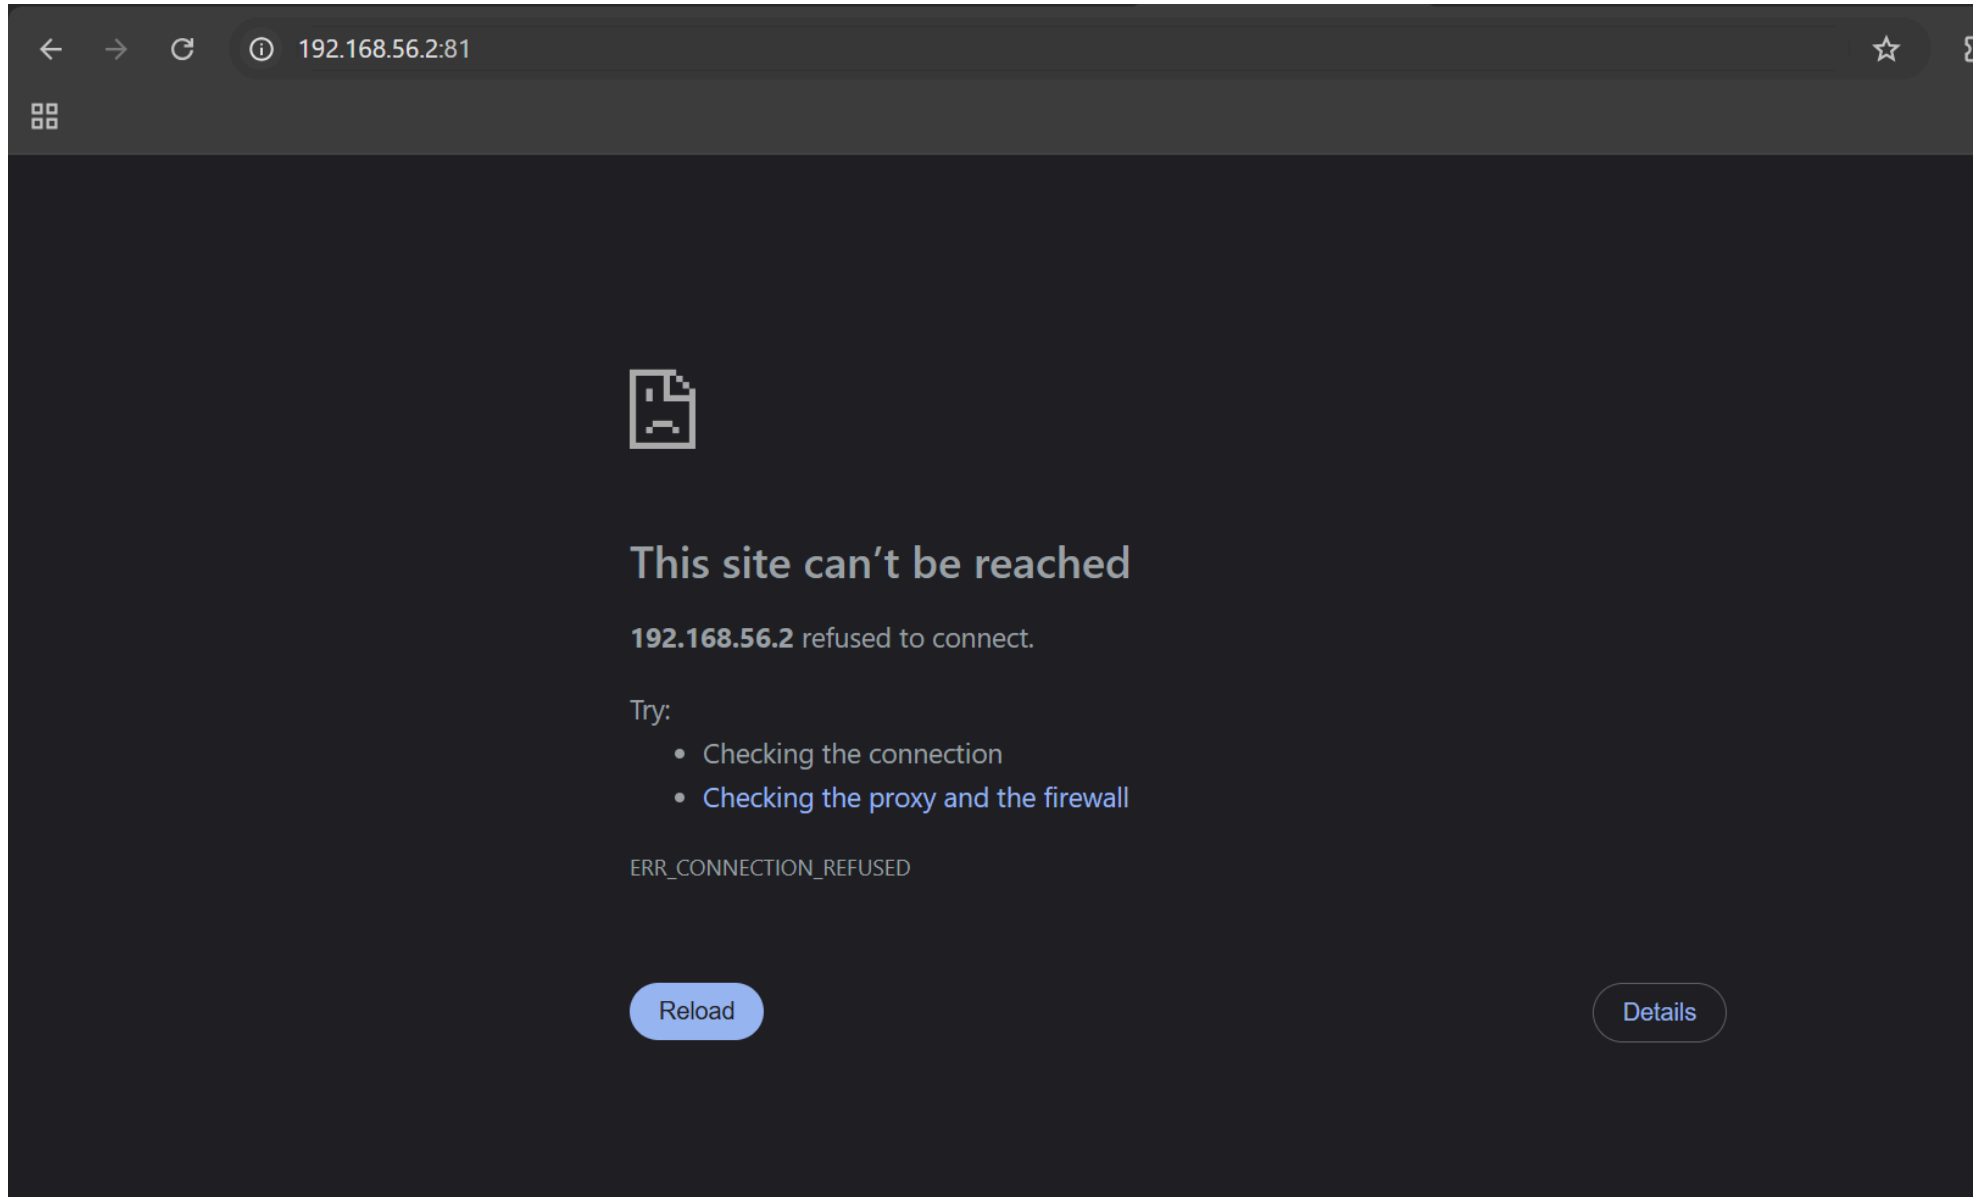

The limitation of the management interface can be used to prevent unauthorised access to the administration of the OpenWRT router/firewall. The access by management must be through trusted hosts or trusted management networks only.

Production Network Design

The production network design demonstrates the way the Sydney TaxCare Services network would be applied in a business reality. This layout is distinct of the VirtualBox lab set up. The proposed office network is displayed in the production design, and the testing was conducted in the lab setup.

The production design comprises two network areas:

- Staff LAN
- Web server DMZ

Manager workstation, administration workstations, accounting consultant workstations, IT support workstation, switch management interface, and printer are found in the staff LAN. The web server is located in the DMZ. The isolation of the web server and staff LAN can enhance security since the public-facing site is not directly put within the staff LAN.


The production IP addressing address involves the use of the student IDs of both members of the group:

Student	Student ID	Last two digits	Used for
Jazib Hussain Syed	12311998	98	Staff LAN
Masood Ali Syed	12316372	72	Web Server DMZ

The production subnets are:

- Staff LAN: 98.10.10.0/24
- Web Server DMZ: 72.10.20.0/24

COIT20246 Production Network Design - Sydney TaxCare Services

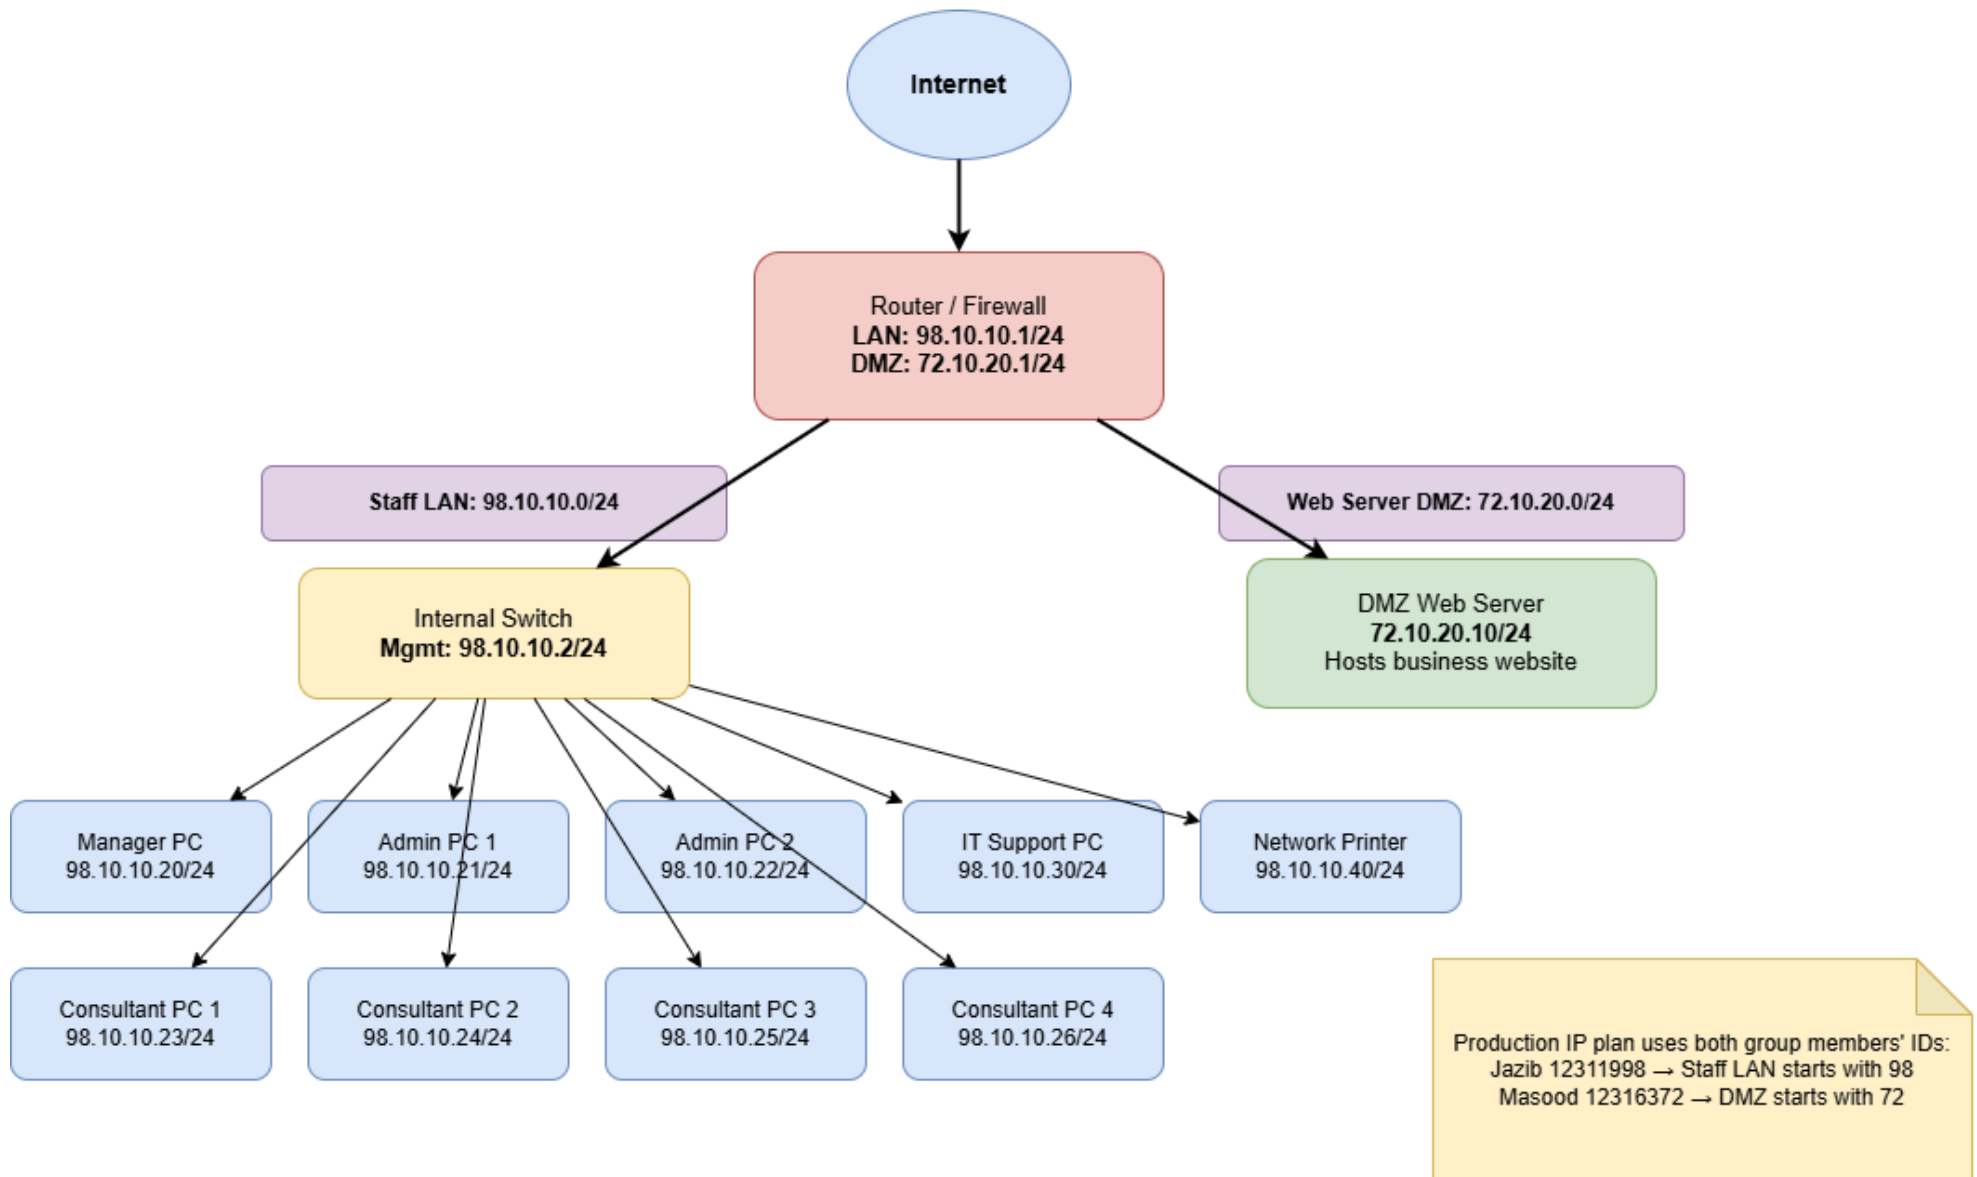

Draw.io source file: [production-network.drawio](https://draw.io/production-network.drawio)

Device	IP Address	Purpose
Router/firewall LAN interface	98.10.10.1/24	Default gateway for staff LAN
Internal switch management	98.10.10.2/24	Staff LAN switch management
Manager workstation	98.10.10.20/24	Manager system
Administration workstation 1	98.10.10.21/24	Administrative work
Administration workstation 2	98.10.10.22/24	Administrative work
Accounting consultant workstation 1	98.10.10.23/24	Accounting and client service work
Accounting consultant workstation 2	98.10.10.24/24	Accounting and client service work
Accounting consultant workstation 3	98.10.10.25/24	Accounting and client service work
Accounting consultant workstation 4	98.10.10.26/24	Accounting and client service work
IT support workstation	98.10.10.30/24	IT support and network administration
Network printer	98.10.10.40/24	Office printing
Router/firewall DMZ interface	72.10.20.1/24	Default gateway for web server DMZ
Web server	72.10.20.10/24	Hosts the Sydney TaxCare Services website

Traffic between the internet, the staff LAN, and web server DMZ are governed by the router/firewall. The staff devices will be put on the network 98.10.10.0/24 and the web server will be on the independent network 72.10.20.0/24 DMZ.