


ASSIGNMENT 2

DML Commands (Insert, Update, Delete)

1) Insert - To insert records into a table.

```
INSERT INTO Restuarant VALUES  
(765432, 'Arjun', 9876543210, 'Italian');
```

```
SELECT * FROM Restuarant;
```

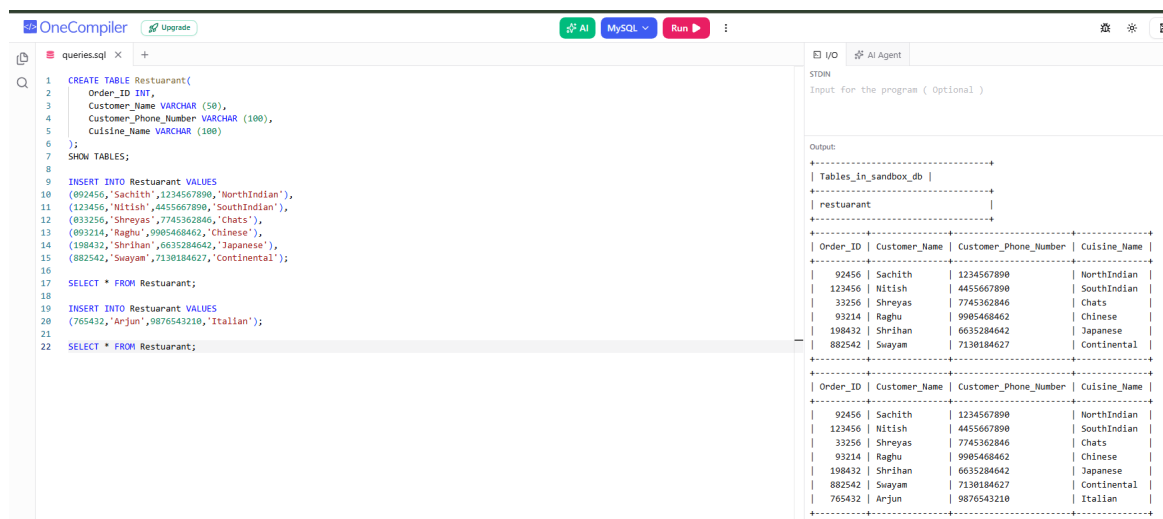

The screenshot shows the OneCompiler MySQL interface. The left pane contains the following SQL code:

```
1 CREATE TABLE Restuarant(  
2   Order_ID INT,  
3   Customer_Name VARCHAR (50),  
4   Customer_Phone_Number VARCHAR (100),  
5   Cuisine_Name VARCHAR (100)  
6 );  
7 SHOW TABLES;  
8  
9 INSERT INTO Restuarant VALUES  
10 (893456, 'Sachith', 1234567890, 'NorthIndian'),  
11 (123456, 'Nitish', 4455667890, 'SouthIndian'),  
12 (893256, 'Shreyas', 7745362846, 'Chats'),  
13 (893214, 'Raghu', 9985468462, 'Chinese'),  
14 (198432, 'Shrihan', 6635284642, 'Japanese'),  
15 (882542, 'Swayam', 7138184627, 'Continental');  
16  
17 SELECT * FROM Restuarant;  
18  
19 INSERT INTO Restuarant VALUES  
20 (765432, 'Arjun', 9876543210, 'Italian');  
21  
22 SELECT * FROM Restuarant;
```

The right pane shows the output of the queries. The first output is the result of the `SHOW TABLES` command, showing a table named `restuarant`. The second output is the result of the `SELECT * FROM Restuarant` command, showing a table with 5 columns: `Order_ID`, `Customer_Name`, `Customer_Phone_Number`, and `Cuisine_Name`. The table contains 6 rows of data, including the newly inserted record for Arjun.

Order_ID	Customer_Name	Customer_Phone_Number	Cuisine_Name
92456	Sachith	1234567890	NorthIndian
123456	Nitish	4455667890	SouthIndian
33256	Shreyas	7745362846	Chats
93214	Raghu	9985468462	Chinese
198432	Shrihan	6635284642	Japanese
882542	Swayam	7138184627	Continental

2) Update - Used to modify existing data in a table.

```
UPDATE Restuarant
```

```
SET Cuisine_Name = 'Italian'
```

```
WHERE Customer_Name = 'Arjun';
```

```
SELECT * FROM Restuarant;
```

The screenshot shows the OneCompiler MySQL interface. The left pane contains the following SQL queries:

```

1 CREATE TABLE Restuarant(
2   Order_ID INT,
3   Customer_Name VARCHAR (50),
4   Customer_Phone_Number VARCHAR (100),
5   Cuisine_Name VARCHAR (100)
6 );
7 SHOW TABLES;
8
9 INSERT INTO Restuarant VALUES
10 (092456,'Sachith',1234567890,'NorthIndian'),
11 (123456,'Nitish',4455667890,'SouthIndian'),
12 (033256,'Shreyas',7745362846,'Chats'),
13 (093214,'Raghu',9905468462,'Chinese'),
14 (198432,'Shrihan',6635284642,'Japanese'),
15 (882542,'Swayam',7130184627,'Continental');
16
17
18 INSERT INTO Restuarant VALUES
19 (765432,'Arjun',9876543210,'Italian');
20
21
22 UPDATE Restuarant
23 SET Cuisine_Name = 'Italian'
24 WHERE Customer_Name = 'Sachith';
25
26 SELECT * FROM Restuarant;

```

The right pane shows the output of the queries:

STDIN
Input for the program (Optional)

Output:

```

+-----+
| Tables_in_sandbox_db |
+-----+
| restaurant           |
+-----+

```

Order_ID	Customer_Name	Customer_Phone_Number	Cuisine_Name
92456	Sachith	1234567890	Italian
123456	Nitish	4455667890	SouthIndian
33256	Shreyas	7745362846	Chats
93214	Raghu	9905468462	Chinese
198432	Shrihan	6635284642	Japanese
882542	Swayam	7130184627	Continental
765432	Arjun	9876543210	Italian

2) Delete Command - The **DELETE** command is used to remove specific records (rows) from a table.

DELETE FROM Restuarant

WHERE Customer_Name = 'Arjun';

The screenshot shows the OneCompiler MySQL interface after executing the DELETE command. The left pane contains the following SQL queries:

```

1 CREATE TABLE Restuarant(
2   Order_ID INT,
3   Customer_Name VARCHAR (50),
4   Customer_Phone_Number VARCHAR (100),
5   Cuisine_Name VARCHAR (100)
6 );
7 SHOW TABLES;
8
9 INSERT INTO Restuarant VALUES
10 (092456,'Sachith',1234567890,'NorthIndian'),
11 (123456,'Nitish',4455667890,'SouthIndian'),
12 (033256,'Shreyas',7745362846,'Chats'),
13 (093214,'Raghu',9905468462,'Chinese'),
14 (198432,'Shrihan',6635284642,'Japanese'),
15 (882542,'Swayam',7130184627,'Continental');
16
17
18 INSERT INTO Restuarant VALUES
19 (765432,'Arjun',9876543210,'Italian');
20
21
22 UPDATE Restuarant
23 SET Cuisine_Name = 'Italian'
24 WHERE Customer_Name = 'Sachith';
25
26
27 DELETE FROM Restuarant
28 WHERE Customer_Name = 'Raghu';
29
30 SELECT * FROM Restuarant;

```

The right pane shows the output of the queries:

STDIN
Input for the program (Optional)

Output:

```

+-----+
| Tables_in_sandbox_db |
+-----+
| restaurant           |
+-----+

```

Order_ID	Customer_Name	Customer_Phone_Number	Cuisine_Name
92456	Sachith	1234567890	Italian
123456	Nitish	4455667890	SouthIndian
33256	Shreyas	7745362846	Chats
198432	Shrihan	6635284642	Japanese
882542	Swayam	7130184627	Continental
765432	Arjun	9876543210	Italian

Github Link - <https://github.com/cr-sparsh/dbms-3-sem>