



Memory BOMB






Memory BOMB (3 / 5)

Jenkins behavior:

- 1 - You put a memory bomb in your Jenkinsfile
- 2 - The Jenkins Master send to the job to an Jenkins agent and it runs the pipeline and the memory bomb. So the Jenkins agent host break down
- 3 - Jenkins Master detect that the jobs was not finished. So the send the same job to another Jenkins Agent
- 4 - Jenkins agent runs memory bomb and... break down
- 5 - Go to step 2

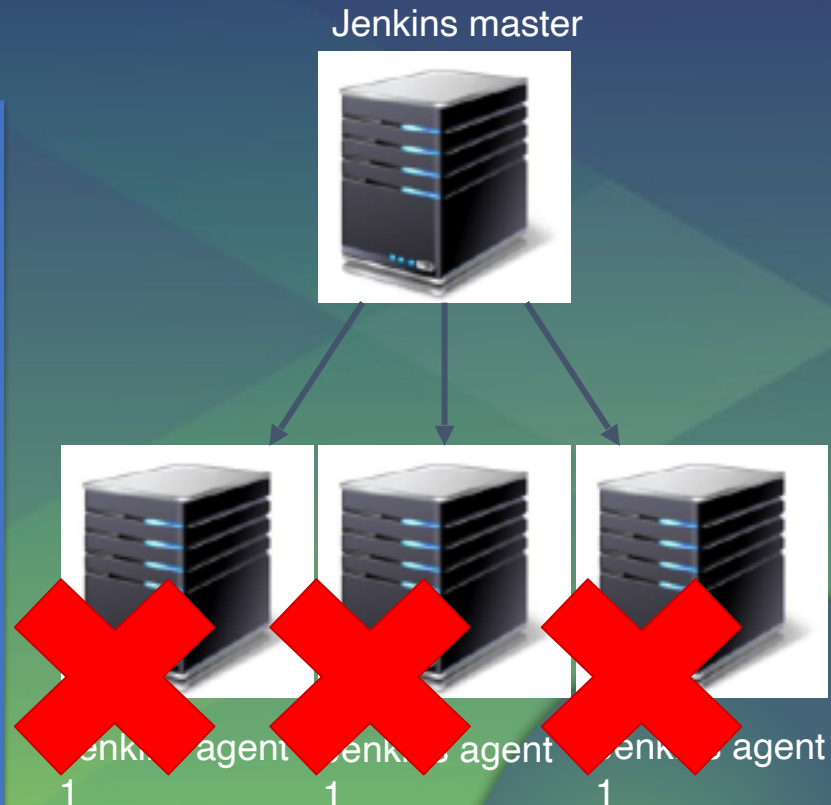

[Volver al Panel de Control](#)[Estado Actual](#)[Cambios](#)[Zona de Trabajo](#)[Cancelar ahora](#)[Reanudar Proyecto](#)[Configurar](#)[GitHub](#)[Resumir](#)

Proyecto memory

[Estado de trabajo](#)[Cambios recientes](#)

Enlaces permanentes

[Estado desahogado](#)[Desahogar el Proyecto](#)[Historia de cambios](#) [Indicadores](#)[Agentes de Jenkins](#) [Agentes de Jenkins](#)