# iemiscdata: Map of Tennessee Exceptional Waters

Irucka Embry, E.I.T. (EcoC<sup>2</sup>S)

### 2024-01-09

## Contents

# state\_boundaries\_wgs84


Creating a ggplot2 Map of the Tennessee Exceptional Waters	1
R Sources	3
EcoC <sup>2</sup> S Links	4
Copyright and License	4

## Creating a ggplot2 Map of the Tennessee Exceptional Waters

river\_states <- subset(state\_boundaries\_wgs84, NAME %in% get\_states)

```
# Source 1 / subset for Southeast states only
states_map <- st_as_sf(river_states, crs = "+proj=longlat +datum=NAD83")</pre>
# add an id column to exceptional_tn_waters
exceptional tn waters map <- exceptional tn waters[, id := seq(nrow(exceptional tn waters))]
# Source 2 begins the data has to be in long form to use sfheaders
tn_dt1 <- exceptional_tn_waters[, .(id, lon = From_Long, lat = From_Lat)]</pre>
tn_dt2 <- exceptional_tn_waters[, .(id, lon = To_Long, lat = To_Lat)]</pre>
# Add a 'sequence' variable to identify which one occurs first
tn_dt1[, sequence := 1L]
tn_dt2[, sequence := 2L]
# rbind the data.tables
exceptional_tn_waters_map2 <- rbindlist(list(tn_dt1, tn_dt2), use.names = TRUE)</pre>
# set the row ordering
setorder(exceptional_tn_waters_map2, id, sequence)
# Source 2 ends
map1 <- exceptional_tn_waters_map2</pre>
# Source 3 begins
map2 <- map1 %>%
    st_as_sf(coords = c("lon", "lat"), na.fail = FALSE, crs = "epsg:4326") %>%
    group_by(id) %>%
    summarize() %>%
    filter(st_geometry_type(.) == "MULTIPOINT") %>%
    st_cast("MULTILINESTRING")
# Source 3 ends
p <- ggplot() + geom_sf(data = states_map, colour = "black", fill = "white")</pre>
p <- p + geom_sf(data = map2, colour = "blue")</pre>
p <- p + labs(x = "", y = "", title = "Tennessee Exceptional Waters Map")
print(p)
```

# Tennessee Exceptional Waters Map

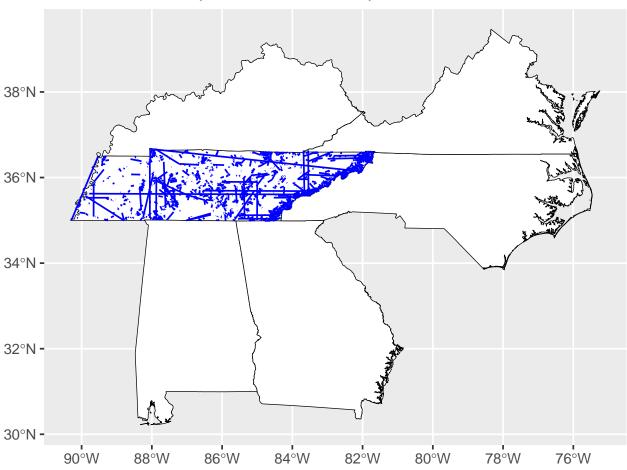

## R Sources

#### Source 1

How to draw good looking maps in R by Jie Zhou on April 18, 2011. See https://uchicagoconsulting.wordpress.com/tag/r-ggplot2-maps-visualization/.

#### Source 2

geometry - r - Create linestring from two points in same row in dataframe - Stack Overflow. Edited answer by Symbolix AU on Jan 29, 2021. See https://stackoverflow.com/questions/51918536/r-create-linestring-from-two-points-in-same-row-in-dataframe

### Source 3

R - sf - create linestrings from sets of coordinate points with missing values - Geographic Information Systems Stack Exchange. Answer by dimfalk on Dec 27, 2022 and edited on Dec 28, 2022. See https://gis.stackexchange.com/questions/448455/r-sf-create-linestrings-from-sets-of-coordinate-points-with-missing-values

## EcoC<sup>2</sup>S Links

EcoC2S Home - https://www.ecoccs.com/
About EcoC2S - https://www.ecoccs.com/about\_ecoc2s.html
Services - https://www.ecoccs.com/services.html
1 Stop Shop - https://www.ecoccs.com/other\_biz.html
Products - https://www.questionuniverse.com/products.html
Media - https://www.ecoccs.com/media.html
Resources - https://www.ecoccs.com/resources.html
R Trainings and Resources provided by EcoC2S (Irucka Embry, E.I.T.) - https://www.ecoccs.com/rtraining.html

## Copyright and License

All R code written by Irucka Embry is distributed under the GPL-3 (or later) license, see the GNU General Public License {GPL} page.

All written content originally created by Irucka Embry is copyrighted under the Creative Commons Attribution-ShareAlike 4.0 International License. All other written content retains the copyright of the original author(s).

This work is licensed under a Creative Commons Attribution-ShareAlike 4.0 International License.