Map tiles

Patrick Brown

May 21, 2015

The following are some examples of maps produced with
`mymap=openmap(x, path="something")`

1 plot(openmap(x,path="osm"))

2 plot(openmap(x,path="osm-no-labels"))

3 plot(openmap(x,path="osm-de"))

4 plot(openmap(x,path="osm-transport"))

5 plot(openmap(x,path="bw-mapnik"))

6 plotRGB(openmap(x,path="mapquest"))

7 plotRGB(openmap(x,path="mapquest-sat"))

Tiles courtesy of MapQuest, portions courtesy NASA/JPL-Caltech and U.S. Depart. of Agriculture, Farm Service Agency.
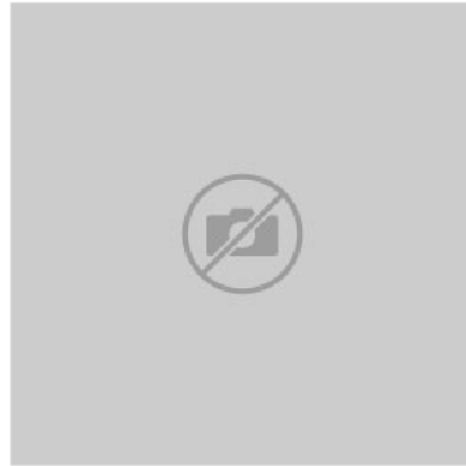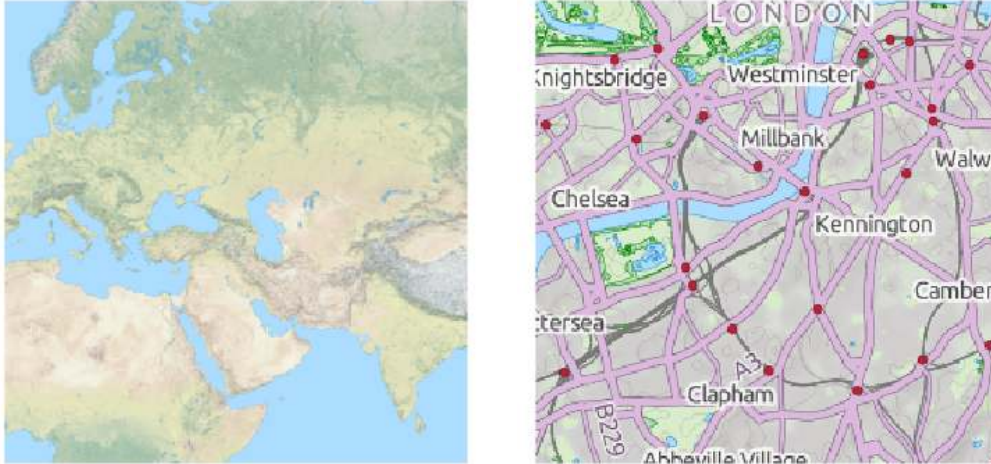

8 plotRGB(openmap(x,path="mapquest-labels"))

Tiles courtesy of MapQuest. Data by OpenStreetMap available under the Open Database License
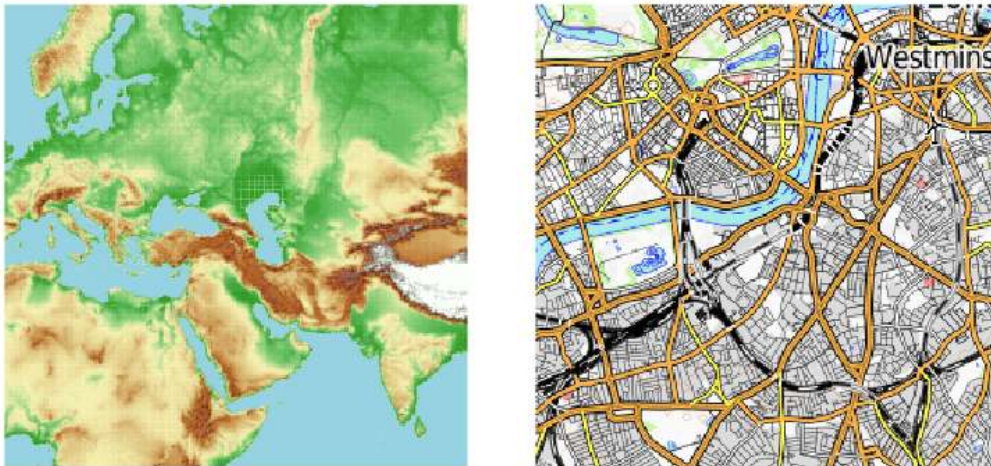
9 plot(openmap(x,path="landscape"))

10 plot(openmap(x,path="opentopomap"))

11 plot(openmap(x,path="maptoolkit"))

12   plotRGB(openmap(x,path="waze"))
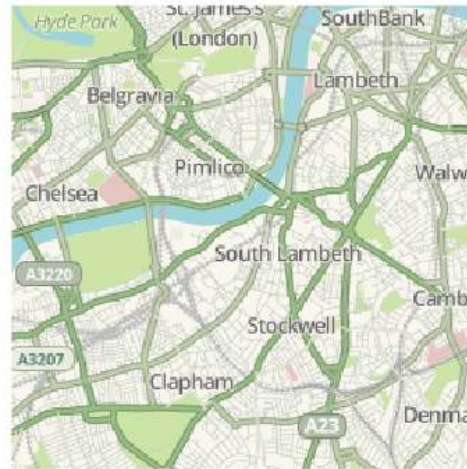
13   plot(openmap(x,path="humanitarian"))

14   plot(openmap(x,path="cartodb"))

15   plot(openmap(x,path="cartodb-dark"))

Map tiles by CartoDB under CC BY 3.0. Data by OpenStreetMap available under the Open Database License

16   plot(openmap(x,path="historical"))

©OpenStreetMap contributors. Data by OpenStreetMap available under the Open Database License, cartography is licensed as CC BY-SA.
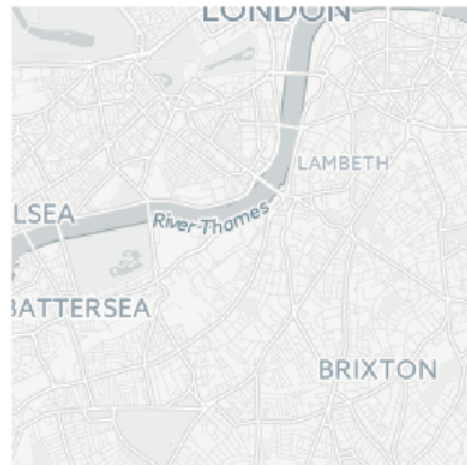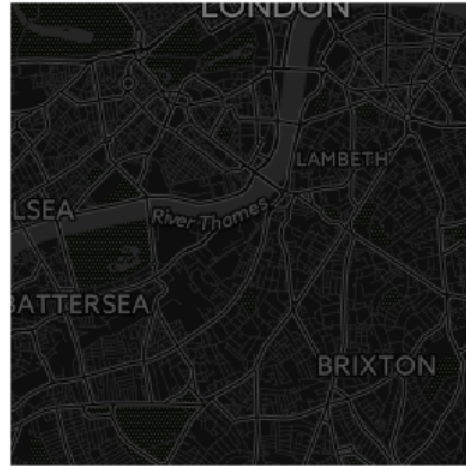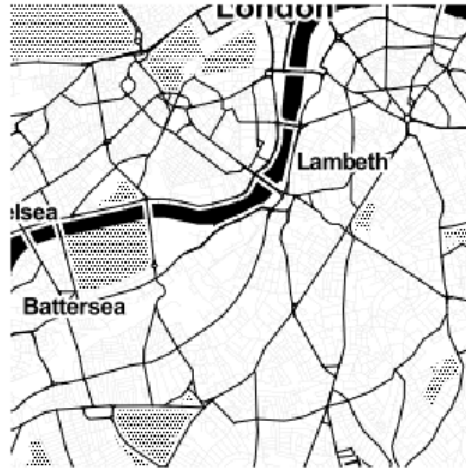
17 plotRGB(openmap(x,path="stamen-toner"))

Map tiles by Stamen Design under CC BY 3.0. Data by OpenStreetMap available under the Open Database License

18 plotRGB(openmap(x,path="stamen-watercolor"))

Map tiles by Stamen Design under CC BY 3.0. Data by OpenStreetMap available under the CC BY-SA