

```
Router>
Bad IP address or host name
Unknown command or computer name, or unable to find computer address
Router>router enable
Router>
Bad IP address or host name
Unknown command or computer name, or unable to find computer address
Router>configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface ethernet 0/0
Router(config-if)#ip address 50.0.0.1 255.0.0.0
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#exit
Router>
Aug 22 05:28:39.453: %SYS-3-CONFIG_I: Configured from console by console
Router>show ip interface brief
Interface IP-Address OK? Method Status Protocol
Ethernet0/0 50.0.0.1 YES TFTP down down
Ethernet0/1 unassigned YES TFTP down down
Ethernet0/2 unassigned YES TFTP down down
Ethernet0/3 unassigned YES TFTP down down
Router>
```

Activate Windows
Go to Settings to activate Windows.




10:59 AM
8/22/2024

```

Router#
% Bad IP address or host name
% Unknown command at computer name
Router#configure terminal
Enter configuration commands, one per line.
End with CTRL-Z (Z with a space)
Router(config)#interface ethernet 0
Router(config-if)#ip address 50.0.0.0
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#exit
Router#
*Aug 22 05:38:16.690: %SYS-5-CONFIG:
Router#show ip interface brief
Interface IP-Address
Ethernet0/0 50.0.0.1
Ethernet0/1 unassigned
Ethernet0/2 unassigned
Ethernet0/3 unassigned
Router#username console password co
% Invalid input detected at '^' mark
Router#config t
Enter configuration commands, one per line.
End with CTRL-Z (Z with a space)
Router(config)#username console pas
Router(config)#line console 0
Router(config-line)#password testco
Router(config-line)#login local
Router(config-line)#exit
Router(config)#line vty 0 4
Router(config-line)#transport input
Router(config-line)#password telnet
Router(config-line)#login
Router(config-line)#exit
Router(config)#

```

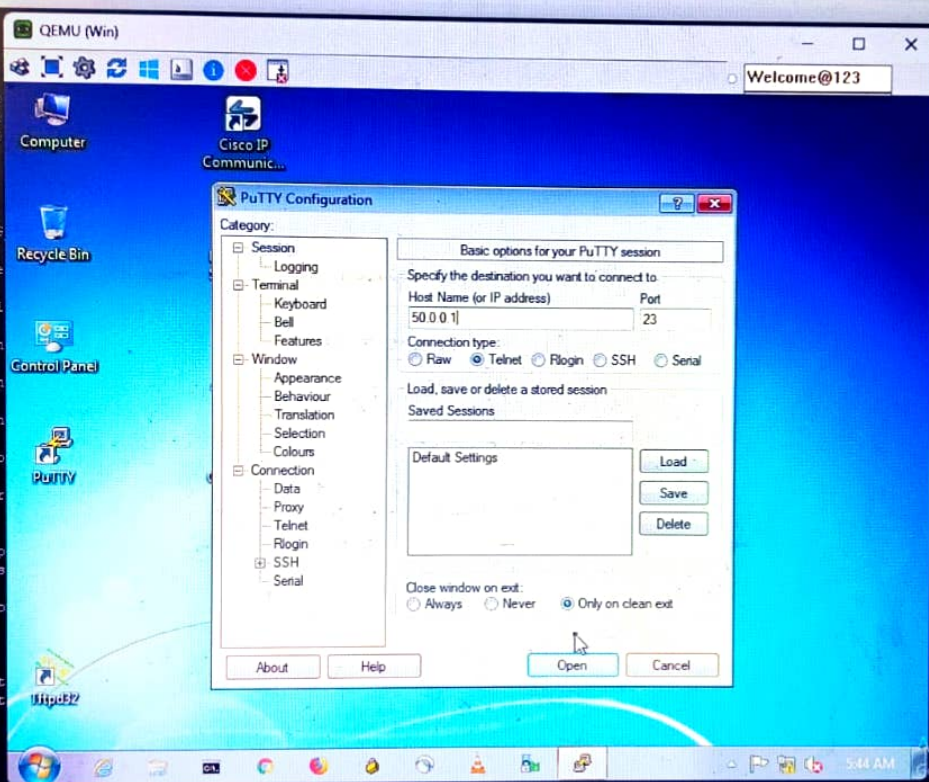

Activate Windows
Go to Settings to activate Windows.

```

% Bad IP address or host name
% Unknown command or computer name, or unable to find computer address
ROUTER#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
ROUTER(config)#interface ethernet 0/0
ROUTER(config-if)#ip address 50.0.0.1 255.0.0.0
ROUTER(config-if)#no shutdown
ROUTER(config-if)#exit
ROUTER(config)#exit
ROUTER#
*Aug 22 05:38:14.690: %SYS-5-CONFIG_I: Configured from console by console
ROUTER#show ip interface brief
Interface                IP-Address      OK? Method Status      Prot
Ethernet0/0              50.0.0.1        YES manual up          up
Ethernet0/1              unassigned      YES TFTP  down        down
Ethernet0/2              unassigned      YES TFTP  down        down
Ethernet0/3              unassigned      YES TFTP  down        down

ROUTER#username console password console
^
% Invalid input detected at '^' marker.

ROUTER#config t
Enter configuration commands, one per line. End with CNTL/Z.
ROUTER(config)#username console password console
ROUTER(config)#line console 0
ROUTER(config-line)#password testconsole
ROUTER(config-line)#login local
ROUTER(config-line)#exit
ROUTER(config)#line vty 0 4
ROUTER(config-line)#transport input telnet
ROUTER(config-line)#password telnet
ROUTER(config-line)#login
ROUTER(config-line)#exit
ROUTER(config)#

```



```

ROUTER#
ROUTER#enable
ROUTER#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
ROUTER(config)#interface ethernet 0/0
ROUTER(config-if)#ip address 50.0.0.1 255.0.0.0
ROUTER(config-if)#no shutdown
ROUTER(config-if)#show ip interface brief

% Invalid input detected at '^' marker.

ROUTER(config-if)#exit
ROUTER(config)#exit
ROUTER#
*Aug 22 06:07:39.878: %SYS-5-CONFIG_I: Configured from console by console
ROUTER#show ip interface brief
Interface                IP-Address      OK? Method Status    Protocol
Ethernet0/0              50.0.0.1        YES manual up        up
Ethernet0/1              unassigned      YES TFTP  down      down
Ethernet0/2              unassigned      YES TFTP  down      down
Ethernet0/3              unassigned      YES TFTP  down      down
ROUTER#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
ROUTER(config)#username Nisha password Nisha
ROUTER(config)#line console 0
ROUTER(config-line)#password test console
ROUTER(config-line)#login local
ROUTER(config-line)#exit
ROUTER(config)#exit
ROUTER#
*Aug 22 06:09:14.852: %SYS-5-CONFIG_I: Configured from console by console
ROUTER#exit

```

ROUTER con0 is now available

Press RETURN to get started.

User Access Verification

Username:

Username: Nisha

Password:

% Login invalid

Username: Nisha

Password:

ROUTER>

vivo Y75

Aug 02, 2026, 11:44



ROUTER con0 is now available

Press RETURN to get started.

User Access Verification

Username:

Username: Nisha

Password:

% Login invalid

Username: Nisha

Password:

ROUTER>

vivo Y75

Aug 22, 2026, 11:44



ROUTER con0 is now available

Press RETURN to get started.

User Access Verification

Username: console

Password:

ROUTER>enable

ROUTER#configure terminal

Enter configuration commands, one per line. End with CNTL/Z.

ROUTER(config)#enable secret enable

ROUTER(config)#line vty 0 4

ROUTER(config-line)#transport input telnet

ROUTER(config-line)#password telnet

I



User Access Verification

Username: console

Password:

ROUTER>enable

ROUTER#configure terminal

Enter configuration commands, one per line. End with CNTL/Z.

ROUTER(config)#enable secret enable

ROUTER(config)#line vty 0 4

ROUTER(config-line)#transport input telnet

ROUTER(config-line)#password telnet

ROUTER(config-line)#login

ROUTER(config-line)#exit

ROUTER(config)#exit

ROUTER#

ROUTER#

ROUTER#

*Aug 22 06:28:30.257: %SYS-5-CONFIG_I: Configured from console by console on console

ROUTER#

ROUTER#

ROUTER#exit