

PAYPRO API VERSION 2

Table of Contents

<i>PayPro Auth (Generate Authorization Token).....</i>	<i>2</i>
<i>Create Single Order (ppro/co).....</i>	<i>3</i>
<i>Create Multiple Orders (ppro/cmo).....</i>	<i>5</i>
<i>Create Single Consumer (ppro/cc).....</i>	<i>7</i>
<i>Create Multiple Consumers (ppro/cmc).....</i>	<i>10</i>
<i>Update Single Consumer (ppro/uc)</i>	<i>12</i>
<i>Update Multiple Consumers (ppro/umc)</i>	<i>14</i>
<i>Mark Single Order as Paid (ppro/moap).....</i>	<i>16</i>
<i>Mark Order as Blocked V2 (ppro/moab).....</i>	<i>18</i>
<i>Mark Multiple Orders as Paid (ppro/moap)</i>	<i>20</i>
<i>Mark Multiple Orders as Blocked (ppro/moab)</i>	<i>22</i>
<i>Get General Order Status (ppro/ggos)</i>	<i>24</i>
<i>Get Paid Order (ppro/gpo).....</i>	<i>26</i>

POST

PayPro Auth

<https://demoapi.paypro.com.pk/v2/ppro/auth>

BODY Raw:

```
{  
  
  "clientid" : "Client ID",  
  "clientsecret" : "Client Secret"  
}
```

EXAMPLE:

POST Generate Token × + ... No Environment

API Version 2 Demo (Documentation) / Generate Token Save ...

POST https://demoapi.paypro.com.pk/v2/ppro/auth Send

Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies Beautify

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {  
2   "ClientID": "a4fDQonwikixwX1",  
3   "ClientSecret": "wMQKSDL4bRFmaS0"  
4 }
```

Body Cookies Headers (16) Test Results Status: 200 OK Time: 69 ms Size: 640 B Save Response

Pretty Raw Preview Visualize JSON

```
1 "Authorized"
```

POST Generate Token × + ... No Environment

API Version 2 Demo (Documentation) / Generate Token Save ...

POST https://demoapi.paypro.com.pk/v2/ppro/auth Send

Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies Beautify

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {  
2   "ClientID": "a4fDQonwikixwX1",  
3   "ClientSecret": "wMQKSDL4bRFmaS0"  
4 }
```

Body Cookies Headers (16) Test Results Status: 200 OK Time: 69 ms Size: 640 B Save Response

KEY	VALUE
Cache-Control	no-cache
Pragma	no-cache
Content-Type	application/json; charset=utf-8
Expires	-1
Server	Microsoft-IIS/8.5
Token	Exh/ngRmK1HC96dacdL2ehQDW0snPH0YpED7dsoQuVBv1K9IJY5y2TP6aKeenwQBfidW P4eV3Jhd9lavbhRX3cjH8Y+i4XU2hctxKJQrgM4=
TokenExpiry	1440
Access-Control-Expose-Headers	Token,TokenExpiry
X-AspNet-Version	4.0.30319

NOTE: Token should be given in headers for every request.

POST


Create Single Order (ppro/co)

<https://demoapi.paypro.com.pk/v2/ppro/co>


BODY Raw:

```
[
  {
    "MerchantId": "Enter Your Provided Username"
  },
  {
    "OrderNumber": "Test-803",
    "OrderAmount": "200",
    "OrderDueDate": "25/10/2021",
    "OrderType": "Service",
    "IssueDate": "05/05/2021",
    "OrderExpireAfterSeconds": "0",
    "CustomerName": "Fahad",
    "CustomerMobile": "",
    "CustomerEmail": "",
    "CustomerAddress": ""
  }
]
```

EXAMPLE:

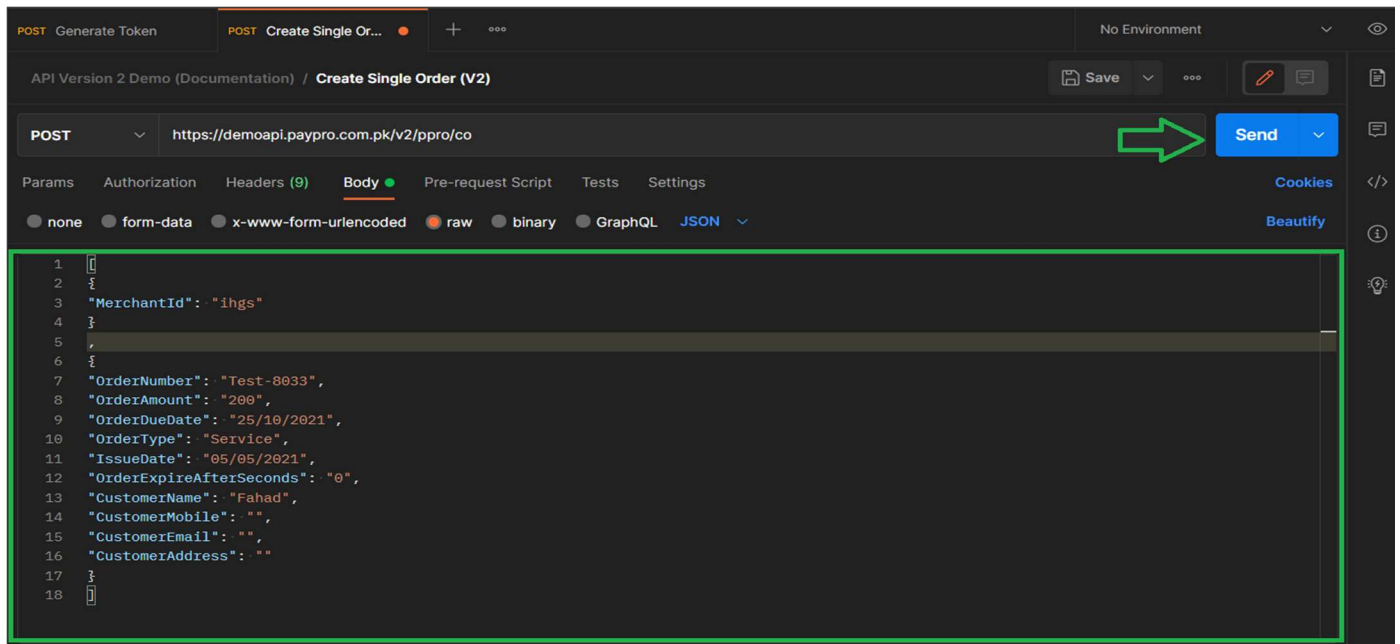

NOTE: Generated token keys will be placed in header section with Key to be put as "Token".

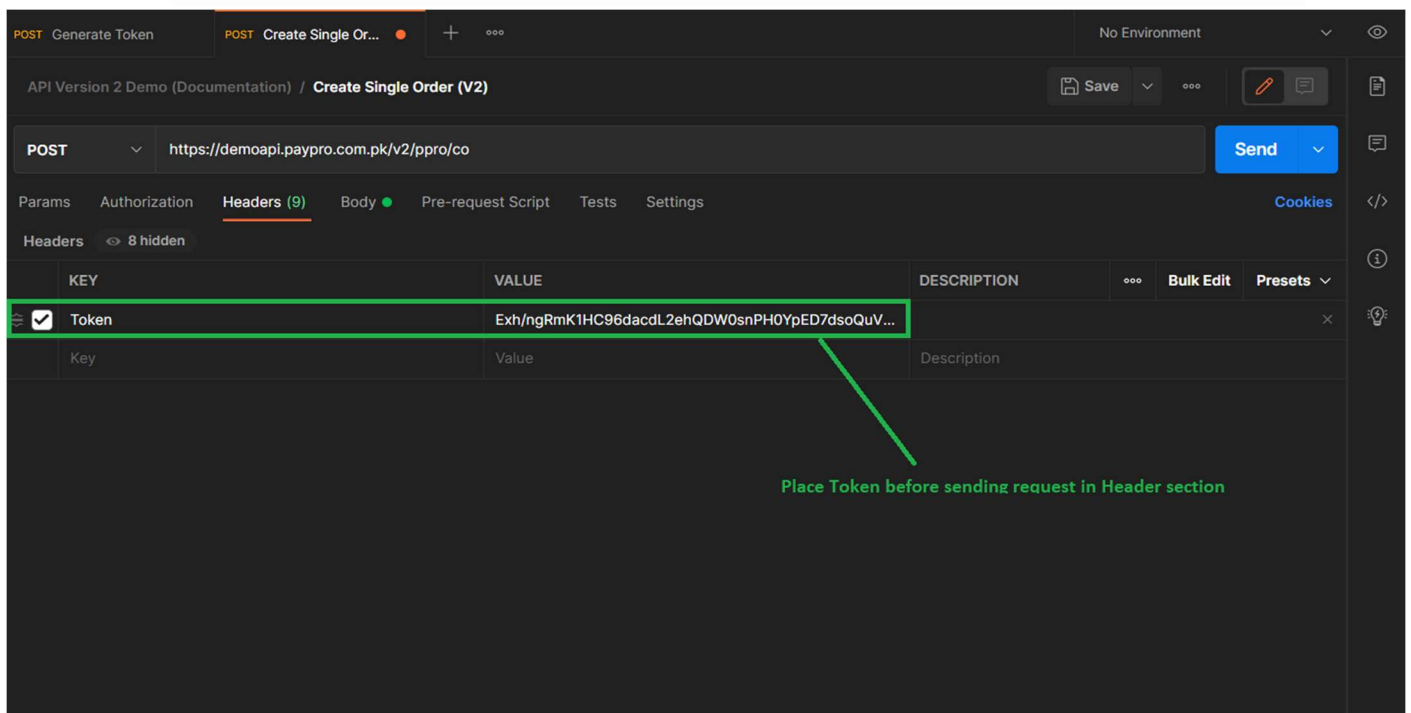

POST

Create Multiple Orders (ppro/cmo)


<https://demoapi.paypro.com.pk/v2/ppro/cmo>

BODY Raw:

```
[
  {
    "MerchantId": "Enter Your Provided Username"
  },
  {
    "OrderNumber": "Test-804",
    "OrderAmount": "200",
    "OrderDueDate": "25/10/2021",
    "OrderType": "Service",
    "IssueDate": "05/05/2021",
    "OrderExpireAfterSeconds": "0",
    "CustomerName": "Fahad",
    "CustomerMobile": "",
    "CustomerEmail": "",
    "CustomerAddress": ""
  },
  {
    "OrderNumber": "Test-805",
    "OrderAmount": "200",
    "OrderDueDate": "25/10/2021",
    "OrderType": "Service",
    "IssueDate": "05/05/2021",
    "OrderExpireAfterSeconds": "0",
    "CustomerName": "Fahad",
    "CustomerMobile": "",
    "CustomerEmail": "",
    "CustomerAddress": ""
  }
]
```

EXAMPLE:


REQUEST:

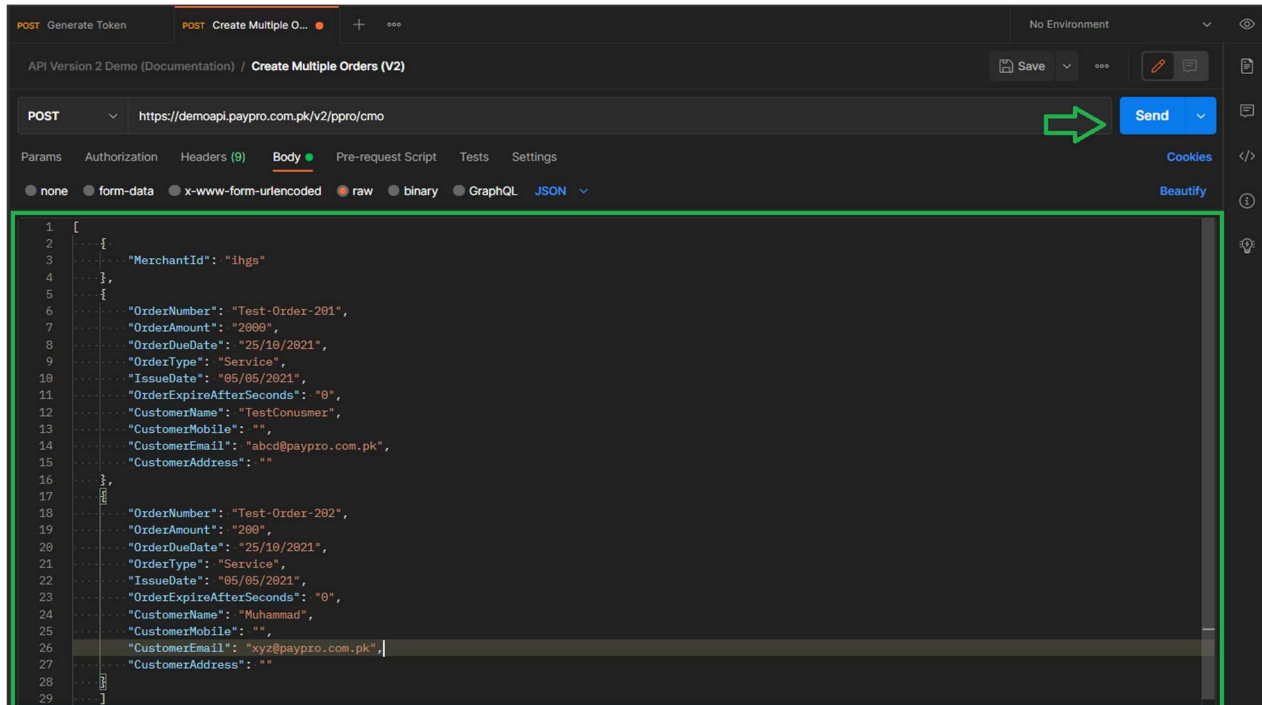

The screenshot shows a REST client interface with a POST request to `https://demoapi.paypro.com.pk/v2/ppro/cmo`. The request body is a JSON array of two order objects. A green arrow points to the 'Send' button.

```
1 [
2   {
3     "MerchantId": "ihgs"
4   },
5   {
6     "OrderNumber": "Test-Order-201",
7     "OrderAmount": "2000",
8     "OrderDueDate": "25/10/2021",
9     "OrderType": "Service",
10    "IssueDate": "05/05/2021",
11    "OrderExpireAfterSeconds": "0",
12    "CustomerName": "TestConsumer",
13    "CustomerMobile": "",
14    "CustomerEmail": "abcd@paypro.com.pk",
15    "CustomerAddress": ""
16  },
17  {
18    "OrderNumber": "Test-Order-202",
19    "OrderAmount": "200",
20    "OrderDueDate": "25/10/2021",
21    "OrderType": "Service",
22    "IssueDate": "05/05/2021",
23    "OrderExpireAfterSeconds": "0",
24    "CustomerName": "Muhammad",
25    "CustomerMobile": "",
26    "CustomerEmail": "xyz@paypro.com.pk",
27    "CustomerAddress": ""
28  }
29 ]
```

RESPONSE:

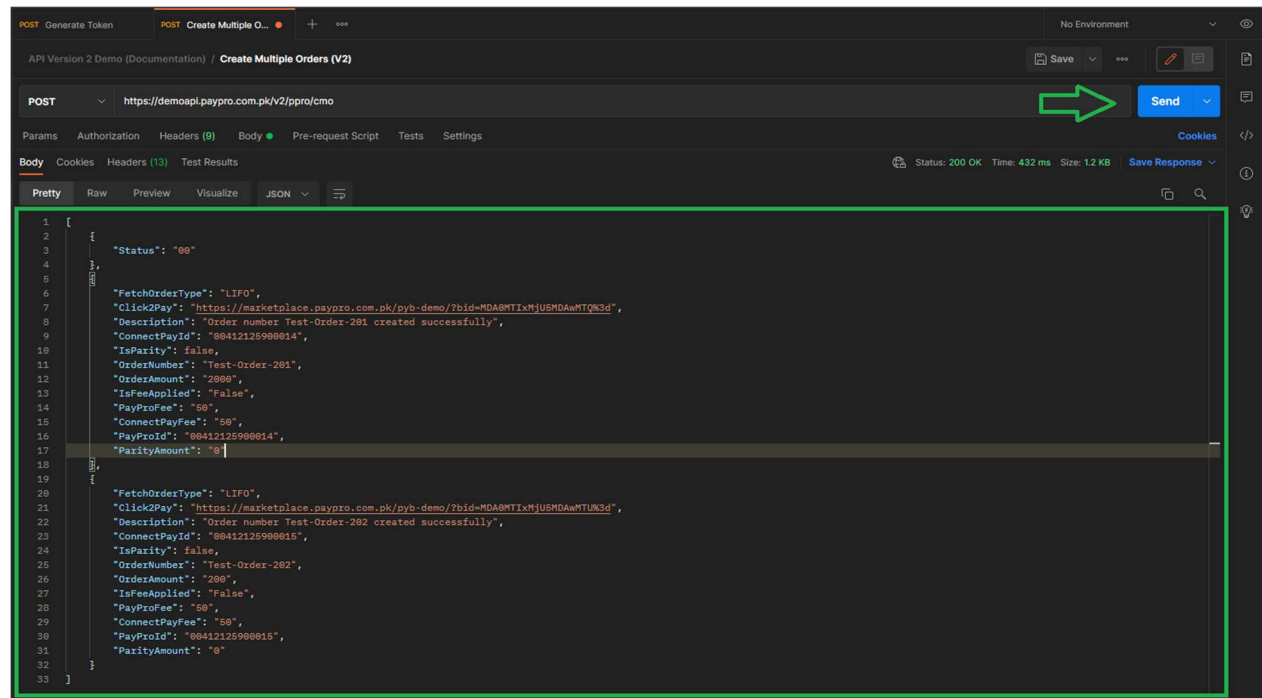

The screenshot shows the response of the POST request. The status is 200 OK. The response body is a JSON array of two objects, each containing order details and a success message. A green arrow points to the 'Send' button.

```
1 [
2   {
3     "Status": "00"
4   },
5   {
6     "FetchOrderType": "LIFO",
7     "Click2Pay": "https://marketplace.paypro.com.pk/pyb-demo/?bid=MDA@MTIXM*JUEMDA@MTUN3d",
8     "Description": "Order number Test-Order-201 created successfully",
9     "ConnectPayId": "00412125900014",
10    "IsParity": false,
11    "OrderNumber": "Test-Order-201",
12    "OrderAmount": "2000",
13    "IsFeeApplied": "False",
14    "PayProFee": "50",
15    "ConnectPayFee": "50",
16    "PayProId": "00412125900014",
17    "ParityAmount": "0"
18  },
19  {
20    "FetchOrderType": "LIFO",
21    "Click2Pay": "https://marketplace.paypro.com.pk/pyb-demo/?bid=MDA@MTIXM*JUEMDA@MTUN3d",
22    "Description": "Order number Test-Order-202 created successfully",
23    "ConnectPayId": "00412125900015",
24    "IsParity": false,
25    "OrderNumber": "Test-Order-202",
26    "OrderAmount": "200",
27    "IsFeeApplied": "False",
28    "PayProFee": "50",
29    "ConnectPayFee": "50",
30    "PayProId": "00412125900015",
31    "ParityAmount": "0"
32  }
33 ]
```

POST

Create Single Consumer (ppro/cc)

<https://demoapi.paypro.com.pk/v2/ppro/cc>


BODY Raw:

```
[
  {
    "MerchantId": "Enter Your Provided Username"
  },
  {
    "ConsumerID": "7867861",
    "Name": "Userone",
    "Mobile": "03001234567",
    "Email": "abcde@paypro.com.pk",
    "Address": "Address"
  }
]
```


EXAMPLE:


TOKEN:

REQUEST:

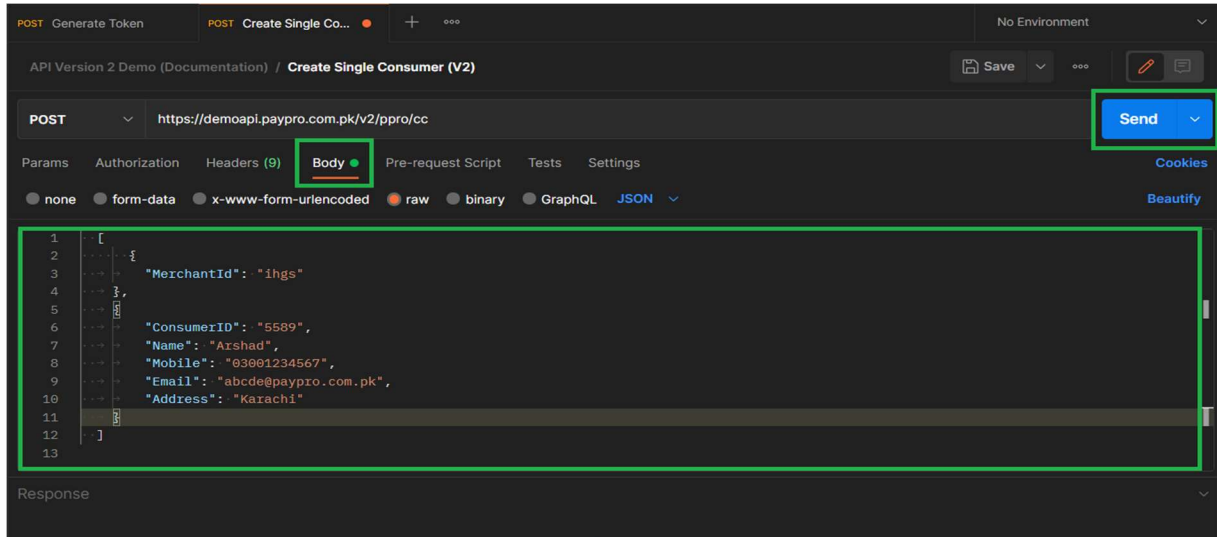

RESPONSE:

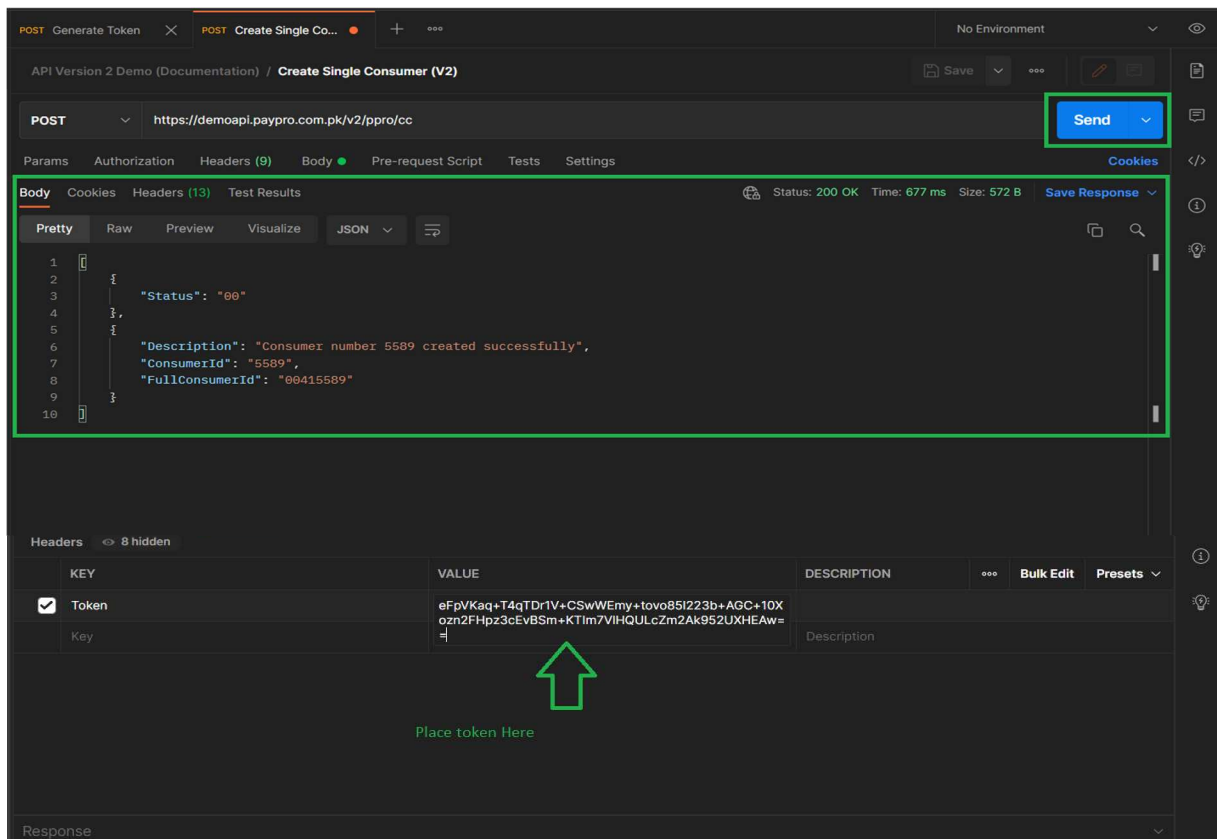



POST

Create Multiple Consumers (ppro/cmc)


<https://demoapi.paypro.com.pk/v2/ppro/cmc>

BODY Raw


```
[
  {
    "MerchantId": "Enter Your Provided Username"
  },
  {
    "ConsumerID": "7867861",
    "Name": "Userone",
    "Mobile": "03001234567",
    "Email": "abcde@paypro.com.pk",
    "Address": "Address"
  },
  {
    "ConsumerID": "7867862",
    "Name": "Usertwo",
    "Mobile": "03001234567",
    "Email": "abcde@paypro.com.pk",
    "Address": "Address"
  }
]
```

EXAMPLE:

REQUEST:

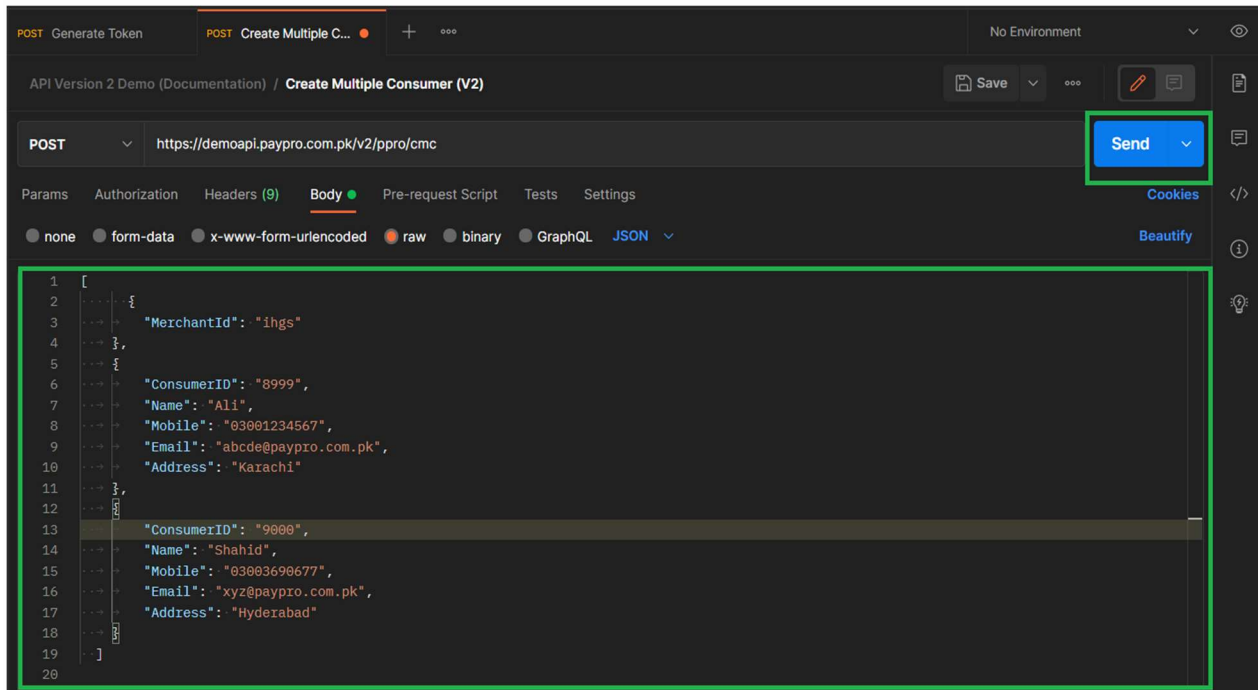

RESPONSE:

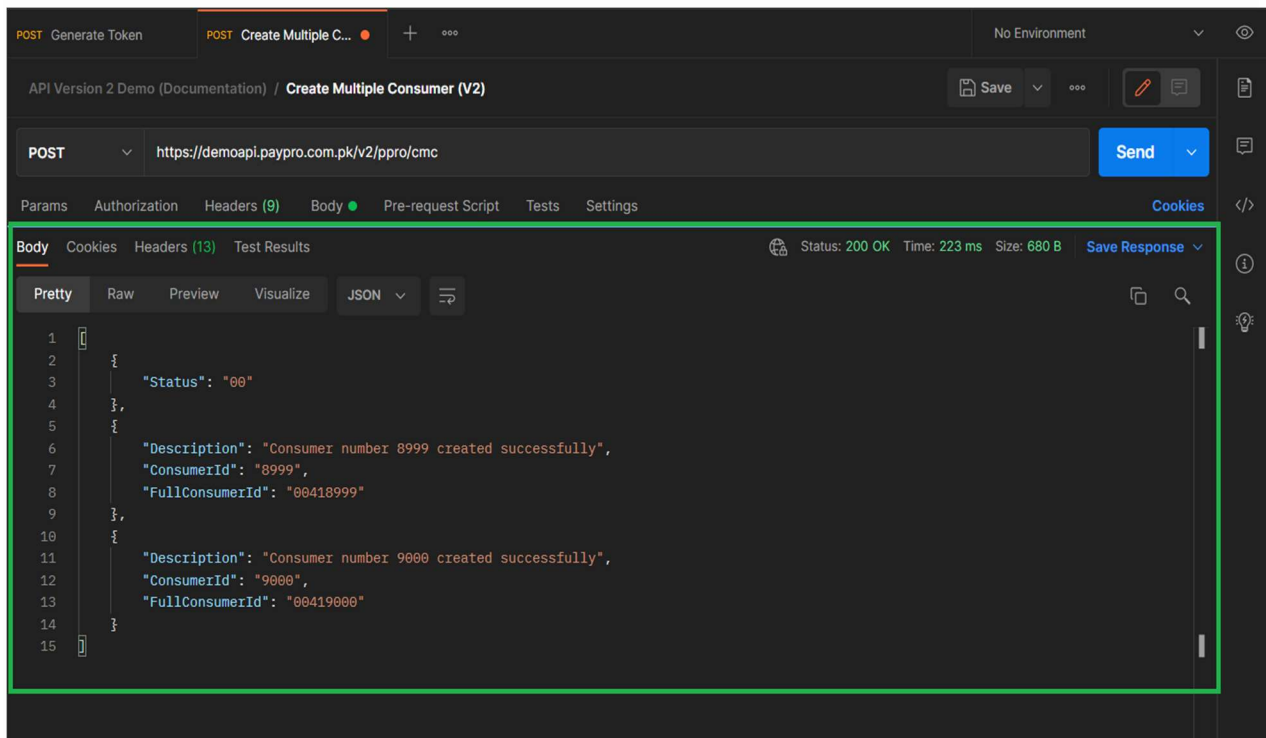

POST

Update Single Consumer (ppro/uc)


<https://demoapi.paypro.com.pk/v2/ppro/uc>

BODY Raw

```
[
  {
    "MerchantId": "Enter Your Provided Username"
  },
  {
    "ConsumerID": "ConsumerID",
    "Name": "UserOneNew",
    "Mobile": "03001234567",
    "Email": "abcd@paypro.com.pk",
    "Address": "Address"
  }
]
```

EXAMPLE:

REQUEST:

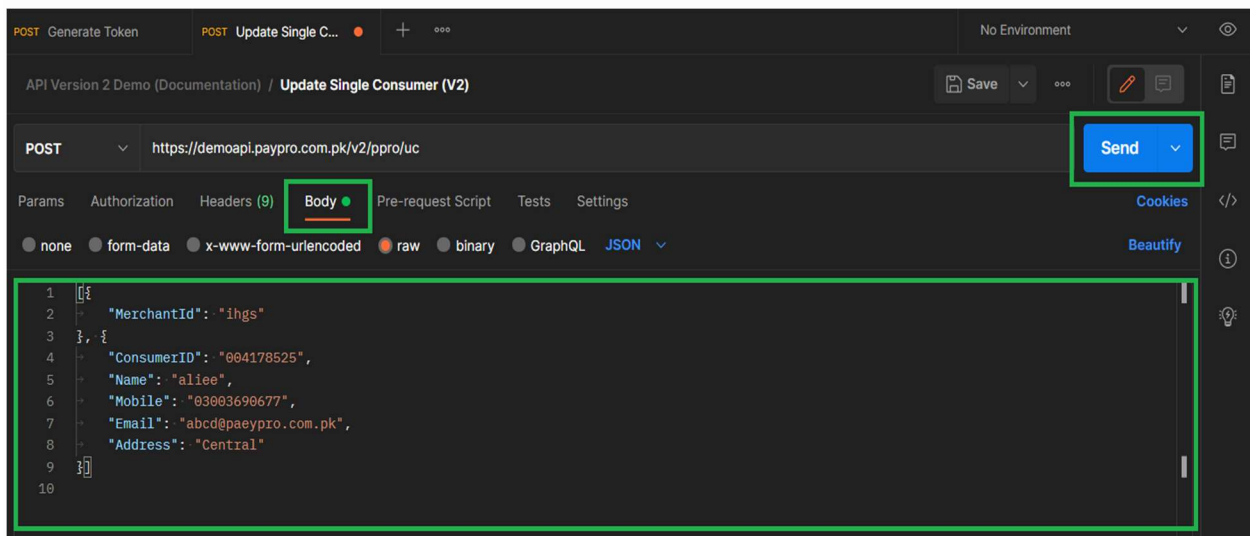

RESPONSE:

The screenshot displays a REST client interface with a dark theme. At the top, there are tabs for 'POST Generate Token' and 'POST Update Single C...'. The active tab is 'POST Update Single C...'. Below the tabs, the URL bar shows 'https://demoapi.paypro.com.pk/v2/ppro/uc' with a 'Send' button. The interface includes sections for 'Params', 'Authorization', 'Headers (9)', 'Body', 'Pre-request Script', 'Tests', and 'Settings'. The 'Body' section is selected, showing a JSON response in 'Pretty' format. The response status is '200 OK' with a time of '123 ms' and a size of '549 B'. The JSON body contains the following data:

```
1 {
2   "Status": "00"
3 },
4 {
5   "Description": "ConsumerID 004178525 updated successfully",
6   "ConsumerID": "004178525"
7 }
8
9 }
```

POST

Update Multiple Consumers (ppro/umc)


<https://demoapi.paypro.com.pk/v2/ppro/umc>

BODY Raw:


```
[
  {
    "MerchantId": "Enter Your Provided Username"
  },
  {
    "ConsumerID": "01107867861",
    "Name": "Ali Ahmed",
    "Mobile": "",
    "Email": "abcde@paypro.com.pk",
    "Address": "Address"
  },
  {
    "ConsumerID": "01107867862",
    "Name": "Ali Zafar",
    "Mobile": "",
    "Email": "abcde@paypro.com.pk",
    "Address": "Address"
  }
]
```

EXAMPLE:

REQUEST:

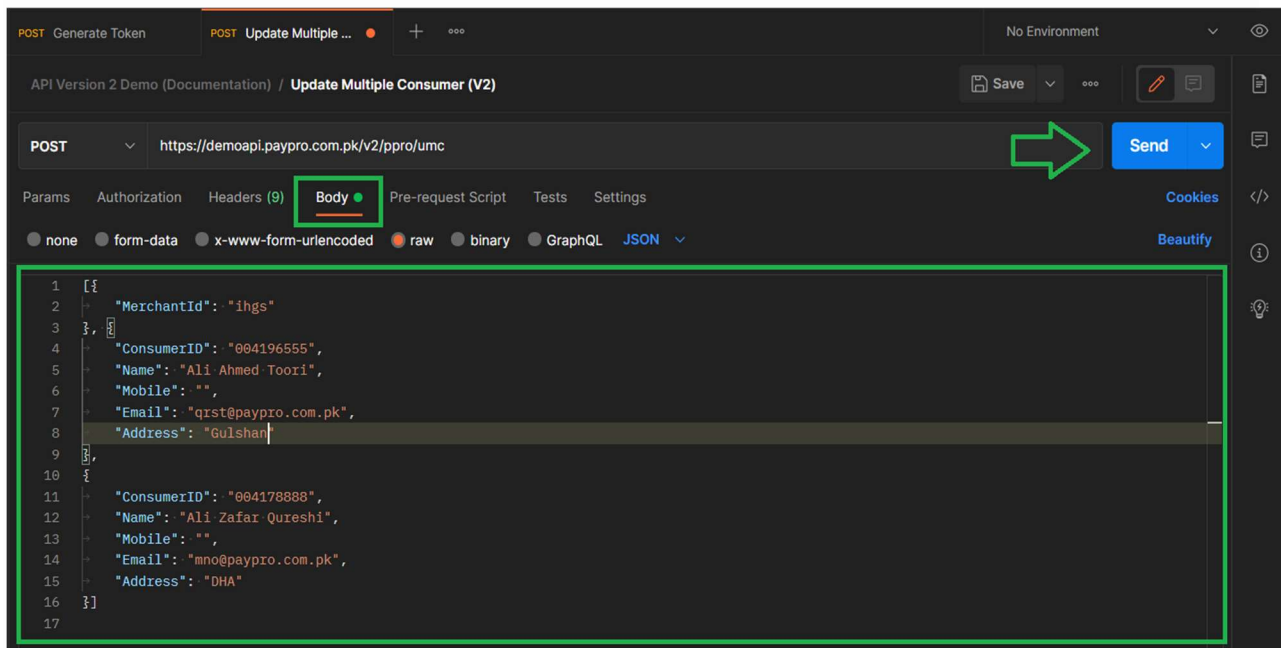

RESPONSE:

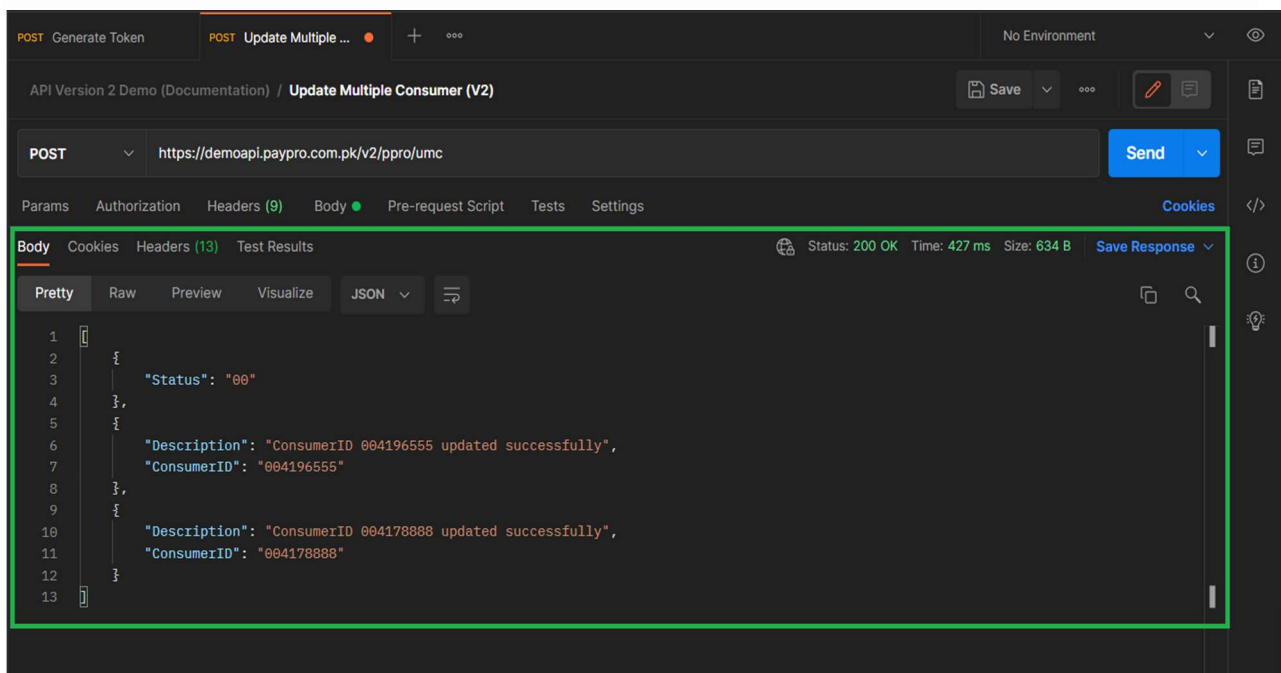

GET

Mark Single Order as Paid (ppro/moap)

<https://demoapi.paypro.com.pk/v2/ppro/moap>

BODY Raw:

```
{
```


```
  "Username": "Enter Your Provided Username",  
  "CsvOrderNumbers" : "Test-800"
```


```
}
```

EXAMPLE:


REQUEST:

NOTE: Place Token in the Headers Section.

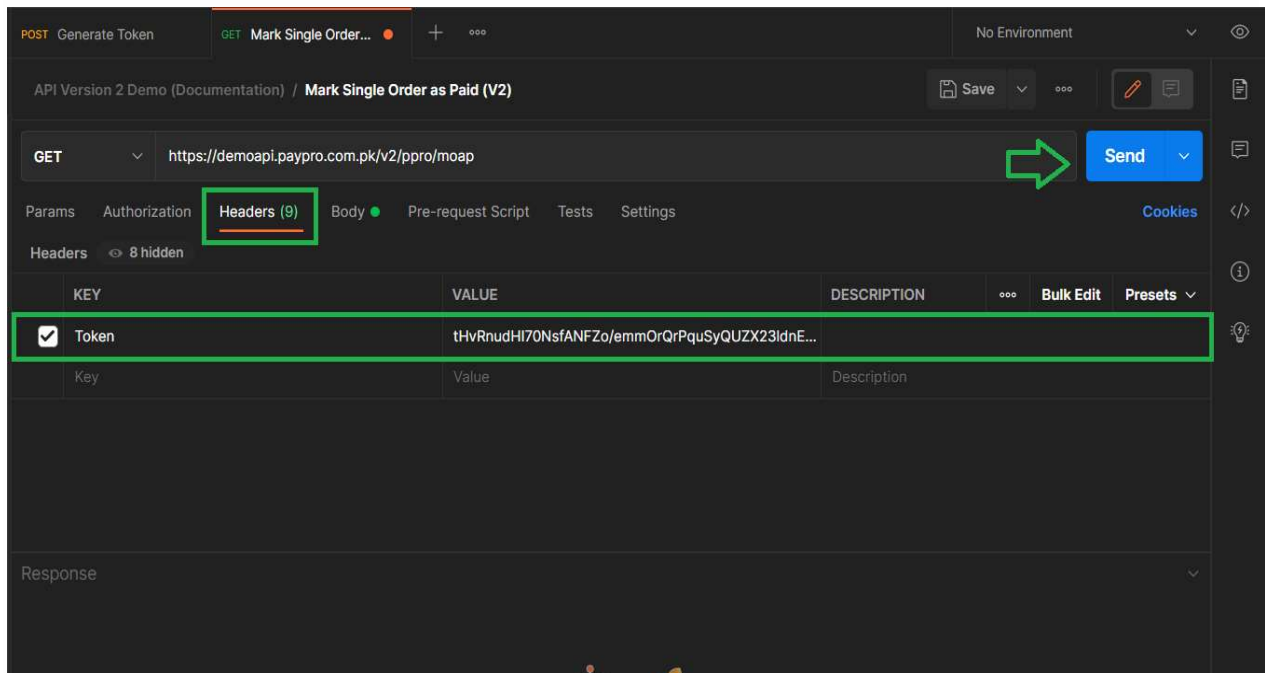

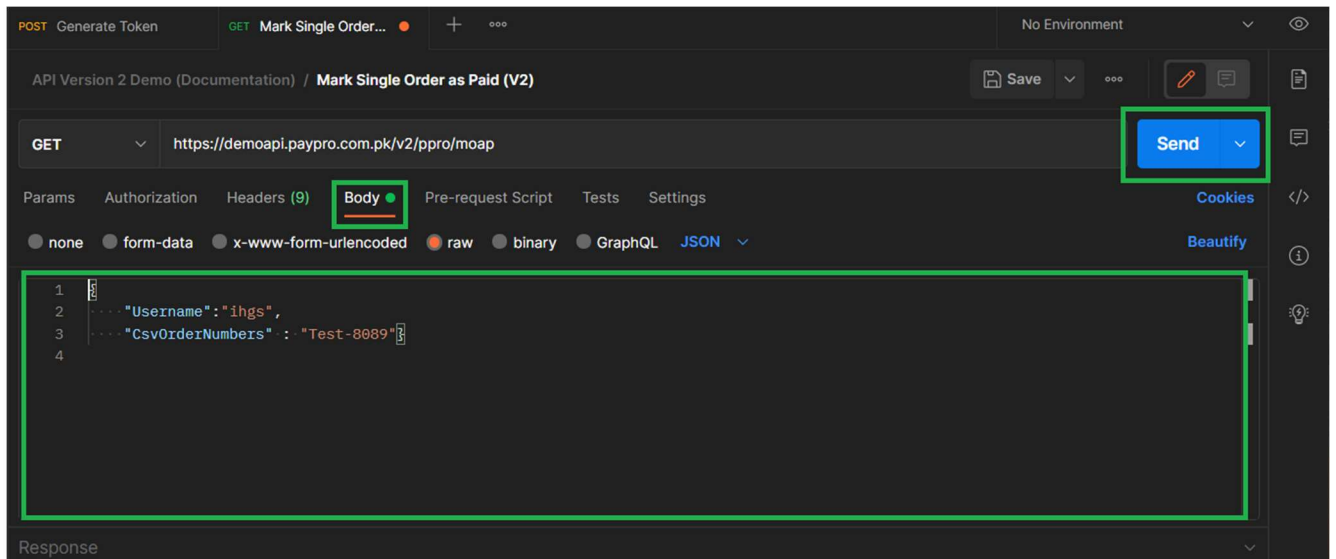

RESPONSE:

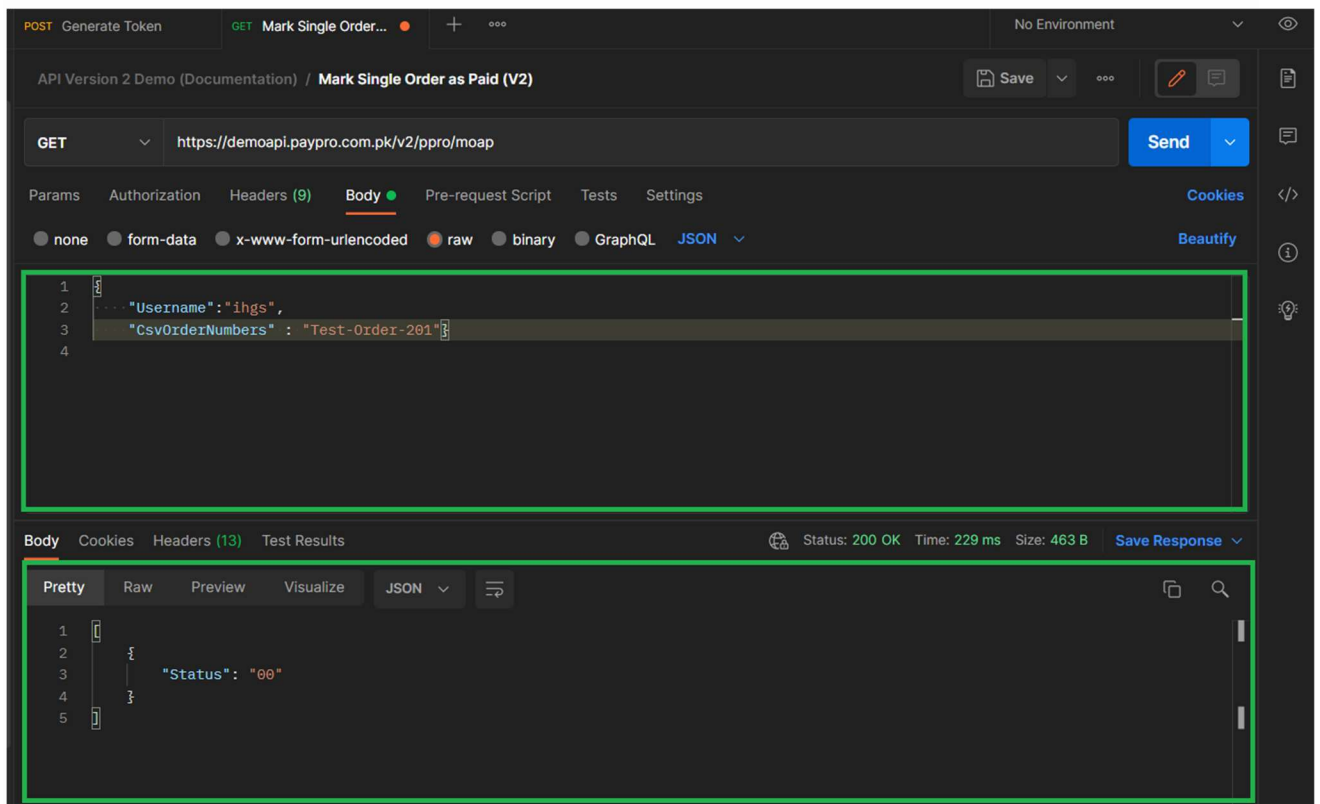

GET

Mark Order as Blocked V2 (ppro/moab)


<https://demoapi.paypro.com.pk/v2/ppro/moab>

BODY Raw:

```
{  
  
  "Username": "Enter Your Provided Username", "CsvOrderNumbers"  
  : "Test-801"  
  
}
```

EXAMPLE:

REQUEST:

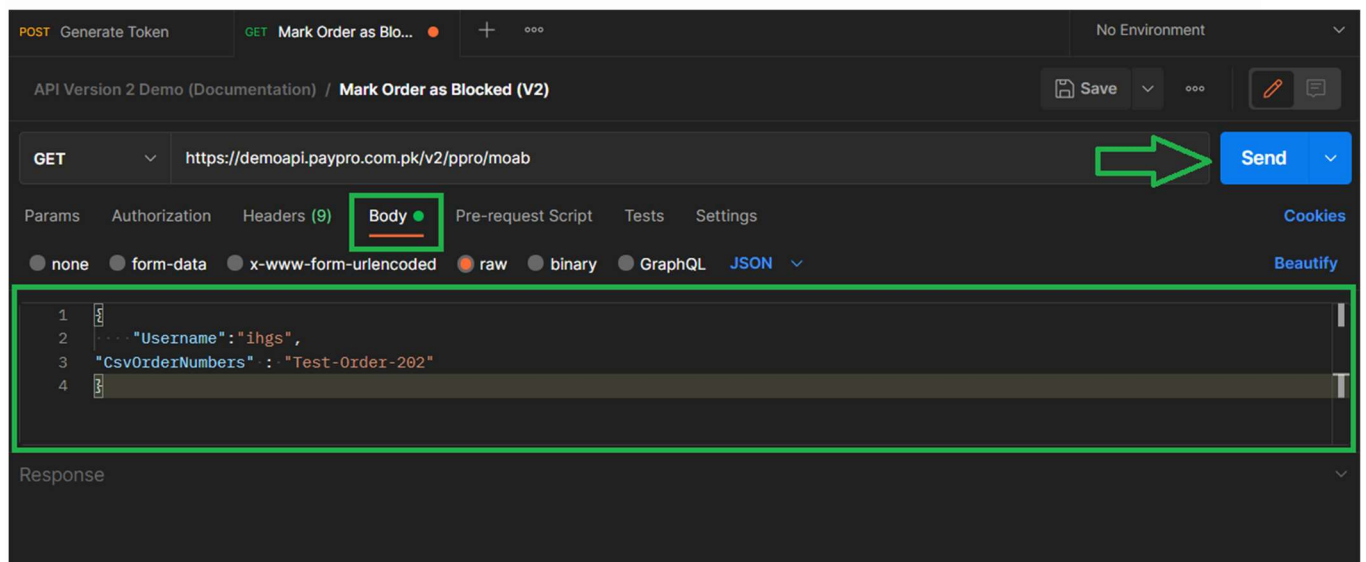

RESPONSE:

The screenshot displays a REST client interface with the following details:

- Request:**
 - Method: GET
 - URL: `https://demoapi.paypro.com.pk/v2/ppro/moab`
 - Body (raw):

```
1 {
2   "Username": "ihgs",
3   "CsvOrderNumbers": "Test-Order-202"
4 }
```
- Response:**
 - Status: 200 OK, Time: 623 ms, Size: 463 B
 - Body (pretty):

```
1 {
2   "Status": "00"
3 }
```

A green arrow points from the text "Response '00' = Success" to the `"Status": "00"` field in the response body.

GET

Mark Multiple Order as Paid (ppro/moap)


<https://demoapi.paypro.com.pk/v2/ppro/moap>

BODY Raw:

```
{  
  
    "Username": "Enter Your Provided Username",  
    "CsvOrderNumbers": "Test-802,Test-803"  
  
}
```

EXAMPLE:

REQUEST:

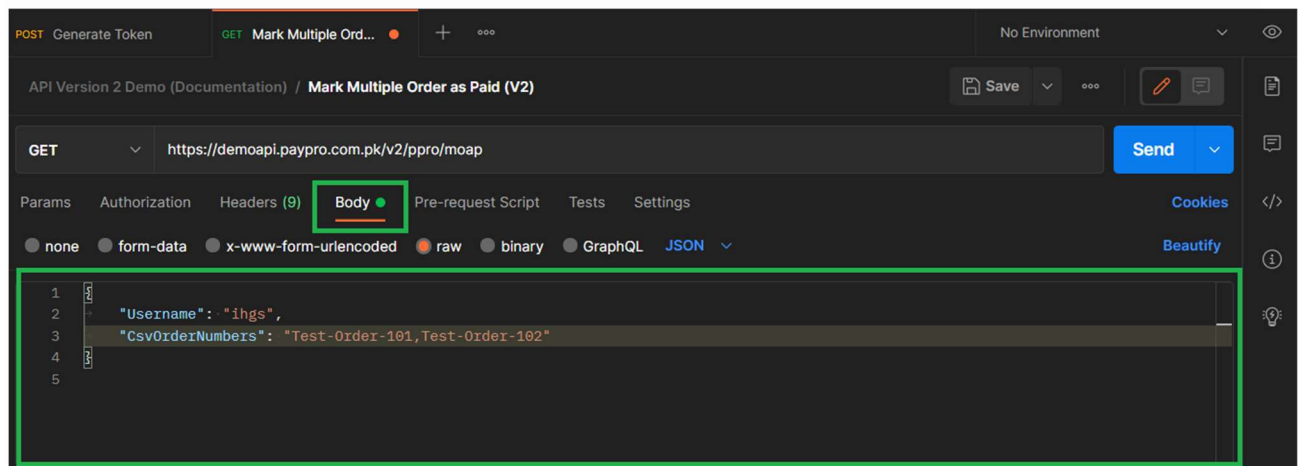

RESPONSE:

The screenshot displays a REST client interface with a dark theme. At the top, a tab for 'GET Mark Multiple Ord...' is active. The URL bar shows 'https://demoapi.paypro.com.pk/v2/ppro/moap'. Below the URL bar, the 'Body' tab is selected, showing a JSON request body:

```
{  "Username": "ihgs",  "CsvOrderNumbers": "Test-Order-101,Test-Order-102"}
```

. The 'Send' button is visible. Below the request, the 'Body' tab of the response is selected, showing a JSON response:

```
{  "Status": "00"}
```

. The status bar indicates 'Status: 200 OK', 'Time: 199 ms', and 'Size: 463 B'. A green rectangular box highlights the response body area.

API Version 2 Demo (Documentation) / Mark Multiple Order as Paid (V2)

GET <https://demoapi.paypro.com.pk/v2/ppro/moap> Send

Params Authorization Headers (9) Body Pre-request Script Tests Settings Cookies Beautify

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2   "Username": "ihgs",
3   "CsvOrderNumbers": "Test-Order-101,Test-Order-102"
4 }
5
```

Body Cookies Headers (13) Test Results Status: 200 OK Time: 199 ms Size: 463 B Save Response

Pretty Raw Preview Visualize JSON

```
1 {
2   "Status": "00"
3 }
4
5
```

GET

Mark Multiple Order as Blocked (ppro/moab)


<https://demoapi.paypro.com.pk/v2/ppro/moab>

BODY Raw:

```
{  
  
  "Username": "Enter Your Provided Username",  
  "CsvOrderNumbers": "Test-804,Test-805"  
  
}
```

EXAMPLE:

REQUEST:

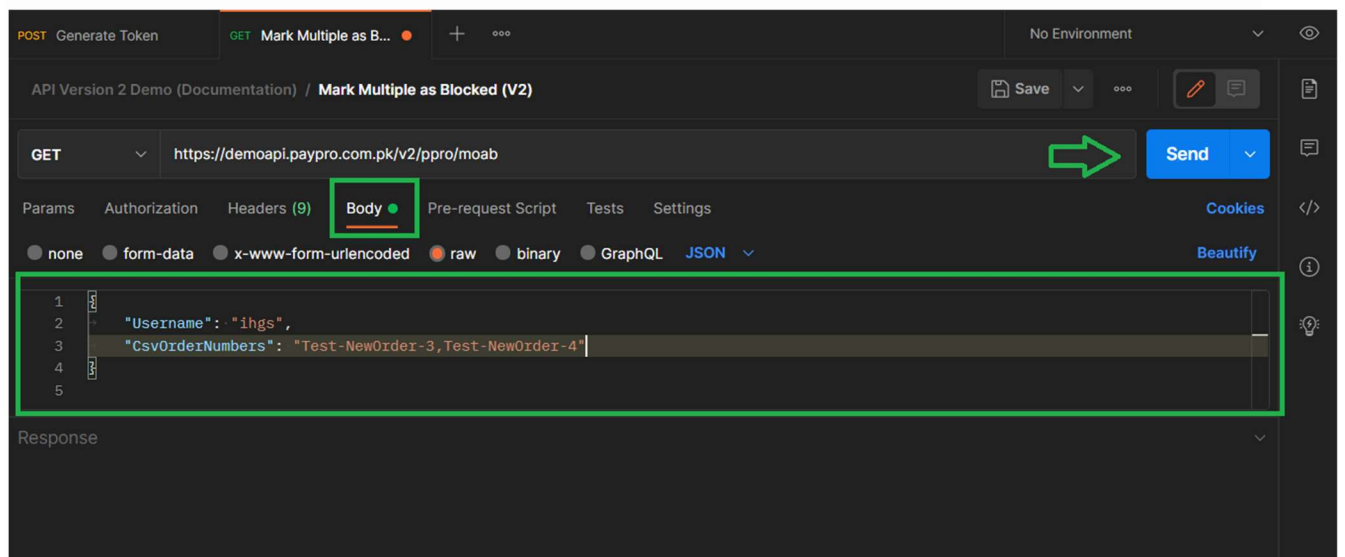

RESPONSE:

The screenshot displays an API client interface with a dark theme. At the top, there are tabs for 'POST Generate Token' and 'GET Mark Multiple as B...'. The main area shows a GET request to 'https://demoapi.paypro.com.pk/v2/ppro/moab'. Below the request bar, there are tabs for 'Params', 'Authorization', 'Headers (9)', 'Body', 'Pre-request Script', 'Tests', and 'Settings'. The 'Body' tab is selected and highlighted with a green box. It shows a JSON request body with the following content:

```
1 {
2   "Username": "ihgs",
3   "CsvOrderNumbers": "Test-NewOrder-3,Test-NewOrder-4"
4 }
5
```

Below the request body, there is a section for the response. It shows the 'Body' tab selected, with a status of '200 OK', time of '157 ms', and size of '463 B'. The response body is displayed in a 'Pretty' JSON format:

```
1 {
2   "Status": "00"
3 }
```

GET

Get General Order Status (ppro/ggos)


<https://demoapi.paypro.com.pk/v2/ppro/ggos>

BODY Raw

```
{  
  
    "userName" : "Enter Your Provided Username",  
    "cpayId" : "01102125200005"  
  
}
```

EXAMPLE:

REQUEST:

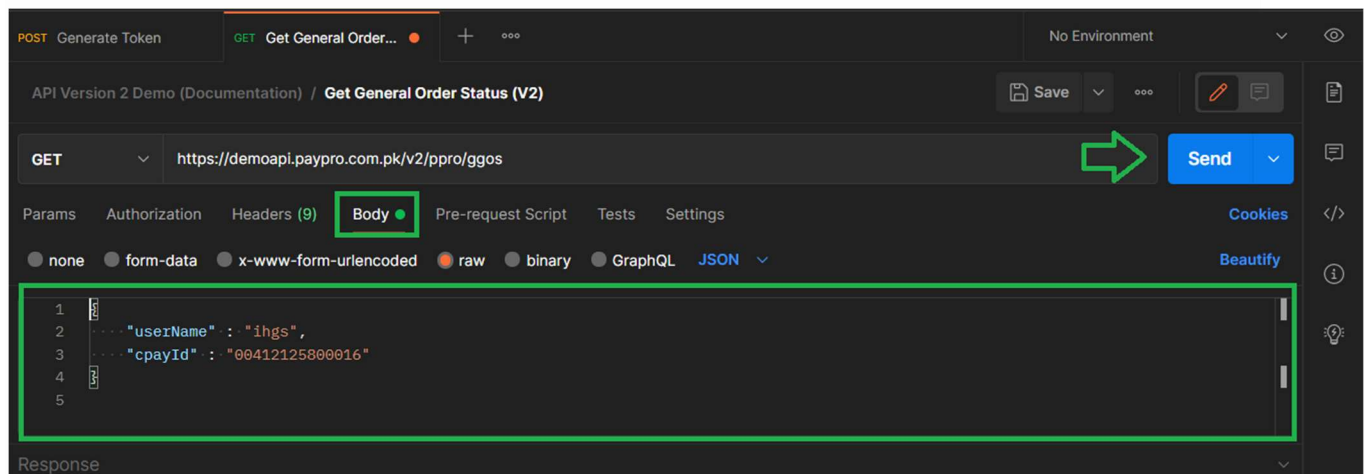

RESPONSE:

The screenshot displays a REST client interface with a GET request to `https://demoapi.paypro.com.pk/v2/ppro/ggos`. The request body is a JSON object with `userName` and `cpayId`. The response is a JSON object with various order details, including `Status`, `DatePaid`, `AmountPayable`, `OrderNumber`, `CustomerName`, `OrderStatus`, and `OrderAmountPaid`. The response status is 200 OK, with a time of 124 ms and a size of 615 B.

Request:

```
1 {
2   "userName": "ihgs",
3   "cpayId": "00412125800016"
4 }
5
```

Response:

```
1 {
2   "Status": "00",
3   "DatePaid": "",
4   "AmountPayable": 200.0000,
5   "OrderNumber": "Test-8055",
6   "CustomerName": "Muhammad-Price Oye",
7   "OrderStatus": "UNPAID",
8   "OrderAmountPaid": 0.0000
9 }
```

GET

Get Paid Order (ppro/gpo)


<https://demoapi.paypro.com.pk/v2/ppro/gpo>

BODY Raw

```
{  
  
  "Username": "Enter Your Provided Username",  
  "startDate": "2020-08-25",  
  "endDate": "2020-12-25"  
  
}
```

EXAMPLE:

REQUEST:

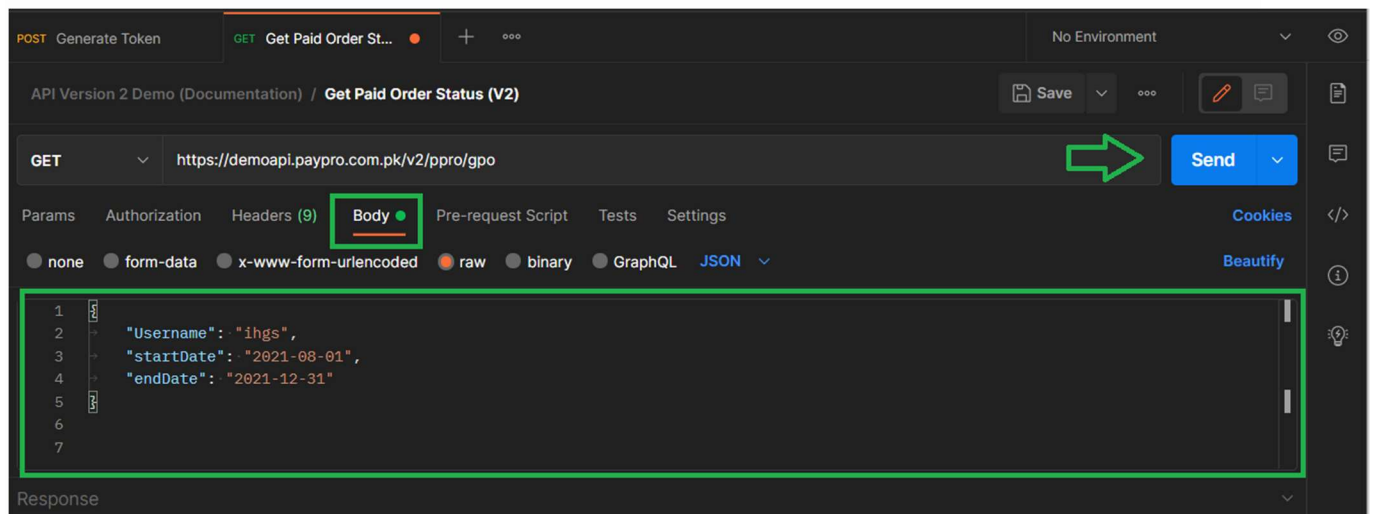

RESPONSE:

The screenshot shows a REST client interface with the following details:

- Method:** GET
- URL:** `https://demoapi.paypro.com.pk/v2/ppro/gpo`
- Status:** 200 OK
- Time:** 210 ms
- Size:** 30.69 KB

The response body is displayed in JSON format (Pretty view) and contains an array of two order objects:

```
1 {
2   "Status": "00"
3 },
4 {
5   "Order Due Date": "2021-12-31T00:00:00",
6   "Customer Address": "",
7   "ConsumerId": "004133",
8   "Amount Paid": 1700.0000,
9   "Date Created": "2021-07-27T12:08:46.273",
10  "Customer Email": null,
11  "TransactionStatus": "PAID",
12  "Date Paid": "2021-09-03T11:09:33.597",
13  "Total Penalty": 0.0,
14  "OrderId": "AAS0011",
15  "Payment Mode": "Manual",
16  "PayProId": "00412120000001",
17  "Issue Date": "2020-11-26T00:00:00",
18  "Customer Mobile": null,
19  "Order Amount": 1700.0000
20 }
21 ]
22 }
```

All the paid orders between the given date range has been fetched.