

**"All colors are the friends of their
neighbors and the lovers of their
opposites."**

Chapter 00: Introduction

Color, "the property possessed by an object of producing different sensations on the eye as a result of the way the object reflects or emits light"--according to the Dictionary app on my laptop. Here's another: "one, or any mixture, of the constituents into which light can be separated in a spectrum or rainbow, sometimes including (loosely) black and white". Whatever that means.

It is believed that color 'ought' to be separate from language, and that the more we try to define or describe color the further we are from truly experiencing it. When I started writing this book it was never my intention to emerge with a definition of what color is--rather, I was interested in understanding color and seeing whether the things we see with our eyes can be reproduced systematically. Methodically. Algorithmically. But the more I tried to develop these algorithms, the more I realized that describing color was exactly what I was trying to do.

I am at a stage in my life where I am still trying to understand how things in the world work, still trying to figure out who I am, still suffering from the occasional existential crisis. Since I am probably unqualified to articulate something on behalf of other people, this book is not about how color works for everyone. This is about how color works for me.

This is The Colorist's Cookbook.

Chapter 01: 3 Colors Into 4 Part I

Remember the dress that turned into a viral phenomenon? Not that thing Lady Gaga wore to the VMA's that one year--but the one that got famous just because people couldn't decide whether it was black and blue or white and gold? In February 2015, a woman took a picture of a dress she wanted to wear to a wedding, and released the photo on Tumblr after many of her friends disagreed over the color. The picture spread quickly across the Internet, and sparked an intense public debate about the color of the dress. It turns out that this phenomenon can be explained by the pure science of color vision. When scientists pitched in to provide insight into what was going on they found that if the dress was shown in yellow lighting the majority of people would see it as blue and black, while lighting with a blue bias caused people to view the dress as white and gold.*


According to color theory, having a color in the background removes that color from the foreground--this is why the dress shown against yellow lighting would make it look less yellow and more blue. I won't get into the specifics of the science behind this because I'm running out of space on this page and frankly I don't fully understand it myself--but this is a very important and interesting concept in color theory that is the basis of many optical illusions. (It also really f***ed me up and made me question whether I was worthy of having perfect color vision.) This chapter is about using this very concept to make 3 colors look like 4. I hope it causes you to lose as much faith in your eyeballs as I did.

*Look up #thedress or Dressgate if my summary displeased you and you want to find out more

0xFFDBC7F2

0xFF975142


0xFFBC97B1



0xFF060EDF

0xFF23E08E


0xFF199EBA



0xFF4677DA

0xFFB59521


0xFF89869B



0xFFAAC61D

0xFFE71EA5

0xFFCA8D76



```

// recipe for making 3 colors look like 4

// prepare the first color
SecureRandom random = new SecureRandom();

int min = 0;
int max = 255;
int r1 = random.nextInt(max-min+1)+min;
int g1 = random.nextInt(max-min+1)+min;
int b1 = random.nextInt(max-min+1)+min;
color col1 = color(r1, g1, b1);

// then prepare the second color
int r2 = random.nextInt(max-min+1)+min;
int g2 = random.nextInt(max-min+1)+min;
int b2 = random.nextInt(max-min+1)+min;
color col2 = color(r2, g2, b2);

// evenly mix the first two colors to create
// the 'middle' color
float mixedred = sqrt((sq(red(col1))*0.5 +sq(red(col2))*0.5));
float mixedgreen = sqrt((sq(green(col1))*0.5 +sq(green(col2))*0.5));
float mixedblue = sqrt((sq(blue(col1))*0.5 +sq(blue(col2))*0.5));

color mid = color(mixedred, mixedgreen, mixedblue);

// pre-translate the transformation matrix
// to the size of your margins
pushMatrix();
translate(margin, margin);

```

```
// arrange the first two colors beside each other
fill(col1);
stroke(col1);
rect(0,0,pgwidth/2f,pgheight);
fill(col2);
stroke(col2);
rect(pgwidth/2f,0,pgwidth/2f,pgheight);

// top with the middle color
fill(mid);
noStroke();

triangle(pgwidth*0.1,pgheight/2f,pgwidth*0.4,pgheight/4f, pgwidth*0.4,pgheight*0.75);
triangle(pgwidth*0.9,pgheight/2f,pgwidth*0.6,pgheight/4f, pgwidth*0.6,pgheight*0.75);

popMatrix();
```

Chapter 02: 3 Colors Into 4 Part II

A guy named Pablo Picasso once said, "Why do two colors, put one next to the other, sing? Can one really explain this? No. Just as one can never learn how to paint." I'm sorry Pab, but I'm going to have to disagree with you on this one because:


- 1) I started learning how to paint the moment I taught myself how to hold a brush. I'm still learning.
- 2) Although it's true that color harmony is complex and often tricky to articulate, it is not entirely inexplicable. Color theorists are better equipped to answer this than I am, but one reason why two colors may 'sing' when placed next to each other is because aesthetic responses can be evoked by complementary hues that are juxtaposed against each other, or analogous hues that are meshed with each other.

The logician in me believes that we can always find a reasonable explanation for almost all observable phenomena. The philosopher in me believes that, without the aid of some kind of 'oracle', there is no way for us to really confirm that our explanations are reasonable. I guess this is why I decided to write this book--because I wanted to see if I could prove myself wrong (and therefore right) by turning the logician into a philosopher, and the philosopher into a logician.

0xFFE607D3

0xFF65E859


0xFFB1A4A1



0xFF190A3D

0xFF85CDA5


0xFF5F917C



0xFF606D8E

0xFFBE3160


0xFF965479



0xFFE72BE1

0xFFCCAOB3

0xFFD975CB



```

// recipe for making 3 colors look like 4...with holes!

// prepare the first color
SecureRandom random = new SecureRandom();

int min = 0;
int max = 255;
int r1 = random.nextInt(max-min+1)+min;
int g1 = random.nextInt(max-min+1)+min;
int b1 = random.nextInt(max-min+1)+min;
color col1 = color(r1, g1, b1);

// then prepare the second color
int r2 = random.nextInt(max-min+1)+min;
int g2 = random.nextInt(max-min+1)+min;
int b2 = random.nextInt(max-min+1)+min;
color col2 = color(r2, g2, b2);

// evenly mix the first two colors to create
// the 'middle' color
float mixedred = sqrt((sq(red(col1))*0.5 +sq(red(col2))*0.5));
float mixedgreen = sqrt((sq(green(col1))*0.5 +sq(green(col2))*0.5));
float mixedblue = sqrt((sq(blue(col1))*0.5 +sq(blue(col2))*0.5));

color mid = color(mixedred, mixedgreen, mixedblue);

// pre-translate the transformation matrix
// to the size of your margins
pushMatrix();
translate(margin, margin);

```

```

rectMode(CORNER) ;

// arrange first two colors beside each other
fill(col1);
stroke(col1);
rect(0,0,pgwidth/2f,pgheight);
fill(col2);
stroke(col2);
rect(pgwidth/2f,0,pgwidth/2f,pgheight);

// top with the middle color
rectMode(CENTER);
fill(mid);
noStroke();
rect((pgwidth)/4f,pgheight/2f,pgwidth/5f,pgheight/2f);
rect((pgwidth*3f)/4f,pgheight/2f,pgwidth/5f,pgheight/2f);

// slice holes in the middle for a more dramatic effect
// waffle aesthetic
rectMode(CORNER);
fill(col1);
for(int rows = 0; rows < 6; rows++) {
    for(int cols = 0; cols < 4; cols++) {
        rect(pgwidth * 0.168 + 140*cols, pgheight * 0.3 + 140*rows,100,100);
    }
}

fill(col2);
float rand3 = random(-350,350);

```

```
pushMatrix();  
  
for (int rows = 0; rows < 6; rows++) {  
    for (int cols = 0; cols < 4; cols++) {  
        rect (pgwidth * 0.668 + 140*cols, pgheight * 0.3 + 140*rows,100,100);  
    }  
}  
popMatrix();  
  
popMatrix();
```

Chapter 03: 4 Colors Into 3


If you've been keeping up with the code (which you should--I painstakingly included it for a reason!), you could probably observe that everything boils down to just a bunch of math. This is because in computerland, colors (and all other things) are just numbers. Consider this: since every color is expressed as a number, then for a encoding scheme with 6 hexadecimal* numbers the value of colors ranges from 0 to 16,777,215--that gives us a total of 16,777,216 possible colors! Does that mean there are 16 million colors that exist in the world?

Well...no. It turns out that humans, on average, can only see about 10 million colors in a single viewing condition--so computers really encode 6 million more colors than necessary. So is the answer 10 million, then? Remember that the 10 million refers to the number of colors we can see in a SINGLE viewing condition. How many possible viewing conditions are there? And how do we take into account that color perception can differ from one person to another? That means the real answer is infinity. Now the question is: is the number of colors that exist in the world countably infinite, or uncountably infinite?** I suck at discrete math, so maybe someone else can answer this question for me.

*this is just a way of saying base-16, which is a very common numerical system for computers. Normal people think in base-10.

**for those who are not familiar with these terms: in mathland there are two infinities, the uncountable and countable. If that isn't weird enough, it has also been proven that the uncountable infinity is 'bigger' than the countable infinity.

0xFF87ACDC 0xFF785323 0xFF8194B5 0xFF7C7780



0xFF1B41C8

0xFFE4BE37

0xFF8378A6

0xFFBB9F7A



0xFF773C49

0xFF88C3B6

0xFF7C7977

0xFF82A39A



```

// recipe for making 4 colors look like 3
// prepare the first and second colors
SecureRandom random = new SecureRandom();

int min = 0;
int max = 255;
int r1 = random.nextInt(max-min+1)+min;
int g1 = random.nextInt(max-min+1)+min;
int b1 = random.nextInt(max-min+1)+min;
color col1 = color(r1, g1, b1);

// the second color is opposite from the first color
color col2 = color(255 - red(col1),
                    255 - green(col1),
                    255 - blue(col1));

// evenly mix the first two colors to create
// the 'middle' color
float mixedred = sqrt((sq(red(col1))*0.5 +sq(red(col2))*0.5));
float mixedgreen = sqrt((sq(green(col1))*0.5 +sq(green(col2))*0.5));
float mixedblue = sqrt((sq(blue(col1))*0.5 +sq(blue(col2))*0.5));

color mid = color(mixedred, mixedgreen, mixedblue);

float c1_weight = 0.35;
float c2_weight = 0.65;

// calculate a weighted average of the first color and middle color
mixedred = sqrt((sq(red(col1))*c1_weight +sq(red(mid))*c2_weight));

```

```

mixedblue = sqrt((sq(blue(col1)) *c1_weight +sq(blue(mid)) *c2_weight)) ;

color mixed1 = color(mixedred, mixedgreen, mixedblue) ;

// calculate a weighted average of the second color and middle color
mixedred = sqrt((sq(red(col2)) *c1_weight +sq(red(mid)) *c2_weight)) ;
mixedgreen = sqrt((sq(green(col2)) *c1_weight +sq(green(mid)) *c2_weight)) ;
mixedblue = sqrt((sq(blue(col2)) *c1_weight +sq(blue(mid)) *c2_weight)) ;

color mixed2 = color(mixedred, mixedgreen, mixedblue) ;

// pre-translate the transformation matrix
// to the size of your margins
pushMatrix() ;
translate(margin, margin) ;

rectMode(CORNER) ;

// arrange opposing colors beside each other
fill(col1) ;
stroke(col1) ;
rect(0,0,pgwidth,pgheight/2) ;
fill(col2) ;
stroke(col2) ;
rect(0,pgheight/2,pgwidth,pgheight/2) ;

// top with the middle colors
fill(mixed1) ;
noStroke() ;

```

```
fill(mixed2);  
rect((pgwidth)/3, (pgheight*2)/3, pgwidth/3, pgheight/6);
```

```
popMatrix();
```

Chapter 04: 5 Colors Into 3

So I probably should be saying something about the next chapter, but I want to tell you a story instead. Last Tuesday, I had to go to my professor's office hours to prepare for an exam. My friend and I made our way to the back corner of the room and sat down, taking out our notes and note-taking instruments and whatever else people possess when they need to study. As more students shuffled into the small office with questions about the material, the afternoon proceeded unremarkably. Some time passed, and as the questions began to slow down I started to have a fairly unremarkable conversation with my friend about Windows computers:

"Oh, you're a Windows person?" I asked him.

"Yeah," he replied.

"Okay, I'm not judging," I lied.


And then:

"I am," chimed in my professor. "Macs are better."

And that's when the room was thrown into a passive-aggressive debate about whether Macs were better than Windows machines (or rather, why Windows machines were better than Macs).

Now I have a confession to make: for the majority of public situations in which I am surrounded by people who are some combination of scientists/engineers/mathematicians, I generally avoid declaring myself as an art student--not out of shame but as a precautionary measure to avoid hostility and having metaphorical daggers thrown at my back. But for whatever reason, on that unremarkable Tuesday, during that unremarkable conversation, it was exactly what I did.

0xFF99B3A2 0xFF664C5D 0xFF8A998F 0xFF828984 0xFF787777




0xFF2BFEFB

0xFFD40104

0xFF7DD0CD

0xFF98B3B1

0xFFAF908E




0xFFE0D995

0xFF1F266A

0xFFB8B388

0xFF9F9B81

0xFF817E79



```

// recipe for making 5 colors look like 3
// prepare the first and second colors
SecureRandom random = new SecureRandom();

int min = 0;
int max = 255;
int r1 = random.nextInt(max-min+1)+min;
int g1 = random.nextInt(max-min+1)+min;
int b1 = random.nextInt(max-min+1)+min;
color col1 = color(r1, g1, b1);

// the second color is opposite from the first color
color col2 = color(255 - red(col1),
                    255 - green(col1),
                    255 - blue(col1));

// evenly mix the first two colors to create
// the 'middle' color
float mixedred = sqrt((sq(red(col1))*0.5 +sq(red(col2))*0.5));
float mixedgreen = sqrt((sq(green(col1))*0.5 +sq(green(col2))*0.5));
float mixedblue = sqrt((sq(blue(col1))*0.5 +sq(blue(col2))*0.5));

color mid = color(mixedred, mixedgreen, mixedblue);

float c1_weight = 0.35;
float c2_weight = 0.65;

// calculate a weighted average of the first color and middle color
mixedred = sqrt((sq(red(col1))*c1_weight +sq(red(mid))*c2_weight));

```

```

mixedblue = sqrt((sq(blue(col1)) *c1_weight +sq(blue(mid)) *c2_weight)) ;

color mixed1 = color(mixedred, mixedgreen, mixedblue) ;

// calculate a weighted average of the second color and middle color
mixedred = sqrt((sq(red(col2)) *c1_weight +sq(red(mid)) *c2_weight)) ;
mixedgreen = sqrt((sq(green(col2)) *c1_weight +sq(green(mid)) *c2_weight)) ;
mixedblue = sqrt((sq(blue(col2)) *c1_weight +sq(blue(mid)) *c2_weight)) ;

color mixed2 = color(mixedred, mixedgreen, mixedblue) ;

// pre-translate the transformation matrix
// to the size of your margins
pushMatrix() ;
translate(margin, margin) ;

rectMode(CORNER) ;

// arrange opposing colors beside each other
fill(col1) ;
stroke(col1) ;
rect(0,0,pgwidth,pgheight/2) ;
fill(col2) ;
stroke(col2) ;
rect(0,pgheight/2,pgwidth,pgheight/2) ;

// top with the middle colors
fill(mixed1) ;
noStroke() ;

```

```
fill(mixed2);
rect((pgwidth)/3, (pgheight*2)/3, pgwidth/3, pgheight/6);

fill(mid);
rect(pgwidth/3, pgheight*0.4375, pgwidth/3, pgheight/8);

popMatrix();
```

Chapter 05: Color Modulation

"I think as an art person," I started boldly. "I am naturally inclined to like Macs more," I could feel the daggers digging into my spine. "It's just--" as the daggers made their way deeper into my skin, I found myself helplessly fumbling for words--"I don't know, the colors are just...nicer?"

A heavy silence.

And then: "That's not a valid reason," argued the guy across the table.

Is it?

When were colors ever 'a valid reason'?

0xFFFF951A0

0xFFE46996


0xFFCF7D8D

0xFFB68E82

0xFF9A9D77

0xFF77AB6A

0xFF43B85B



0xFFA47631

0xFFAE7A66


0xFFB87E87

0xFFC282A2

0xFFCB85B9

0xFFD489CE

0xFFDC8DE1



0xFF295285

0xFF6D667A


0xFF95786E

0xFFB58760

0xFFCF9451

0xFFE7A13D

0xFFFFDAD1F



0xFF3CFFFF

0xFF53E8ED


0xFF66D0E6

0xFF75B4DE

0xFF8393D6

0xFF8F69CE

0xFF9B0FC5



0xFFFFD5C00

0xFFE86E30


0xFFD27E44

0xFFB98C54

0xFF9D9961

0xFF79A46C

0xFF46B077



```
// recipe for color modulation

SecureRandom random = new SecureRandom();

// prepare the first color
int min = 0;
int max = 255;
int r1 = random.nextInt(max-min+1)+min;
int g1 = random.nextInt(max-min+1)+min;
int b1 = random.nextInt(max-min+1)+min;
color col1 = color(r1, g1, b1);

// then prepare the second color
int r2 = random.nextInt(max-min+1)+min;
int g2 = random.nextInt(max-min+1)+min;
int b2 = random.nextInt(max-min+1)+min;
color col2 = color(r2, g2, b2);

// make preliminary calculations
float numsteps = 7;
float step = (1.0) / (numsteps-1);
float c1_weight = 1; // the starting weight for the first color
float c2_weight = 0; // the starting weight for the second color
float gapsize = 10;
float rectwidth = pgwidth/numsteps - gapsize;

pushMatrix();
translate(margin, margin);
noStroke();
```

```

for (int i = 0; i < numsteps; i++) {
    // get a weighted average of the red, green, blue channels
    float mixedred = sqrt((sq(red(col1)) *c1_weight +sq(red(col2)) *c2_weight));
    float mixedgreen = sqrt((sq(green(col1)) *c1_weight +sq(green(col2)) *c2_weight));
    float mixedblue = sqrt((sq(blue(col1)) *c1_weight +sq(blue(col2)) *c2_weight));

    // prepare the color strip
    color stripcol = color(mixedred, mixedgreen, mixedblue);
    fill(stripcol);
    float posx = (rectwidth + gapsize)*i;

    // lay down the color strip
    rect(posx, 0, rectwidth, pgheight);

    text("0x"+hex(stripcol), posx, height*0.05 - margin);
    c1_weight -= step;
    c2_weight += step;

}

popMatrix();

```

Chapter 06: Bridging Colors


I had vodka the other day (it was in a mixed drink). It was not unlike drinking the liquid embodiment of a migraine. Within a few gulps I felt my head spinning, as the world around me swirled together into a conglomerate of colors and lights. Before I knew it I had my elbows on the table, holding my forehead in my hands while squinting at my dad across from me.

"So yeah, I think in general my alcohol tolerance is pretty good," I began. A few moments later: "I'm getting kinda sleepy."


If my experience that day could be somehow represented as an infographic, it would look exactly like the next few studies.

0xFF47F109


0xFFB90AFE



0xFF0ED22E 0xFFD91108



0xFF14E8B3 0xFF2C03F5



```
// recipe for using bridging colors

// switch working color mode to HSB
// before preparing the foreground color
colorMode(HSB,360,100,100);
SecureRandom random = new SecureRandom();

int min = 0;
int max = 360;
int h1 = random.nextInt(max-min+1)+min;
int h2 = random.nextInt(max-min+1)+min;

color col1 = color(h1, random(90,100) , random(80,100));

rectMode(CORNER);
pushMatrix();
translate(margin, margin);
noStroke();

// glaze with the background color, which is opposite from the foreground color
// with a touch of randomness for enhanced flavor
color bg = color((hue(col1)+180+h2)%360, random(90,100) , random(80,100));

fill(bg);
rect(0, 0, pgwidth,pgheight);

// randomly add 90 slices of the foreground color
for(int i = 0; i < 90; i++) {
    float posX = random(0, pgwidth-200);
```

```
float rectw = random(100, min(1200, pgwidth-posX));
float recth = random(200, min(800, pgheight-posY));

// the slices can overlap with each other,
// but they must be thin
// like prosciutto
fill(col1, 50);
rect(posX, posY, rectw, recth);

}

// for balance, top with a few thin slices of the background color
for(int i = 0; i < 10; i++) {
    float posX = random(0, pgwidth-200);
    float posY = random(0, pgheight-200);

    float rectw = random(100, min(1200, pgwidth-posX));
    float recth = random(200, min(800, pgheight-posY));

    fill(bg,70);
    rect(posX, posY, rectw, recth);
```

Chapter 01: Same Value Studies

You may have noticed that some of the studies you've seen so far work pretty effectively, while others don't seem to work at all.

You may be waiting for me to provide you with some sort of explanation for that.

You may be stopping and asking yourself, 'Is this really ART???'


You may be debating whether you should just skip this useless expository text or read on.

You may be sitting on your living room couch right now--winding and rewinding your mind--trying to pull yourself back to the time when you were able to feel the warm sun on your face without having to worry about getting burned later, when Tuesdays were good and you didn't miss the tingle of someone else's breath on your skin.


You may be wondering what that previous sentence has to do with anything.

You may not even care. But even if you don't, thanks for caring enough to read on.


value: 41



value: 66



value: 89



```
// recipe for same value studies (a la Johannes Itten)

// we're working in HSB space now!
// RGB is for posers
colorMode(HSB, 360, 100, 100);
SecureRandom random = new SecureRandom();

int min = 40;
int max = 95;
int value = random.nextInt(max-min+1)+min;

// boundaries for saturation
int satmin = 0;
int satmax = 100;

// noise variables
int noisemin = 0;
int noisemax = 100;
float hoff = random.nextInt(noisemax-noisemin+1)+noisemin;
float soff = random.nextInt(noisemax-noisemin+1)+noisemin;

rectMode(CORNER);
pushMatrix();
translate(margin + 500, margin);
noStroke();

// sprinkle squares in a matrix
for(int row = 0; row < 5; row++) {
    for(int col = 0; col < 5; col++) {
```

```

// instead of using random, I'm mapping the colors to noise
// noise is a bit more 'organic' than random
// huemin and huemax are just parameters I defined at the beginning of the function
float hue = map(noise(hoff), 0,1, huemin,huemax);
float sat = map(noise(soff), 0,1, satmin,satmax);
color squarecol = color(hue, sat, value);

fill(squarecol);
stroke(squarecol);
rect(400*col, 400*row, 400, 400);

// add a touch of magic numbers
hoff += 0.55;
soff += 0.3;
}

}

popMatrix();
colorMode(RGB);

textFont(mainFont, 60);
fill(0);
text("value: " +value, width*0.05, height*0.05);

```

Appendix: Proportional Palettes

I'm not very good at goodbyes. I'm not referring to the ones you say to your friends after you've had dinner with them or the ones you might have said to your parents after they dropped you off to your first day of school--I'm talking about the real goodbyes that creep up on you and then seize you by the chest the minute you realize you may not even be able to say 'hello' to that person again. A lot of the goodbyes I've made came in the form of poorly-worded emails, uncomfortable hugs, or long silences on the phone. Goodbyes, from my experience, tend not to be very 'good' --they're unsettling, they're awkward, they're emotionally taxing, but most of all they're just downright sad. So I've given up on trying to make my goodbyes 'good'. Instead, I decided that if I could manage to make them less sad, that's about as good as I can make it.

I hope the goodbye here is not the sad kind I have just described. But in case it is, here's my attempt at making it less sad: I don't know who you are, whether you're a colleague or a friend or a family member or someone I've never even talked to before. Though that does not even matter, because this book is not about who you are. And it's not really even about color theory; this book is ultimately about who I am and how I understand some tiny subset of the universe. Regardless of whether you've read this book from the very beginning or decided to skip to the very end, I just wanted to say thanks. Thanks for thinking this book was worth more than just a few seconds of your time. Thanks for caring about what this existentially trapped twenty-something-year-old had to say. Thanks for reading.

Thanks for staying.


artist:
Paul Klee



artist:
Gustav Klimt



artist:
James Jean



0xFF484D5B

0xFF24445A

0xFF0D808C
0xFF507079

0xFF8D8589
0xFFB6AEEA

0xFFD3CCCC

0xFFFFAF8C0
0xFF86575D


0xFF150E2A

0xFFB23E40

0xFFCE6464
0xFFDA3434


0xFF6A4D56

artist:
Yves Klein



0xFF201BC4

artist:
Alphonse Mucha

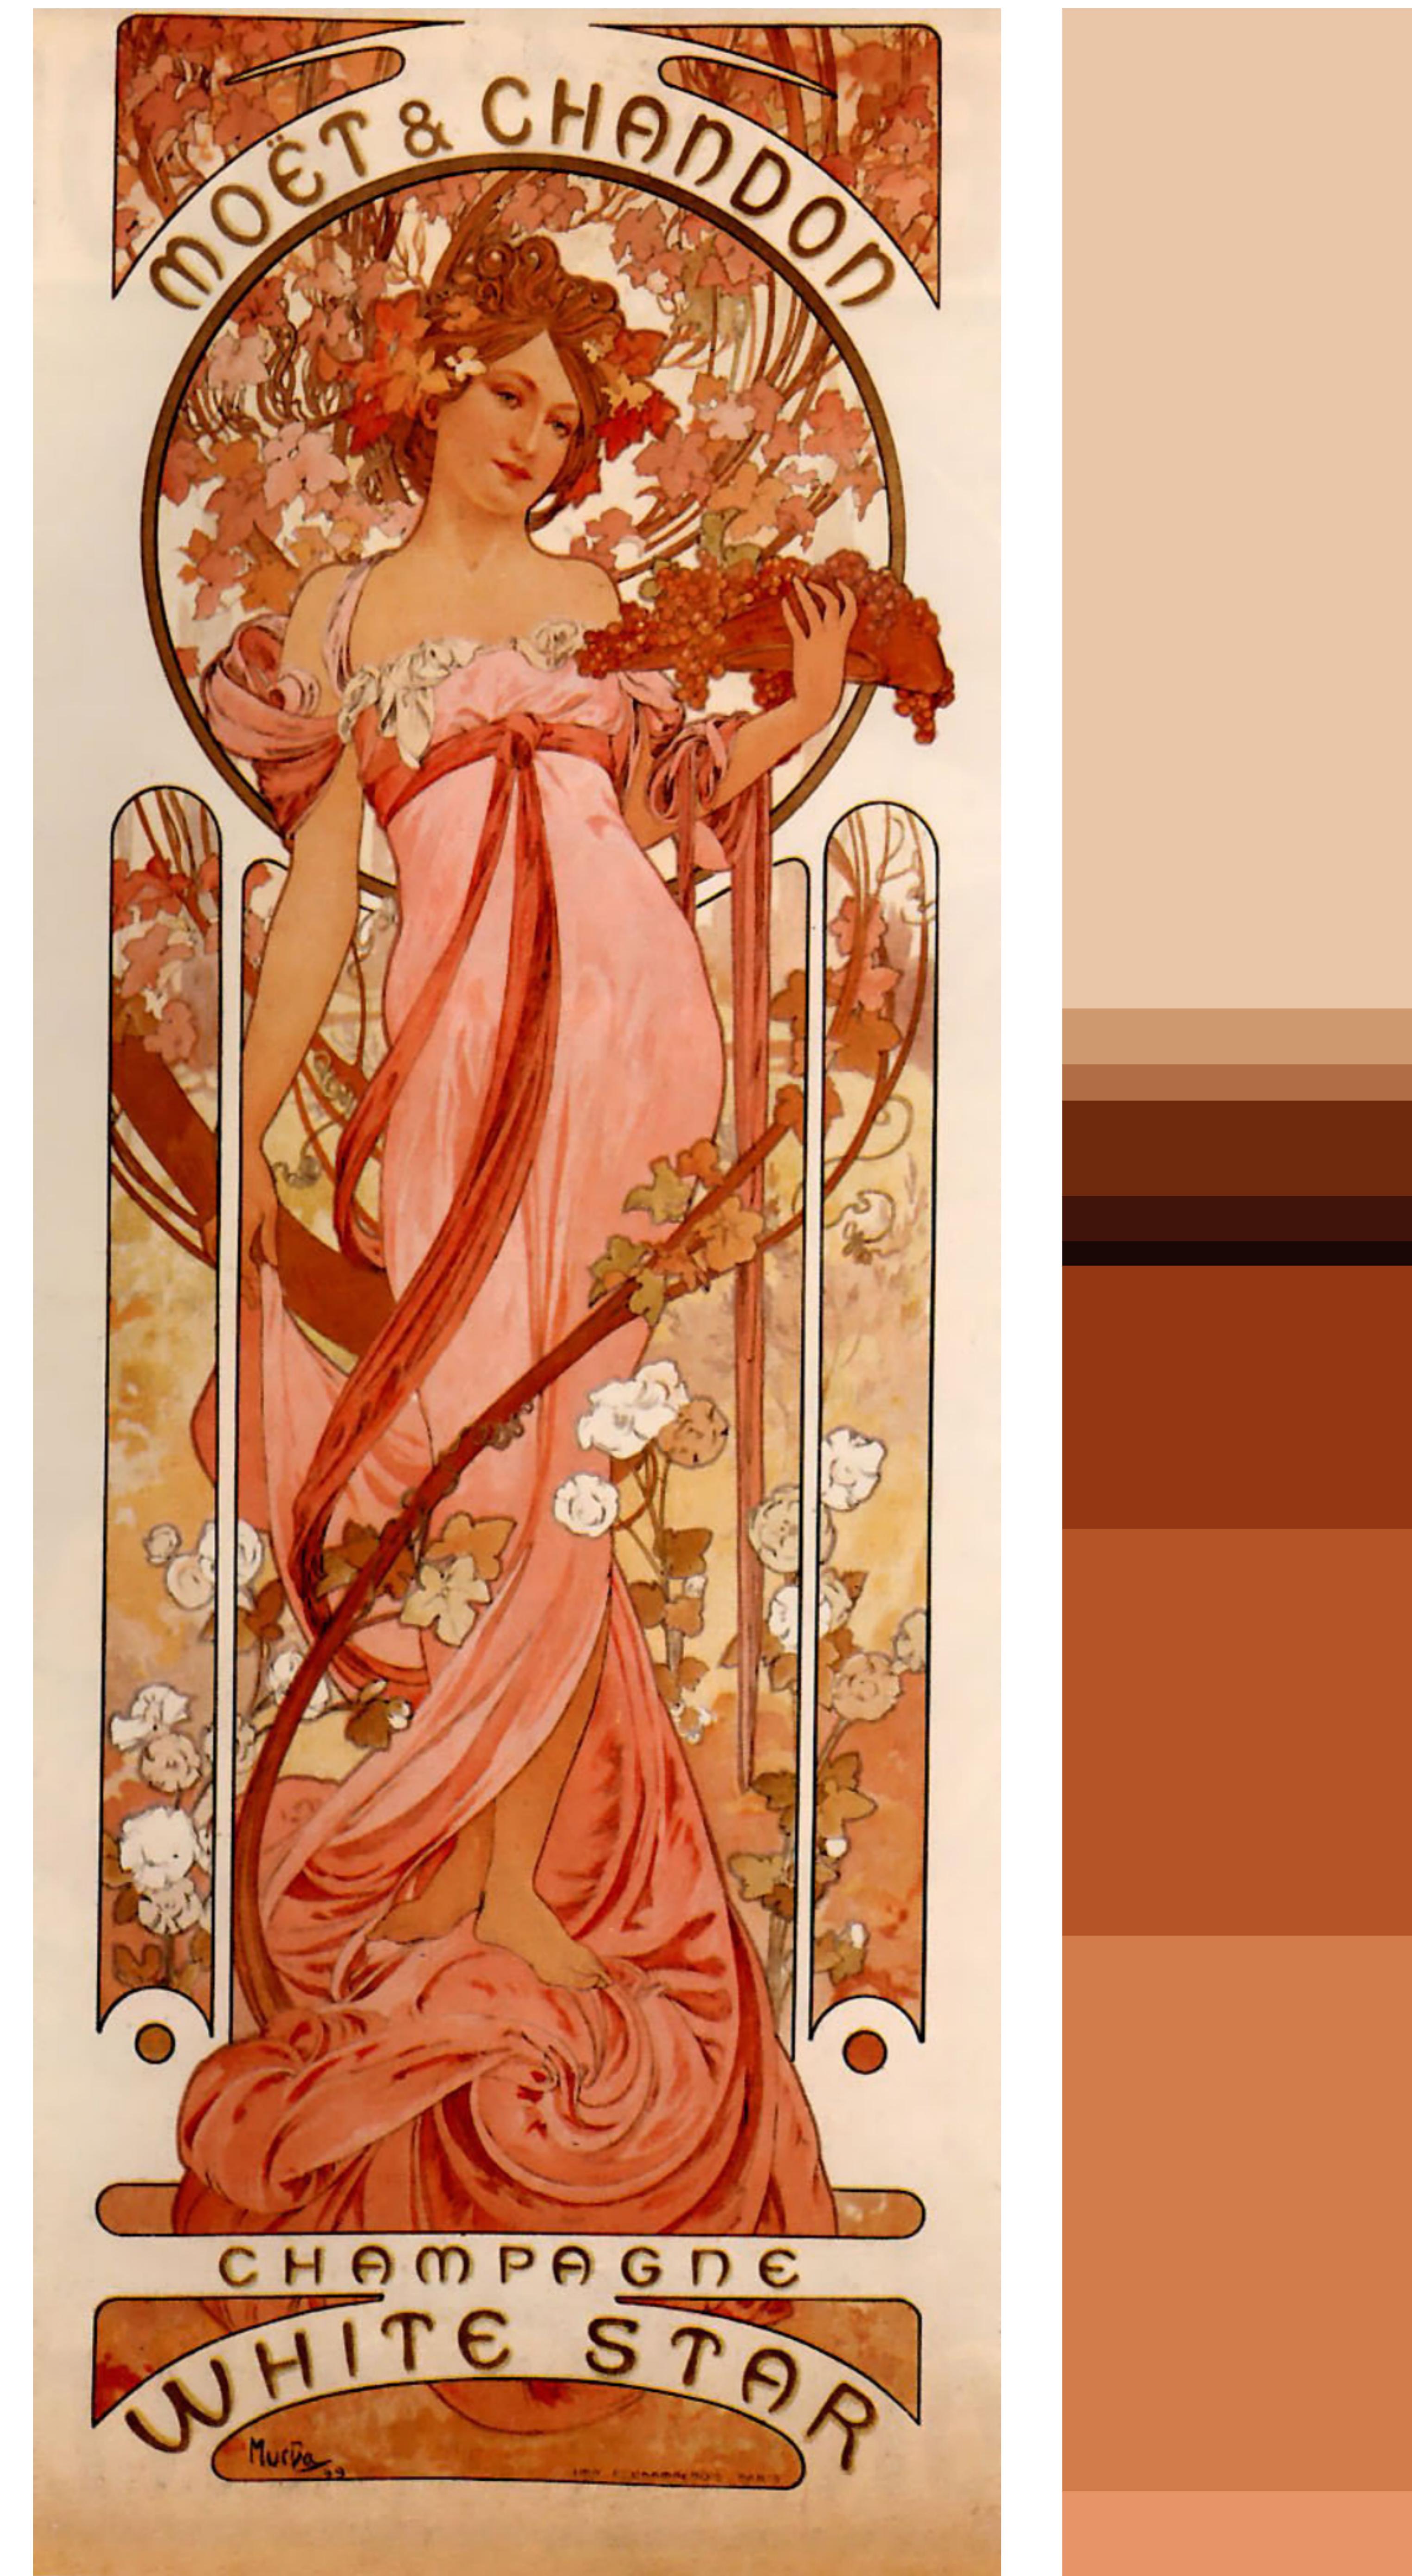

0xFFEAC6A9

0xFFCE996F
0xFFB16E44
0xFF6F2A0D

0xFF40140A
0xFF1A00806
0xFF933812

0xFFB55527

0xFFD17C4A

0FFE79469

artist:
Tatsuyuki Tanaka



artist:
Sara Cwynar



0xFFFFAC9E

0xFFDD725F

0xFFB84C3B
0xEE8D3526
0xFFED7961

0xFFD14C3D

artist:
Shintaro Ohata



artist:
Piotr Jablonski



artist:
James Jean



0xFFDCCECB

0xFFBBA49C

0xFF957668

0xFF654339

0xFF3B221F

0xFF1B0F10

0xFFFF2EDEB

```
ArrayList<Pixel> colors = new ArrayList<Pixel>();
float tolerance = 50.0;
int totalCount = 0;
float proptolerance = 0.005;
PImage[] images = new PImage[folderimages];
String[] names = new String[folderimages];
```

```
// recipe for palette grabber
```

```
public class Pixel {
    public ArrayList pixelgroup;
    public int count;
}
```

```
float colorDist(color c1, color c2) {
    float r = red(c1) - red(c2);
    float g = green(c1) - green(c2);
    float b = blue(c1) - blue(c2);

    return sqrt(sq(r) + sq(g) + sq(b));
}
```

```
void addPixel(color currpix) {
    Pixel p = new Pixel();
    // head of the color group
    p.pixelgroup = new ArrayList();
    p.pixelgroup.add(currpix);
    p.count = 1;
    colors.add(p);
    totalCount++;
```

```

boolean notBlackorWhite(color col) {
    return ((col != 0.0) && (col != 255.0));
}

void palettePage(int imgindex) {
    totalCount = 0;

    // rinse palette before use
    for (int i = colors.size() - 1; i >= 0; i--) {
        colors.remove(i);
    }

    PImage sourceimg = images[imgindex];

    sourceimg.resize(0, (int) pgheight);
    int iwidth = sourceimg.width;
    int iheight = sourceimg.height;
    color temp = sourceimg.get(0, 0);
    float palettepos = sourceimg.width + 50;

    // extract colors from image
    // and add them to the palette
    for (int i = 0; i < iheight; i++) {
        for (int j = 0; j < iwidth; j++) {
            color currpix = sourceimg.get(i, j);

            if (notBlackorWhite(currpix)) {
                if (colors.size() == 0) {
                    addPixel(currpix);
                }
            }
        }
    }
}

```

```

else {
    int idx;
    boolean foundMatch = false;
    int prevIdx = 0;
    float minDist = 0.0;

    // look through existing colors in the palette
    for (idx = 0; idx < colors.size(); idx++) {
        float currDist = colorDist(currpix, (Integer) colors.get(idx).pixelgroup.get(0));
        // if the color is in the palette
        if (currDist < tolerance) {
            // increase the count for the palette color closest to
            // the current pixel
            if (foundMatch && (currDist < minDist)) {
                colors.get(idx).count++;
                colors.get(prevIdx).count--;
                colors.get(idx).pixelgroup.add(currpix);

                prevIdx = idx;
                minDist = currDist;
            }
            else if (!foundMatch) {
                colors.get(idx).count++;
                colors.get(idx).pixelgroup.add(currpix);
                totalCount++;
                foundMatch = true;
                prevIdx = idx;
                minDist = currDist;
            }
        }
    }
}

```

```

        }

    }

    if (!foundMatch) {
        addPixel(currpix);

    }

}

}

}

int netCount = totalCount;
for (int idx = 0; idx < colors.size(); idx++) {
    float prop = colors.get(idx).count / ((float)totalCount);

    if (prop < proptolerance) {
        netCount -= colors.get(idx).count;
    }
}

rectMode(CORNER);
float ypos = 0f;

pushMatrix();
// place image a little to the right of your margins
translate(margin + 700, margin);
image(sourceimg, 0,0);
// place palette beside image

```

```

float prop = colors.get(i).count / ((float) netCount);

// if there is enough of the color in the image, display it
if (prop >= proptolerance) {
    float rheight = pgheight * prop;
    float totred = 0;
    float totgreen = 0;
    float totblue = 0;

    // calculate an average value of the colors in each group
    int groupsize = colors.get(i).pixelgroup.size();
    for (int j = 0; j < groupsize; j++) {
        Pixel thepixel = colors.get(i);
        color currcolor = (Integer) thepixel.pixelgroup.get(j);
        totred += red(currcolor);
        totgreen += green(currcolor);
        totblue += blue(currcolor);
    }
    color paletteColor = color(totred/groupsize, totgreen/groupsize, totblue/groupsize);

    stroke(paletteColor);
    fill(paletteColor);
    rect(palettespos, ypos, 300, rheight);

    // top it off with the hex value for the colors
    textAlign(mainFont, 40);
    fill(paletteColor);
    text("0x" + hex(paletteColor), palettespos + 350, ypos+30);
}

```

```
    }  
}  
  
popMatrix();  
  
}
```

**A special thanks to
Clayton Merrell
and Bob Bingham
and Rafael Abreu-Canedo
for your guidance and support.**