CREATIVE VIDEO TIPS · DAVINCI RESOLVE

LTX Inpaint Still Guide

Guide v1.06 · November 12, 2026 · LTX Inpaint Still 1.30

AI clean plates in Fusion, on your Mac. LTX Inpaint Still is an OpenFX plugin that makes clean plate stills with Lightricks' LTX-2.5 and its in/outpainting LoRA. You track, match-move and grade the still yourself.



1. Install
The plugin, then the models

2. Connect
Yellow: image. Green: mask.

3. Process
Stills come back on Loaders

What your Mac needs

- **Apple Silicon only,** on **macOS 15 (Sequoia) or later**.
- **128 GB of RAM recommended; not recommended on 64 GB or less.** One HD still reserves about 46 GB in Rec.709 and about 56 GB in ACEScg, and on a 64 GB Mac macOS leaves less than the model needs.
- **About 80 GB of disk space,** or about 125 GB on M1 and M2 Macs.
- **Apple's Command Line Tools.** In Terminal, run `xcode-select --install`. You don't need to install Python.
- **Fusion only:** Fusion Studio or Resolve's Fusion page, not the Edit or Color pages.

Install and Setup


Quit Resolve and Fusion Studio, double-click the pkg, then start Fusion. The node is under Effects > OpenFX > Creative Video Tips > LTX Inpaint Still.

The models are a separate download, so you need a free Hugging Face account. In the node's **Setup** section:

1. Press **View Licence** and tick **I Accept**.
2. Press **LTX-2.5 Model Page** and **In/Outpainting LoRA Page**. Log in and accept the terms on both.
3. Press **Token Page** and create a **Read** token.
4. Paste the token into **Hugging Face Token** and press **Download**.


The token is used once and never stored. **If you have LTX Alpha Gen,** the node reuses its models and only downloads the LoRA. If you have the files elsewhere, put that folder in **Existing Models**. Tick **Link Existing Models** to link to them instead of copying them. Each folder field has a **Choose** button that opens a Finder window.

Until Setup is complete, the viewer shows **SETUP REQUIRED**.

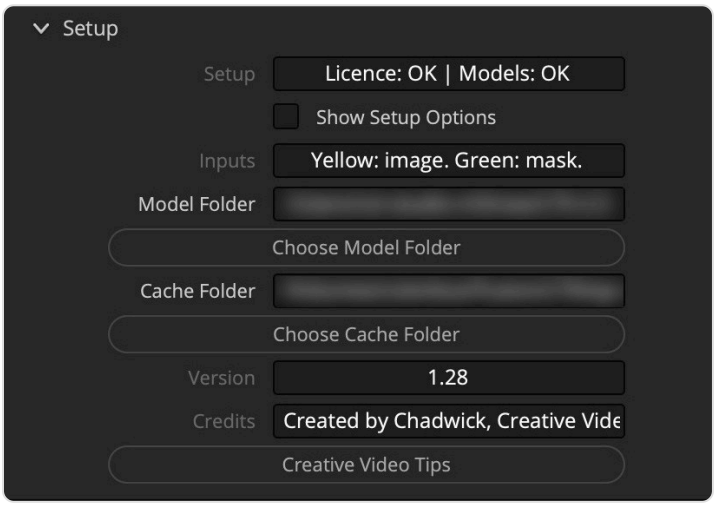

Once Setup is done, the section folds down to this. Tick **Show Setup Options** to see the download controls again.

Making a still

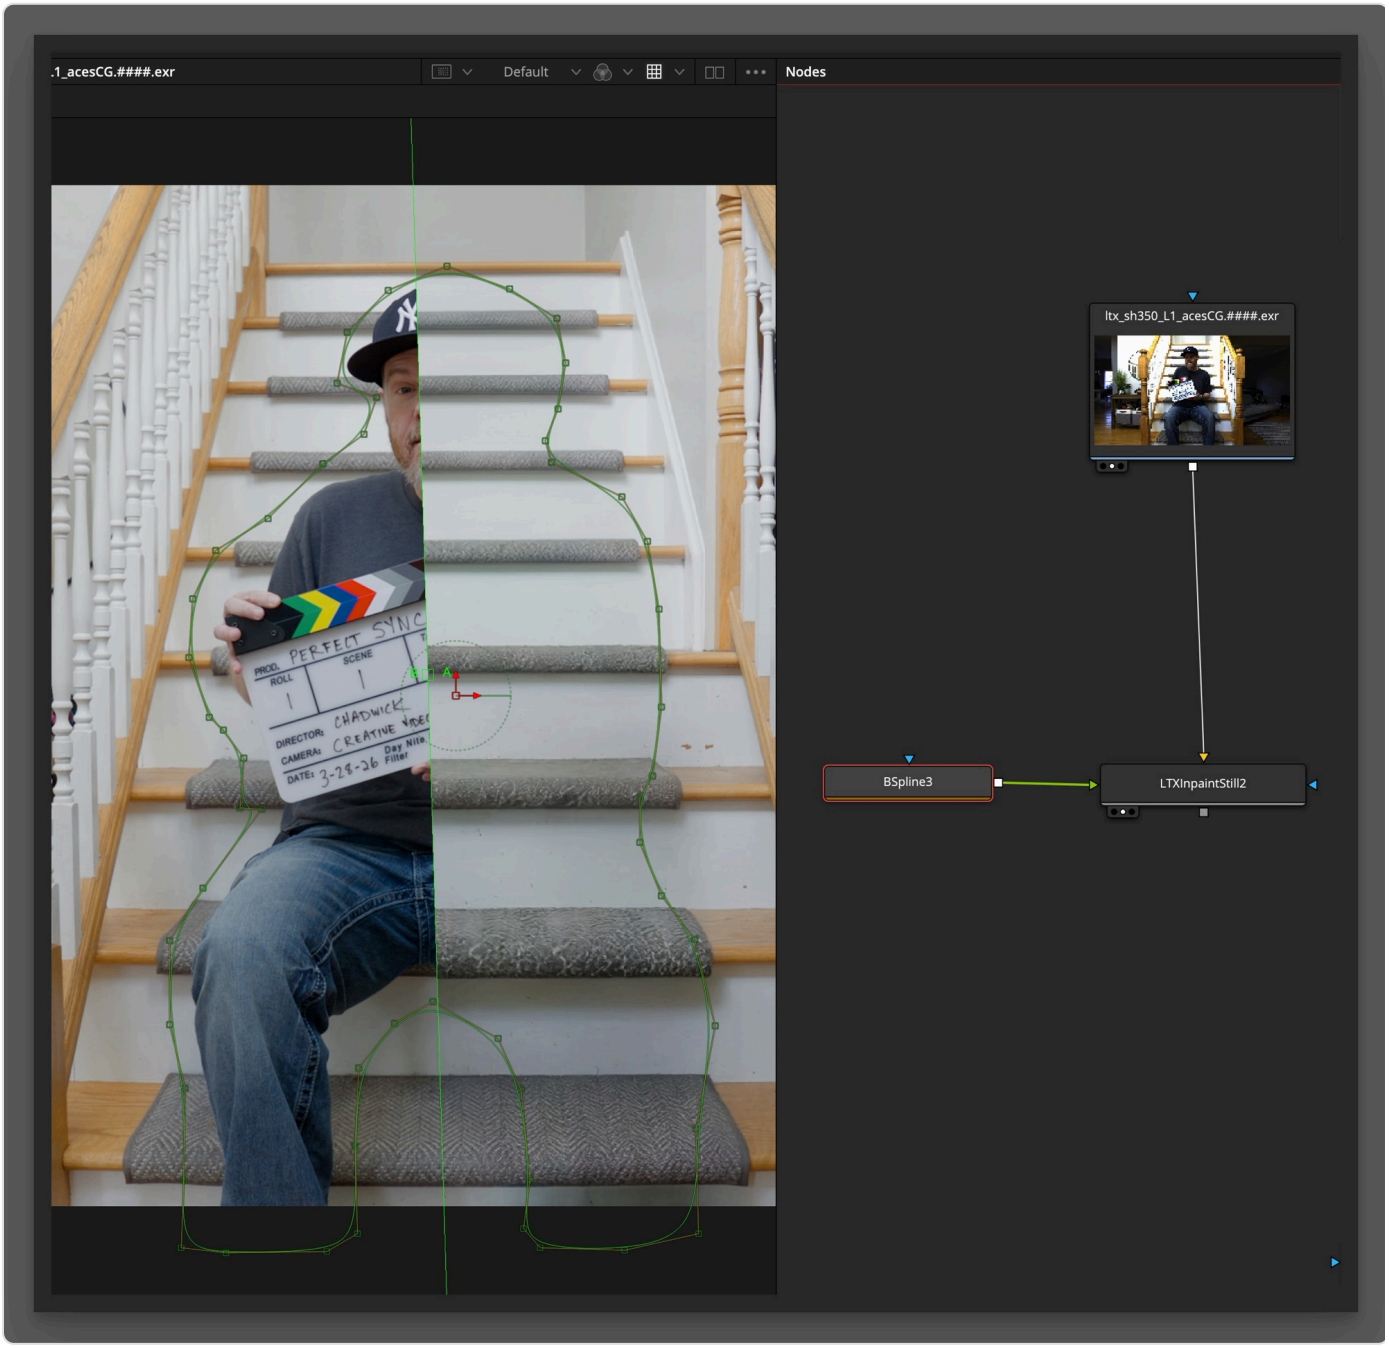


A wipe across the stairs shot: the man on the left, and the still with him removed on the right, with the mask drawn around him, and the mask and plate going into the node

On the left of the wipe is the original frame, and on the right the still, with the man removed. The green outline is the mask on the node's green input.

1. Connect your picture to the **yellow** input and a mask to the **green** input. White is the area to fill.
2. Set **Input Colour**.
3. Go to the frame you want and press **Process**.

4. Stills save to **Stills Folder** and come back on Loaders, named after the clip and frame, like `sh010_LTXStill_f01032_A.exr`.

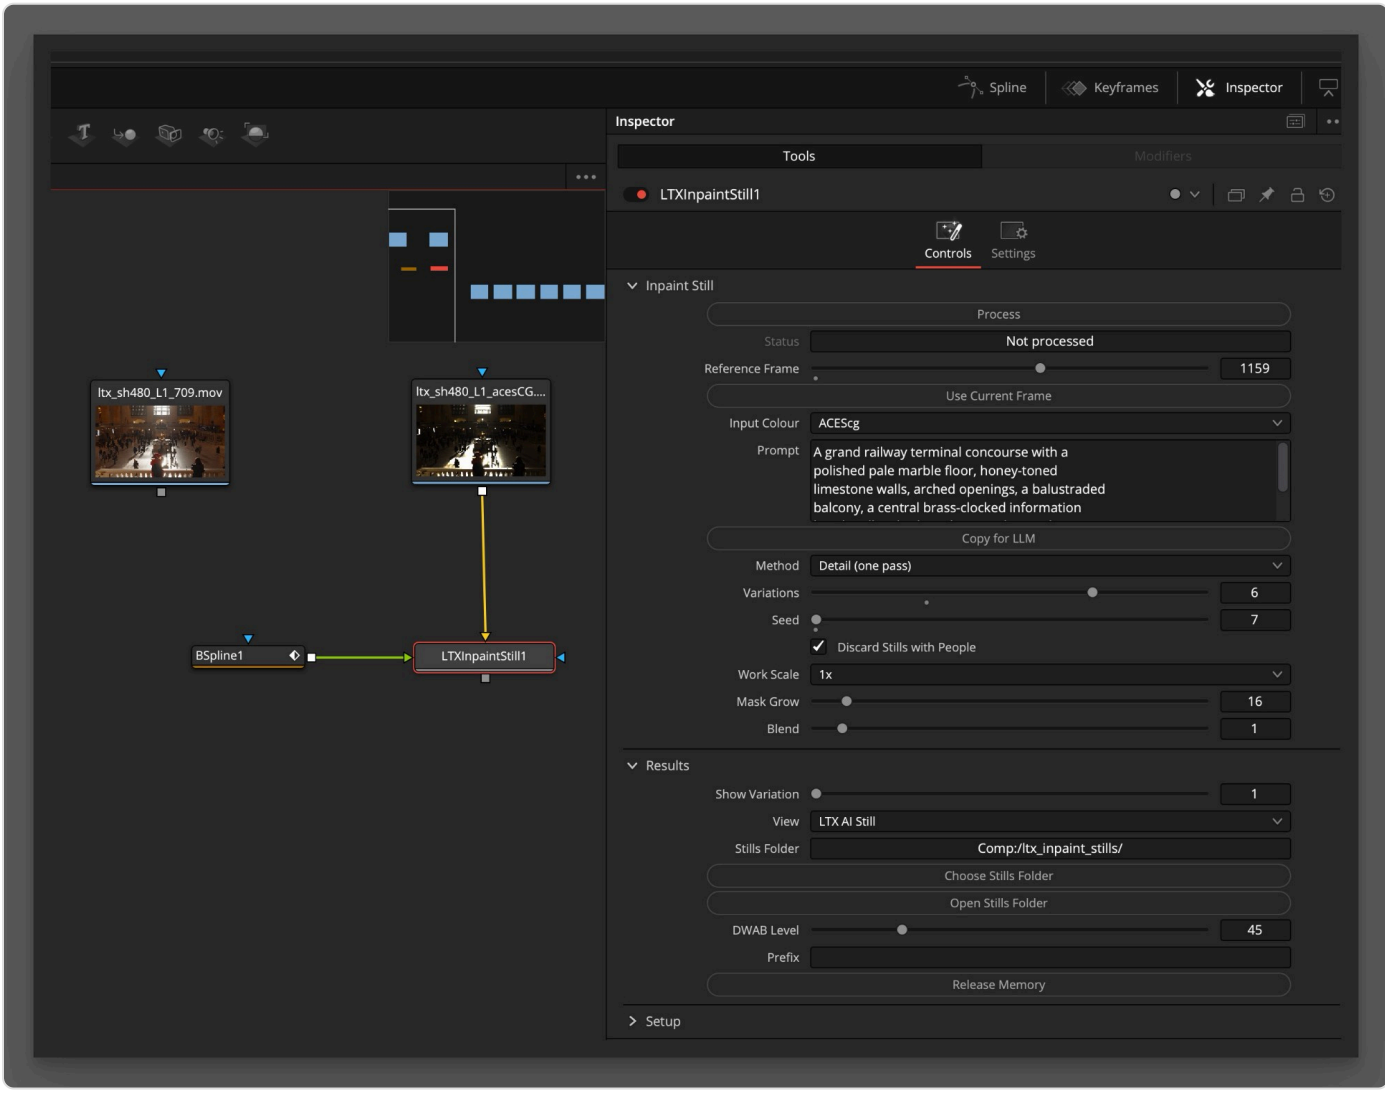

The node with an ACEScg plate on yellow and a mask on green, and its controls in the Inspector

Control	What it does
Reference Frame	The frame the still is made from
Input Colour	As Is (Rec.709, faster), ACEScg or Linear sRGB
Prompt	Optional. Describes the scene as it should look
Copy for LLM	Gets a frame and instructions ready for any LLM to suggest a prompt
Method	Detail (one pass) has the most detail. Structure (two pass) is safer on very big holes
Variations	How many stills to make, each from its own seed

Control	What it does
Seed	Moves on by itself, so running again makes new stills
Discard Stills with People	Throws away any still with a person in the filled area, and tries the next seed
Work Scale	Enlarges small crops for the model. A small crop needs 2x or 4x
Mask Grow	Pixels the fill overlaps your picture. Keep 16 unless it touches something you need
Blend	How far the fill's brightness blends into its surroundings
View	LTX AI Still, or Original to compare
Release Memory	Unloads the model now. Otherwise it unloads after 5 minutes

Getting a good fill

> **The biggest wins.** Keep the hole small, keep masks clear of people, and describe the scene on big holes.

- **Prompt the whole scene.** Say what should be there: "A wooden staircase with grey carpet treads in a bright home". Don't mention what you're removing, and leave out "no", "without" and "remove". In tests on one big hole, a scene prompt gave 16 clean stills of 16, against 1 of 8 with no prompt.
- **Small holes:** try no prompt first, since a prompt makes little difference there.
- **Repeated patterns:** if the same lettering appears elsewhere in the frame, crop it out or mask it all, or the model may paint it back.
- **Don't let a mask cut through a person.** The model tends to finish them, even with a good prompt.
- **Paint easy areas first.** Over open sky, paint most of it in Fusion and mask only the hard part. On one shot this took stills with no invented object from 0 of 15 to 18 of 18.

Discard Stills with People catches most people, including out-of-focus people seen from behind, but it can miss a small partial head, so still look at your stills. If you're outpainting most of someone's body, it can discard every still: untick it then.

ACEScg and highlights

Choose **ACEScg** or **Linear sRGB** and the stills come back in that space, with real values above 1.0 in the fill. Beyond the fade around the fill, every pixel is your original. Convert log footage with a CST to ACEScg first.

HDR takes longer than Rec.709: about 72 seconds a still against 52 on an M5 Max at HD. Invented windows and skies aren't matched to your exposure, so you may need to grade them.

Using the alpha

Each still carries your mask plus Mask Grow in its alpha. The colour is the whole picture, not premultiplied, so you see the full plate on the Loader. When you composite, treat it as straight: turn on Post-Multiply on the Loader, or set the Merge to match. The alpha's edge is as hard as your mask, so blur it in Fusion if you want it softer.

Outpainting

Put the `cvt_LTXOutpaintCanvas` macro in Fusion's Macros folder and restart. Connect your image to the macro and the macro to the yellow input, leaving green empty: its alpha is the mask.

Set **Canvas Width** and **Height**, then **Picture Size**, **Filter** and **Picture Position**. At Picture Size 1 your picture stays pixel-exact. Keep Mask Grow at 16: that's the overlap that hides the join. A prompt usually isn't needed, and you don't need to mention people who are already in the picture.

How long it takes

Measured on an M5 Max with 128 GB, HD, ACEScg:

Variations	First run (new prompt, model not loaded)	Model still loaded
1	about 2:15	about 1:15
3	about 4:40	about 3:40
6	about 8:00	about 7:15

Only the 6-variation first run was timed whole; the others are worked out from it.

If something goes wrong

- **Status** says what happened, and errors pop up in a message window.
- **"Not enough free memory":** quit other heavy apps, or press **Release Memory** on another node.
- **No Loaders on Resolve's Fusion page:** set Preferences > System > General > External scripting to Local.
- **Stills went to Documents:** Status says why. In Fusion Studio, save the comp first. A project or comp set up on another Mac can point to that Mac's home folder or a drive that isn't mounted: on Resolve, change Project media location in Project Settings > General Options > Working Folders, or choose a Stills Folder.

- **Setup section hidden:** tick **Show Setup Options** to download again or change folders.
- **Collect Logs** writes a support bundle to your home folder, with no pictures and no token. Review it before sending it.

From Creative Video Tips (CVT) · Created by Chadwick | creativevideotips.com
Free to use and share. NOT FOR SALE - please do not sell it or redistribute it for payment.

v1.00: first guide.

v1.01: adds Link Existing Models and the SETUP REQUIRED marker.

v1.02: not recommended on 64 GB Macs or smaller; the folder fields have Choose buttons.

v1.03: adds a screenshot of the node and its controls.

v1.04: adds a picture of a still made with the node.

v1.05: the stairs picture shows the whole node tree, and a screenshot of the Setup section.

v1.06: for 1.30, which says when the Stills Folder is on another Mac or a drive that isn't mounted.