# Chapter 2: ARRAYS AND STRUCTURES

Data Structures Lecture Note Prof. Sungwon Jung Big Data Processing Laboratory Dept. of Computer Science and Engineering Sogang University

# 2.1 ARRAYS

## 2.1.1 The Abstract Data Type

- ■An *array* is usually viewed as "a consecutive set of memory locations" which is a usual implementation.
- ■An *array* as an ADT is a set of pairs, < *index, value*>, such that each index that is defined has a value associated with it.
- Aside from creating a new array, most languages provide only two standard operations for arrays,
  - (1) retrieving a value
  - (2) storing a value

#### <Abstract Data Type Array>

#### **ADT** Array is

**objects**: A set of pairs < *index*, *value*> where for each value of *index* there is a value from the set *item*. *Index* is a finite set of one or more dimensions, for example,  $\{0, \ldots, n-1\}$  for one dimension,  $\{(0,0), (0,1), (0,2), (1,0), (1,1), (1,2), (2,0), (2,1), (2,2)\}$  for two dimensions, etc.

#### functions:

for all  $A \in Array$ ,  $i \in index$ ,  $x \in item$ , j,  $size \in integer$ 

Array Create(j, list) ::= **return** an array of j dimensions where list is a j-tuple whose ith element is the size of the ith dimension. Items are undefined.  $B = Create(3,(4,5,7)) \rightarrow B[4][5][7]$ 

Item Retrieve(A, i) ::= if  $(i \in index)$  return the item associated with index value i in array A

else return error.

Array Store(A, i, x) ::= if  $(i \in index)$  return an array that is identical to array A except the new pair  $\langle i, x \rangle$  has been inserted else return error.

end Array

**Data Engineering Laboratory** 

## 2.1.2 Arrays in C

■Declaration of one-dimensional arrays in C:

int list[5], \*plist[5];

Memory allocation of arrays :

Memory address
base address = list
list + sizeof(int)
list + 2·sizeof(int)
list + 3'sizeof(int)
list + 4·sizeof(int)

C interprets list[i] as a pointer to an integer.

Observe the difference between a declaration such as

```
int *list1;
and
int list2[5];
```

Variables *list1* and *list2* are both pointers to an integer type object. *list2* is a pointer to *list2*[0] and *list2*+*i* is a pointer to *list2*[i].

```
Thus, (list2+i) equals \&list2[i]. So, *(list2+i) equals list2[i].
```

**Data Engineering Laboratory** 

5

## **■** [Program 2.1]

- When sum is invoked, *input* = & *input*[0] is copied into a temporary location and associated with the formal parameter *list*.
- When list[i] occurs on the right-hand side of '=' in an assignment statement, a dereference takes place and the value pointed at by (list+i) is returned.
- If list[i] appears on the left-hand side of '=', then the value produced on the right-hand side is stored in the location (list+i).

**Data Engineering Laboratory** 

7

#### ■ Example 2.1 [One-dimensional array addressing]

```
int one[]=\{0, 1, 2, 3, 4\};
```

A function that prints out both the address of the *I*th element of this and the value found at this address.

## [Program 2.2]

**Data Engineering Laboratory** 

## ■ [Figure 2.1] One-dimensional array addressing

Address	Contents
12244868	0
12344872	1
12344876	2
12344880	3
12344884	4

**Data Engineering Laboratory** 

Q

## 2.2 DYNAMICALLY ALLOCATED ARRAYS

#### 2.2.1 ONE-DIMENSIONAL ARRAYS


- ■If the user wishes to change array size, we have to change the definition of *MAX\_SIZE* and recompile the program.
- ■A good solution to this problem is to defer this decision to run time and allocate the array when we have a good estimate of the required array size.

```
int i, n, *list;
printf("Enter the number of numbers to generate: ");
scanf("%d", &n);
if ( n < 1 ) {
    fprintf(stderr, "Improper value of n \n");
    exit(EXIT_FAILURE);
}
MALLOC(list, n * sizeof(int));</pre>
```

**Data Engineering Laboratory** 

#### 2.2.2 TWO-DIMENSIONAL ARRAYS

- ■A 2-D array is represented as a 1-D array in which each element is itself a 1-D array
- **■**(e.g.) int x[3][5];

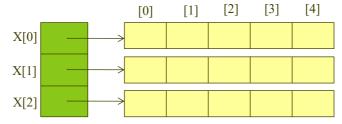

■A 3-D array is represented as a 1-D array in which each element is itself a 2-D array

Data Engineering Laboratory

11 =

## **■** [Program 2.3]

**Data Engineering Laboratory** 

- void\* calloc(elt\_count, elt\_size)
- → allocates a region of memory large enough to hold an array of elt\_count elements, each of size elt\_size, and the region of memory is set to zero
- ■void\* realloc(p, s)
  - → changes the size of memory block pointed at by p to s

**Data Engineering Laboratory** 

13 -

# 2.3 STRUCTURES AND UNIONS

#### 2.3.1 Structures

- A *structure* (called a *record* in many other programming language) is a collection of data items, where each item is identified as to its *type* and *name*.
- For example, the following declaration creates a variable whose name is person with three fields.

```
struct {
   char name[10];
   int age;
   float salary;
} person;
```

■ The structure member operator · is used to select a particular member of the structure.

```
strcpy (person.name, "james");
person.age = 10;
person.salary = 35000;
```

**Data Engineering Laboratory** 

• Creating new structure data types by using the *typedef* statement :

humanBeing person1, person2;

**Data Engineering Laboratory** 

15

## ■ [Program 2.4]

```
int humans equal(human being person1, human being person2)
  /* return TRUE if person1 and person2 are the same human being
  otherwise return FALSE */
  if (strcmp(person1.name, person2.name))
      return FALSE;
  if (person1.age != person2.age)
      return FALSE;
  if (person1.salary != person2.salary)
       return FALSE;
  return TRUE;
}
if (humans equal(person1, person2))
  printf("The two human beings are the same");
else
  printf("The two human beings are not the same");
                                                           Data Engineering Laboratory
```

#### A structure within a structure

17

```
typedef struct {
    int month;
    int day;
    int year;
    } date;

typedef struct human_being {
    char name[10];
    int age;
    float salary;
    date dob;
    };
human_being person1;
person1.dob.month = 2;
person1.dob.day = 11;
person1.dob.year = 1944;
```

**Data Engineering Laboratory** 

#### **2.3.2 Unions**

19 \blacksquare

■ Fields share their memory space → only one field of union is active at any given time

```
human_being person1, person2;
person1.sex_info.sex = male;
person1.sex_info.u.beard = FALSE;
person2.sex_info.sex = female;
person2.sex_info.u.children = 4;
```

## 2.3.3 Internal Implementation of Structures

- In most cases we need not be concerned with exactly how the C compiler will store the fields of structure in memory.
- Generally, the values will be stored in the same way using increasing address location in the order specified in the structure definition.

**Data Engineering Laboratory** 

24

## 2.3.4 Self-Referential Structures

- A *self-referential structure* is one in which one or more of its components is a pointer to itself.
- Self-referential structure usually require dynamic storage management routine (*malloc* and *free*) to explicitly obtain and release memory.

```
typedef struct list {
        char data;
        list *link;
      };

list item1, item2, item3;

item1.data = 'a';
item2.data = 'b';
item3.data = 'c';
item1.link = item2.link = item3.link = NULL;

item1.link = &item2;
item2.link = &item3;

Data Engineering Laboratory
```

# 2.4 POLYNOMIALS

23

## 2.4.1 The Abstract Data Type

- Arrays are not only data structures in their own right, we can also use them to implement other abstract data types.
- One of the simplest and most commonly found data structures:
   ordered list or linear list.

```
( item_0, item_1, ..., item_{n-1})
```

- Examples:
  - Days of the week: (Sunday, Monday, Tuesday, Wednesday, Thursday, Friday, Saturday)
  - Values in a deck of cards: (Ace, 2, 3, 4, 5, 6, 7, 8, 9, 10, Jack, Queen, King)
  - Floors of the building : (basement, lobby, mezzanine, first, second)
     etc.

- Possible operations on the ordered lists :
  - Finding the length, n, of a list.
  - Reading the items in a list from left to right (or right to left).
  - Retrieving the *l*th item from a list,  $0 \le i < n$ .
  - Replacing the item in the *l*th position of a list,  $0 \le i < n$ .
  - Inserting a new item in the ith position of a list,  $0 \le i < n$ . The items previously numbered i, i+1, . . ., n-1 become items numbered i+1, i+2, . . ., n.
  - Deleting an item from the *i*th position of a list,  $0 \le i < n$ . The items previously numbered  $i+1, \ldots, n$  become items numbered  $i, i+1, \ldots, n-1$ .
- Implementations (ways to represent an ordered list) :
  - Sequential mapping
  - Nonsequential mapping

**Data Engineering Laboratory** 

25

■ A *polynomial* (viewed from a mathematical perspective) is a sum of terms, where each term has a form  $ax^e$ , where x is a variable, a is the coefficient, and e is the exponent.

For example:

$$A(X) = 3X^{2} + 2X^{5} + 4$$

$$B(X) = X^{4} + 10X^{3} + 3X^{2} + 1$$

Standard mathematical definitions for sum and product of polynomials.

For A(x) = 
$$\sum a_i x^i$$
 and B(x) =  $\sum b_i x^i$   
A(x) + B(x) =  $\sum (a_i + b_i) x^i$   
A(x)·B(x) =  $\sum (a_i x^i \bullet (\sum b_i x^i))$ 

## [ADT 2.2] Abstract Data Type Polynomial

**ADT** Polynomial is

**Objects**:  $p(x) = a_1 x^{e_1} + \dots + a_n x^{e_n}$ ; a set of ordered pairs of  $\langle a_i, e_i \rangle$ 

where  $a_i$  in Coefficients and  $e_i$  in Exponents, are integers >=0.

**Functions**:

for all poly, poly1,  $poly2 \in Polynomial$ ,  $coef \in Coefficients$ ,  $expon \in Exponents$ 

Polynomial Zero() ::= **return** the polynomial p(x)=0

Boolean IsZero(poly) ::= if (poly) return FALSE

else return TRUE

Coefficients Coef(poly, expon) ::= **if** (expon  $\in$  poly) **return** its coefficient

else return zero

Exponent LeadExp(poly) ::= **return** the largest exponen in poly.

Polynomial Attach(poly,coef,expon)  $::= if (expon \in poly) return error$ 

else return the polynomial poly with

the term < coef, expon> inserted

**Data Engineering Laboratory** 

27

*Polynomial* Remove(poly, expon) ::= **if** ( $expon \in poly$ )

**return** the polynomial *poly* with

the term whose exponent

is expon deleted

is emport defeted

else return error

*Polynomial* SingleMult(*poly,coef,expon* ) ::= **return** the polynomial

 $poly \cdot coef \cdot \chi^{expon}$ 

 $Polynomial \ Add(poly1,poly2)$  ::= **return** the polynomial

poly1 + poly2

Polynomial Mult(poly1,poly2) ::= **return** the polynomial

poly1 · poly2

end Polynomial

## 2.4.2 Polynomial Representation

[Program 2.5] Initial version of padd function

```
/* d = a + b, where a, b, and d are polynomials */
                                                    A(X) = 3X^2 + 2X^5 + 4
d = Zero();
                                                    B(X) = X^4 + 10X^3 + 3X^2 + 1
While(!IsZero(a) && ! IsZero(b)) do {
   switch COMPARE(Lead Exp(a), Lead Exp(b)) {
                d = Attach(d, Coef(b, Lead_Exp(b)), Lead_Exp(b));
                 b = Remove(b, Lead Exp(b));
                 break;
     case 0:
                 sum = Coef(a, Lead Exp(a)) + Coef(b, Lead Exp(b));
                 if (sum) {
                     Attach(d, sum, Lead Exp(a));
                 a = Remove(a, Lead Exp(a));
                 b = Remove(b, Lead Exp(b));
                 break;
     case 1: d = Attach(d, Coef(a, Lead Exp(a)), Lead Exp(a));
                 a = Remove(a, Lead Exp(a));
```

insert any remaining terms of a or b into d

**Data Engineering Laboratory** 

29

Representation

Exponents are uniquely arranged in decreasing order.

<Dense Representation>

Include all the terms in a polynomial:

A(x) = 
$$a_n x^n + a_{n-1} x^{n-1} + \dots + a_1 x + a_0$$
, where  $a_n \neq 0$ 

```
#define MAX_DEGREE 1001
typedef struct {
   int degree;
   float coef[MAX_DEGREE];
   } polynomial;
```

Let *a* be a variable of type polynomial.

We can represent the polynomial 
$$A(x) = \sum_{i=1}^{n} a_i x^i$$
 in  $a_i$ , by setting a.degree =  $n$  and a.coef[i] =  $a_{n-i}$ ,  $0 \le i \le n$ .

- Although this representation leads to very simple algorithms for most of the operations, it wastes a lot of space.
- For instance, if a.degree << MAX\_DEGREE or if the polynomial is sparse.
   Examples:

#define MAX\_DEGREE 10001
typedef struct {
 int degree;
 float coef[MAX\_DEGREE];
 } polynomial;

Let a be a variable of type polynomial. We can represent the polynomial  $A(x) = \sum_{i} a_i x^i$  in a, by setting a.degree = n and a.coef[i]  $= a_{n-i}$ ,  $0 \le i \le n$ .

$$A(x) = 2x^{1000} + 1$$

$$B(x) = x^4 + 10x^3 + 3x^2 + 1$$

struct {int degree; float coef[1001];} polys;←

degree = 1000

- 1	acgree	1000							
	0←	1←	2←	3←	←	998←	999	1000←	+
	2←	0←	0←	0←	⊄	0←	0←	1←	+

degree = 4←

0 <b>←</b>	1←	2←	3←	4←	←	999←	1000←
1←	10←	2←	0←	1←	0←	0←	0←

**Data Engineering Laboratory** 

31

## <Sparse Representation>

To preserve space, we use only one global array to store all our polynomials.

```
#define MAX_TERMS 100
typedef struct {
     float coef;
     int expon;
     } polynomial;
polynomial terms[MAX_TERMS];
int avail = 0;
```

## ■ [Figure 2.2] : Array representation of two polynomials

Examples: 
$$A(x) = 2x^{1000} + 1, B(x) = x^4 + 10x^3 + 3x^2 + 1$$

To represent a zero polynomial c, set startc > finishc.

**Data Engineering Laboratory** 

33

## 2.4.3 Polynomial Addition

## ■[Program 2.6] : Function to add two polynomials

```
void padd(int starta, int finisha, int startb, int finishb, int *startd, int *finishd)
{
    /* add A(x) and B(x) to obtain D(x) */
    float coefficient;
    *startd = avail;
    while (starta <= finisha && startb <= finishb)
        switch (COMPARE(terms[starta].expon, terms[startb].expon)) {
        case -1 : /* a expon < b expon */
            attach(terms[startb].coef, terms[startb].expon);
            startb++;
            break;
        }
}</pre>
```

**Data Engineering Laboratory** 

```
case 0 : /* equal exponents */
                       coefficient = terms[starta].coef + terms[startb].coef;
                       if (coefficient)
                                  attach(coefficient, terms[starta].expon);
                                   startb++;
                       starta++;
                       break;
           case 1: /* a expon > b expon */
                       attach(terms[starta].coef, terms[starta].expon);
                       starta++;
    /* add in remaining terms of A(x) */
    for (; starta <= finisha; starta++)
           attach(terms[starta].coef, terms[starta].expon);
    /* add in remaining terms of B(x) */
    for (; startb <= finishb; startb++)</pre>
           attach(terms[startb].coef, terms[startb].expon);
    *finishd =avail-1;
}
```

**Data Engineering Laboratory** 

35

## [Program 2.7]: Function to add a new term

```
void attach(float coefficient, int exponent)
{
    /* add a new term to the polynomial */
    if (avail >= MAX_TERMS) {
        fprintf(stderr, "Too many terms in the polynomial");
        exit(1);
    }
    terms[avail].coef = coefficient;
    terms[avail++].expon = exponent;
}
```

■ Analysis of *padd*:

Time complexity is O(n+m), where m and n are the number of terms in A and B, respectively.

When avail > MAX\_TERMS, must we quit?

**Data Engineering Laboratory** 

37

# 2.5 THE SPARSE MATRIX

## 2.5.1 The Abstract Data Type

- A *sparse matrix* is a matrix which contains many zero entries.
- If a two-dimensional array is used to represent a sparse matrix, a lot of space is used to store the same value 0 and this implementation does not work when the matrices are large since most compilers impose limits on array sizes.

#### [Figure 2.3]

	<u>c</u>	:o1 0	col 1	col 2		2	:o1 0	col 1	col 2	col 3	col 4	co1 5
woı	0	-27	3	4	0 wor	1	15	0	0	22	0	-15
woı	1	6	82	-2	row 1	1	0	11	3	0	0	0
woı	2	109	-64	11	row 2	1	0	0	0	-6	0	0
woı	3	12	8	9	row 3	1	0	0	0	0	0	0
woı	4	48	27	47	row 4	1	91	0	0	0	0	0
					row 5	1	0	0	28	0	0	0

(a) (b)

**Data Engineering Laboratory** 

39 **I** 

## ■ [ADT 2.3] ADT Sparse Matrix

**ADT** Sparse\_Matrix is

**objects**: a set of triples, <*row*, *column*, *value*>, where *row* and *column* are integers and from a unique combination, and value comes from the set *item*.

#### functions:

for all  $a, b \in Sparse\_Matrix, x \in item, i, j, max\_col, max\_row \in index$ 

*Sparse\_Matrix* Create(*max\_row*, *max\_col*) ::=

return a Sparse\_Matrix that can hold up to max\_items = max\_row ×max\_col and whose maximum row size is max\_row and whose maximum column size is max\_col.

Sparse\_Matrix Transpose(a) ::=

**return** the matrix produced by interchanging the row and column value of every triple.

**Data Engineering Laboratory** 

 $Sparse\_Matrix \ Add(a, b) ::=$ 

if the dimension of a and b are the same return the matrix produced by adding corresponding items, namely those with identical row and column values. else return error.

*Sparse Matrix* Multiply(a, b) ::=

if number of columns in a equals number of rows in b return the matrix d produced by multiplying a by b according to the formula :  $d(i, j) = \sum a(i, k) \cdot b(k, j)$ , where d(i,j) is the (i,j)th element else return error.

end Sparse matrix

**Data Engineering Laboratory** 

41

## 2.5.2 Sparse Matrix Representation

■We can characterize uniquely any element within a matrix by a triple < row, col, value>.

Thus we can use an array of triples.

- •We organize the triples so that row indices are in ascending order and among those with the same row indices are ordered in ascending order of column indices.
- To insure that the operations terminate, we must know the number of rows and columns, and the number of nonzero elements in the matrix.

```
Sparse_Matrix Create(max_row, max_col) ::=

#define Max_TERMS 101 /* maximum number of terms +1*/
typedef struct {
    int col;
    int row;
    int value;
    } term;
term a[MAX_TERMS];
```

**Data Engineering Laboratory** 

43

		2	:OT 0	COI I	CO1 Z	CO1 3	CO1 4	COT 2
wor	0	ı	15	0	0	22	0	-15
row	1	I	0	11	3	0	0	0
row	2	I	0	0	0	-6	0	0
woı	3	I	0	0	0	0	0	0
wor	4	I	91	0	0	0	0	0
	_		_	_		_	_	_

[Figure 2.5] For example, row 5 | 0 0 28 0 0

81 <u></u>	IOW	col	value	<u> </u>	IOW	col	value
a[0]	6	6	8	b[0]	6	6	8
[1]	0	0	15	[1]	0	0	15
[2]	0	3	22	[2]	0	4	91
[3]	0	5	-15	[3]	1	1	11
[4]	1	1	11	[4]	2	1	3
[5]	1	2	3	[5]	2	5	28
[6]	2	3	-6	[6]	3	0	22
[7]	4	0	91	[7]	3	2	-6
[8]	5	2	28	[8]	5	0	-15
		(a)				(p)	

**Data Engineering Laboratory** 

## 2.5.3 Transposing A Matrix

A simple algorithm >

```
for each row i

take element <i, j, value> and store it
as element <j, i, value> of the transpose;
```

We will not know exactly where to place element <j, i, value> in the transpose until we have processed all the elements that precede it.

For instance,

```
(0, 0, 15) becomes (0, 0, 15)
(0, 3, 22) becomes (3, 0, 22)
(0, 5,-15) becomes (5, 0,-15)
```

Consecutive insertions are required.

We must move elements to maintain the correct order.

**Data Engineering Laboratory** 

45

 We can avoid this data movement by using the column indices to determine the placement of elements in the transpose matrix.

```
for all elements in column j
place element <i, j, value> in element <j, i, value>;
```

**■** [Program 2.8]

**Data Engineering Laboratory** 

4/

A transpose algorithm using dense representation :

```
for (j = 0; j < columns; j++)
for (i = 0; i < rows; i++)
b[j][i] = a[i][j];
```

Time complexity : O(*rows columns*).

<A much better algorithm by using a little more storage>

This algorithm, *fast\_transpose*, proceeds by first determining the number of elements in each column of the original matrix.

This number gives the number of elements in each row of the transpose matrix.

	0	1	2	3	4	5
row-terms	2	1	2	2	0	1
starting_pos	1	3	4	6	8	8

#### [Program 2.9]

```
void fast transpose(term a[], term b[])
                                                                                                        <u>value</u>
{ /* the transpose of a is placed in b */
                                                                                   a[0]
                                                                                                          8
    int row terms[MAX COL], starting pos[MAX COL];
                                                                                    [1]
                                                                                                         15
    int i, j, num cols = a[0].col, num terms = a[0].value;
                                                                                    [2]
                                                                                                 3
                                                                                                         22
    b[0].row = num cols; b[0].col = a[0].row;
                                                                                                         -15
                                                                                    [3]
                                                                                                 5
    b[0].value = num terms;
                                                                                    [4]
                                                                                                          11
                                                                                    [5]
                                                                                                          3
    if (num terms > 0) {
                              /* nonzero matrix */
                                                                                    [6]
                                                                                                         -6
            for (i = 0; i < num cols; i++)
                                                row terms[i] = 0;
                                                                                    [7]
                                                                                                         91
            for (i = 1; i \le num \text{ terms}; i++) row terms[a[i].col]++;
                                                                                    [8]
                                                                                                          28
            starting pos[0] = 1;
            for (i = 1; i < num cols; i++)
                                                                                                         <u>value</u>
                         starting_pos[i] = starting_pos[i-1] + row_terms[i-1];
                                                                                   b[0]
                                                                                           6
                                                                                                            8
                                                                                                   6
                                                                                                           15
            for (i = 1; i \le num \text{ terms}; i++) \{
                                                                                    [1]
                                                                                           0
                                                                                                   0
                                                                                    [2]
                                                                                           0
                                                                                                   4
                                                                                                           91
                         j = \text{starting pos}[a[i].col]++;
                                                                                    [3]
                                                                                           1
                                                                                                           11
                         b[j].row = a[i].col; b[j].col = a[i].row;
                                                                                    [4]
                                                                                                   1
                                                                                                            3
                         b[j].value = a[i].value;
                                                                                    [5]
                                                                                                           28
                                                                                    [6]
                                                                                                           22
                                                                                    [7]
                                                                                           3
                                                                                                           -6
                                                                             Data I
}
                                                                                    [8]
                                                                                                          -15
```

- Time complexity: O(columns + elements).
  If elements = O(rows columns), then
  O(columns + elements) becomes O(rows columns).
- Additional arrays, *row\_terms* and *starting\_pos*, are used.
- We can reduce this space to one array
  if we put the starting positions into the space used by row\_terms.

## 2.5.4 Matrix Multiplication

#### Definition :

Given two matrices A and B where A is  $m \times n$  and B is  $n \times p$ , the product matrix D has dimension  $m \times p$ . Its  $\langle i, j \rangle$  element is :

$$d_{ij} = \sum_{k=0}^{n-1} a_{ik} b_{kj}$$

for  $0 \le i < m$  and  $0 \le j < p$ .

**Data Engineering Laboratory** 

51

<Matrix Multiplication Algorithm using dense representation>

```
\label{eq:cost_sum} \begin{split} &\text{for } (i=0;\,i < rows\_a;\,i++) \; \{ \\ &\text{for } (j=0;\,j < cols\_b;\,j++) \; \{ \\ &\text{sum} = 0; \\ &\text{for } (k=0;\,k < cols\_a;\,k++) \\ &\text{sum} += a[i][k]*b[k][j]; \\ &\text{d}[i][j] = sum; \\ &\} \end{split}
```

Time Complexity: O(rows\_a·cols\_a·cols\_b)

Note that the product of two sparse matrices may no longer be sparse.

For example :  $\begin{bmatrix} 1 & 0 & 0 \\ 1 & 0 & 0 \\ 1 & 0 & 0 \end{bmatrix} \begin{bmatrix} 1 & 1 & 1 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix} = \begin{bmatrix} 1 & 1 & 1 \\ 1 & 1 & 1 \\ 1 & 1 & 1 \end{bmatrix}$ 

<Multiplying two sparse matrices represented as an ordered list>
Need to compute the elements of D by rows so that we can store them in their proper place without moving previously computed elements.

${f A}$							
rows_a	cols_a	totala					
rows_a							
$B^{T}$							

D								
rows_b	cols_b	totalb						

	$\mathbf{B}_{\mathbf{I}}$						
cols_b	rows_b	totalb					
cols b	-1						

D							
rows_a	cols_b	totald					

Data Engineering Laboratory

## ■ [Program 2.10]

Matrices A, B, and D are stored in the arrays a, b, and d, respectively. Transpose of B is stored in  $new_b$ .

#### Variables used:

*row* - the row of A that we are currently multiplying with the columns in B.

row\_begin - the position in a of the first element of the current row.

column - the column of B that we are currently multiplying with a row in A.

totald - the current number of elements in the product matrix D.

*i, j* - pointers which are used to examine successively elements from a row of A and a column B.

```
<u>value</u>
                                                                                 IOW
                                                                                       col
void mmult(term a[], term b[], term d[])
                                                                          a[0]
                                                                                 6
                                                                                        6
                                                                                                8
/* multiply two sparse matrices */
                                                                                        0
                                                                                               15
                                                                                 0
                                                                           [1]
                                                                           [2]
                                                                                        3
                                                                                               22
                                                                           [3]
                                                                                        5
                                                                                               -15
 int i, j, column, totalb = b[0].value, totald = 0;
                                                                           [4]
                                                                                        1
                                                                                               11
 int rows a = a[0].row, cols a = a[0].col, totala = a[0].value;
                                                                           [5]
                                                                                 1
                                                                           [6]
                                                                                               -6
 int cols b = b[0].col;
                                                                           [7]
                                                                                 4
                                                                                        0
                                                                                               91
 int row begin = 1, row = a[1].row, sum = 0;
                                                                           [8]
                                                                                               28
 term new_b[MAX_TERMS];
                                                                                 row
                                                                                       col
                                                                                              value
 if (col a != b[0].row) {
                                                                          b[0]
                                                                                  6
                                                                                        6
                                                                                                 8
    fprintf(stderr, "Incompatible matrices\n");
                                                                           [1]
                                                                                  0
                                                                                                15
                                                                                                91
                                                                           [2]
                                                                                 0
    exit(1);
                                                                           [3]
                                                                                                11
                                                                           [4]
                                                                                  2
                                                                                                 3
                                                                                        1
 fast transpose(b, new b);
                                                                                                28
                                                                           [5]
                                                                                 2
 /* set boundary condition */
                                                                           [6]
                                                                                  3
                                                                                        0
                                                                                                22
                                                                           [7]
                                                                                        2
                                                                                                -6
 a[totala+1].row = rows a;
                                                                           [8]
                                                                                        0
                                                                                               -15
 new b[totalb+1].row = cols b; new b[totalb+1].col = -1;
```

**Data Engineering Laboratory** 

column = new b[j].row;

**Data Engineering Laboratory** 

}

55

for  $(i = 1; i \le totala;)$ 

```
else switch (COMPARE(a[i].col, new_b[j].col)) {  case -1 : /* \ go \ to \ next \ term \ in \ a \ */ \\ i++; \ break; \\ case \ 0 : /* \ add \ terms, go \ to \ next \ term \ in \ a \ and \ b \ */ \\ sum \ += (a[i++].value \ * \ new_b[j++].value); \\ break; \\ case \ 1 : /* \ go \ to \ next \ term \ in \ b \ */ \\ j++; \\ \} \\ \} \ /* \ end \ of \ for \ j <= totalb+1 \ */ \\ for \ ( \ ; \ a[i].row == row; \ i++) \\ ; \\ row_begin = i; \ row = a[i].row; \\ \} /* \ end \ of \ for \ i <= totala \ */ \\ d[0].row = row_a; \ d[0].col = cols_b; \\ d[0].value = totald; \\ \}
```

**Data Engineering Laboratory** 

$$\mathbf{A} = \begin{bmatrix} 7 & 0 & 0 & 5 \\ 4 & 5 & 0 & 1 \\ 0 & 0 & 5 & 0 \end{bmatrix}$$

**57** 

$$\mathbf{B} = \begin{array}{|c|c|c|c|c|c|} \hline 0 & 1 & 0 \\ \hline 9 & 9 & 7 \\ \hline 0 & 0 & 1 \\ \hline 1 & 0 & 0 \\ \hline \end{array}$$

$$\mathbf{D} = \begin{array}{c|cccc} 5 & 7 & 0 \\ 46 & 49 & 35 \\ \hline 0 & 0 & 5 \end{array}$$

	3	4	6
	0	0	7
	0	3	5
	1	0	4
	1	1	5
	1	3	1
	2	2	5
	3	0	0
,			

A

3	4	6
0	1	9
0	3	1
1	0	1
1	1	9
2	1	7
2	2	1
3	-1	0

 $\mathbf{B}^{\mathrm{T}}$ 

0	0
0	5
1	7
0	46
1	49
	0 1 0

D

**Data Engineering Laboratory** 

58

row = 0 column = 0

rowBegin = 3

sum = 99

■ Notice that we have introduced an additional term into both *a* and *new\_b*:

Time complexity :

lines before the for loop:

fast transpose - O(cols\_b + totalb) time.

the outer *for* loop is iterated *rows a* times:

at each iteration - one row of the product matrix D is computed by the inner *for* loop in which at each iteration either *i* or *j* or both increase by 1, or *i* is reset to *row begin*.

**Data Engineering Laboratory** 

59 ı

The maximum total increment in *j* is *totalb*+1.

Let  $r_k$  be the number of terms in row k.

Then when row k is processed, i can increase at most  $r_k$  times

and i is reset to row begin at most cols b times.

Thus the maximum total increment in *i* is  $cols_b \cdot r_k$ .

The inner *for* loop requires  $O(cols_b \cdot r_k + totalb)$  time.

column is reset.

Therefore the outer *for* loop requires

$$\sum_{k=0}^{rows} O(cols\_b \cdot r_k + totalb)$$

$$= O(cols\_b \cdot \sum_{k=0}^{rows\_a-1} r_k + rows\_a \cdot totalb)$$

$$= O(cols\_b \cdot totala + rows\_a \cdot totalb).$$

Note that if  $totala = O(rows\_a \cdot cols\_a)$  and  $totalb = O(rows\_b \cdot cols\_b)$ ,

its complexity becomes  $O(rows\_a \cdot cols\_a \cdot cols\_b)$ .

**Data Engineering Laboratory** 

# 2.6 REPRESENTATION OF MULTIDIMENSIONAL ARRAYS

- If an array is declared a[upper<sub>0</sub>][upper<sub>1</sub>]···[upper<sub>n-1</sub>], the number of elements in the array is  $\prod_{i=0}^{n-1} upper_i$
- Two common ways to represent multidimensional arrays : row major order column major order

**Data Engineering Laboratory** 

61

<row major order>
We interpret the two-dimensional array a[upper<sub>0</sub>][upper<sub>1</sub>]
as upper<sub>0</sub> rows, row<sub>0</sub>, row<sub>1</sub>, . . ., row<sub>upper0-1</sub>
each row containing upper<sub>1</sub> elements.

If we assume that a is the address of a[0][0], then the address of a[i][j] is a+i-upper $_1+j$ . To represent a three-dimensional array a[upper $_0$ ][upper $_1$ ][upper $_2$ ], we interpret the array as upper $_0$  two-dimensional arrays of dimension upper $_1 \times$  upper $_2$ .

Then the address of a[i][j][k] is  $a + i \cdot upper_1 \cdot upper_2 + j \cdot upper_2 + k$ .

- column major order address:
  - $a + j \cdot upper_0 + i$
  - $a + k \cdot upper_0 \cdot upper_1 + j \cdot upper_0 + i$

• Generalizing on the preceding discussion, we can obtain the addressing formula for any element  $a[i_0][i_1]\cdots[i_{n-1}]$  in an array declared as  $a[upper_0][upper_1]\cdots[upper_{n-1}]$ .

If a is the address of  $a[0][0] \dots [0]$ , the address of  $a[i_0][i_1] \cdots [i_{n-1}]$  is :

$$= \alpha + \sum_{j=0}^{n-1} i_j a_j \quad \text{where } a_j = \prod_{k=j+1}^{n-1} upper_k, \quad 0 \le j < n-1, \ a_{n-1} = 1$$

- Example:
  - Given a[upper₀][upper₁][upper₂][upper₃] array, the address of a[i][j][k][m] is

 $row\ major\ order\ address:\ a+i\cdot upper_1\cdot upper_2\cdot upper_3+j\cdot upper_2\cdot upper_3+k\cdot upper_3+m\leftarrow 1$ 

 $column\ major\ order\ address:\ a+m\cdot upper_0\cdot upper_1\cdot upper_2+k\cdot upper_0\cdot upper_1+j\cdot upper_0+i$ 

**Data Engineering Laboratory** 

63

# 2.7 STRINGS

## 2.7.1 The Abstract Data Type

A string is a finite sequence of zero or more characters,

$$S = S_0, ..., S_{n-1}$$
, where  $S_i$  are characters.

## ■[ADT2.4] Abstract data type String:

**ADT** String is

**objects**: a finite sequence of zero or more characters.

**functions**: for all  $s, t \in String, i, j, m \in non-negative integers$ 

String Null(m) ::= **return** a string whose maximum length is m characters, but is initially set to NULL. We write NULL as "".

Integer Compare(s, t) ::= **if** s equals t **return** 0 else if s precedes t return -1else return +1. *Boolean* IsNull(s) ::= if (Compare(s, NULL)) return FALSE else return TRUE. ::= if (Compare(s, NULL))*Integer* Length(s) **return** the number of characters in s **else** return 0. String Concat(s, t) := **if** (Compare(t, NULL)) return a string whose elements are those of *s* followed by those of *t* else return s. *String* Substr(*s*,*i*,*j*)  $::= if((j>0) && (i+j-1) \leq Length(s))$ return the string containing the characters of s at positions i, i+1,.... i+j-1. else return NULL.

C provides many string operations in its library : see Fig. 2.8 (string.h)

**Data Engineering Laboratory** 

**65** 

## 2.7.2 Strings in C

#### Representation>

In C, we represent strings as character arrays terminated with the null character.

```
For instance,

#define MAX_SIZE 100

char s[MAX_SIZE] = "dog";

char t[MAX_SIZE] = "house";
```

Internal representation in C:

# [Figure 2.8]

s[0] s[1] s[2] s[3] t[0] t[1] t[2] t[3] t[4] t[5]

d o g \0 h o u s e \0

Alternative declaration :

```
char s[] = "dog";
char t[] = "house";
```

Concatenating these two strings by calling *strcat*(s,t) which stores the result in *s*. This produces the new string, "doghouse".

Although s has increased in length by five, we have no additional space in s to store the extra five characters.


Most of *C* compilers simply *overwrite* the memory to fit in the extra five characters.

Data Engineering Laboratory

- C provides built-in other string functions which we access through the statement #include <string.h>
- Example 2.2 [String insertion]

```
# include <string.h>
# define MAX_SIZE 100
char string1 [MAX_SIZE], *s = string1;
char string2 [MAX_SIZE], *t = string2;
```

# *strnins* (*s*, *t*, 1)

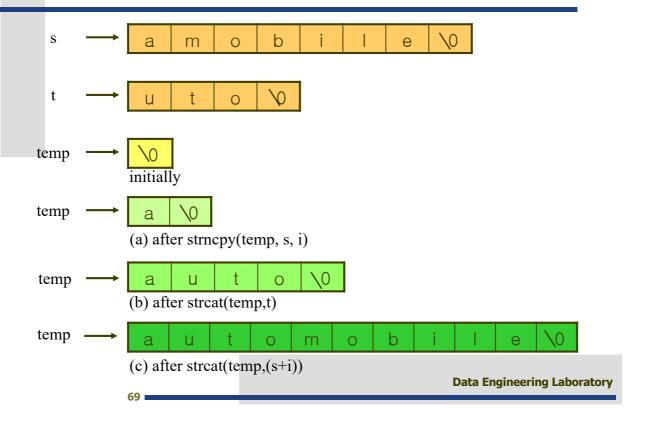

## ■ [Program 2.12]

```
void strnins(char *s, char *t, int i)
{ /* insert string t into string s at position i */
    char string[MAX_SIZE], *temp = string;

if (i<0 && i>strlen(s)) {
    fprint(stderr, "Position is out of bounds ");
    exit(1);
    }
    if (!strlen(s))
        strcpy(s, t);
    else if (strlen(t)) {
        strncpy(temp, s, i);
        strcat(temp, t);
        strcat(temp, (s+i));
        strcpy(s, temp);
    }
}
```

## 2.7.3 Pattern Matching

```
char pat[MAX_SIZE], string[MAX_SIZE], *t;


To determine if pat is in string:
    if (t = strstr(string, pat))
        printf("The string from strstr is: %s", t);
    else
        printf("The pattern was not found with strstr");

The call (t = strstr(string, pat)) returns
    a null pointer if pat is not in string.
    a pointer to the start of pat in string if pat is in string.
```

**Data Engineering Laboratory** 

71

- Reasons of developing our own pattern matching function:
  - (1) The function *strstr* may not be available with the compiler we are using.
  - (2) There are several different methods for implementing a pattern matching function.
- A simple matching algorithm :
   At each position i of string, check if pat == string[i+strlen(pat)-1].
- If pat is not in string, this algorithm has a computing time of O(nm), where n is the length of pat and m is the length of string.
- Improvements:
  - 1. Quitting when *strlen(pat)* is greater than the number of remaining characters in the string.
  - 2. Checking the first and last characters of pat before we checking the remaining characters.

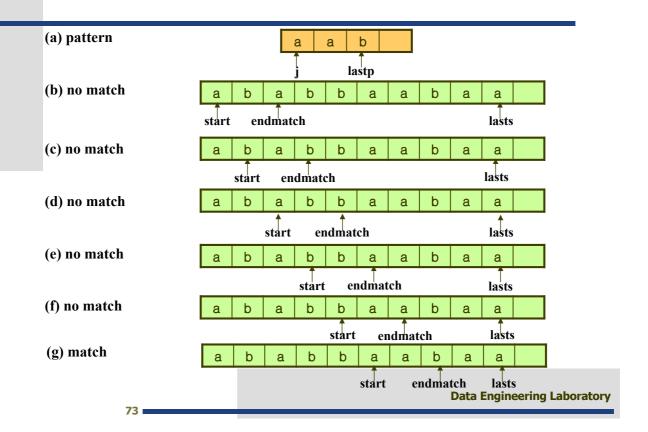

## [Program 2.13]

#### Analysis of *nfind*:

For string = "aa...a'' and pat = "aa...ab'', the computing time is O(m). Bur for string = "aa...a'' and pat = "aa...aba'', the computing time is still O(nm).

**Data Engineering Laboratory** 

75

## <KMP Algorithm>

- When a mismatch occurs, use our knowledge of the characters in the pattern and the position in the pattern where the mismatch occurred to determine where we should continue the search.
- We want to search the string for the pattern without moving backwards in the string

$$pat =$$
 'a b c a b c a c a b'  $p_0 p_1 p_2 p_3 p_4 p_5 p_6 p_7 p_8 p_9$  if  $s_i \neq p_0$ , ? if  $s_i = p_0$  and  $s_{i+1} \neq p_1$ , ? if  $s_i = p_0$ ,  $s_{i+1} = p_1$ , and  $s_{i+2} \neq p_2$ , ? if  $s_i = p_0$ ,  $s_{i+1} = p_1$ ,  $s_{i+2} = p_2$ ,  $s_{i+3} = p_3$ , and  $s_{i+4} \neq p_4$ , ?

**Data Engineering Laboratory** 

#### ■ Definition :


If  $p = p_0 p_1 p_2$ ...  $p_{n-1}$  is a pattern, then its *failure function*, f, is defined as:


$$f(j) = \begin{cases} \text{largest i} < j \text{ such that } p_0 p_1 \dots p_j = p_{j-i} p_{j-i+1} \dots p_j \text{ if such an i} \ge 0 \text{ exists} \\ -1 & \text{otherwise} \end{cases}$$


#### A rule for pattern matching :

If a partial match is found such that  $s_{i-j} cdots ... s_{i-1} = p_0 p_1 cdots ... p_{j-1}$  and  $s_i \neq p_j$  then matching may be resumed by comparing  $s_i$  and  $p_{f(j-1)+1}$  if  $j \neq 0$ . If j = 0, then we may continue by comparing  $s_{i+1}$  and  $p_0$ .

**Data Engineering Laboratory** 

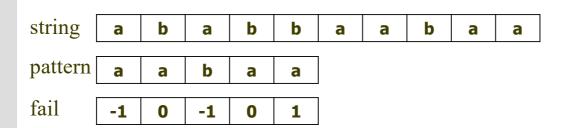

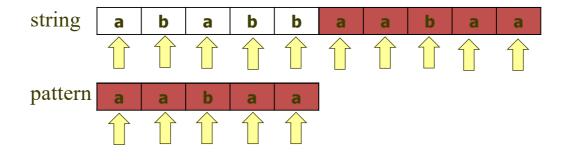

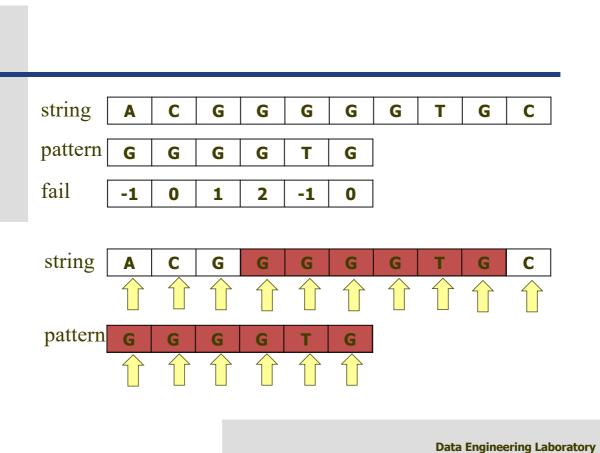

**79** 

#### Assumed declarations:

#include <stdio.h>
#include <string.h>
#define max\_string\_size 100
#define max\_pattern\_size 100
int pmatch();
void fail();
int failure[max\_pattern\_size];
char string[max\_string\_size];
char pat[max\_pattern\_size];

**Data Engineering Laboratory** 

#### • [Program 2.14]

**Data Engineering Laboratory** 

81

#### Analysis of *pmatch*:

The *while* loop is iterated until the end of either the string or the pattern is reached.

In each iteration, one of the following three actions occurs:

- 1) increment i.
- 2) increment both i and j.
- 3) reset j to failure[j-1]+1
  - -- this cannot be done more than j is incremented by the statement j++ as otherwise, j falls off the pattern.

Note that j cannot be incremented more than m = strlen(string) times.

Hence the complexity of *pmatch* is O(m).

#### Another definition of the failure function:

$$f(j) = \begin{cases} -1 & \text{if } j = 0 \\ f^{\wedge}m(j-1) + 1 & \text{where } m \text{ is the least integer } k \text{ for which } p_{f^{\wedge}k(j-1)+1} = p_j \\ -1 & \text{if there is no } k \text{ satisfying the above} \end{cases}$$

**Data Engineering Laboratory** 

83

## • [program 2.15]

```
void fail(char *pat)
{
/* compute the pattern's failure function */
    int i, n = strlen(pat);
    failure[0] = -1;
    for (j = 1; j < n; j++) {
        i = failure[j-1];
        while ((pat[j] != pat[i+1]) && (i >= 0))
            i = failure[i];
        if (pat[j] == pat[i+1])
            failure[j] = i+1;
        else failure[j] = -1;
    }
}
```

**Data Engineering Laboratory** 

## Analysis of fail:

In each iteration of the *while* loop, the value of i decreases (by the definition of f).

The variable i is reset at the beginning of each iteration of the *for* loop.

However, it is either reset to −1

or it is reset to a value 1 greater than its terminal value on the previous iteration.

Since the *for* loop is iterated only *n-*1 times,

the value of i has a total increment of at most n-1.

Hence it cannot be decremented more than *n*-1 times.

Consequently, the *while* loop is iterated at most *n*-1 times over the whole algorithm

Hence the complexity of *fail* is O(n) = O(strlen(pat))