AD 2. AERODROMES

OIMB AD 2.1 AERODROME LOCATION INDICATOR AND NAME

OIMB - BIRJAND / Secondary International Aerodrome

OIMB AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	*ARP coordinates and site at AD*	325353N 0591558E
2	*Direction and distance from (city)*	NE, 5.5 NM from Birjand
3	*Elevation / Reference temperature*	4979 FT / 36°C
4	*MAG VAR / Annual change*	3° E (2012) / Information not available
5	*AD Administration, address, telephone, telefax, telex, AFS*	Iran Airports & Air Navigation Company (IAC) Birjand Airport P.O. BOX: 97175 - 156 Birjand - Islamic Republic of Iran Tel: +9856 – 32389205, 32316961, 32312167 Telefax: +9856 – 32313725, 32319630 Telex: NIL AFS: OIMBYDYX
6	*Types of traffic permitted (IFR/VFR)*	IFR/VFR
7	*Remarks*	NIL

OIMB AD 2.3 OPERATIONAL HOURS

1	*AD Administration*	0330-1200 Except Thursday
2	*Customs and immigration*	O/R
3	*Health and sanitation*	O/R
4	*AIS Briefing Office*	NIL
5	*ATS Reporting Office (ARO)*	Service available by ATS
6	*MET Briefing Office*	NIL
7	*ATS*	HJ, other times O/R
8	*Fuelling*	HJ
9	*Handling*	Available during main carrier schedule flights
10	*Security*	H24
11	*De-icing*	NIL
12	*Remarks*	PPR at least 48 HR before EOBT from OIMB

OIMB AD 2.4 HANDLING SERVICES AND FACILITIES

1	*Cargo - handling facilities*	Available by main carrier
2	*Fuel / oil types*	Jet A-1
3	*Fuelling facilities/capacity*	Jet A-1: 2 trucks, 20000 litres,17 litres/sec, No limitation
4	*De - icing facilities*	NIL
5	*Hanger space for visiting aircraft*	NIL
6	*Repair facilities for visiting aircraft*	NIL
7	*Remarks*	NIL

OIMB AD 2.5 PASSENGER FACILITIES

1	*Hotels*	Available in the city
2	*Restaurants*	Available in the city
3	*Transportation*	Taxis
4	*Medical facilities*	Hospital in the city
5	*Bank and Post Office*	Available in the city
6	*Tourist Office*	Available in the city
7	*Remarks*	NIL

OIMB AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	*AD category for fire fighting*	CAT 3
2	*Rescue equipment*	Available in accordance with AD category for fire fighting
3	*Capability for removal of disabled aircraft*	NIL
4	*Remarks*	CAT 6 available for scheduled flights and for flight which get prior permission at least 48 hours before EOBT from birjand aerodrome.

OIMB AD 2.7 SEASONAL AVAILABILITY - CLEARING

1	*Types of clearing equipment*	2 blades fitted into trucks and one urea spreader
2	*Clearance priorities*	1-RWY10/28 2-TWY A AND APRON 3 -TWY B 4-Other Areas
3	*Remarks*	NIL

OIMB AD 2.8 APRONS, TAXIWAYS

1	*Apron surface and strength*	Surface: Asphalt Strength: 56/F/B/X/T
2	*Taxiway width, surface and strength*	Width: 23M Surface: Asphalt Strength: 56/F/B/X/T
3	*Remarks*	Apron dimensions: 423 x 150 M

OIMB AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	*Use of aircraft stand ID signs, TWY guide lines and parking guidance system of aircraft stands*	- Information and mandatory for taxing guidance signs at all intersections with RWY and TWY at all holding positions. - Guide lines at apron. - Nose-in guidance at aircraft stand.
2	*RWY and TWY markings and LGT*	RWY: Designation, THR, TDZ, centre line, edge & end marked RWY lighting: See OIMB AD 2.14 below TWY: Centre line, edge, holding position at TWY/RWY intersection marked TWY lighting: See OIMB AD 2.15 below
3	*Stop bars*	NIL
4	*Remarks*	NIL

OIMB AD 2.10 AERODROME OBSTACLES

In approach / TKOF areas			*In circling area and at AD*		*Remarks*
1			2		3
RWY/Area affected	*Obstacle type Elevation / HGT Markings / LGT*	*Coordinates*	*Obstacle type Elevation / HGT Markings / LGT*	*Coordinates*	
a	b	c	a	b	
08 / APCH 26 / TKOF	Triple tower 5012 FT AMSL NIL	32° 53' 40.21" N 059° 13' 48.56" E	Oil tank 5075 FT AMSL NIL	32°54'53.16"N 059°16'15.77"E	
			Oil tank 5083 FT AMSL LGTD	32°54'48.18"N 059°16'13.06"E	
			Mast over hill 7355 FT AMSL NIL	32° 58' 06.61" N 059° 11' 57.98" E	
			Mast 5117 FT AMSL NIL	32° 54' 44.97" N 059° 14' 32.36" E	
			Antenna 5047 FT AMSL NIL	32° 52' 59.12" N 059° 13' 22.91" E	
			Building complex 5057 FT AMSL NIL	32° 53' 02.36" N 059° 14' 05.36" E	
			VOR/DME antenna 4979 FT AMSL LGTD	32° 53' 51.52" N 059° 16' 51.46" E	
			Fence (extended THR 08) 4867 FT AMSL NIL	32° 53' 41.30" N 059° 15' 09.93" E	

OIMB AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	*Associated MET Office*	Birjand
2	*Hours of service* *MET Office outside hours*	H24 --
9	*ATS units provided with information*	Birjand AFIS

Note: Subject concerning item 3 to 8 and 10 not available.

OIMB AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	*TRUE BRG*	*Dimensions of RWY (M)*	*Strength (PCN) and surface of RWY and SWY*	*THR coordinates THR geoid undulation*	*THR elevation and highest elevation of TDZ of precision APP RWY*
1	2	3	4	5	6
08	078.63°GEO	2177 x 30	27/F/B/Y/T Asphalt	325342.39N 0591519.18E GUND –41 FT	THR 4874 FT
26	258.64°GEO	2177 x 30	27/F/B/Y/T Asphalt	325356.25N 0591641.32E GUND –41 FT	THR 4951 FT
10	098.74°GEO	3797 x 45	56/F/B/X/T Asphalt	325347.47N 0591610.85E GUND –41 FT	THR 4920 FT
28	278.76°GEO	3797 x 45	56/F/B/X/T Asphalt	325328.80N 0591835.27E GUND –41 FT	THR 4979 FT

Slope of RWY - SWY	*SWY dimensions (M)*	*CWY dimensions (M)*	*Strip dimensions (M)*	*OFZ*	*Remarks*
7	8	9	10	11	12
1.08 %	NIL	NIL	NIL	NIL	-THR RWY 08 displaced 174 M. ELEV: 4880FT DTHR Coordinates: 325343.50 N 0591525.73E
1.08 %	62 x 30	62 x 150	NIL	NIL	
0.48 %	121 x 45	121 x 150	NIL	NIL	
0.48 %	134 x 45	134 x 150	NIL	NIL	-AD Code Letter / Number : 4D

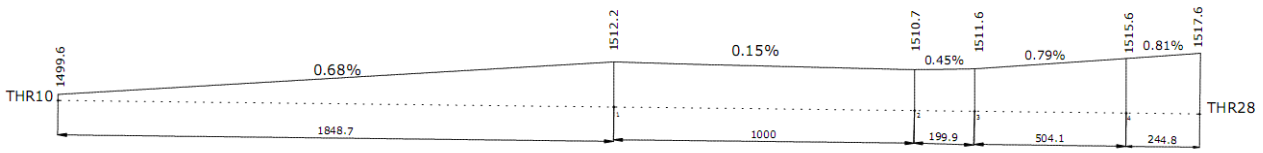

OIMB AD 2.13 DECLARED DISTANCES

RWY Designator	*TORA (M)*	*TODA (M)*	*ASDA (M)*	*LDA (M)*	*Remarks*
1	2	3	4	5	6
08 26	2177 2003	2177 2239	2177 2239	2003 2177	NIL NIL
10 28	3797 3797	3918 3931	3918 3931	3797 3797	NIL NIL

OIMB AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	*APCH LGT type LEN INTST*	*THR LGT colour WBAR*	*VASIS (MEHT) PAPI*	*TDZ LGT LEN*	*RWY Centre Line LGT LEN, spacing, colour INTST*	*RWY edge LGT LEN, spacing colour, INTST*	*RWY End LGT colour WBAR*	*SWY LGT LEN colour*	*Remarks*
1	*2*	*3*	*4*	*5*	*6*	*7*	*8*	*9*	*10*
08	*NIL*	*NIL*	*NIL*	*NIL*	*NIL*	*NIL*	*NIL*	*NIL*	*NIL*
26	*NIL*	*NIL*	*NIL*	*NIL*	*NIL*	*NIL*	*NIL*	*NIL*	*NIL*
10	*SALS 420M LIH*	*Green*	*PAPI Left /3.2° (65 FT)*	*NIL*	*NIL*	*3797 M 60 M White, LIH*	*Red*	*121 M Red*	*NIL*
28	*SALS 420M LIH*	*Green Supplemented by WBAR*	*PAPI Left /3.4° (65 FT)*	*NIL*	*NIL*	*3797 M 60 M White, LIH*	*Red*	*134 M Red*	*NIL*

OIMB AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	*ABN location, characteristics and hours of operation*	On top of the control tower building, FLG G and W, EV 2 sec HN and during IMC
2	*LDI location and LGT* *Anemometer location and LGT*	NIL 1500 M from THR RWY10; information not available.
3	*TWY edge and centre line lighting*	TWY A, B, C edge lighted, Center line: NIL.
4	*Secondary power supply/switch-over time*	Available Switch-over time: 10 - 15 sec
5	*Remarks*	NIL

OIMB AD 2.16 HELICOPTER LANDING AREA

NIL

OIMB AD 2.17 ATS AIRSPACE

1	*Designation and lateral limits*	Birjand ATZ: A circle, radius 7 NM centered at 325353N 0591558E (ARP)
2	*Vertical limits*	10000 FT AMSL
3	*Airspace classification*	G
4	*ATS unit call sign* *Language(s)*	Birjand Information English / Persian
5	*Transition altitude*	11000 FT AMSL
6	*Remarks*	Transition level: FL 130

OIMB AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	*Call sign*	*Frequency*	*Hours of operation*	*Remarks*
1	2	3	4	5
AFIS	Birjand Information	127.350 MHZ 121.700 MHZ 121.500 MHZ 257.800 MHZ 243.000 MHZ	HJ → Other times O/R	- Surface movement Emergency frequency Military aircraft Military aircraft

OIMB AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid, CAT of ILS (For VOR/ILS, give VAR)	*ID*	*Frequency*	*Hours of operation*	*Site of transmitting antenna coordinates*	*Elevation of DME transmitting antenna*	*Remarks*
1	2	3	4	5	6	7
NDB	BRN	405 KHZ	H24	325328.0N 0591646.0E		
VOR/DME	BRN	117.450 MHZ (CH 121 Y)	H24	325351.4N 0591651.4E		DME Transmitting Antenna ELEV 4979FT

OIMB AD 2.20 LOCAL TRAFFIC REGULATIONS

NIL

OIMB AD 2.21 NOISE ABATEMENT PROCEDURES

NIL

OIMB AD 2.22 FLIGHT PROCEDURES

Traffic pattern is defined as below:

a. For fighter and heavy fixed-wing ACFT 6500 feet,
b. For other fixed-wing ACFT 6000 feet and
c. For helicopter 5500 feet.

Note: see AD 1.1.

OIMB AD 2.23 ADDITIONAL INFORMATION

1- Strolling animals exist on the movement area.

2- Heavy aircraft are authorized to make 180° turn only on turn pads which are provided at both ends of RWY 10/28.

3- Isolated aircraft parking position for light and medium aircraft is at the end of RWY 08 and for heavy aircraft is at the end of RWY 10

4- RWY 08/26 is a non-instrument runway.

OIMB AD 2.24 CHARTS RELATED TO AN AERODROME

Aerodrome Chart – ICAO ----------AD 2 OIMB ADC

Standard Departure Chart - Instrument – ICAO ----------AD 2 OIMB SID 1-1

AD 2 OIMB SID 1-2

AD 2 OIMB SID 1-3

AD 2 OIMB SID 1-4

Standard Departure Chart - Instrument – ICAO ----------AD 2 OIMB SID 2-1

Standard Arrival Chart - Instrument – ICAO ----------AD 2 OIMB STAR 1-1

AD 2 OIMB STAR 2-1

Instrument Approach Chart – ICAO ----------AD 2 OIMB IAC 2-1

AD 2 OIMB IAC 2-2

Instrument Approach Chart – ICAO ----------AD 2 OIMB IAC 4-1

AD 2 OIMB IAC 4-2