


1. The plan can pick up the wrong program

Issue found: A plan qualifies through one program, but the final result can use a different program record, including a deleted link.

Why it matters: Eleos could receive the plan with the wrong program, care episode or diagnoses.

EVERYDAY EXAMPLE / HOTEL RESERVATIONS

A hotel confirms Alex's active reservation, then passes only Alex's name to the key desk. The desk finds a newer canceled booking and assigns its room.

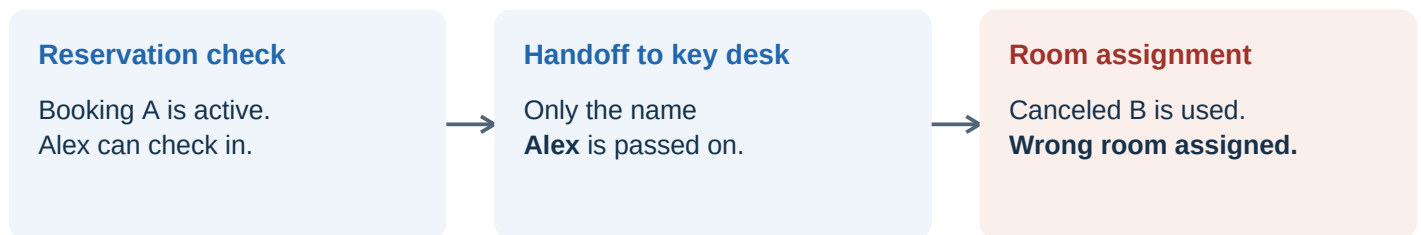

In our data: A reservation represents a program enrollment. Losing which booking qualified is like losing which program should supply the exported details.

QUERY EXCERPT

SNOWFLAKE_Eleos Base Treatment Plan Query_V1.0.sql

```

52  tx_plans_selected as (
53  select document_id
54  from (
    ... intervening lines omitted ...
223  INNER JOIN tx_plans_selected on tx_plans_selected.document_id = mtp.document_id
224  LEFT JOIN MOD_TX_PLAN_CLIENT_PROG tprog on tprog.mod_tx_plan_id = mtp.mod_tx_plan_id
226  LEFT JOIN descriptor dsc1 on dsc1.descriptor_id=mtp.plan_type_dsc_id
  
```

Yellow = section discussed. Original wording; comments omitted and long lines wrapped.

Vendor response: Please review why the final plan can use a different program or episode from the one that qualified it, and confirm the resulting behavior.

Example only. This illustrates a possible result when a plan has multiple program links; it is not an observed patient-data error.

Evidence: base query lines 52-87, 203, 220, 223-241 and 258-259. CareLogic query migration guide, p.14: deleted-record handling.


2. A blank date can win over a real date

Issue found: A plan with no begin date can be chosen ahead of a plan with a recorded date.

Why it matters: Eleos could receive an undated plan instead of the intended dated plan.

EVERYDAY EXAMPLE / THE LATEST SIGNED FORM

An office must use a customer's latest signed form. One is dated September 15; another has no date. The filing system incorrectly treats the undated form as newest.

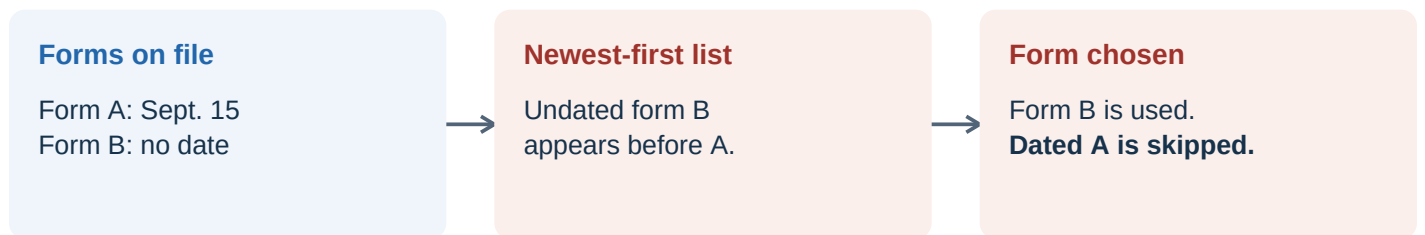

In our data: The form represents a treatment plan. When one plan is selected, treating a missing date as newest can cause an undated plan to win.

QUERY EXCERPT

SNOWFLAKE_Eleos Base Treatment Plan Query_V1.0.sql

```

58     row_number() over (
59     partition by d.client_id
60     order by
61     mtp.begin_date desc,
62     mtp.created_date desc,
63     cp.begin_date desc,
64     mtp.document_id desc
65     ) as rn
  
```

Yellow = section discussed. Original wording; comments omitted and long lines wrapped.

Vendor response: Please confirm the intended handling of missing dates and whether a plan with no date should take priority over a dated plan.

This can occur with Snowflake's default sorting behavior if a ranked date is blank. Actual missing dates and account settings have not been verified.

Evidence: base query lines 58-64 and 220; the same selection appears in all six queries. Snowflake ORDER BY usage notes; CareLogic migration guide p.14.


3. The receiving system may miss the labels

Issue found: Some exported column names differ from the names expected by the local demonstration combiner.

Why it matters: Required plan and client IDs can appear blank to that combiner, preventing the export from being processed.

EVERYDAY EXAMPLE / PACKAGE LABELS

A package label says "Postal code: 39201," but the warehouse software only reads a field labeled "ZIP." The address is present, yet the software reports it missing.

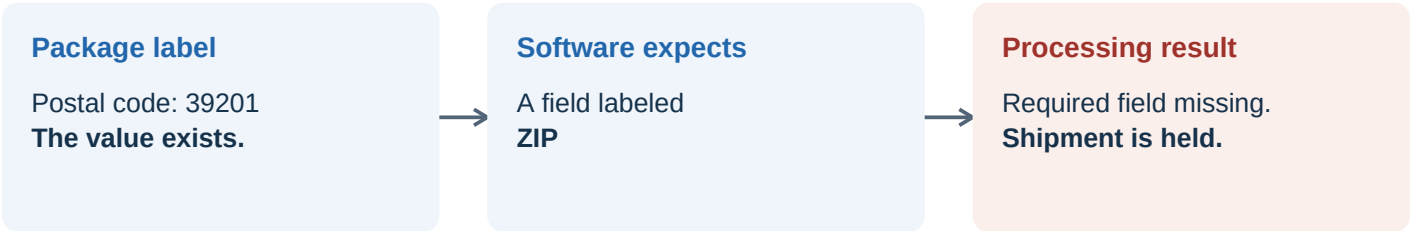

In our data: The query returns document_id and client_id. The local combiner expects Id and PatientId; it does not automatically translate these names.

QUERY EXCERPT

SNOWFLAKE_Eleos Base Treatment Plan Query_V1.0.sql

```
174 mtp.mod_tx_plan_id
175 ,mtp.document_id
... intervening lines omitted ...
190 ,d.client_id
191 ,d.staff_id
```

Yellow = section discussed. Original wording; comments omitted and long lines wrapped.

Vendor response: Please confirm the agreed output field names with the receiving-system owner and whether the delivered files match that agreement.

Compatibility question: confirmed against the local demo application only. The production file agreement has not been verified.

Evidence: base query lines 175 and 190; local TreatmentPlanRecord.cs and CsvLoader.cs; supplied field crosswalk, rows 2-3.

4. Shared goals can confuse the plan structure

Issue found: The export can repeat a goal under different problems. The local demo combiner rejects repeated goal IDs.

Why it matters: Valid plan content can be rejected. If the same goal's branches are combined, objectives can appear under the wrong problem.

EVERYDAY EXAMPLE / RESTAURANT ORDERS

Two tables order the same burger. Table 4 requests fries; Table 7 requests a salad. Matching on "burger" alone loses which side belongs to which table.



In our data: Table = problem; burger = shared goal; side = objective. A repeated goal is valid, just as two tables can order the same burger with different sides.

QUERY EXCERPT

SNOWFLAKE_Canopy_Goals_V1.0.sql

```

93      ,mtem.problem_entity_id
94      ,mtem.objective_entity_id
95      ,mte.mod_tplan_entity_id as goal_entity_id
    ... intervening lines omitted ...
141     LEFT JOIN mod_tplan_entity_map mtem ON mtem.goal_entity_id = mte.mod_tplan_entity_id
    AND mtem.goal_entity_id IS NOT null
142     and mtem.last_operation <>'del'
```

Yellow = section discussed. Original wording; comments omitted and long lines wrapped.

Vendor response: Please confirm what each repeated row represents and how each objective remains connected to its own problem and goal in the final integration.

Repeated SQL rows can be valid. The highlighted join exposes these relationships; the confirmed rejection is in the local demo combiner, not proof of a faulty vendor join.

Evidence: Goals query lines 93-95 and 141-142; data dictionary p.35; local ValidationService.cs and HierarchyBuilder.cs.