

# SNA Closeness 4\_REFERENCIA DE RECEBIMENTO CONTRAREFERENCIA (var2)

*Leonardo Martins*

*17 de julho de 2016*

## Contents

<b>1</b>	<b>4_REFERENCIA DE RECEBIMENTO CONTRAREFERENCIA (var2)</b>	<b>2</b>
<b>2</b>	<b>Loading objects generated with previous script</b>	<b>2</b>
2.1	Reload packages . . . . .	2
2.2	Adding phantom tools . . . . .	2
2.3	Setting a random seed - this is a good strategy to keep the same graph pattern layout in a new report generation . . . . .	2
2.4	Simplify Graph - removing loops and duple edges . . . . .	3
<b>3</b>	<b>Closeness - centrality based on distance to others in the graph</b>	<b>3</b>
3.1	Closeness Non-normalized . . . . .	3
3.2	Network Plotting Based On Non-normalized Closeness - IN . . . . .	4
3.3	Network Plotting Based On Non-normalized Closeness - OUT . . . . .	7
3.4	Network Plotting Based On Non-normalized Closeness - ALL . . . . .	10
3.5	Closeness Normalized . . . . .	12
3.6	Network Plotting Based On Normalized Closeness - IN . . . . .	13
3.7	Network Plotting Based On Normalized Closeness - OUT . . . . .	16
3.8	Network Plotting Based On Normalized Closeness - ALL . . . . .	19
3.9	Closeness Normalized . . . . .	21
3.10	Centralization Closeness . . . . .	22
3.11	Network Plotting Based On Centralization Closeness . . . . .	22
<b>4</b>	<b>Closeness Dinamic Table</b>	<b>24</b>
4.1	Getting Closeness Measures . . . . .	24
4.2	Creating a datagramme of measures . . . . .	25
4.3	General tabel - DT . . . . .	25
4.4	Aggregating data from previous table - mean . . . . .	26
4.5	Aggregating data from previous table - sd . . . . .	27
4.6	Plotting final table with round for Closeness . . . . .	27

SNA Descriptive Analysis from “Projeto Redes de Atenção às pessoas que consomem álcool e outras Drogas em Juiz de Fora-MG Brazil” - SNArRDJF

Here you can find a basic script to analysis data from SNArRDJF - this script was elaborated considering its use for orther matrix adjacency data from SNArRDJF - Here we are going to analyse:

## 1 4\_REFERENCIA DE RECEBIMENTO CONTRAREFERENCIA (var2)

```
##### Basic Preparation ##### ‘#####
```

## 2 Loading objects generated with previous script

```
rm(list = ls()) # removing previous objects to be sure that we don't have objects conflicts name
load("~/SNArRDJF/Robjct/2_degree_var2.RData")
```

### 2.1 Reload packages

```
suppressMessages(library(RColorBrewer))
suppressMessages(library(car))
suppressMessages(library(xtable))
suppressMessages(library(igraph))
suppressMessages(library(miniCRAN))
suppressMessages(library(magrittr))
suppressMessages(library(keyplayer))
suppressMessages(library(dplyr))
suppressMessages(library(feather))
suppressMessages(library(visNetwork))
suppressMessages(library(knitr))
suppressMessages(library(DT))
```

### 2.2 Adding phantom tools

```
#In order to get dynamic javascript object install those ones. If you get problems installing go to Sta
#devtools::install_github("wch/webshot")
#webshot::install_phantomjs()
```

### 2.3 Setting a random seed - this is a good strategy to keep the same graph pattern layout in a new report generation

```
set.seed(123)
```

## 2.4 Simplify Graph - removing loops and duple edges

```
var2<-simplify(var2) #Simplify
```

## 3 Closeness - centrality based on distance to others in the graph

*How close an actor to all the other actors in network?*

High closeness centrality - short communication path to others, minimal number of steps to reach others.

Answers the “Kevin Bacon” question:

*How many steps are required to access every other vertex from a given vertex?*

One practical implication of this metric: it helps you gauge how information might spread within your network, and who might be the best people to leverage if you need to make sure information gets around. Link here: <http://www.tc.umn.edu/~alink/R-social-network-analysis.html>

Closeness centrality can be defined as a measure of how far other nodes are from the node in question. Nodes with high closeness centrality are likely to be relatively efficient in receiving or transmitting information to/from distant parts of the social network.

Scores may be interpreted as arising from a reciprocal process in which the centrality of each actor is proportional to the sum of the centralities of those actors to whom he or she is connected.

In general, vertices with high eigenvector centralities are those which are connected to many other vertices which are, in turn, connected to many others (and so on). (The perceptive may realize that this implies that the largest values will be obtained by individuals in large cliques (or high-density substructures))

### 3.1 Closeness Non-normalized

#### 3.1.1 Saving to Igraph object

```
V(var2)$incloseness <- closeness(var2, mode = "in", weights = E(var2)$var2) %>% round(6)
V(var2)$outcloseness <- closeness(var2, mode = "out", weights = E(var2)$var2) %>% round(6)
V(var2)$totalcloseness <- closeness(var2, mode = "total", weights = E(var2)$var2) %>% round(4)
```

#### 3.1.2 Saving to Environment

```
var2_incloseness<- closeness(var2, mode = "in", weights = E(var2)$var2) %>% round(6)
var2_outcloseness<- closeness(var2, mode = "out", weights = E(var2)$var2) %>% round(6)
var2_totalcloseness<- closeness(var2, mode = "total", weights = E(var2)$var2) %>% round(6)
```

#### 3.1.3 Closeness Non-normalized - in

```
summary(var2_incloseness)
```

```
##      Min.   1st Qu.   Median     Mean   3rd Qu.     Max.
## 2.900e-05 6.300e-05 6.300e-05 6.195e-05 6.400e-05 6.800e-05
```

```
sd(var2_incloseness)
```

```
## [1] 7.035801e-06
```

### 3.2 Network Plotting Based On Non-normalized Closeness - IN

```
V(var2)$incloseness<-closeness(var2, weights = E(var2)$var2, mode="in")

#Get Variable
V(var2)$var2_color_degree<-round(V(var2)$incloseness,4)

#Creating brewer palette
vertex_var2_color_degree<-
  colorRampPalette(brewer.pal(length(unique(
    V(var2)$var2_color_degree)), "RdBu"))(
    length(unique(V(var2)$var2_color_degree)))

#Saving as Vertex properties
V(var2)$vertex_var2_color_degree<-
  vertex_var2_color_degree[as.numeric(
    cut(V(var2)$var2_color_degree,
      breaks=length(unique(V(var2)$var2_color_degree))))]

set.seed(123)
#Plotting based only on degree measures
edge.start <- ends(var2, es=E(var2), names=F)[,1]

# Fixing ego
minC <- rep(-Inf, vcount(var2))
maxC <- rep(Inf, vcount(var2))
minC[1] <- maxC[1] <- 0
co <- layout_with_fr(var2, niter=10^4, minx=minC, maxx=maxC,miny=minC, maxy=maxC, weights = E(var2)$wei

#Plotting
plot(var2,
  layout=co,
  edge.color=V(var2)$vertex_var2_color_degree[edge.start],
  edge.arrow.size=closeness(var2, weights = E(var2)$var2, mode="in"),
  edge.width=E(var2)$weight/mean(E(var2)$weight),
  edge.curved = TRUE,
  vertex.color=V(var2)$vertex_var2_color_degree,
  vertex.size=closeness(var2, weights = E(var2)$var2, mode="in")*10^5,
  vertex.frame.color="black",
  vertex.label.color="black",
  vertex.label=get.vertex.attribute(var2,"LABEL_COR"),
  vertex.label.cex=(closeness(var2, weights = E(var2)$var2, mode="in")+10^-5)*2000,
  vertex.label.dist=0,
  rescale=F,
  xlim=range(co[,1]),
  ylim=range(co[,2])
```

```

    )
axis(1)
axis(2)


#Solving Problems with legend rendering
a<-V(var2)$var2_color_degree
b<-V(var2)$vertex_var2_color_degree
c<-table(a,b)
d<-as.data.frame(c)
e<-subset(d, d$Freq>0)
e<-e[order(e$a,decreasing=T),]
f<-t(e$a)
g<-t(e$b)

#Adding Legend
legend(x=range(co[,1])[2],
      y=range(co[,2])[2],
      legend=as.character(f),
      pch=21,
      col = "#777777",
      pt.bg=as.character(g),
      pt.cex=2,
      bty="n",
      ncol=1,
      lty=1,
      cex = .3)

#Adding Title
title("Network Closeness Degree Sized and Colored In - 4_REFERENCIA DE RECEBIMENTO CONTRAREFERENCIA (
text(
  x=range(co[,1])[1],
  y=range(co[,2])[1],
  labels = sprintf(
    "Median In Closennes:%.4f\nSD In Closennes: %.5f",
    median(closeness(var2, mode="in", weights = E(var2)$var2)),
    sd(closeness(var2, mode="in", weights = E(var2)$var2))
  )
)

```

### Network Closeness Degree Sized and Colored In – 4\_REFERENCIA DE RECEBIMENTO CONTRAREFERENCIA (var2)

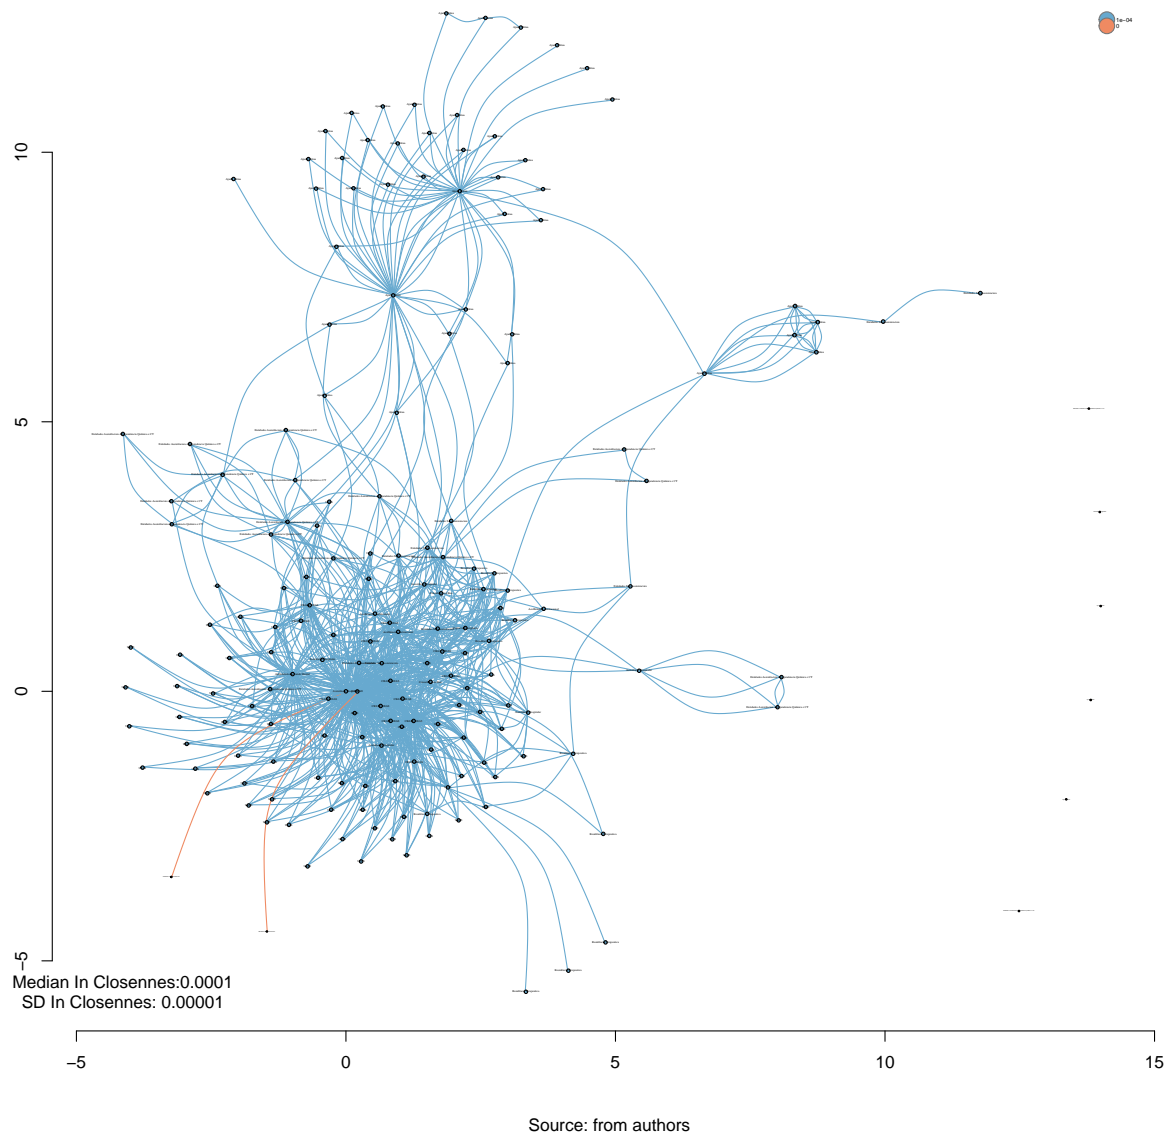

#### 3.2.1 Closeness Non-normalized - OUT

```
summary(var2_outcloseness)
```

```
##      Min.   1st Qu.   Median     Mean   3rd Qu.    Max.
## 0.0000290 0.0000290 0.0004480 0.0002792 0.0004825 0.0005380
```

```
sd(var2_outcloseness)
```

```
## [1] 0.000224621
```

### 3.3 Network Plotting Based On Non-normalized Closeness - OUT

```
V(var2)$outcloseness<-closeness(var2, weights = E(var2)$var2, mode="out")

#Get Variable
V(var2)$var2_color_degree<-round(V(var2)$outcloseness,4)

#Creating brewer palette
vertex_var2_color_degree<-
  colorRampPalette(brewer.pal(length(unique(
    V(var2)$var2_color_degree)), "RdBu"))(
    length(unique(V(var2)$var2_color_degree)))

#Saving as Vertex properties
V(var2)$vertex_var2_color_degree<-
  vertex_var2_color_degree[as.numeric(
    cut(V(var2)$var2_color_degree,
      breaks=length(unique(V(var2)$var2_color_degree))))]

set.seed(123)
#Plotting based only on degree measures
edge.start <- ends(var2, es=E(var2), names=F)[,1]

# Fixing ego
minC <- rep(-Inf, vcount(var2))
maxC <- rep(Inf, vcount(var2))
minC[1] <- maxC[1] <- 0
co <- layout_with_fr(var2, niter=10^4, minx=minC, maxx=maxC,miny=minC, maxy=maxC, weights = E(var2)$weight)

#Plotting
plot(var2,
  layout=co,
  #edge.color=V(var2)$vertex_var2_color_degree[edge.start],
  edge.arrow.size=closeness(var2, weights = E(var2)$var2, mode="out"),
  edge.width=E(var2)$weight/2*mean(E(var2)$weight),
  edge.curved = TRUE,
  vertex.color=V(var2)$vertex_var2_color_degree,
  vertex.size=closeness(var2, weights = E(var2)$var2, mode="out")*10^4,
  vertex.frame.color="white",
  vertex.label.color="black",
  vertex.label=get.vertex.attribute(var2,"LABEL_COR"),
  vertex.label.cex=closeness(var2, weights = E(var2)$var2, mode="out")*200,
  vertex.label.dist=0,
  rescale=F,
  xlim=range(co[,1]),
  ylim=range(co[,2])
)
axis(1)
axis(2)

#Solving Problems with legend rendering
```

```

a<-V(var2)$var2_color_degree
b<-V(var2)$vertex_var2_color_degree
c<-table(a,b)
d<-as.data.frame(c)
e<-subset(d, d$Freq>0)
e<-e[order(e$a,decreasing=T),]
f<-t(e$a)
g<-t(e$b)


#Adding Legend
legend(x=range(co[,1])[2],
      y=range(co[,2])[2],
      legend=as.character(f),
      pch=21,
      col = "#777777",
      pt.bg=as.character(g),
      pt.cex=2,
      bty="n",
      ncol=1,
      lty=1,
      cex = .3)

#Adding Title
title("Network Closeness Degree Sized and Colored OUT - 4_REFERENCIA DE RECEBIMENTO CONTRAREFERENCIA
text(
  x=range(co[,1])[1],
  y=range(co[,2])[1],
  labels = sprintf(
    "Median OUT Closennes: %.4f\nSD OUT Closennes: %.5f",
    median(closeness(var2, mode="out", weights = E(var2)$var2)),
    sd(closeness(var2, mode="out", weights = E(var2)$var2))
  )
)

```



### Network Closeness Degree Sized and Colored OUT – 4\_REFERENCIA DE RECEBIMENTO CONTRAREFERENCIA (var2)

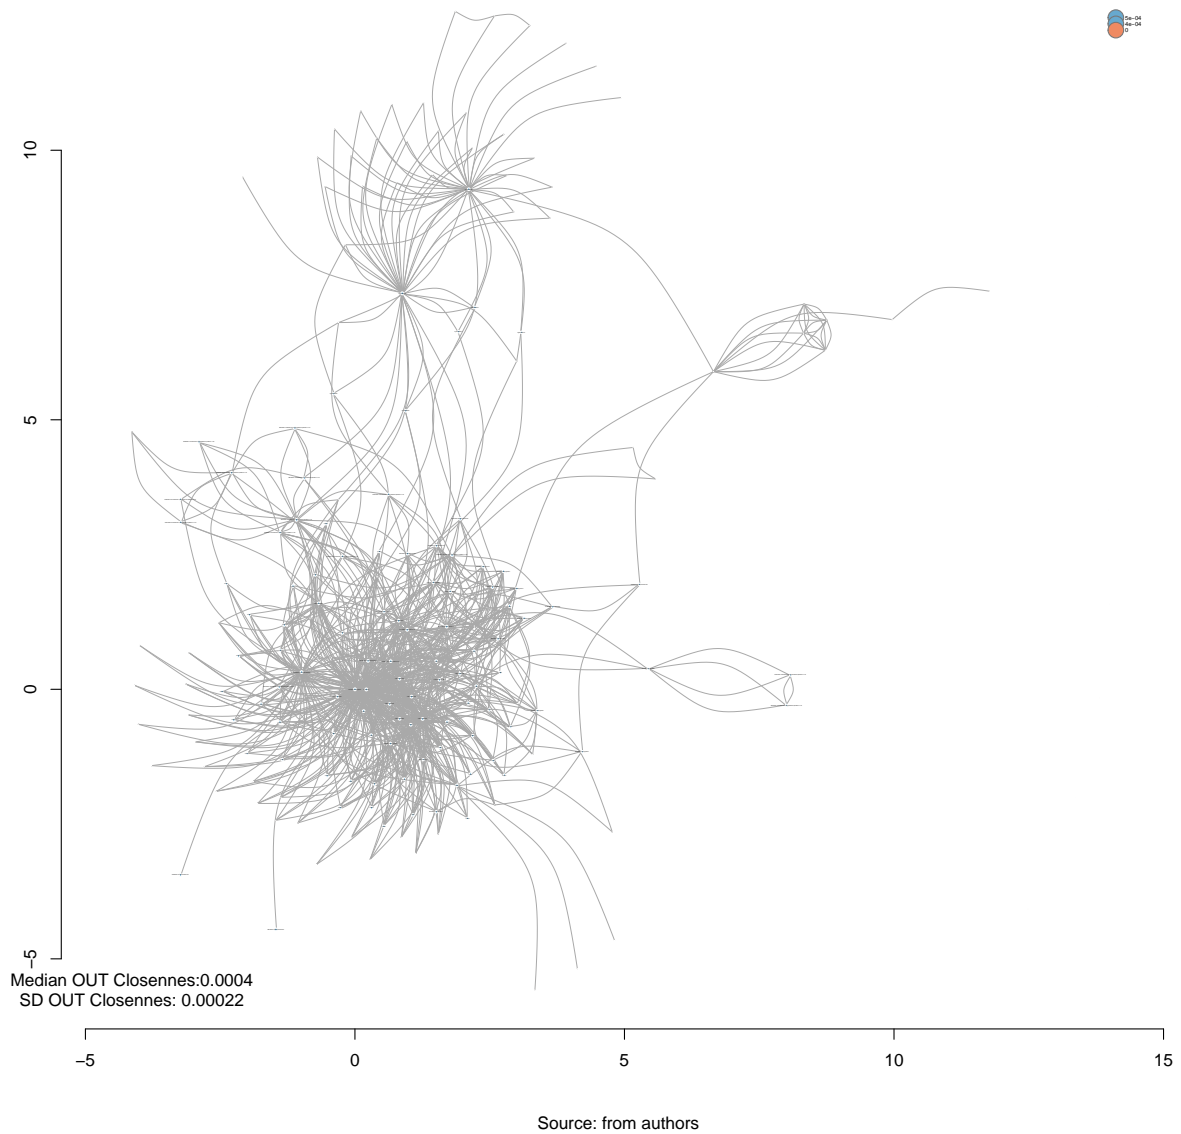

#### 3.3.1 Closeness Non-normalized - ALL

```
summary(var2_totalcloseness)
```

```
##      Min.   1st Qu.   Median     Mean   3rd Qu.    Max.
## 0.0000290 0.0006120 0.0006440 0.0006133 0.0006480 0.0007160
```

```
sd(var2_totalcloseness)
```

```
## [1] 0.0001105428
```

### 3.4 Network Plotting Based On Non-normalized Closeness - ALL

```
V(var2)$allcloseness<-closeness(var2, weights = E(var2)$var2, mode="all")

#Get Variable
V(var2)$var2_color_degree<-round(V(var2)$allcloseness,4)

#Creating brewer palette
vertex_var2_color_degree<-
  colorRampPalette(brewer.pal(length(unique(
    V(var2)$var2_color_degree)), "RdBu"))(
    length(unique(V(var2)$var2_color_degree)))

#Saving as Vertex properties
V(var2)$vertex_var2_color_degree<-
  vertex_var2_color_degree[as.numeric(
    cut(V(var2)$var2_color_degree,
      breaks=length(unique(V(var2)$var2_color_degree))))]

set.seed(123)
#Plotting based only on degree measures
edge.start <- ends(var2, es=E(var2), names=F)[,1]

# Fixing ego
minC <- rep(-Inf, vcount(var2))
maxC <- rep(Inf, vcount(var2))
minC[1] <- maxC[1] <- 0
co <- layout_with_fr(var2, niter=10^4, minx=minC, maxx=maxC,miny=minC, maxy=maxC, weights = E(var2)$wei

#Plotting
plot(var2,
  layout=co,
  #edge.color=V(var2)$vertex_var2_color_degree[edge.start],
  edge.arrow.size=closeness(var2, weights = E(var2)$var2, mode="all"),
  edge.width=E(var2)$weight/2*mean(E(var2)$weight),
  edge.curved = TRUE,
  vertex.color=V(var2)$vertex_var2_color_degree,
  vertex.size=closeness(var2, weights = E(var2)$var2, mode="all")*10^4,
  vertex.frame.color="white",
  vertex.label.color="black",
  vertex.label=get.vertex.attribute(var2,"LABEL_COR"),
  vertex.label.cex=closeness(var2, weights = E(var2)$var2, mode="all")*200,
  vertex.label.dist=0,
  rescale=F,
  xlim=range(co[,1]),
  ylim=range(co[,2])
)
axis(1)
axis(2)

#Solving Problems with legend rendering
```

```


a<-V(var2)$var2_color_degree
b<-V(var2)$vertex_var2_color_degree
c<-table(a,b)
d<-as.data.frame(c)
e<-subset(d, d$Freq>0)
e<-e[order(e$a,decreasing=T),]
f<-t(e$a)
g<-t(e$b)

#Adding Legend
legend(x=range(co[,1])[2],
       y=range(co[,2])[2],
       legend=as.character(f),
       pch=21,
       col = "#777777",
       pt.bg=as.character(g),
       pt.cex=2,
       bty="n",
       ncol=1,
       lty=1,
       cex = .3)

#Adding Title
title("Network Closeness Degree Sized and Colored all - 4_REFERENCIA DE RECEBIMENTO CONTRAREFERENCIA
text(
  x=range(co[,1])[1],
  y=range(co[,2])[1],
  labels = sprintf(
    "Median all Closennes: %.4f\nSD all Closennes: %.5f",
    median(closeness(var2, mode="all", weights = E(var2)$var2)),
    sd(closeness(var2, mode="all", weights = E(var2)$var2))
  )
)

```

## Network Closeness Degree Sized and Colored all – 4\_REFERENCIA DE RECEBIMENTO CONTRAREFERENCIA (var2)

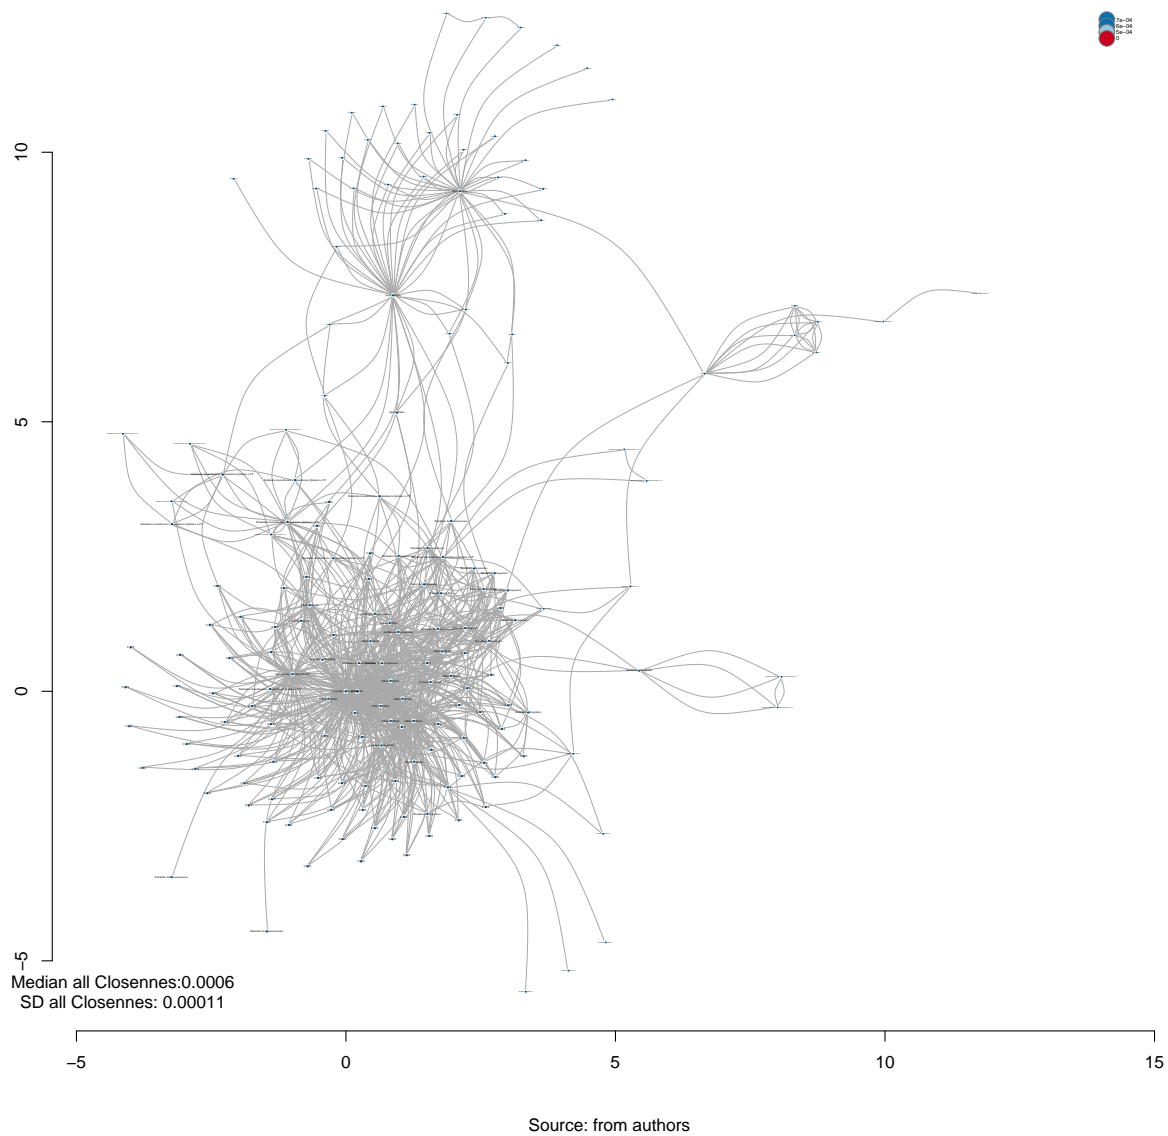

### 3.5 Closeness Normalized

#### 3.5.1 Saving to Igraph object

```
V(var2)$incloseness_n <- closeness(var2, mode = "in", weights = E(var2)$var2, normalized = T) %>% round(4)
V(var2)$outcloseness_n <- closeness(var2, mode = "out", normalized = T, weights = E(var2)$var2) %>% round(4)
V(var2)$totalcloseness_n <- closeness(var2, mode = "total", normalized = T, weights = E(var2)$var2) %>% round(4)
```

### 3.5.2 Saving to Environment

```
var2_incloseness_n<- closeness(var2, mode = "in", normalized = T, weights = E(var2)$var2) %>% round(6)
var2_outcloseness_n<- closeness(var2, mode = "out", normalized = T, weights = E(var2)$var2) %>% round(6)
var2_totalcloseness_n<- closeness(var2, mode = "total", normalized = T, weights = E(var2)$var2) %>% round(6)
```

### 3.5.3 Closeness Normalized - IN

```
summary(var2_incloseness_n)
```

```
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
## 0.005348 0.011690 0.011800 0.011530 0.011830 0.012570
```

```
sd(var2_incloseness_n)
```

```
## [1] 0.001320909
```

## 3.6 Network Plotting Based On Normalized Closeness - IN

```
V(var2)$incloseness_n<-closeness(var2, weights = E(var2)$var2, mode="in", normalized = T)

#Get Variable
V(var2)$var2_color_degree<-round(V(var2)$incloseness_n,4)

#Creating brewer palette
vertex_var2_color_degree<-
  colorRampPalette(brewer.pal(length(unique(
    V(var2)$var2_color_degree)), "RdBu"))(
    length(unique(V(var2)$var2_color_degree)))

#Saving as Vertex properties
V(var2)$vertex_var2_color_degree<-
  vertex_var2_color_degree[as.numeric(
    cut(V(var2)$var2_color_degree,
        breaks=length(unique(V(var2)$var2_color_degree))))]

set.seed(123)
#Plotting based only on degree measures
edge.start <- ends(var2, es=E(var2), names=F)[,1]

# Fixing ego
minC <- rep(-Inf, vcount(var2))
maxC <- rep(Inf, vcount(var2))
minC[1] <- maxC[1] <- 0
co <- layout_with_fr(var2, niter=10^4, minx=minC, maxx=maxC,miny=minC, maxy=maxC, weights = E(var2)$wei,
```

```

#Plotting
plot(var2,
      layout=co,
      #edge.color=V(var2)$vertex_var2_color_degree[edge.start],
      edge.arrow.size=closeness(var2, weights = E(var2)$var2, mode="in",normalized = T),
      edge.width=E(var2)$weight/10*mean(E(var2)$weight),
      edge.curved = TRUE,
      vertex.color=V(var2)$vertex_var2_color_degree,
      vertex.size=(closeness(var2, weights = E(var2)$var2, mode="in",normalized = T))*1000,
      vertex.frame.color="black",
      vertex.label.color="black",
      vertex.label=get.vertex.attribute(var2,"LABEL_COR"),
      vertex.label.cex=closeness(var2, weights = E(var2)$var2, mode="in",normalized = T)*10,
      vertex.label.dist=0,
      rescale=F,
      xlim=range(co[,1]),
      ylim=range(co[,2])
)
axis(1)
axis(2)

#Solving Problems with legend rendering
a<-V(var2)$var2_color_degree
b<-V(var2)$vertex_var2_color_degree
c<-table(a,b)
d<-as.data.frame(c)
e<-subset(d, d$Freq>0)
e<-e[order(e$a,decreasing=T),]
f<-t(e$a)
g<-t(e$b)


#Adding Legend
legend(x=range(co[,1])[2],
      y=range(co[,2])[2],
      legend=as.character(f),
      pch=21,
      col = "#777777",
      pt.bg=as.character(g),
      pt.cex=2,
      bty="n",
      ncol=1,
      lty=1,
      cex = .3)

#Adding Title
title("Network Closeness Degree Sized Normalized In - 4_REFERENCIA DE RECEBIMENTO CONTRAREFERENCIA (v
text(
  x=range(co[,1])[1],
  y=range(co[,2])[1],
  labels = sprintf(
    "Median In Closennnes:%.4f\nSD In Closennnes: %.5f",
    median(closeness(var2, mode="in", weights = E(var2)$var2, normalized = T)),

```

```
sd(closeness(var2, mode="in", weights = E(var2)$var2, normalized = T))
)
```

Network Closeness Degree Sized Normalized In – 4\_REFERENCIA DE RECEBIMENTO CONTRAREFERENCIA (var2)

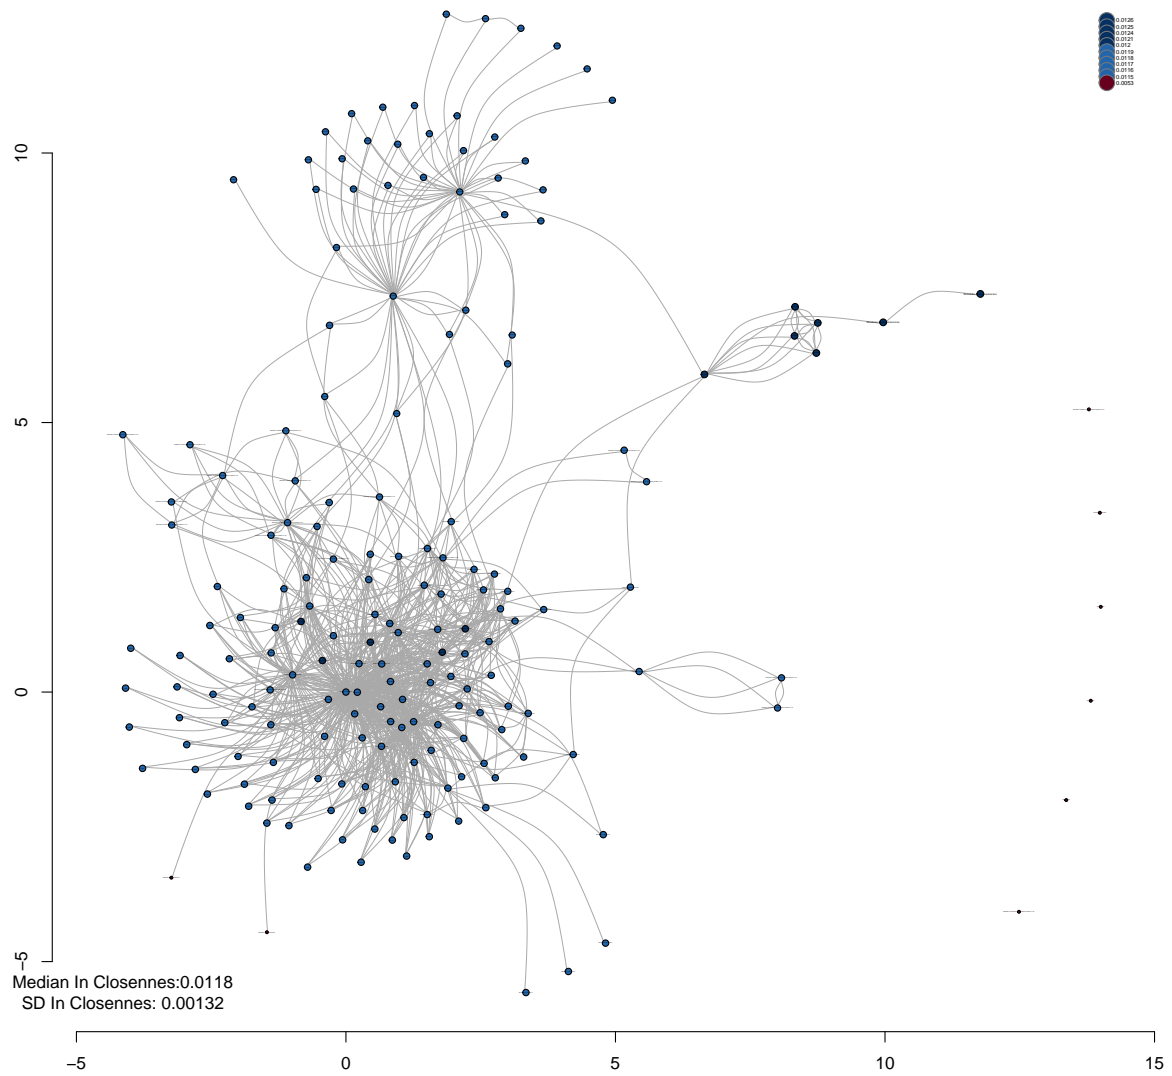

Source: from authors

###Closeness Normalized - OUT

```
summary(var2_outcloseness_n)
```

```
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
## 0.005348 0.005348 0.083300 0.051910 0.089750 0.100000
```

```
sd(var2_outcloseness_n)
```

```
## [1] 0.04181229
```

### 3.7 Network Plotting Based On Normalized Closeness - OUT

```
V(var2)$outcloseness_n<-closeness(var2, weights = E(var2)$var2, mode="out", normalized = T)

#Get Variable
V(var2)$var2_color_degree<-round(V(var2)$outcloseness_n,2)

#Creating brewer palette
vertex_var2_color_degree<-
  colorRampPalette(brewer.pal(length(unique(
    V(var2)$var2_color_degree)), "RdBu"))(
    length(unique(V(var2)$var2_color_degree)))

#Saving as Vertex properties
V(var2)$vertex_var2_color_degree<-
  vertex_var2_color_degree[as.numeric(
    cut(V(var2)$var2_color_degree,
      breaks=length(unique(V(var2)$var2_color_degree))))]

set.seed(123)
#Plotting based only on degree measures
edge.start <- ends(var2, es=E(var2), names=F)[,1]

# Fixing ego
minC <- rep(-Inf, vcount(var2))
maxC <- rep(Inf, vcount(var2))
minC[1] <- maxC[1] <- 0
co <- layout_with_fr(var2, niter=10^4, minx=minC, maxx=maxC,miny=minC, maxy=maxC, weights = E(var2)$weight)

#Plotting
plot(var2,
  layout=co,
  #edge.color=V(var2)$vertex_var2_color_degree[edge.start],
  edge.arrow.size=closeness(var2, weights = E(var2)$var2, mode="out",normalized = T),
  edge.width=E(var2)$weight/10*mean(E(var2)$weight),
  edge.curved = TRUE,
  vertex.color=V(var2)$vertex_var2_color_degree,
  vertex.size=(closeness(var2, weights = E(var2)$var2, mode="out",normalized = T))*100,
  vertex.frame.color="black",
  vertex.label.color="black",
  vertex.label=get.vertex.attribute(var2,"LABEL_COR"),
  vertex.label.cex=closeness(var2, weights = E(var2)$var2, mode="out",normalized = T)*1.5,
  vertex.label.dist=0,
  rescale=F,
  xlim=range(co[,1]),
  ylim=range(co[,2])
)
axis(1)
axis(2)

#Solving Problems with legend rendering
```



```


a<-V(var2)$var2_color_degree
b<-V(var2)$vertex_var2_color_degree
c<-table(a,b)
d<-as.data.frame(c)
e<-subset(d, d$Freq>0)
e<-e[order(e$a,decreasing=T),]
f<-t(e$a)
g<-t(e$b)

#Adding Legend
legend(x=range(co[,1])[2],
       y=range(co[,2])[2],
       legend=as.character(f),
       pch=21,
       col = "#777777",
       pt.bg=as.character(g),
       pt.cex=2,
       bty="n",
       ncol=1,
       lty=1,
       cex = .3)

#Adding Title
title("Network Closeness Degree Sized Normalized OUT - 4_REFERENCIA DE RECEBIMENTO CONTRAREFERENCIA (
text(
  x=range(co[,1])[1],
  y=range(co[,2])[1],
  labels = sprintf(
    "Median OUT Closennes: %.4f\nSD OUT Closennes: %.5f",
    median(closeness(var2, mode="out", weights = E(var2)$var2, normalized = T)),
    sd(closeness(var2, mode="out", weights = E(var2)$var2, normalized = T))
  )
)

```

### Network Closeness Degree Sized Normalized OUT – 4\_REFERENCIA DE RECEBIMENTO CONTRAREFERENCIA (var2)

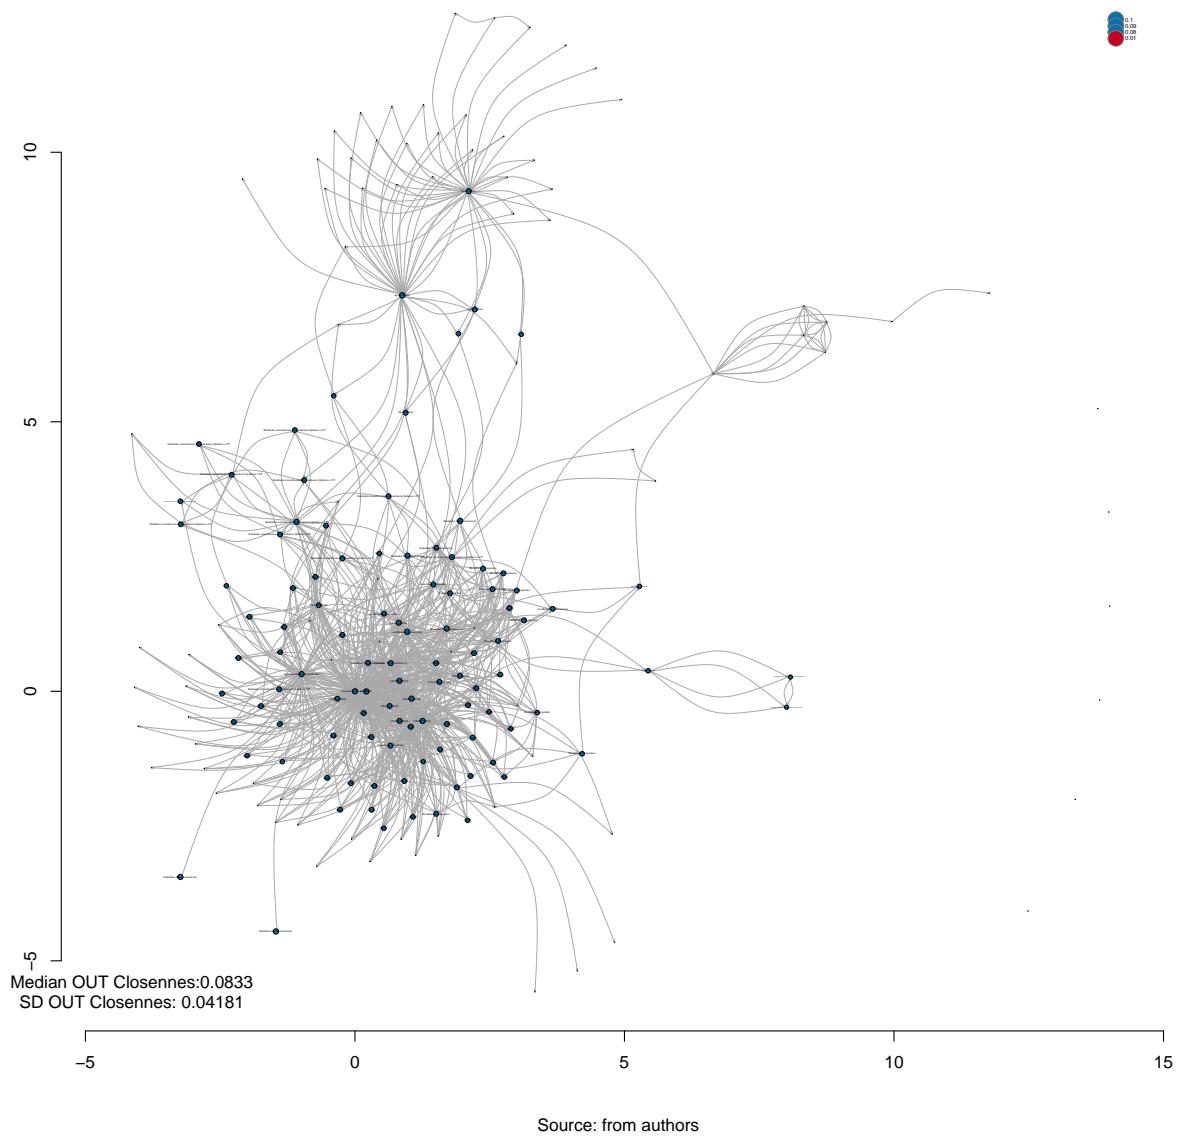

#### 3.7.1 Closeness Normalized - ALL

```
summary(var2_totalcloseness_n)
```

```
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
## 0.005348 0.113900 0.119800 0.114100 0.120500 0.133200
```

```
sd(var2_totalcloseness_n)
```

```
## [1] 0.02056888
```

### 3.8 Network Plotting Based On Normalized Closeness - ALL

```
V(var2)$allcloseness_n<-closeness(var2, weights = E(var2)$var2, mode="all", normalized = T)

#Get Variable
V(var2)$var2_color_degree<-round(V(var2)$allcloseness_n,2)

#Creating brewer palette
vertex_var2_color_degree<-
  colorRampPalette(brewer.pal(length(unique(
    V(var2)$var2_color_degree)), "RdBu"))(
    length(unique(V(var2)$var2_color_degree)))

#Saving as Vertex properties
V(var2)$vertex_var2_color_degree<-
  vertex_var2_color_degree[as.numeric(
    cut(V(var2)$var2_color_degree,
      breaks=length(unique(V(var2)$var2_color_degree))))]

set.seed(123)
#Plotting based only on degree measures
edge.start <- ends(var2, es=E(var2), names=F)[,1]

# Fixing ego
minC <- rep(-Inf, vcount(var2))
maxC <- rep(Inf, vcount(var2))
minC[1] <- maxC[1] <- 0
co <- layout_with_fr(var2, niter=10^4, minx=minC, maxx=maxC,miny=minC, maxy=maxC, weights = E(var2)$wei

#Plotting
plot(var2,
  layout=co,
  #edge.color=V(var2)$vertex_var2_color_degree[edge.start],
  edge.arrow.size=closeness(var2, weights = E(var2)$var2, mode="all",normalized = T),
  edge.width=E(var2)$weight/10*mean(E(var2)$weight),
  edge.curved = TRUE,
  vertex.color=V(var2)$vertex_var2_color_degree,
  vertex.size=(closeness(var2, weights = E(var2)$var2, mode="all",normalized = T))*100,
  vertex.frame.color="black",
  vertex.label.color="black",
  vertex.label=get.vertex.attribute(var2,"LABEL_COR"),
  vertex.label.cex=closeness(var2, weights = E(var2)$var2, mode="all",normalized = T)*1.5,
  vertex.label.dist=0,
  rescale=F,
  xlim=range(co[,1]),
  ylim=range(co[,2])
)
axis(1)
axis(2)

#Solving Problems with legend rendering
```

```


a<-V(var2)$var2_color_degree
b<-V(var2)$vertex_var2_color_degree
c<-table(a,b)
d<-as.data.frame(c)
e<-subset(d, d$Freq>0)
e<-e[order(e$a,decreasing=T),]
f<-t(e$a)
g<-t(e$b)

#Adding Legend
legend(x=range(co[,1])[2],
      y=range(co[,2])[2],
      legend=as.character(f),
      pch=21,
      col = "#777777",
      pt.bg=as.character(g),
      pt.cex=2,
      bty="n",
      ncol=1,
      lty=1,
      cex = .3)

#Adding Title
title("Network Closeness Degree Sized Normalized ALL - 4_REFERENCIA DE RECEBIMENTO CONTRAREFERENCIA (
text(
  x=range(co[,1])[1],
  y=range(co[,2])[1],
  labels = sprintf(
    "Median ALL Closennes: %.4f\nSD ALL Closennes: %.5f",
    median(closeness(var2, mode="all", weights = E(var2)$var2, normalized = T)),
    sd(closeness(var2, mode="all", weights = E(var2)$var2, normalized = T))
  )
)

```

## Network Closeness Degree Sized Normalized ALL – 4\_REFERENCIA DE RECEBIMENTO CONTRAREFERENCIA (var2)

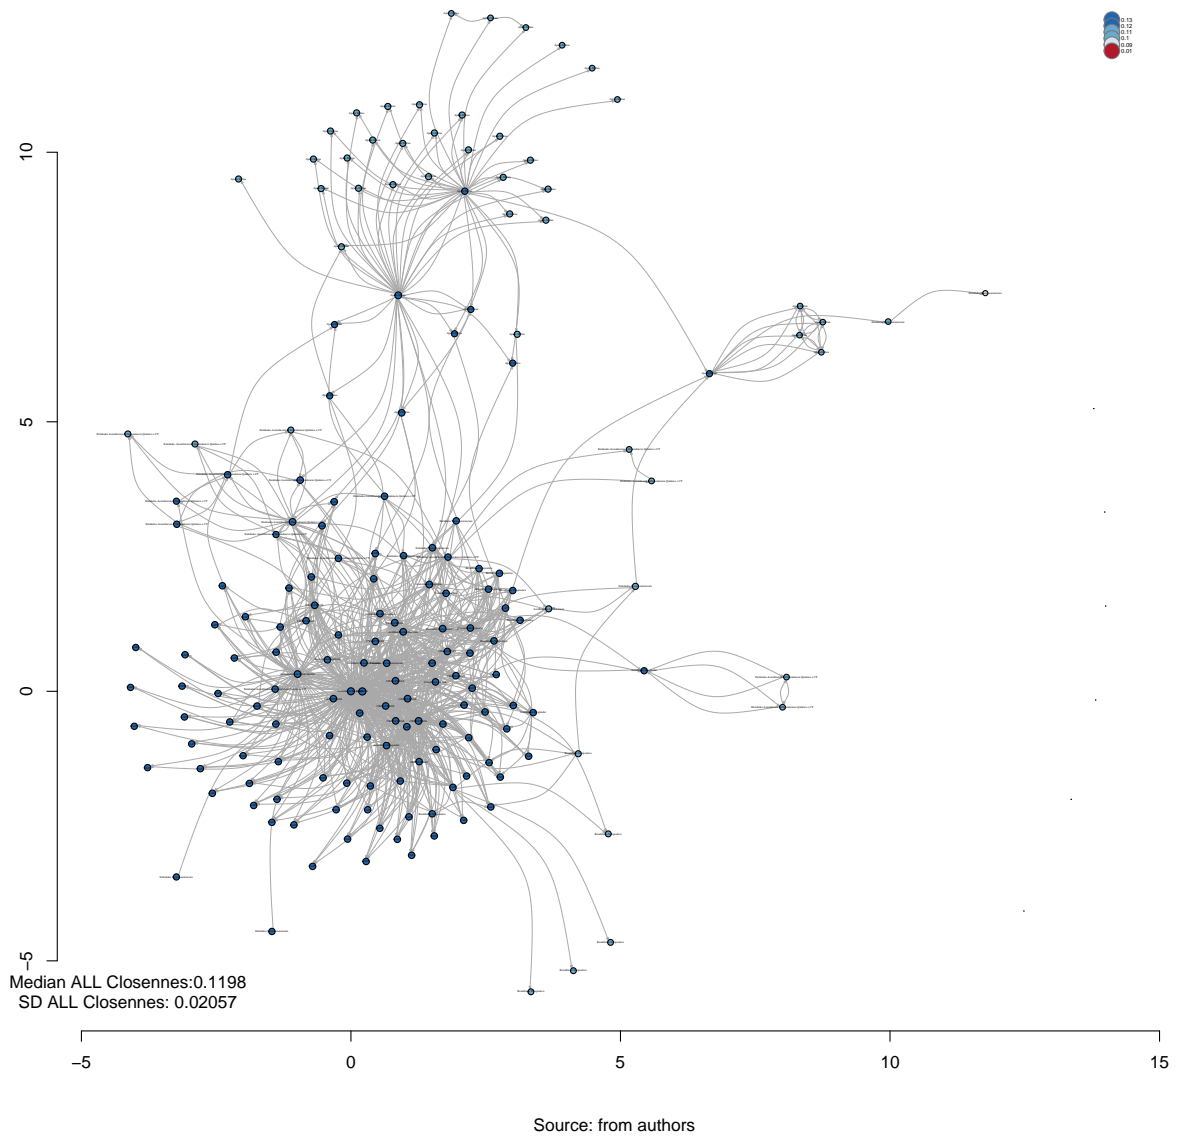

### 3.9 Closeness Normalized

#### 3.9.1 Saving to Igraph object

```
V(var2)$incloseness_n <- closeness(var2, weights = E(var2)$var2, mode = "in", normalized = T) %>% round
V(var2)$outcloseness_n <- closeness(var2, weights = E(var2)$var2, mode = "out", normalized = T) %>% round
V(var2)$totalcloseness_n <- closeness(var2, weights = E(var2)$var2, mode = "total", normalized = T) %>% round
```

## 3.10 Centralization Closeness

```
V(var2)$var2_centr_closeness<- centralization.closeness(var2)$res  
var2_centr_closeness<- centralization.closeness(var2)$res  
var2_centr_closeness_all<- centralization.closeness(var2)
```

### 3.10.1 Centralization

```
var2_centr_closeness_all$centralization
```

```
## [1] 0.04861136
```

### 3.10.2 Theoretical Max

```
var2_centr_closeness_all$theoretical_max
```

```
## [1] 185.0053
```

## 3.11 Network Plotting Based On Centralization Closeness

```
V(var2)$var2_centr_closeness<- centralization.closeness(var2)$res
```

```
#Get Variable
```

```
V(var2)$var2_color_degree<-round(V(var2)$var2_centr_closeness,2)
```

```
#Creating brewer palette
```

```
vertex_var2_color_degree<-  
  colorRampPalette(brewer.pal(length(unique(  
    V(var2)$var2_color_degree)), "Spectral"))(  
    length(unique(V(var2)$var2_color_degree)))
```

```
#Saving as Vertex properties
```

```
V(var2)$vertex_var2_color_degree<-  
  vertex_var2_color_degree[as.numeric(  
    cut(V(var2)$var2_color_degree,  
      breaks=length(unique(V(var2)$var2_color_degree))))]
```

```
set.seed(123)
```

```
#Plotting based only on degree measures
```

```
edge.start <- ends(var2, es=E(var2), names=F)[,1]
```

```
# Fixing ego
```

```
minC <- rep(-Inf, vcount(var2))
```

```
maxC <- rep(Inf, vcount(var2))
```

```
minC[1] <- maxC[1] <- 0
```

```
co <- layout_with_fr(var2, niter=104, minx=minC, maxx=maxC,miny=minC, maxy=maxC, weights = E(var2)$wei
```

```
#Plotting
```

```
plot(var2,  
      layout=co,  
      edge.color=V(var2)$vertex_var2_color_degree[edge.start],  
      edge.arrow.size=centralization.closeness(var2)$res,  
      edge.width=E(var2)$weight/10*mean(E(var2)$weight),  
      edge.curved = TRUE,  
      vertex.color=V(var2)$vertex_var2_color_degree,  
      vertex.size=centralization.closeness(var2)$res*100,  
      vertex.frame.color="black",  
      vertex.label.color="black",  
      vertex.label=get.vertex.attribute(var2,"LABEL_COR"),  
      vertex.label.cex=centralization.closeness(var2)$res,  
      vertex.label.dist=0,  
      rescale=F,  
      xlim=range(co[,1]),  
      ylim=range(co[,2])  
    )  
axis(1)  
axis(2)
```

```
#Solving Problems with legend rendering
```

```
a<-V(var2)$var2_color_degree  
b<-V(var2)$vertex_var2_color_degree  
c<-table(a,b)  
d<-as.data.frame(c)  
e<-subset(d, d$Freq>0)  
e<-e[order(e$a,decreasing=T),]  
f<-t(e$a)  
g<-t(e$b)
```

```
#Adding Legend
```

```
legend(x=range(co[,1])[2],  
       y=range(co[,2])[2],  
       legend=as.character(f),  
       pch=21,  
       col = "#777777",  
       pt.bg=as.character(g),  
       pt.cex=2,  
       bty="n",  
       ncol=1,  
       lty=1,  
       cex = .3)
```

```
#Adding Title
```


```
title("Network Centralization Closeness - 4_REFERENCIA DE RECEBIMENTO CONTRAREFERENCIA (var2)", sub =  
text(  
  x=range(co[,1])[1],  
  y=range(co[,2])[1],  
  labels = sprintf(  
    "Median Centralization Closeness:%.4f\nSD Centralization Closeness: %.5f",
```

```

median(centralization.closeness(var2)$res),
sd(centralization.closeness(var2)$res)
)

```

Network Centralization Closeness – 4\_REFERENCIA DE RECEBIMENTO CONTRAREFERENCIA (var2)

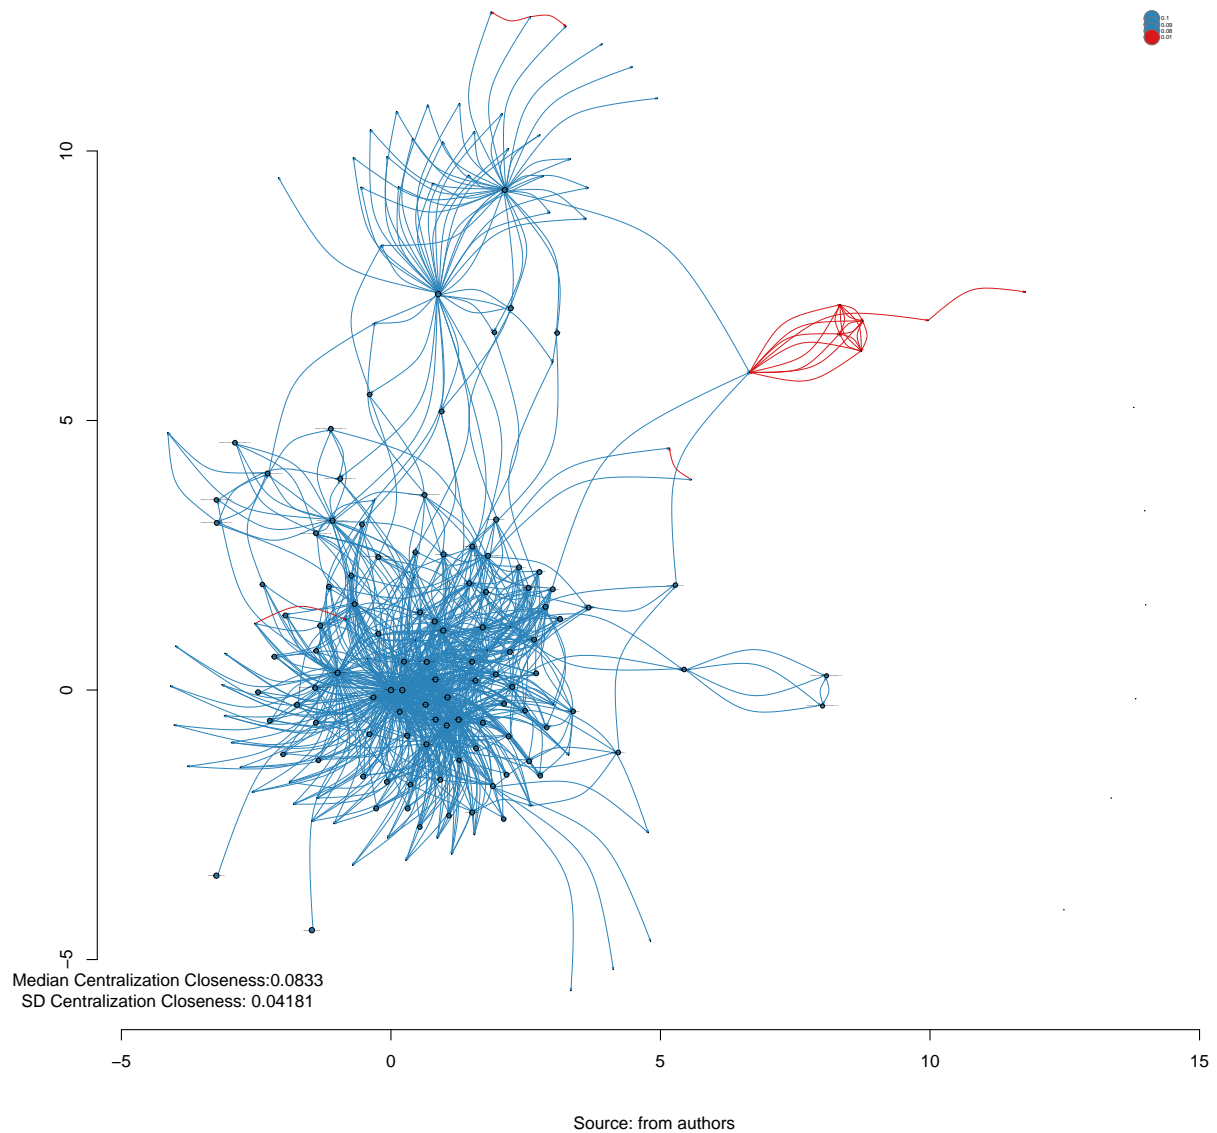

## 4 Closeness Dinamic Table

### 4.1 Getting Closeness Measures



```

var2_incloseness<- closeness(var2, weights = E(var2)$var2, mode = "in") %>% round(6)
var2_outcloseness<- closeness(var2, weights = E(var2)$var2, mode = "out") %>% round(6)
var2_totalcloseness<- closeness(var2, weights = E(var2)$var2, mode = "total") %>% round(6)
var2_incloseness_n<- closeness(var2,weights = E(var2)$var2, mode = "in", normalized = T) %>% round(6)
var2_outcloseness_n<- closeness(var2,weights = E(var2)$var2, mode = "out", normalized = T) %>% round(6)
var2_totalcloseness_n<- closeness(var2,weights = E(var2)$var2, mode = "total", normalized = T) %>% round(6)
var2_centr_closeness <- centralization.closeness(var2)$res %>% round(6)

```

## 4.2 Creating a datagram of measures

```

var2_df_clossenness <- data.frame(
  var2_incloseness,
  var2_outcloseness,
  var2_totalcloseness,
  var2_incloseness_n,
  var2_outcloseness_n,
  var2_totalcloseness_n,
  var2_centr_closeness) %>% round(6)

#Adding type
var2_df_clossenness <-cbind(var2_df_clossenness, V(var2)$LABEL_COR)

#Adding names
names(var2_df_clossenness) <- c("In Closeness", "Out Closeness", "Total Closeness","In Closeness Normalized", "Out Closeness Normalized", "Total Closeness Normalized", "Centralization Closeness")

#Ordering Variables
var2_df_clossenness<-var2_df_clossenness[c("Type","In Closeness", "Out Closeness", "Total Closeness","In Closeness Normalized", "Out Closeness Normalized", "Total Closeness Normalized", "Centralization Closeness")]

```

## 4.3 General tabel - DT

```

datatable(var2_df_clossenness, filter = 'top')

```

Show 10 entries

Search:

	Type	In Closeness	Out Closeness	Total Closeness	In Closeness Normalized	Out Closeness Normalized	Total Closeness Normalized	Centralization Closeness
	<input type="text" value="All"/>	<input type="text" value="All"/>	<input type="text" value="All"/>	<input type="text" value="All"/>	<input type="text" value="All"/>	<input type="text" value="All"/>	<input type="text" value="All"/>	<input type="text" value="All"/>
ASS_HOS_ Hospital de Pronto Socorro – HPS	Assistência Hospitalar	0.000064	0.000515	0.000705	0.011834	0.095778	0.131171	0.095778
AMB_SAM_ Centro de Atenção à Saúde Mental (CASM)	Ambulatório de Saúde Mental	0.000064	0.000509	0.000674	0.011813	0.094753	0.125337	0.094753
CAPS_AD	CAPSAD	0.000064	0.000524	0.000716	0.011861	0.097433	0.133238	0.097433
CRAS_AS_ CRAS Sudeste Costa Carvalho	CRAS/CREAS	0.000064	0.000509	0.000663	0.011812	0.094753	0.12326	0.094753
CRE_SOC_ CREAS Infância e Juventude	CRAS/CREAS	0.000064	0.000483	0.000651	0.011818	0.089855	0.121094	0.089855
CRE_SOC_ CREAS Norte	CRAS/CREAS	0.000065	0.000029	0.000649	0.012098	0.005348	0.120701	0.005348
ASS_HOS_ Serviço de Controle e Prevenção e Tratamento do Tabagismo (SECOPTT)	Assistência Hospitalar	0.000063	0.000491	0.000657	0.011794	0.091356	0.122127	0.091356
EA_DQCT_ Centro de Recuperação Resgatando Vidas (Escritório)	Entidades Assistenciais e Dependencia Química e CT	0.000063	0.000505	0.000669	0.011766	0.093939	0.124498	0.093939
EA_DQCT_ Comunidade Terapêutica Geração de Adoradores – CTGA	Entidades Assistenciais e Dependencia Química e CT	0.000063	0.000484	0.000645	0.011692	0.090116	0.12	0.090116
EA_DQCT_ Centro de Recuperação Resgatando Vidas	Entidades Assistenciais e Dependencia Química e CT	0.000063	0.000465	0.0006	0.011697	0.086471	0.111578	0.086471

Showing 1 to 10 of 187 entries

Previous  2 3 4 5 ... 19 Next

#### 4.4 Aggregating data from previous table - mean

```
aggdata_mean <- aggregate(var2_df_closeness, by=list(var2_df_closeness$Type), FUN=mean, na.rm=TRUE)
names(aggdata_mean) <- c("Group", "Type", "In Closeness(M)", "Out Closeness(M)", "Total Closeness(M)", "In Closeness Normalized", "Out Closeness Normalized", "Total Closeness Normalized", "Centralization Closeness")
#Removing Type variable
aggdata_mean<-aggdata_mean[,-c(2)]
```

## 4.5 Aggregating data from previous table - sd

```
aggdata_sd <-aggregate(var2_df_closeness, by=list(var2_df_closeness$Type), FUN=sd, na.rm=TRUE)

names(aggdata_sd) <- c("Group","Type","In Closeness(SD)", "Out Closeness(SD)", "Total Closeness(SD)","In Closeness(M)", "Out Closeness(M)", "Total Closeness(M)", "In Closeness(SD)", "Out Closeness(SD)", "Total Closeness(SD)", "In Closeness(M)", "Out Closeness(M)", "Total Closeness(M)")

#Removing Type variable
aggdata_sd<-aggdata_sd[,-c(2)]

#Merging mean and standart deviation
total_table <- merge(aggdata_mean,aggdata_sd,by="Group")

#Rounding
Group<-total_table[,c(1)] #Keeping group
total_table<-total_table[,-c(1)] %>% round(6) #Rouding
total_table<-cbind(Group,total_table) #Binding togheter

#Organizing Variabels
total_table<-total_table[c("Group","In Closeness(M)", "In Closeness(SD)", "Out Closeness(M)", "Out Closeness(SD)", "Total Closeness(M)", "Total Closeness(SD)", "In Closeness(M)", "In Closeness(SD)", "Out Closeness(M)", "Out Closeness(SD)", "Total Closeness(M)", "Total Closeness(SD)", "Centralization Closeness(M)", "Centralization Closeness(SD)")]
```

## 4.6 Plotting final table with round for Closeness

```
datatable(total_table, filter = 'top')
```

Show 10 entries

Search:

	Group	In Closeness(M)	In Closeness(SD)	Out Closeness(M)	Out Closeness(SD)	Total Closeness(M)	Total Closeness(SD)	In Closeness Normalized(M)	In Closeness Normalized(SD)	Out Closeness Normalized(M)	Out Closeness Normalized(SD)	Total Closeness Normalized(M)	Total Closeness Normalized(SD)	Centralization Closeness(M)	Centralization Closeness(SD)
1	Acolhimento Institucional	0.000064	0.000001	0.000489	0.000023	0.000643	0.000029	0.011795	0.000038	0.091006	0.004218	0.119501	0.00543	0.091006	0.004218
2	Ajuda Mútua	0.000061	0.000009	0.000097	0.000163	0.000568	0.000146	0.011312	0.001611	0.018011	0.030264	0.105675	0.027181	0.018011	0.030264
3	Ambulatório de Saúde Mental	0.000064		0.000509		0.000674		0.011813		0.094753		0.125337		0.094753	
4	Assistência Hospitalar	0.000059	0.000013	0.000349	0.00022	0.000569	0.000239	0.010901	0.00245	0.064977	0.04096	0.105833	0.044534	0.064977	0.04096
5	CAPS	0.000064	0	0.000486	0.000007	0.000656	0.000003	0.011816	0.000003	0.090501	0.001202	0.121929	0.000589	0.090501	0.001202
6	CAPSAD	0.000064		0.000524		0.000716		0.011861		0.097433		0.133238		0.097433	
7	Consultório na Rua	0.000063	0	0.000487	0	0.000648	0.000001	0.011806	0.000006	0.090511	0	0.120505	0.000166	0.090511	0
8	CRAS/CREAS	0.000064	0	0.000381	0.000202	0.000656	0.000008	0.01186	0.000089	0.070789	0.037588	0.122088	0.001472	0.070789	0.037588
9	Entidades Assistenciais e Dependência Química e CT	0.000059	0.000011	0.000354	0.000201	0.000557	0.000189	0.011055	0.002012	0.065786	0.037352	0.10364	0.035157	0.065786	0.037352
10	Entidades Socioassistenciais	0.000058	0.000014	0.000411	0.00019	0.000623	0.000047	0.010742	0.002685	0.076376	0.03534	0.11582	0.00872	0.076376	0.03534

Showing 1 to 10 of 13 entries

Previous 1 2 Next

## 5 Saving objects with new variables and changes

```
save.image("~/SNArRDJF/Robject/3_closeness_var2.RData")
```