

Google SCC for Jira Cloud

Release Documentation and User Guide

Overview	2
Compatibility Matrix	2
Prerequisites	2
User Permissions	3
Release History	3
v1.0.0	3
App Usage Instructions	4
Installation	4
Getting User's Service Account JSON	4
Configuring Google SCC for Jira Cloud	5
Issue Creation	10
Issue Enrichment	11
Third-Party Libraries Used	14
Known Behavior	16
Troubleshooting	16

Overview

Google Security Command Center (SCC) is a comprehensive security and risk management platform for Google Cloud. It provides visibility into your cloud assets and helps you detect, prevent, and respond to threats. It helps organizations maintain a secure cloud environment by providing a centralized platform for managing security-related tasks and insights.

Google SCC for Jira Cloud provides functionality to periodically receive findings from Google SCC into Jira Cloud based on specific filters and configured schedules. The app allows users to configure filters related to findings. The app would create issues in the configured project in Jira based on the Google SCC data. The created issues will have custom issue types, custom fields, and the Google SCC Enrichment feature. The app provides a Google SCC Enrichment manual action. Users can enrich Jira issues with finding source details. Additionally, users can change finding State and Mute Status from the Jira issues which will get synced to Google SCC.

Compatibility Matrix

Browser	Google Chrome
Google SCC NodeJS Client library	v8.12.0
Jira Cloud REST API Version	v3
Forge CLI Version	v10.13.4
Forge NodeJS Runtime Version	v20.x.x
Development Platform	Atlassian Forge
App Hosting Type	Cloud
Supported Atlassian Products	Jira, Jira Service Management

Prerequisites

- Jira Cloud instance configured properly with Google SCC for Jira Cloud installed.

User Permissions

- Only Jira admin users could configure the App.

Release History


v1.0.0

- Automated Google SCC Sync
 - The app will automatically fetch Google SCC Findings and create Jira issues corresponding to them.
 - The syncing process occurs at the user-configured interval.
 - The app provides flexibility to the user for doing certain configurations for the scheduler, Jira projects, and filters for findings
 - The app would create custom issue type for findings in Jira and add custom fields to enrich issues with Google SCC Data
- Manual Google SCC Enrichment
 - The app provides a manual action in the issues created by the app to enrich them with the Google SCC information
 - App provides a manual action to bring data related to the source of the finding and add the information in a custom field of the Jira Issue.
 - The app allows users to change finding State and Mute Status from the Jira issue which will get synced to Google SCC.

App Usage Instructions

Installation

1. Log in to your Atlassian Jira account. Click on the Apps tab on the top and then select Explore More Apps. Only Jira administrators have the privilege to access this.

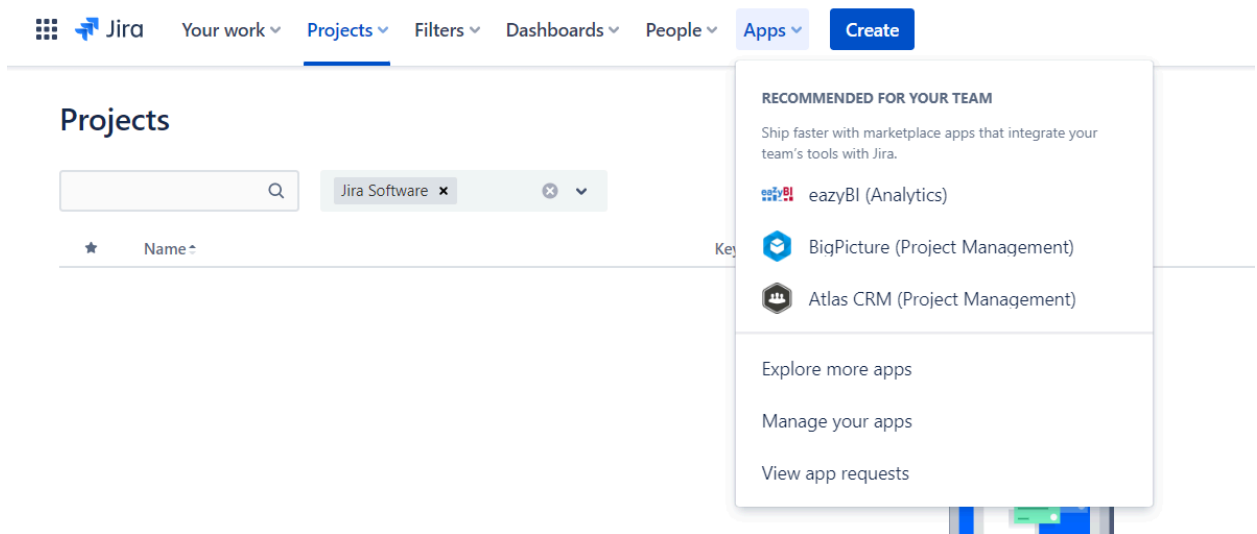


2. In the search bar, search for the Google SCC for Jira Cloud. Click on the app and then press the *Get App* button. A pop-up would appear, then click on the *Get it now* button. Pressing that would begin the installation process. Once installed, a message would appear on the bottom left indicating that installation is successful.
3. Click on the apps tab on the top and navigate to *Manage Apps*. You can see the Google SCC for Jira Cloud in the User-Installed Apps section.

Getting User's Service Account JSON


1. This app requires User's Service Account JSON from Google SCC, which is used to make API calls from Jira to Google SCC.
2. The User's Service Account JSON is required during the configuration of the app post-installation.
3. To generate the User's Service Account JSON, follow these [steps](#).

Configuring Google SCC for Jira Cloud

1. Post successful installation, under the Apps tab on the top, a Manage your Apps option would be visible. Clicking on it would open the Manage Apps section.

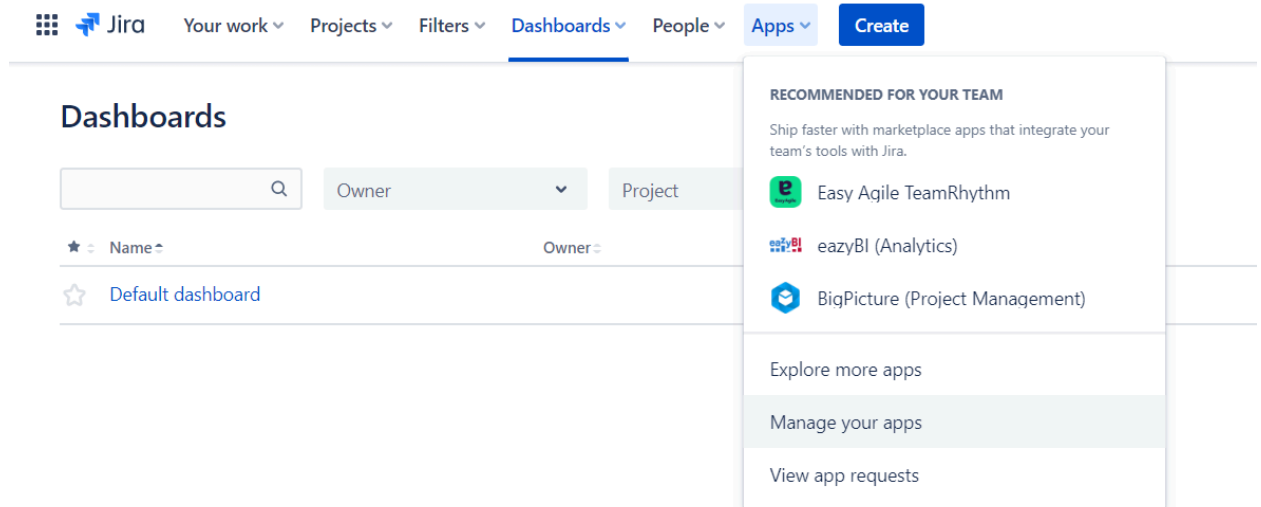

2. On the left panel, the Google SCC for Jira Cloud under the Apps section would be visible. Clicking on it would open the configuration page for the Google SCC for Jira Cloud.
3. For the first time, it might ask for allowing the app to access Atlassian products on your behalf. Clicking on the Allow Access button would open the authorization window. After validating the permission, the Accept button needs to be clicked.

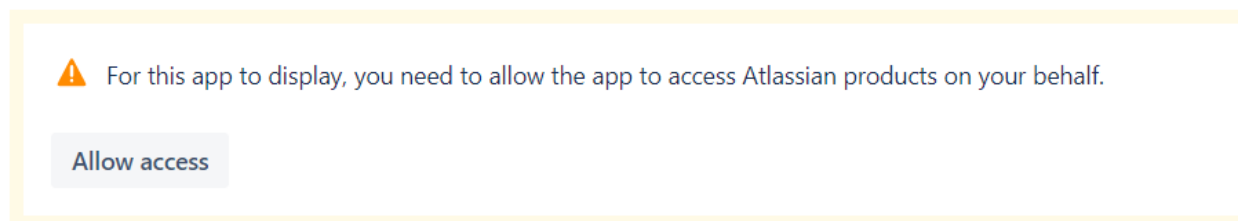

4. It would open up the Configuration page for the app.
5. The user needs to provide the *Google Service Account JSON*, Base URL, and Organization ID under the Authentication Information panel.

6. The Base URL may vary based on the region of the Google Cloud API services. For more information follow this [link](#).

The screenshot shows the Jira interface for configuring the Google SCC app. The top navigation bar includes 'Jira', 'Your work', 'Projects', 'Filters', 'Dashboards', 'Teams', 'Plans', 'Apps', and a 'Create' button. The left sidebar lists 'Apps' with options like 'Atlassian Marketplace', 'Manage apps', 'App requests', 'Promotions', 'OAuth credentials', and 'Apps'. Under 'Apps', 'Google SCC for Jira...' is selected, showing a 'DEV' status. The main content area is titled 'Google SCC for Jira Cloud Configuration' and contains the 'Authentication Information' section. This section has three input fields: 'User's Service Account JSON' (empty), 'Enter Base URL' (containing 'https://securitycenter.googleapis.com'), and 'Enter Organization ID' (empty).

7. In Scheduler Configurations, a user needs to select the interval at which the syncing process should occur between Google SCC and Jira. The provided options are Hourly, Daily, Weekly and Custom. Select Custom if you want to run sync after a customized number of hours. The app also allows fetching historical data. In the field *Number of days of historical findings to fetch initially* users can add the number of days from which they want to collect data from the Google SCC and create Jira issues.

The screenshot shows the 'Scheduler Configuration' section of the Jira interface. The 'Run' dropdown menu is set to 'Hourly'. Below it, the 'Number of days of historical findings to fetch initially' field contains the value '7'. The left sidebar is the same as in the previous screenshot, with 'Google SCC for Jira...' selected under the 'Apps' menu.

8. The user needs to select the project in which Jira issues will be created. If the required project is not visible in the dropdown, type the project name in the project selection field and if the project with the entered name is present it will show up for selection. The project selection field restricts team-managed projects. Users also need to select the *default Assignee*, the default will be unassigned.

The screenshot shows the 'Project & Users' configuration page for the 'Google SCC for Jira...' app in the Atlassian Marketplace. The left sidebar contains navigation links: 'Atlassian Marketplace', 'Manage apps', 'App requests', 'Promotions', 'OAuth credentials', and 'Apps'. The 'Apps' section is active, showing the app name and a 'DEV' tag. The main content area has a title 'Project & Users' and two dropdown menus: 'Select Project*' (with a help icon) and 'Default Assignee*'. The 'Select Project*' dropdown currently shows 'Select...' and the 'Default Assignee*' dropdown shows 'Unassigned'. Below these is a section titled 'Findings Configuration'.

9. In the *Findings Configuration* section, users can configure different filters which will be applied while fetching Findings from Google SCC.
10. The *GCP Project ID* filter field allows configuring multiple comma-separated project ID for which the findings will be fetched.
11. The user can use the *State* filter to fetch only ACTIVE or INACTIVE findings. Select ALL option if you need to fetch findings containing both the states. By default only ACTIVE findings will be fetched.
12. The *Severity* filter field allows you to configure multiple severity levels for which the findings will be fetched. By default findings of all the severity levels will be fetched.
13. The *Category* filter field allows configuring multiple comma-separated categories for which the findings will be fetched.
14. After entering all the required fields, click on the *Validate and Save* button which will authenticate and save all the credentials and configurations in the app storage.
15. Once the configuration is validated and saved, the sync process will initiate in some time. After the configuration is saved, users are not allowed to change the selected Jira project and the no. of day of historical data to be fetched.
16. To start the sync process instantly click on the *Manual Sync* button which will initiate a new sync process from the previously saved checkpoint. This will only work if there is no on-going process currently running.
17. Click on the *Stop Sync* button if you want to stop any further sync processes from running.
18. On clicking the *Reset* button, all the saved credentials and configuration will be removed and users can reconfigure the app again.

Manage apps
App requests
Promotions
OAuth credentials
Apps
Google SCC for Jira... DEV

Findings Configuration

GCP Project ID ?

State

ACTIVE

Severity ?

Select...

Category ?

Validate and Save
Reset
Manual Sync
Stop Sync

Configuration Page Field Information

Field Name	Description	Required
Service Account JSON	Enter the Service Account JSON file. Steps to get service account JSON file.	Yes
Base URL	Enter regional endpoint base URL. Default value : https://securitycenter.googleapis.com)	Yes
Organization ID	Enter the ID of the GCP organization for which the Google SCC plan is configured	Yes
Run	Select the interval at which the scheduler should run. Options: Hourly, Daily, Weekly, custom interval Default value : Hourly	Yes
Number of days of historical findings to be fetched initially	For how many days of historical data are to be fetched? Default value : 7	Yes

Select Project	Select the project in which Jira issues will be created. This field restricts Team-managed projects.	Yes
Default Assignee	Select to whom the created issues will be assigned by default. Options: Unassigned, Administrator, Automatically Default Assignee : Unassigned.	Yes
Project Name	Apply project name filter while fetching findings from Google SCC	No
State	Apply a state filter while fetching findings from Google SCC. Options: Active, Inactive. Default State : Active	No
Severity	Apply severity filter while fetching findings from Google SCC. Options: Severity Unspecified, Critical, High, Medium, Low	No
Category	Apply category filter while fetching findings from Google SCC.	No
Validate and Save	This button will authenticate and validate all the configurations entered by the user. On successful authentication and validation, the configuration will be stored in the Forge storage.	-
Reset	This button will reset all the configurations and remove any old checkpoints stored.	-
Manual Sync	This button will start the sync process if no process is running currently.	-
Stop Sync	This button will stop any further scheduler runs.	-

Issue Creation

1. Once the Configurations are validated and saved successfully, the issue creation process will be initiated.
2. The issues will get created in the configured project and syncing will occur at user-configured intervals.

The screenshot displays the Google SCC issue creation interface. The main section shows the 'Asset Details' for an 'UNUSED_IAM_ROLE' finding. The 'Asset Details' table includes fields such as 'name', 'projectName', 'projectDisplayName', 'parentName', 'parentDisplayName', 'type', 'displayName', 'cloudProvider', 'organization', 'service', 'location', 'resourcePath', and 'resourcePathString'. The 'Finding Information' panel on the right shows details like 'Assignee', 'Reporter', 'Development', 'Finding Name', 'Finding Parent', 'Project Name', 'Finding Class', 'Resource Name', 'External URI', 'Finding URL', 'Finding Category', 'Event Time', 'Created Time', 'Mute Status', 'Finding State', 'Event Timestamp', and 'Priority'. The 'Next Steps' section provides guidance on how to remediate the finding. The 'Security Marks' section shows the 'mute_description' and a comment box.

Projects / Google SCC Findings - / GCP-11254

UNUSED_IAM_ROLE - f8972bb74a1749f5b34776059b0b7de9

+ Add @ Apps

Description
The IAM role listed here has not been used in the last 90 days. Please remove or replace the role as appropriate in order to reduce the security risk for your environment. For additional guidance, see "Next Steps".

Asset Details

folders	1	[]
name	//cloudresourcemanager.googleapis.com/projects/149266608974	
projectName	//cloudresourcemanager.googleapis.com/projects/149266608974	
projectDisplayName	msel-47280	
parentName	//cloudresourcemanager.googleapis.com/organizations/595779152576	
parentDisplayName	credata.ai	
type	google.cloud.resourcemanager.Project	
displayName	msel-47280	
cloudProvider	GOOGLE_CLOUD_PLATFORM	
organization	organizations/595779152576	
service	cloudresourcemanager.googleapis.com	
location		
resourcePath	1 [{"nodes": [{"nodeType": "GCP_PROJECT", "id": "projects/149266608974", "di...}]}	
resourcePathString	organizations/595779152576/projects/149266608974	

Turn on webp

Next Steps

1. Review the 'Security insights' column in IAM to understand identity security risk along with our recommendations to remediate it.
2. Or, if you have integrated your ITSM tool, a ticket is auto-created for findings with critical or high severity. Leverage the ticket ID to remediate this finding at a future time.

Security Marks

mute_description [ServiceNow] [system] Updating the finding as per user mute/unmute criteria

100 Add a comment...

Looks good! Need help? This is blocked... Can you clarify? This is on track

Backlog Actions

Details

Assignee Unassigned
Assign to me

Reporter Google SCC for Jira Co...

Development Create branch
Create commit

Finding Name organizations/595779152576/sources/6926088932834625743/findings/f8972bb74a1749f5b34776059b0b7de9

Finding Parent organizations/595779152576/sources/6926088932834625743

Project Name msel-47280

Finding Class VULNERABILITY

Resource Name //cloudresourcemanager.googleapis.com/projects/149266608974

External URI https://console.cloud.google.c...

Finding URL https://console.cloud.google.c...

Finding Category UNUSED_IAM_ROLE

Event Time Mar 07, 2025, 11:59 AM

Created Time Mar 07, 2025, 3:42 AM

Mute Status UNMUTED

Finding State ACTIVE

Event Timestamp 2025-03-07T06:28:17.975Z

Priority High

More fields

Original estimate 0m

Activate Windows
Go to Settings to activate Windows

3. All the details related to the corresponding Finding will be added in the description along with the Asset Details.
4. In the Details panel, the user would be able to see the custom fields which have the Google SCC information.
5. A link is provided in the *Finding URL* custom field to see the Finding in Google SCC. When the user clicks on the provided link, it navigates to the Google SCC platform where details of the finding can be seen.

lays. Please remove or
irity risk for your

External URI


<https://console.cloud.google.com/iam-ad...>

Finding URL

<https://console.cloud.google.com/security...>

Issue Enrichment

1. If the user opens any of the issues created by the app and navigates to the top right corner, the user will be able to see a Google SCC Enrichment option.

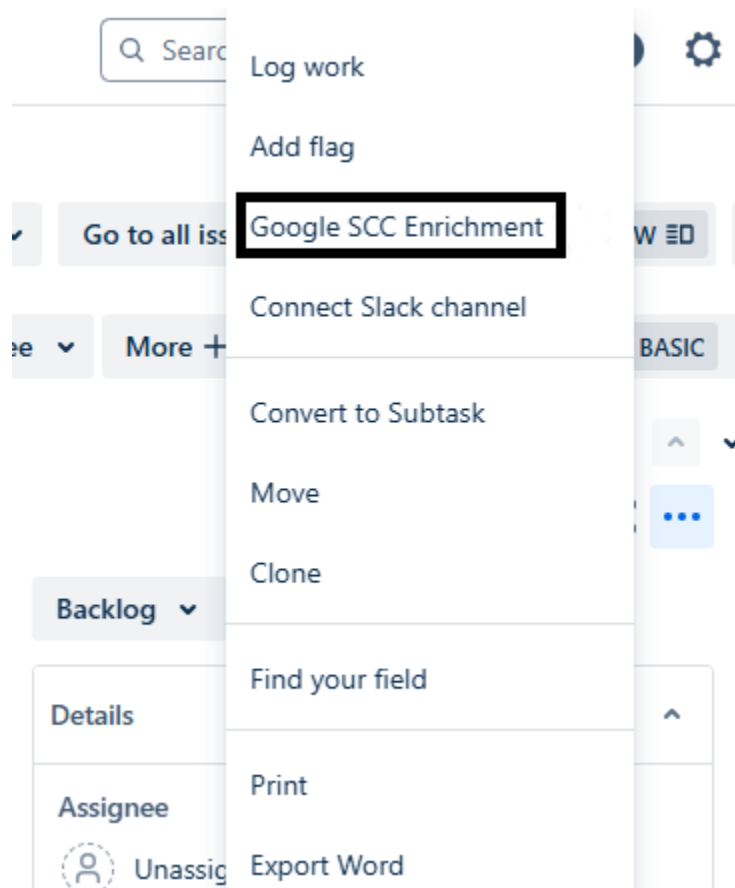

2. On clicking the Google SCC Enrichment option, a model will open showing the buttons Confirm and Cancel.

Google SCC Enrichment

Please confirm to fetch the source details from Google SCC.

CancelConfirm

- On clicking the Confirm button, the app will fetch the source details of the finding and add the details in the Source Details custom field in tabular format.

Source Details

Name	Display Name	Description	Canonical Name
organizations/595779152576/sources/14427099964614203968	GKE Security Posture	Provides actionable security issues on GKE.	

- Users can also update the finding *State* and *Mute* Status from the Jira issue details screen. The updated values will get synced to the corresponding finding in Google SCC.
- Comment will be added when the “Finding State” is updated, regardless of whether the update is successful or fails.
- When the “finding state” is successfully updated. The comment is added in the Jira issue.

GE

Google SCC Enrichment

2 minutes ago

Successfully updated Finding state to INACTIVE for Finding [organizations/595779152576/sources/4563429019522465317/findings/14f0eb8567eb1e92d6db290253e05e42].

Finding State

INACTIVE

- If the "Finding State" update fails, a comment is added to the Jira issue, and the "Finding State" reverts to its previous value. The "Finding State" is reverted only if the failure occurs on the SCC side during the update.

GE

Google SCC Enrichment
13 seconds ago

Failed to update Finding state to ACTIVE for Finding
[organizations/595779152576/sources/4563429019522465317/findings/14f0eb8567eb1e92d6db290253e05e42].

Finding State

INACTIVE

- Comment will be added when the “Mute Status” is updated, regardless of whether the update is successful or fails.
- When the “mute status” is successfully updated. The comment is added in the Jira issue.

GE

Google SCC Enrichment
1 minute ago

Successfully updated Finding Mute state to MUTED for Finding
[organizations/595779152576/sources/4563429019522465317/findings/14f0eb8567eb1e92d6db290253e05e42].

Mute Status

MUTED

Finding State

- If the "Mute Status" update fails, a comment is added to the Jira issue, and the "Mute Status" reverts to its previous value. The "Mute Status" is reverted only if the failure occurs on the SCC side during the update.

GE

Google SCC Enrichment
40 seconds ago

Failed to update Finding Mute state to UNMUTED for Finding
[organizations/595779152576/sources/4563429019522465317/findings/14f0eb8567eb1e92d6db290253e05e42].

Mute Status

MUTED

Finding State

- Whenever a finding State or Mute Status is changed from the Jira issue, it gets synced to the corresponding finding in Google SCC and a description is added in the security mark field of the finding.

State

☐ Show
☐ Show

Security marks

state_desc... : [Jira Clou...

state_description: [Jira Cloud][] - Finding
State Changed to INACTIVE

Detection service

Finding canonical name

organization84550242c0

Finding class

Finding class

Third-Party Libraries Used

Library	Version	Github/Bitbucket	License
eslint	8.57.1	https://github.com/eslint/eslint	https://github.com/eslint/eslint/blob/v7.32.0/LICENSE
eslint-plugin-react-hooks	4.6.0	https://github.com/facebook/react	https://github.com/facebook/react/blob/main/LICENSE
husky	9.1.7	https://github.com/typicode/husky	https://github.com/typicode/husky/blob/main/LICENSE
google-cloud/security-center	8.12.0	https://github.com/googleapis/google-cloud-node	https://github.com/googleapis/google-cloud-node/blob/main/LICENSE
atlaskit/button	20.3.12	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/LICENSE
atlaskit/css-reset	6.16.0	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/LICENSE
atlaskit/datetime-picker	15.13.1	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/LICENSE
atlaskit/form	11.2.0	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/LICENSE
atlaskit/icon-object	6.2.7	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/LICENSE
atlaskit/select	18.10.6	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/LICENSE
atlaskit/textfield	7.0.0	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/LICENSE


atlas-kit/tooltip	19.2.0	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/LICENSE
atlas-kit/checkbox	15.4.0	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/LICENSE
atlas-kit/lozenge	11.14.0	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/LICENSE
atlas-kit/modal-dialog	12.20.8	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/	https://bitbucket.org/atlassian/atlassian-frontend-mirror/src/master/LICENSE
react	18	github.com/facebook/react	https://github.com/facebook/react/blob/main/LICENSE
react-dom	18	github.com/facebook/react	https://github.com/facebook/react/blob/main/LICENSE

Known Behavior

1. After the configuration is saved successfully, the Atlassian Forge platform may take some time to initiate the scheduler.
2. In case the user resets the app configuration then all the data of the configured interval will be fetched again.
3. If any platform unexpected error is faced during the scheduler run then the scheduler execution will be stopped and will continue from the next scheduler run based on the checkpoint saved before the error occurrence.
4. In case an error occurred during the sync creation process, the app will retry the sync process for a maximum of 4 times. If after 4 times still the failure occurs then proper logs will be added for those failures and the current configuration and progress will be saved. The next scheduler run will resume from the last saved data.
5. If the error persists after the 4 retries and user updates the configuration before the next scheduler is triggered, then new configuration will be used for issue creation instead of the previously saved configuration.
6. The app may not function as intended and may behave differently if the user manually deletes or modifies the custom Issue Type, custom Fields, Screen or Screen schema that have been created.

Troubleshooting

1. To see the application logs, follow the below steps. It would require the role of a system administrator.
 - a. Go to <https://admin.atlassian.com/>.
 - b. Click on Products.

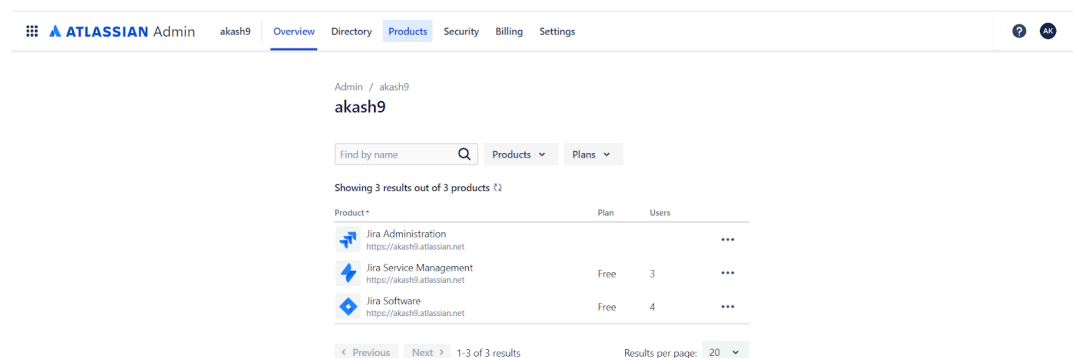

c. Click on your site from the SITES AND PRODUCTS section.

Admin / akash9

Products

Manage access, changes, and more for all the products in your organization.

Find by name Products Plans

Showing 3 results out of 3 products

Product	Plan	Users	Actions
Jira Administration https://akash9.atlassian.net			Manage access ...
Jira Service Management https://akash9.atlassian.net	Free	3	Manage access ...
Jira Software https://akash9.atlassian.net	Free	4	Manage access ...

< Previous Next > 1-3 of 3 results Results per page: 20

d. Navigate to “Connected Apps”.

google-scc-jira-1


Connected Apps

App	System	Actions
Atlassian Home for Jira Cloud by Atlassian	System	Jira Products https://google-scc-jira-1.atlassian.net View app details ...
Jira Cloud for Slack by Atlassian	System	Jira Products https://google-scc-jira-1.atlassian.net View app details ...
Automation for Jira by Atlassian	System	Jira Products https://google-scc-jira-1.atlassian.net View app details ...
Embedded Marketplace for Jira by Atlassian	System	Jira Products https://google-scc-jira-1.atlassian.net View app details
Google SCC for Jira Cloud	Admin	Jira Products https://google-scc-jira-1.atlassian.net View app details
Jira Cloud for Microsoft Teams by Atlassian	System	Jira Products https://google-scc-jira-1.atlassian.net View app details ...
Jira Cloud for Outlook by Atlassian	System	Jira Products https://google-scc-jira-1.atlassian.net View app details
Jira Service Management Widget by Atlassian	System	Jira Products https://google-scc-jira-1.atlassian.net View app details

e. Find Google SCC for Jira Cloud from the installed apps list and click on the View app details.

 Embedded Marketplace for Jira by Atlassian	System	 Jira Products https://google-scc-jira-1.atlassian.net	View app details
 Google SCC for Jira Cloud	Admin	 Jira Products https://google-scc-jira-1.atlassian.net	View app details
 Jira Cloud for Microsoft Teams by Atlassian	System	 Jira Products https://google-scc-jira-1.atlassian.net	View app details ...
 Jira Cloud for Outlook by Atlassian	System	 Jira Products https://google-scc-jira-1.atlassian.net	View app details

f. From the app details page, click on the Download Logs button present at the bottom which will open a dialog box. The user can apply the time interval and download the logs.

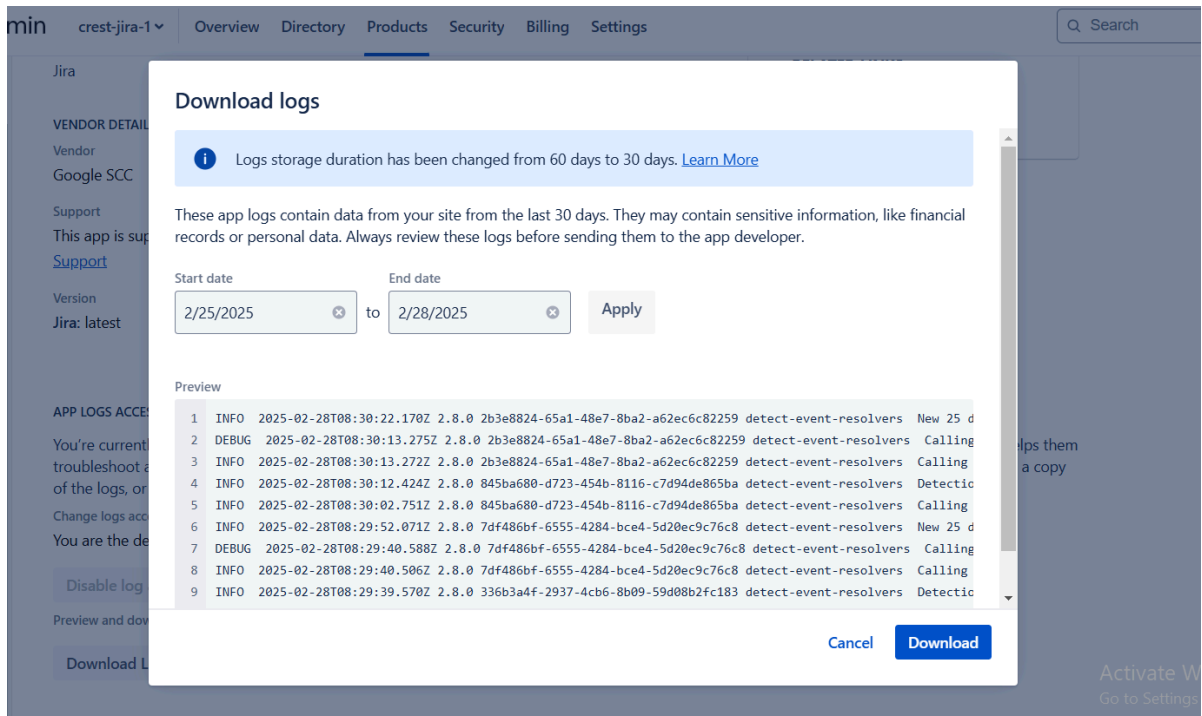

2. Manage users, groups, permissions, and roles in Jira Cloud
 - a. To manage users, groups, permissions, and roles in Jira Cloud review the following link and execute the steps
<https://support.atlassian.com/jira-cloud-administration/docs/manage-users-groups-permissions-and-roles-in-jira-cloud/>
3. Unable to install/activate the app on Jira Cloud
 - a. If any issue is faced during installation/activation of the app on the Jira Cloud, review the following link and execute the steps.
<https://confluence.atlassian.com/upm/installing-marketplace-apps-273875715.html>
4. Issue encountered in Jira Issue creation
 - a. If an error occurs during authentication, in the creation of issues based on the user's configured details, or in the creation of new issues after resetting/updating the configured fields, the user can check the error message and reset the data on the Configuration page. Make sure to reset cautiously, as it might result in duplication of issues.