

Google SCC for Jira On-Prem

Release Documentation and User Guide

Overview	2
Compatibility Matrix	2
User Permissions	2
Release History	3
v1.0.0	3
App Usage Instructions	4
Installation	4
Getting User's Service Account JSON	4
Configuring Google SCC for Jira On-Prem	5
Issue Creation	10
Issue Enrichment	11
Known Behavior	14
Troubleshooting	14

Overview

Google Security Command Center (SCC) is a comprehensive security and risk management platform for Google Cloud. It provides visibility into your cloud assets and helps you detect, prevent, and respond to threats. It helps organizations maintain a secure cloud environment by providing a centralized platform for managing security-related tasks and insights.

Google SCC for Jira On-Prem provides functionality to periodically receive findings from Google SCC into Jira Data-Center based on specific filters and configured schedules. The app allows users to configure filters related to findings. The app would create issues in the configured project in Jira based on the Google SCC data. The created issues will have custom issue types, custom fields, and the Google SCC Enrichment feature. The app provides a Google SCC Enrichment manual action. Users can enrich Jira issues with finding source details. Additionally, users can change finding State and Mute Status from the Jira issues which will get synced to Google SCC.

Compatibility Matrix

Browser	Google Chrome, Microsoft Edge, Safari
Development Platform	Atlassian SDK, Java
Jira Data Center Version	v9.0.x - v9.15.x v10.0.x - v10.5.x
Atlassian SDK Version	v8.2.7
Java Version	8(1.8.x)
Google Cloud Security Center Client Library	2.67.0
App Hosting Type	On-Premise

User Permissions

- Only Jira admin users could configure the App.

Release History


v1.0.0

- Automated Google SCC Sync
 - The app will automatically fetch Google SCC Findings and create Jira issues corresponding to them.
 - The syncing process occurs at the user-configured interval.
 - The app provides flexibility to the user for doing certain configurations for the scheduler, Jira projects, and filters for findings
 - The app would create custom issue type for findings in Jira and add custom fields to enrich issues with Google SCC data
- Manual Google SCC Enrichment
 - The app provides a manual action in the issues created by the app to enrich them with the Google SCC information
 - The app provides a manual action to bring data related to the source of the finding and add the information in a custom field of the Jira Issue.
 - The app allows users to change finding State and Mute Status from the Jira issue which will get synced to Google SCC.

App Usage Instructions

Installation

1. Log in to your Atlassian Jira account. Click on the Settings on the top and then select Manage Apps. Only Jira administrators have the privilege to access this.

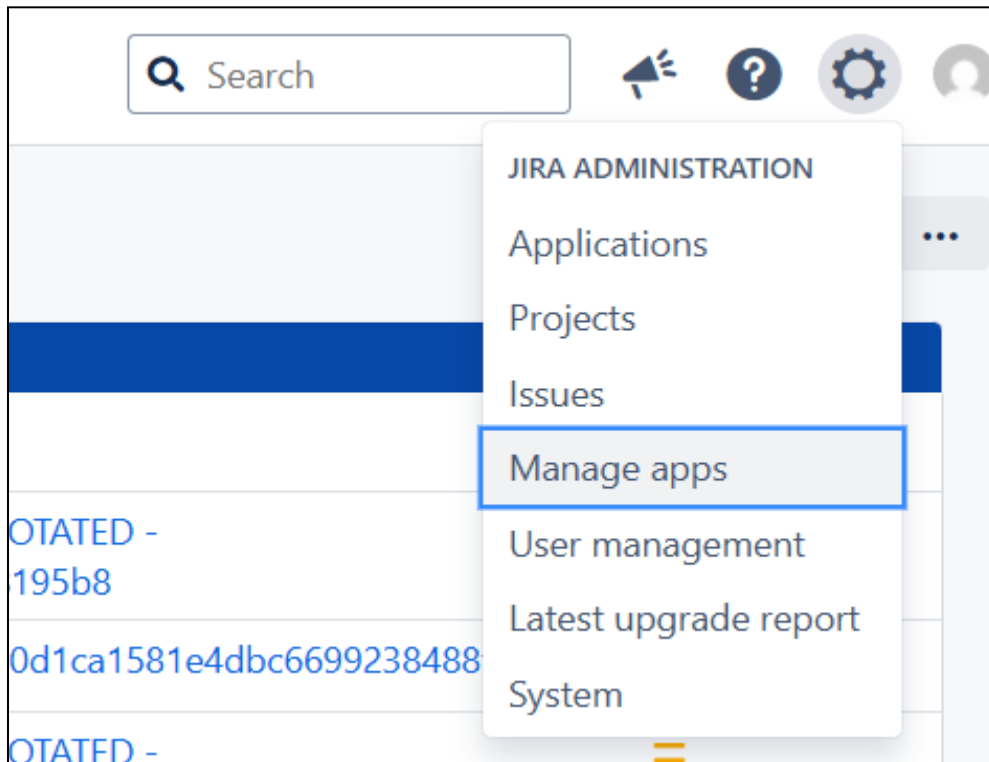


2. Inside the Find New Apps section, search for the Google SCC for Jira On-Prem. Then press the *Install* button. A pop-up would appear, then click on the *Accept & Install* button. Pressing that would begin the installation process. Once installed, a message would appear on the bottom left indicating that installation is successful.
3. On the same page, you can see the **Google SCC Plugin** in the “Other” section on the left side.

Getting User's Service Account JSON

1. This app requires User's Service Account JSON from Google SCC, which is used to make API calls from Jira to Google SCC.
2. The User's Service Account JSON is required during the configuration of the app post-installation.
3. To generate the User's Service Account JSON, follow these [steps](#).

Configuring Google SCC for Jira On-Prem

1. Post successful installation, under the settings tab on the top right, a Manage your Apps option would be visible. Clicking on it would open the Manage Apps section.

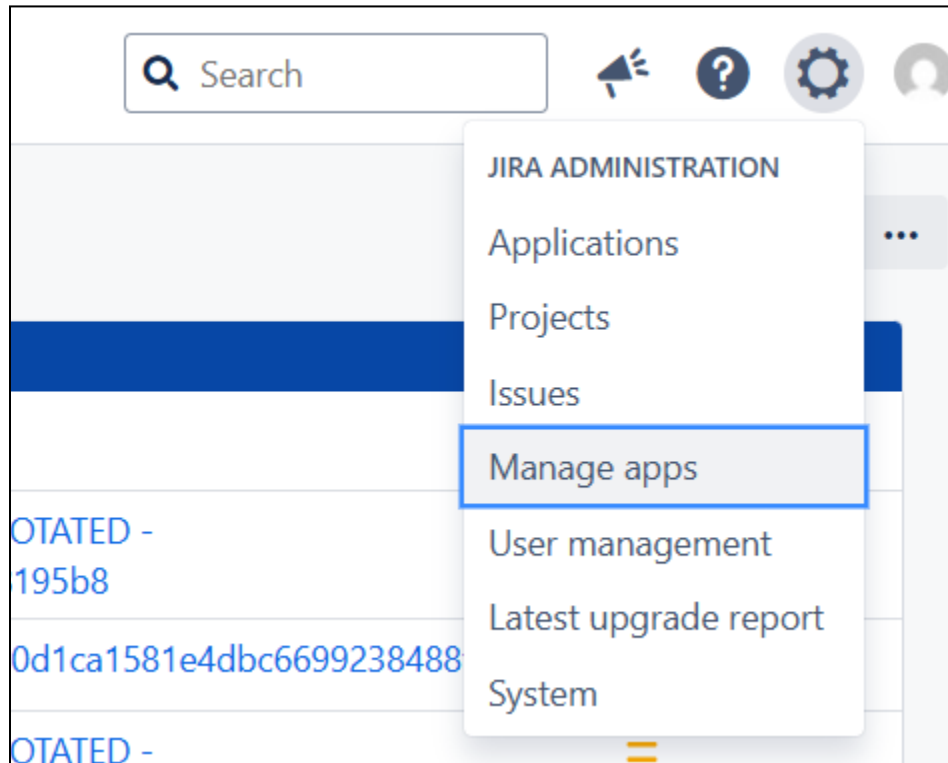

2. On the left panel, the Google SCC for Jira Configuration under the Apps section would be visible, clicking on it would open the configuration page for the Google SCC for Jira Configuration.
3. It would open up the Configuration page for the app.
4. The user needs to provide the Google Service Account JSON, Base URL APIs and organization ID for which the findings will be fetched under the Authentication Information panel.

5. The Base URL may vary based on the region of the Google Cloud API services. For more information follow this [link](#).

[Configuration](#)

Authentication Information and Proxy Configuration

Enable Proxy: ☐

User's Service Account JSON File:*

Choose file

 No file chosen

Base URL:*

https://securitycenter.googleapis.com

Enter regional endpoint base URL.

Organization ID:*

Enter the ID of the GCP organization for which the Google SCC plan is configured

6. If the proxy is enabled, then the user needs to provide the full url (url & port number, eg: 10.20.30.40:3128) for the proxy server along with proxy username and proxy password.

[Configuration](#)

Authentication Information and Proxy Configuration

Enable Proxy: ☒

Proxy URL:*

10.10.10.10:8888

Please enter Proxy URL without http or https

Proxy Username:

Proxy Password:

7. In Scheduler Configurations, the user needs to select the interval at which the scheduler should run. If users select the custom interval, they need to enter the interval by selecting the custom interval option. The app also allows fetching historical data. In the field *Number of days of historical findings to fetch initially* users can add the number of days from which they want to collect data from the Google SCC and create Jira issues.

Scheduler Configuration

Run:*

Daily



Number of days of historical*
findings to fetch initially:

7

- The user needs to select the project in which Jira issues will be created. Users must also select a default assignee. They can search for and choose an assignee, with "Unassigned," "Administrator," and "Automatically" options always appearing in the search results. If no assignee is selected, all Jira issues will remain unassigned by default.

Project & Users

Select Project:*

<-- Select Project -->



Project in which Jira issues will be created.

Default Assignee:*

Select Default Assignee



Select the default assignee for the issues created. If no user is selected, then the default assignee would be "Unassigned".

- In the *Findings Configuration* section, users can configure different filters which will be applied while fetching Findings from Google SCC.
- The *GCP Project ID* filter field allows configuring multiple comma-separated project ID for which the findings will be fetched.
- The user can use the *State* filter to fetch only ACTIVE or INACTIVE findings. Select ALL option if you need to fetch findings containing both the states. By default only ACTIVE findings will be fetched.
- The *Severity* filter field allows you to configure multiple severity levels for which the findings will be fetched. By default findings of all the severity levels will be fetched.
- The *Category* filter field allows configuring multiple comma-separated categories for which the findings will be fetched.

Findings Configuration

GCP Project ID:

The ID of the GCP project from which findings will be fetched. This field allows multiple comma-separated values.

State:

Active

▼

Severity:

▼

Category:

The category of the findings to be fetched. This field allows multiple comma-separated values.

14. After entering all the required fields, click on the *Validate and Save* button which will authenticate and save all the credentials and configurations in the database.
15. Once the configuration is validated and saved, the sync process will initiate in some time. After the configuration is saved, users are not allowed to change the no. of day of historical data to be fetched.
16. To start the sync process instantly click on the *Manual Sync* button which will initiate a new sync process from the previously saved checkpoint. This will only work if there is no on-going process currently running.
17. Click on the *Stop Sync* button if you want to stop any further sync processes from running.
18. On clicking the *Reset* button, all the saved credentials and configuration will be removed and users can reconfigure the app again.

Configuration Page Field Information

Field Name	Description	Required
Enable Proxy	Upon checking, the proxy details will be visible to the user.	No
Proxy URL	URL of the proxy server.	Yes (If proxy is enabled)
Proxy Username	Username to access the proxy service.	No
Proxy Password	Password to authenticate the proxy service.	No
Service Account JSON	Enter the Service Account JSON file. Steps to get service account JSON file.	Yes

Base URL	Enter regional endpoint base URL. Default value : https://securitycenter.googleapis.com)	Yes
Organization ID	Enter the ID of the GCP organization for which the Google SCC plan is configured	Yes
Run	Select the interval at which the scheduler should run. Options: Hourly, Daily, Weekly, custom interval Default value : Daily	Yes
Number of days of historical findings to be fetched initially	For how many days of historical data are to be fetched? Default value : 7	Yes
Select Project	Select the project in which Jira issues will be created.	Yes
Default Assignee	Search for and select the user to whom newly created issues will be assigned by default. Default value: Unassigned. ("Unassigned", "Administrator", and "Automatically" options will always appear in the search results.)	Yes
GCP Project ID	Apply project id filter while fetching findings from Google SCC	No
State	Apply a state filter while fetching findings from Google SCC. Options: Active, Inactive, All. Default State : Active	No
Severity	Apply severity filter while fetching findings from Google SCC. Options: Severity Unspecified, Critical, High, Medium, Low	No
Category	Apply category filter while fetching findings from Google SCC.	No

Validate and Save	This button will authenticate and validate all the configurations entered by the user. On successful authentication and validation, the configuration will be stored in the Jira DB.	-
Reset	This button will reset all the configurations and remove any old checkpoints stored.	-
Manual Sync	This button will start the sync process if no process is running currently.	-
Stop Sync	This button will stop any further scheduler runs.	-

Issue Creation

1. Once the Configurations are validated and saved successfully, the issue creation process will be initiated.
2. The issues will get created in the configured project and syncing will occur at user-configured intervals.

The screenshot shows a Jira Software issue page. The issue title is 'PRIMITIVE_ROLES_USED - 87cc00d1ca1581e4dbc6699238488f1f'. The issue is categorized as a 'Finding' with a 'Medium' priority and is currently 'Unresolved'. The 'Details' section shows the following information:

- Type: Finding
- Priority: Medium
- Labels: None
- Finding Category: PRIMITIVE_ROLES_USED
- External URL: <https://console.cloud.google.com/iam-admin/iam/project--gcp-52538/organizations/595779152576/sources/4563429019522465317/locations/global>
- Finding Parent: <https://cloudresourcemanager.googleapis.com/projects/4458118019024>
- Resource Name: <https://cloudresourcemanager.googleapis.com/projects/4458118019024>
- Project Name: Security Health Analytics
- Asset Details: A table with fields and values.

Field	Value
parent	//cloudresourcemanager.googleapis.com/organizations/595779152576
folders	[]
projectDisplayNa	gcp-52538
displayName	gcp-52538
project	//cloudresourcemanager.googleapis.com/projects/4458118019024
type	google.cloud.resourcemanager.Project
parentDisplayNam	crestdata.ai
resourcePathStin	organizations/595779152576/projects/4458118019024
nodes	[[{"nodeType": "GCP_PROJECT", "id": "projects/4458118019024", "displayName": "gcp-52538", "nodeType": "GCP_ORGANIZATION", "id": "organizations/595779152576", "displayName": ""}]]
service	cloudresourcemanager.googleapis.com
cloudProvider	GOOGLE_CLOUD_PLATFORM
organization	organizations/595779152576
name	//cloudresourcemanager.googleapis.com/projects/4458118019024
location	

The 'Finding Class' is 'MISCONFIGURATION'. The 'Finding Name' is 'organizations/595779152576/sources/4563429019522465317/locations/global/findings/87cc00d1ca1581e4dbc6699238488f1f'. The 'Finding ID' is 'https://console.cloud.google.com/iam-admin/iam/project--gcp-52538/organizations/595779152576/sources/4563429019522465317/locations/global/findings/87cc00d1ca1581e4dbc6699238488f1f'.


3. All the details related to the corresponding Finding will be added in the description along with the Asset Details.
4. In the Jira Issue, the user would be able to see the custom fields which have the Google SCC information.

5. A link is provided in the *Finding URL* custom field to see the Finding in Google SCC. When the user clicks on the provided link, it navigates to the Google SCC platform where details of the finding can be seen.


Finding URL:	https://console.cloud.google.com/security/command-center/findings?organizationId=595779152576&resourceId=organizations/595779152576/sources/4563429019522465317/locations/global/findings/87cc00d1ca1581e4dbc6699238488f1f
--------------	---

Issue Enrichment

1. If the user opens any of the issues created by the app and clicks on the “More” option in the top of the issue details screen., the user will be able to see a Google SCC Enrichment option.

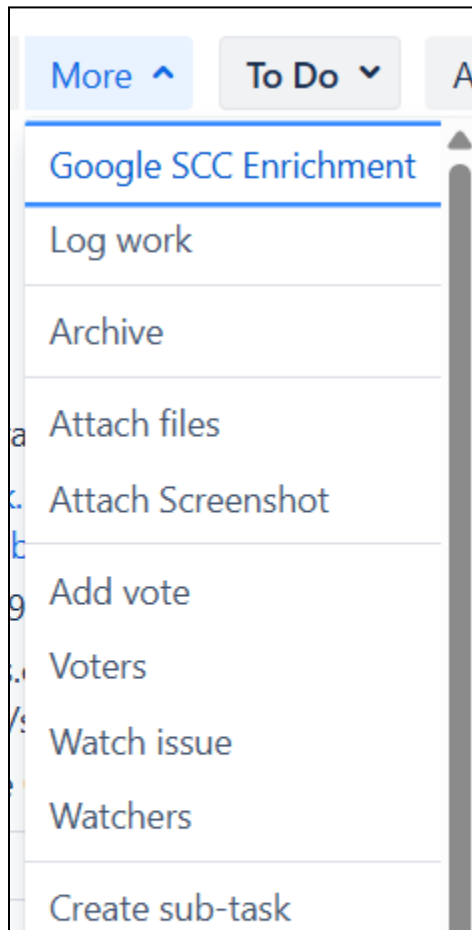

2. On clicking the Google SCC Enrichment option, a model will open showing the buttons Confirm and Cancel.

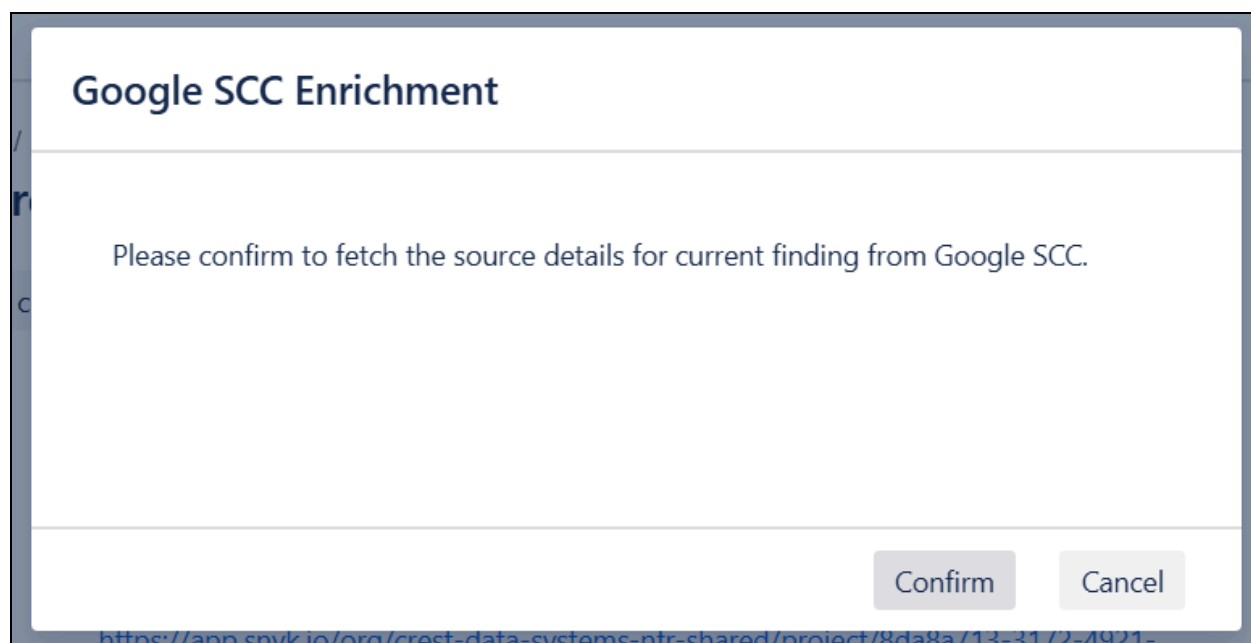


- On clicking the Confirm button, the app will fetch the source details of the finding and add the details in the Source Details custom field in tabular format.

Source Details:

Field	Value
Display Name	Snyk for Google Cloud Security Command Center (SCC)
Description	Integrate Snyk with SCC to achieve a unified view of your application & cloud security risks.
Canonical Name	
Name	organizations/595779152576/sources/12167549656709091686

- Users can also update the finding *State* and *Mute* Status from the Jira issue details screen. The updated values will get synced to the corresponding finding in Google SCC.
- Comment will be added when the “Finding State” is updated, regardless of whether the update is successful or fails.
- When the “finding state” is successfully updated. The comment is added in the Jira issue.

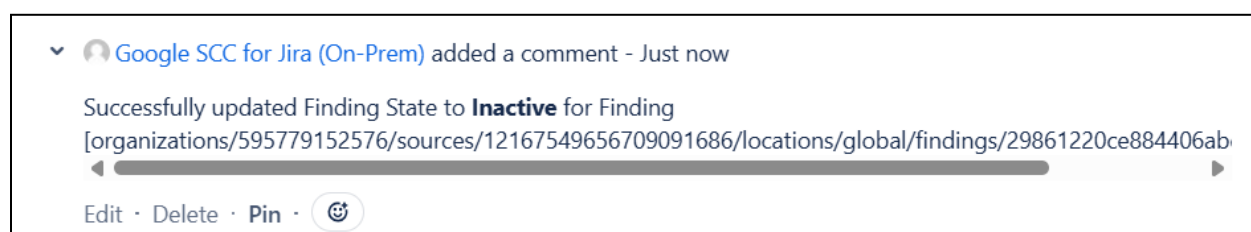

7. If the "Finding State" update fails, a comment is added to the Jira issue, and the "Finding State" reverts to its previous value. The "Finding State" is reverted only if the failure occurs on the SCC side during the update.

▼

 Google SCC for Jira On-Prem added a comment - 5 days ago

Failed to update Finding State to **Active** for Finding
[organizations/595779152576/sources/4563429019522465317/locations/global/findings/d3ba8976304e2df319b]

Edit · Delete · Pin · 

8. Comment will be added when the "Mute Status" is updated, regardless of whether the update is successful or fails.
9. When the "mute status" is successfully updated. The comment is added in the Jira issue.

▼

 Google SCC for Jira (On-Prem) added a comment - Just now

Successfully updated Mute Status to **Muted** for Finding
[organizations/595779152576/sources/4563429019522465317/locations/global/findings/d3ba8976304e2df319b]

Edit · Delete · Pin · 

10. If the "Mute Status" update fails, a comment is added to the Jira issue, and the "Mute Status" reverts to its previous value. The "Mute Status" is reverted only if the failure occurs on the SCC side during the update.

▼

 Google SCC for Jira On-Prem added a comment - 5 days ago

Failed to update Mute Status to **Muted** for Finding
[organizations/595779152576/sources/4563429019522465317/locations/global/findings/d3ba8976304e2df319b]

Edit · Delete · Pin · 

11. Whenever a finding State or Mute Status is changed from the Jira issue, it gets synced to the corresponding finding in Google SCC and a description is added in the security mark field of the finding.

Security marks

mute_descr... : [Jira Data...

state_desc...

mute_description: [Jira Data-Center][] -

Mute Status Changed to Muted

state="A

Next steps

Known Behavior

1. The app may not function as intended and may behave differently if the user manually deletes or modifies the custom Issue Type, custom Fields, Screen or Screen schema, Screen Tab that have been created.
2. For the "Finding State" and "Mute Status" custom fields on a Jira issue, if the user selects the "None" option (provided by Jira by default), no action will be taken on the Google SCC side, and the custom field will be removed from the Jira issue.
3. After saving the configuration with **assignee-1**, if the user changes the assignee to **assignee-2** without resetting, newly created Jira issues will be assigned to **assignee-2**. For existing issues, the fields will be updated based on the latest configuration, but the assignee will remain as **assignee-1** without any change.

Troubleshooting

1. For any issues, please refer to the "atlassian-jira.log" log file.
(Location: \$JIRA_HOME/atlassian/application-data/jira/log/atlassian-jira.log)
2. Following are the error messages.

Messages	Responses	Location
Authentication Failure: Either due to Invalid Service Account File / Base URL / Organization Id or Invalid Proxy Detail (If proxy is enabled)	If invalid service account json file, base url, organization ID or invalid proxy details provided	Config Screen
Internal Server error.	The Jira server is down	Config Screen
Successfully validated service account.	Valid service account file	Config Screen
Valid Service Account file exists.	The existing service account file is valid	Config Screen
Syncing already in progress. Please try after sometime.	When syncing is already in progress, and user starts syncing again by clicking manual sync button	Config Screen