


- Modelo base de datos

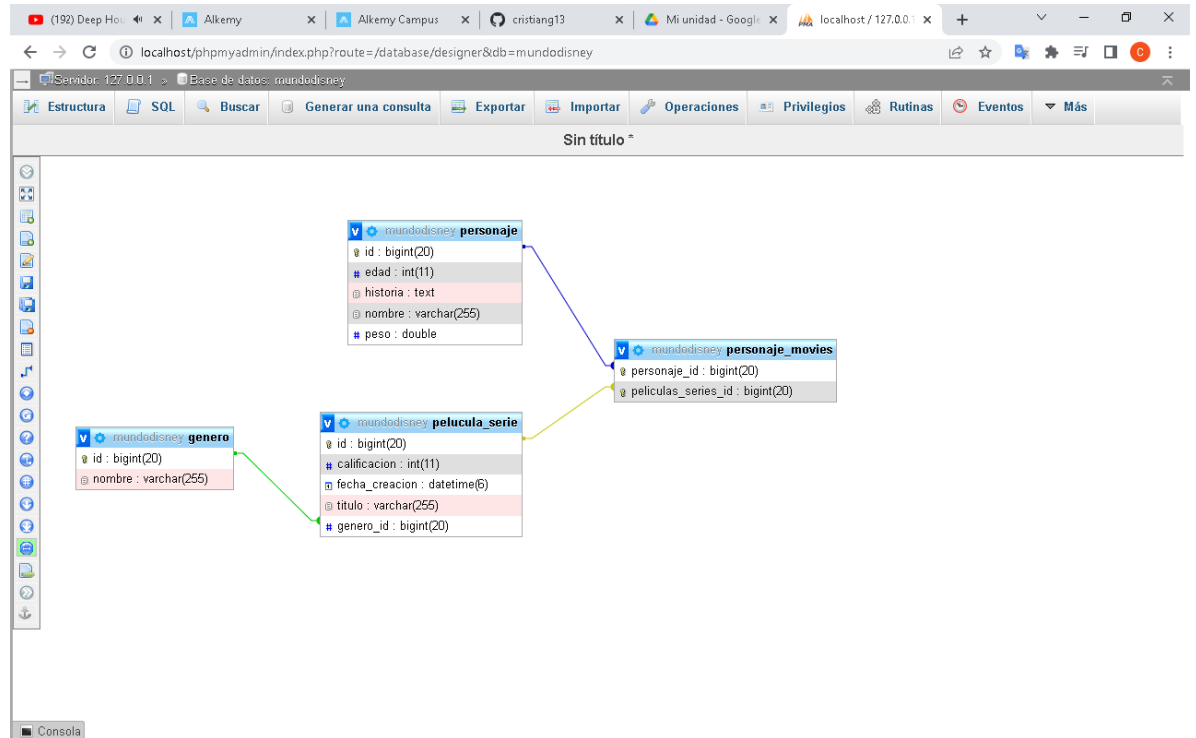

- Listado de personajes

Endpoint: <http://localhost:8080/movies>

Postman interface showing a GET request to `http://localhost:8080/characters`. The response is a JSON array of two character objects.

```
[{"id": 2, "nombre": "estefania", "edad": 25, "peso": 65.8, "historia": "nacio en palmira"}, {"id": 3, "nombre": "federico", "edad": 58, "peso": 88.8, "historia": "nacio en cali"}]
```

Creación

The screenshot shows the Postman application interface. At the top, there's a navigation bar with 'Home', 'Workspaces', 'Reports', and 'Explore'. A search bar and 'Sign In'/'Create Account' buttons are also present. Below this, a yellow banner indicates 'Working locally in Scratch Pad. Switch to a Workspace'. The main area shows a new POST request being created. The URL is 'http://localhost:8080/characters'. The 'Body' tab is selected, and the request body is a JSON object:

```
{  "id": 4,  "nombre": "camilo zamora",  "edad": 19,  "peso": 68,  "historia": "nacio en bogota, trabajo como mesero por 3 meses"}
```

. The status bar at the bottom shows 'Status: 200 OK', 'Time: 6.46 s', and 'Size: 281 B'. The 'Send' button is visible on the right.

Edición

The screenshot shows the Postman application interface with an existing POST request being edited. The URL is 'http://localhost:8080/characters'. The 'Body' tab is selected, and the request body is a JSON object:

```
{  "id": 4,  "nombre": "camilo zamora izquierdo",  "edad": 19,  "peso": 78,  "historia": "nacio en bogota, trabajo como mesero por 3 meses en el restaurante la terraza"}
```

. The status bar at the bottom shows 'Status: 200 OK', 'Time: 647 ms', and 'Size: 320 B'. The 'Send' button is visible on the right.

Eliminación

Postman interface showing a DELETE request to `http://localhost:8080/characters/4`. The request body is a JSON object:

```
{  "id": 4,  "nombre": "camilo zamora izquierdo",  "edad": 19,  "peso": 70,  "historia": "nació en bogota, trabajo como mesero por 3 meses en el restaurante la terraza"}
```

The response status is 200 OK. The response body is:

```
1 se elimino el personaje id4
```

- Películas y series

Endpoint: <http://localhost:8080/movies>

Postman interface showing a GET request to `http://localhost:8080/movies`. The response status is 200 OK. The response body is a JSON array of movie objects:

```
[  {    "id": 2,    "titulo": "aero",    "fecha_creacion": "2013-02-23",    "genero": null,    "calificacion": 3  },  {    "id": 3,    "titulo": "lazy II",    "fecha_creacion": "2013-05-28",    "genero": {      "id": 2,      "nombre": "drama"    },    "calificacion": 6  }]
```

Creación

The screenshot shows the Postman application interface. At the top, there's a navigation bar with 'Home', 'Workspaces', 'Reports', and 'Explore'. Below this is a yellow banner indicating 'Working locally in Scratch Pad. Switch to a Workspace'. The main area displays a POST request to 'http://localhost:8080/movies/'. The request body is a JSON object:

```
{  "titulo": "Los vengadores",  "fecha_creacion": "2021-08-30",  "genero": "comedia",  "calificacion": 5}
```

. The response status is 200 OK, with a time of 300 ms and a size of 282 B. The response body is also a JSON object:

```
{  "id": 7,  "titulo": "Los vengadores",  "fecha_creacion": "2021-08-30",  "genero": {    "id": 3,    "nombre": "comedia"  },  "calificacion": 5}
```

. The interface includes tabs for Params, Authorization, Headers (9), Body, Pre-request Script, Tests, and Settings. The Body tab is active, showing the request and response bodies in a code editor with syntax highlighting.

Actualización

The screenshot shows the Postman application interface for a PUT request. The request is to 'http://localhost:8080/movies/'. The request body is a JSON object:


```
{  "id": 7,  "titulo": "Los vengadores ",  "fecha_creacion": "2021-08-30",  "genero": {    "id": 2,    "nombre": "drama"  },  "calificacion": 2}
```

. The response status is 200 OK, with a time of 538 ms and a size of 282 B. The response body is a JSON object:

```
{  "id": 7,  "titulo": "Los vengadores ",  "fecha_creacion": "2021-08-30",  "genero": {    "id": 2,    "nombre": "drama"  },  "calificacion": 2}
```


. The interface is similar to the previous one, but the request method is PUT and the body content is updated. The Body tab is active, showing the request and response bodies in a code editor with syntax highlighting.

Eliminación

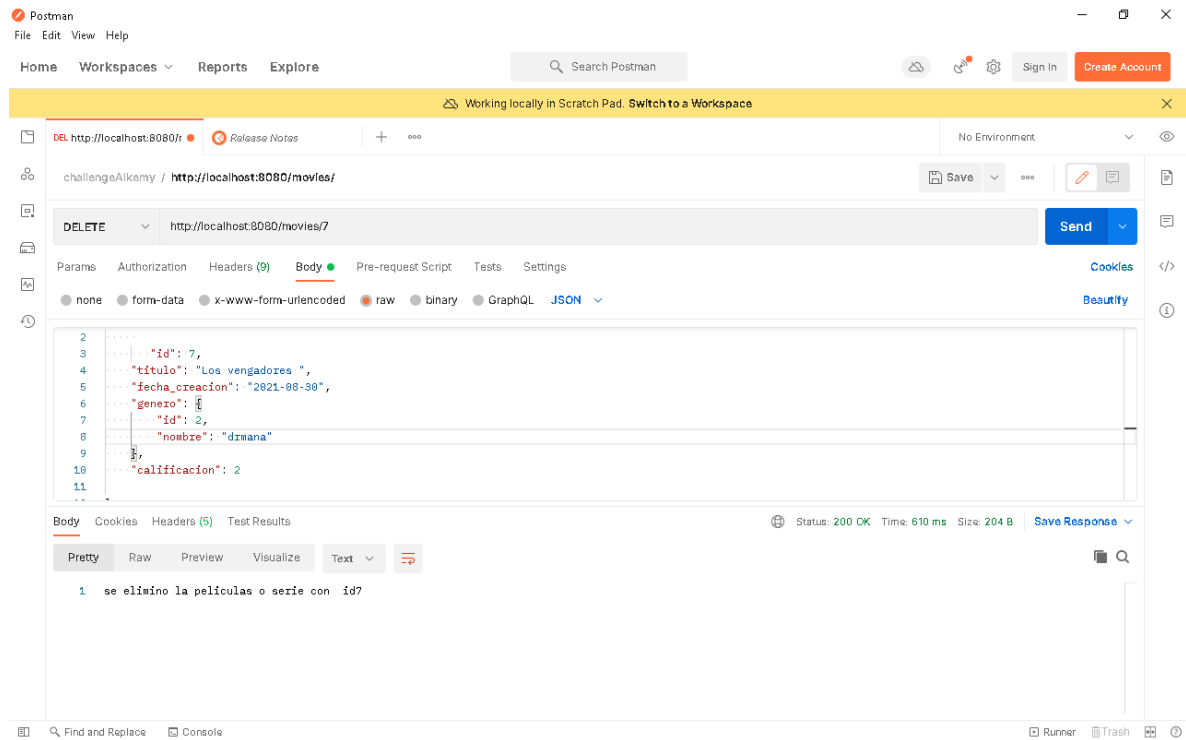


- detallePersonaje

endpoint: `http://localhost:8080/personajesMovies/detallePersonaje?personaje=personaje`

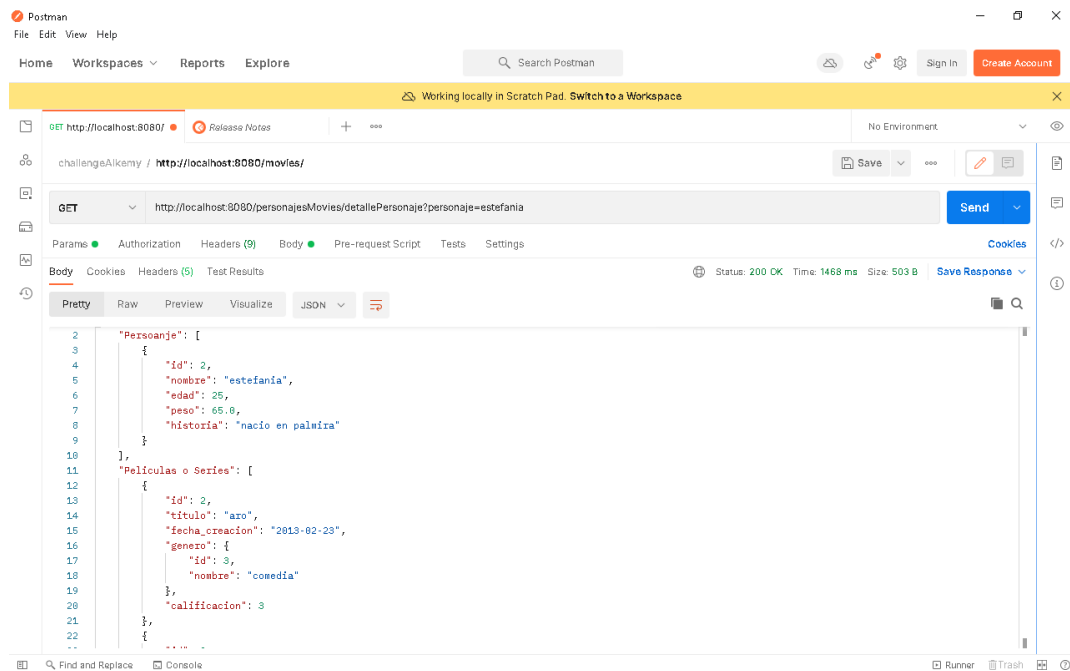


- búsqueda personaje
por nombre
endpoint: `http://localhost:8080/characters/name?nombre=nombre`

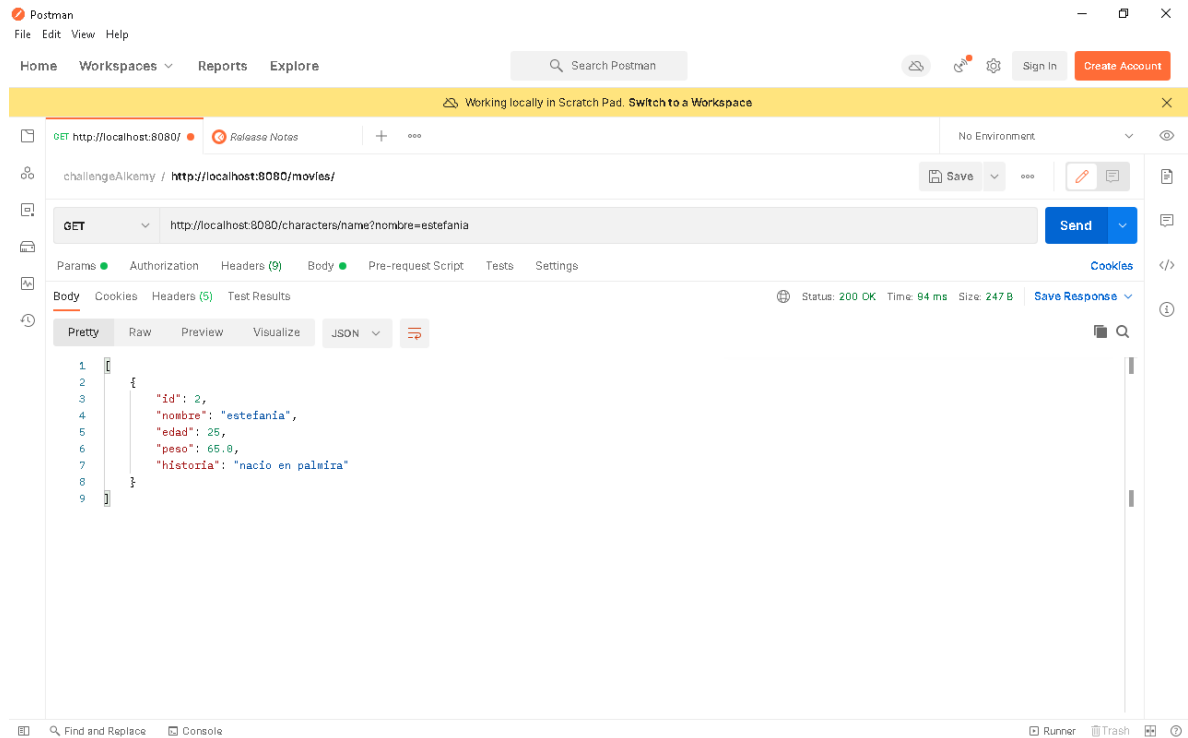


Por edad

Endpoint: <http://localhost:8080/characters/age?edad=edad>

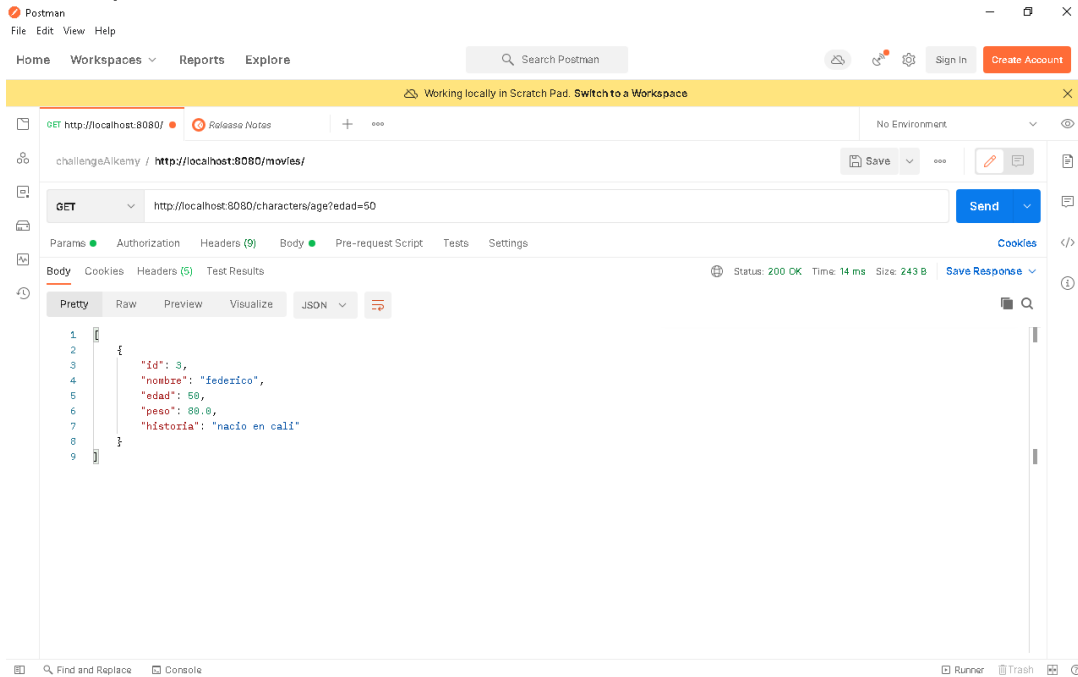


- listado de películas
endpoint <http://localhost:8080/personajesMovies/detalleMovie?movie=movie>

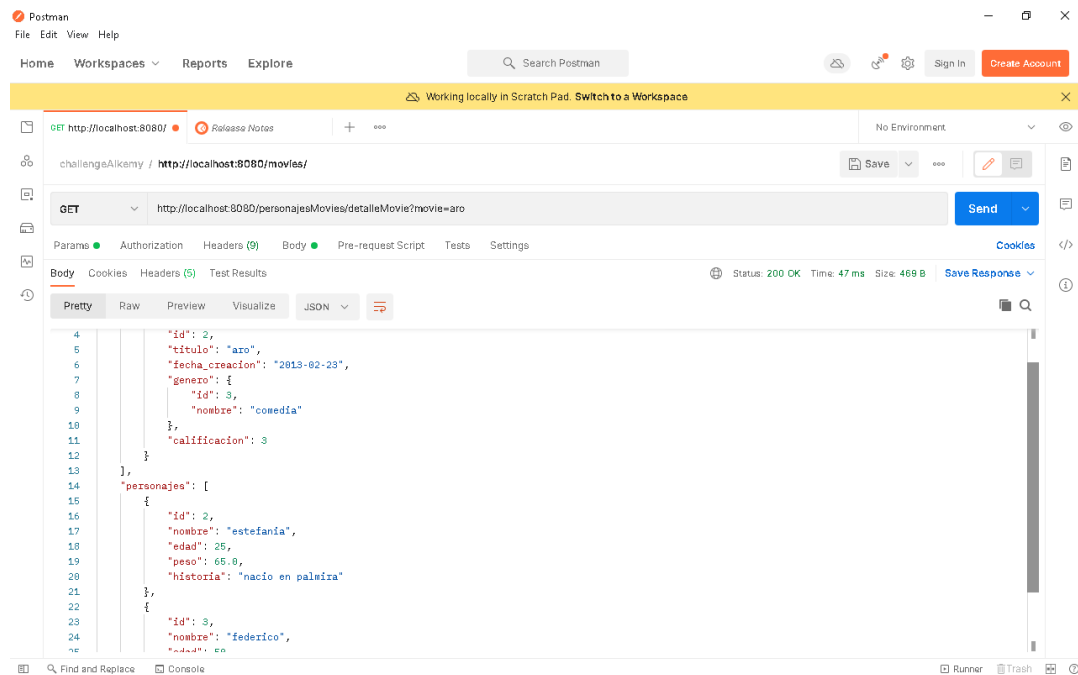

Por genero

Endpoint `http://localhost:8080/movies/genero?idGenero=id`

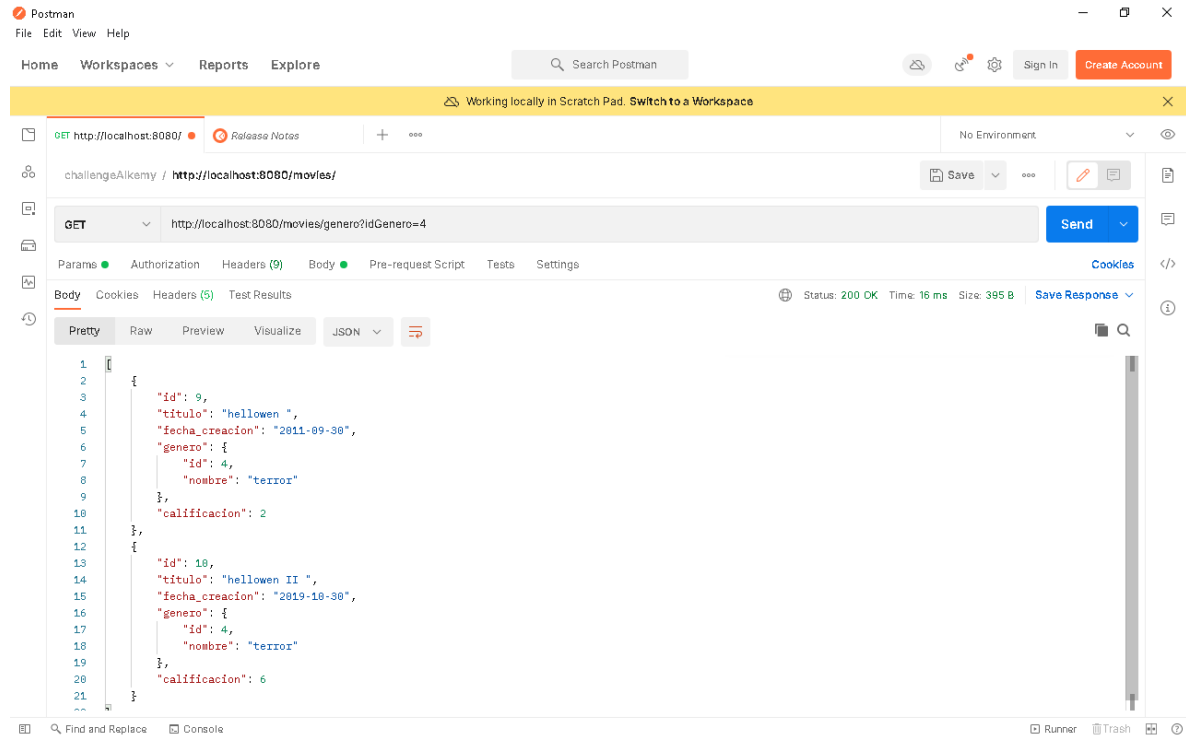

Por nombre

Endpoint `http://localhost:8080/movies/name?titulo=titulo`

