

Resolvendo os erros

Windows PowerShell
Copyright (C) Microsoft Corporation. Todos os direitos reservados.

Experimente a nova plataforma cruzada PowerShell <https://aka.ms/pscore6>

. : 0 arquivo C:\Users\brito\Documents\WindowsPowerShell\Microsoft.PowerShell_profile.ps1 não pode ser carregado. O arquivo C:\Users\brito\Documents\WindowsPowerShell\Microsoft.PowerShell_profile.ps1 não está assinado digitalmente. Não é possível executar este script no sistema atual. Para obter mais informações sobre como executar scripts e definir a política de execução, consulte about_Execution_Policies at <https://go.microsoft.com/fwlink/?LinkID=135170>.

No linha:1 caractere:3

+ . 'C:\Users\brito\Documents\WindowsPowerShell\Microsoft.PowerShell_pr ...

+ ~~~~~
+ CategoryInfo : Erro de Segurança: (:) [], PSSecurityException
+ FullyQualifiedErrorId : UnauthorizedAccess

O carregamento de perfis pessoais e do sistema levou 514ms.

PS C:\Users\brito> \$PSVersionTable ◀

Name	Value
PSVersion	5.1.19041.2364
PSEdition	Desktop
PSCompatibleVersions	{1.0, 2.0, 3.0, 4.0...}
BuildVersion	10.0.19041.2364
CLRVersion	4.0.30319.42000
WSManStackVersion	3.0
PSRemotingProtocolVersion	2.3
SerializationVersion	1.1.0.1

PS C:\Users\brito> |

Veja o numero da versão

Defina a politica irrestrita

Depois disso tente os comandos

```
+ FullyQualifiedErrorId : UnauthorizedAccess
0 carregamento de perfis pessoais e do sistema levou 514ms.
PS C:\Users\brito> $PSVersionTable
```

Name	Value
PSVersion	5.1.19041.2364
PSEdition	Desktop
PSCompatibleVersions	{1.0, 2.0, 3.0, 4.0...}
BuildVersion	10.0.19041.2364
CLRVersion	4.0.30319.42000
WSManStackVersion	3.0
PSRemotingProtocolVersion	2.3
SerializationVersion	1.1.0.1

```
PS C:\Users\brito> Set-ExecutionPolicy Unrestricted
PS C:\Users\brito> |
```

```
PS C:\Users\brito> Set-ExecutionPolicy Unrestricted
```

```
PS C:\Users\brito> Import-Module -Name oh-my-posh
```

```
Hey friend
```

In an effort to grow oh-my-posh, the decision was made to no longer support the PowerShell module. Over the past year, the added benefit of the module disappeared, while the burden of maintaining it increased.

However, this doesn't mean oh-my-posh disappears from your terminal, it just means that you'll have to use a different tool to install it.

All you need to do, is follow the migration guide here:

<https://ohmyposh.dev/docs/migrating>

```
PS C:\Users\brito> |
```



```
pwsh in brito
```

```
+ ~~~~~~  
+ CategoryInfo          : ErroreSegurança: (:) [], PSSecurityException  
+ FullyQualifiedErrorId : UnauthorizedAccess  
0 carregamento de perfis pessoais e do sistema levou 514ms.  
PS C:\Users\brito> $PSVersionTable
```

Name	Value
PSVersion	5.1.19041.2364
PSEdition	Desktop
PSCompatibleVersions	{1.0, 2.0, 3.0, 4.0...}
BuildVersion	10.0.19041.2364
CLRVersion	4.0.30319.42000
WSManStackVersion	3.0
PSRemotingProtocolVersion	2.3
SerializationVersion	1.1.0.1

```
PS C:\Users\brito> Set-ExecutionPolicy Unrestricted  
PS C:\Users\brito> Import-Module -Name oh-my-posh  
Hey friend
```

In an effort to grow oh-my-posh, the decision was made to no longer support the PowerShell module. Over the past year, the added benefit of the module disappeared, while the burden of maintaining it increased.

However, this doesn't mean oh-my-posh disappears from your terminal, it just means that you'll have to use a different tool to install it.

All you need to do, is follow the migration guide here:


<https://ohmyposh.dev/docs/migrating>

```
PS C:\Users\brito> set-PoshPrompt -Theme unicorn
```

```
brito ~ 18:51
```

in pwsh at 18:51:31

Depois de executar os comandos pretendidos
Mude de novo para restrito

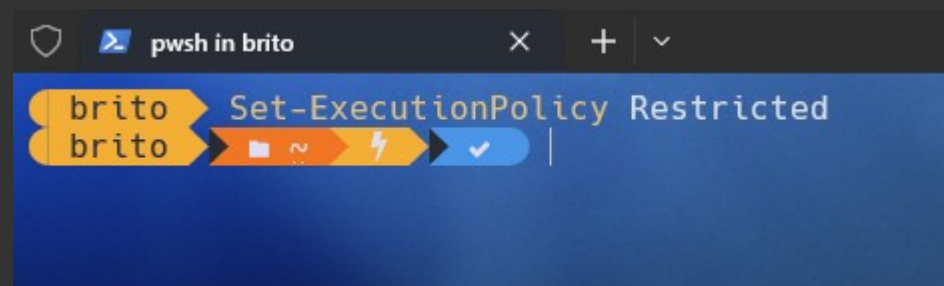

```
pwsh in brito
```

```
+ CategoryInfo          : ObjectNotFound: (C:\Users\brito\...-my-posh\themes:String) [Get-ChildItem], ItemNotFound
Exception
+ FullyQualifiedErrorId : PathNotFound,Microsoft.PowerShell.Commands.GetChildItemCommand
```

Themes location: C:\Users\brito\AppData\Local\oh-my-posh\themes

To change your theme, adjust the init script in C:\Users\brito\Documents\WindowsPowerShell\Microsoft.PowerShell_profile.ps1.
Example:
oh-my-posh init pwsh --config 'C:\Users\brito\AppData\Local\oh-my-posh\themes\jandedobbeleer.omp.json' | Invoke-Expression

```
brito (Get-Command oh-my-posh).Source  
C:\Users\brito\AppData\Local\Programs\oh-my-posh\bin\oh-my-posh.exe  
brito
```

in pwsh at 19:05:05

Para a politica de anti virus

Themes location: `C:\Users\brito\AppData\Local\oh-my-posh\themes`

To change your theme, adjust the init script in `C:\Users\brito\Documents\WindowsPowerShell\Microsoft.PowerShell_profile.ps1`.
Example:

```
oh-my-posh init pwsh --config 'C:\Users\brito\AppData\Local\oh-my-posh\themes\jandedobbeleer.omp.json' | Invoke-Expression
```

```
brito & ([ScriptBlock]::Create((oh-my-posh init pwsh --config "$env:POSH_THEMES_PATH\jandedobbeleer.omp.json" --print) -join "`n"
))nt) -join "`n"))
```

```
brito get-poshThemes
```

< > [Oh My Posh]

Get-ChildItem : Não é possível localizar o caminho 'C:\Users\brito\AppData\Local\oh-my-posh\themes' porque ele não existe.
No linha:271 caractere:19

```
+ ... $themes = Get-ChildItem -Path "$Path/*" -Include '*.omp.json' | Sor ...
```

```
+ ~~~~~
```

```
+ CategoryInfo          : ObjectNotFound: (C:\Users\brito\...-my-posh\themes:String) [Get-ChildItem], ItemNotFoundException
+ FullyQualifiedErrorId : PathNotFound,Microsoft.PowerShell.Commands.GetChildItemCommand
```

Themes location: `C:\Users\brito\AppData\Local\oh-my-posh\themes`

To change your theme, adjust the init script in `C:\Users\brito\Documents\WindowsPowerShell\Microsoft.PowerShell_profile.ps1`.
Example:


```
oh-my-posh init pwsh --config 'C:\Users\brito\AppData\Local\oh-my-posh\themes\jandedobbeleer.omp.json' | Invoke-Expression
```

```
brito & ([ScriptBlock]::Create((oh-my-posh init pwsh --config "$env:POSH_THEMES_PATH\jandedobbeleer.omp.json" --print) -join "`n"
))nt) -join "`n"))
```

```
brito
```

in pwsh at 19:14:21

Criei uma pasta

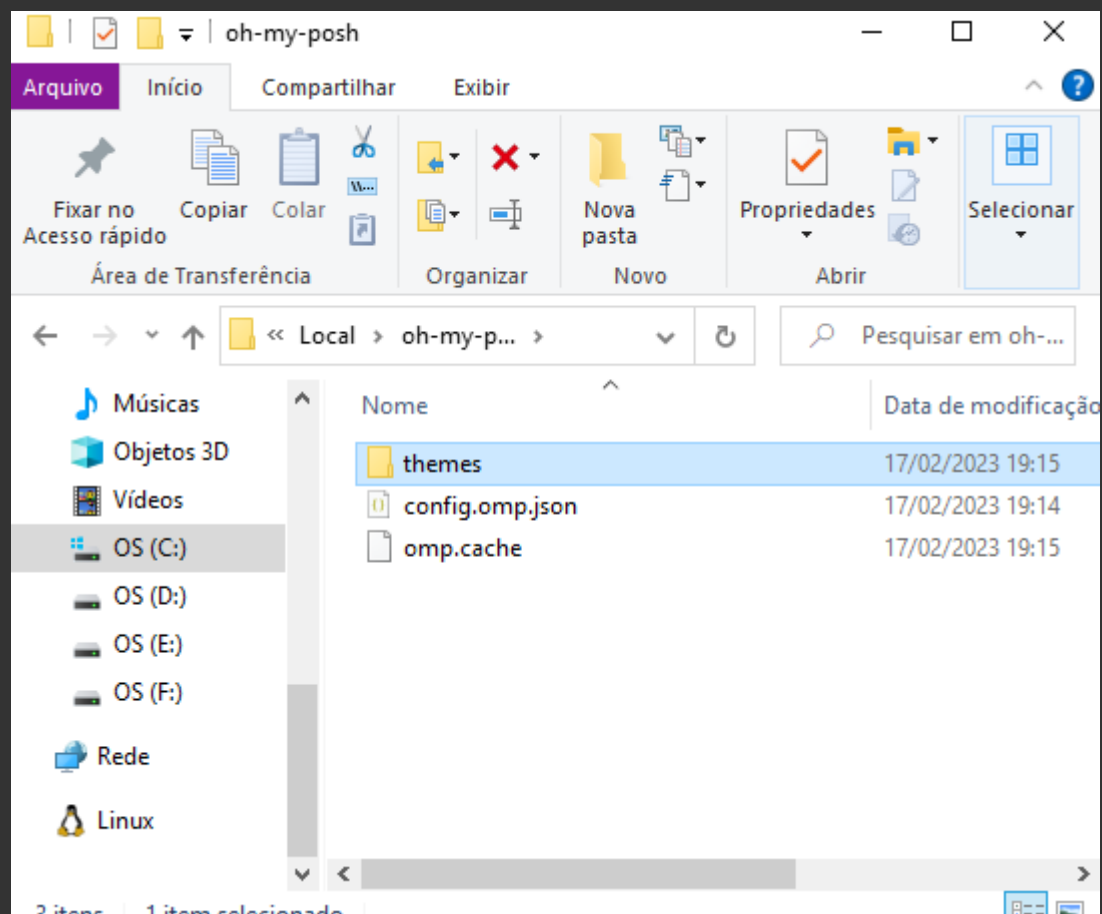

Themes location: `C:\Users\brito\AppData\Local\oh-my-posh\themes`

OS LUGARES ONDE POSSO MUDAR O TEMA

powershell

```
brito get-po
```

Themes location:

To change your t

Example:

```
oh-my-posh ini
```

```
brito & ([Sc
```

```
)nt) -join "`n"
```

```
brito get-po
```

Themes location: C:\Users\brito\AppData\Local\oh-my-posh\themes


To change your theme, adjust the init script in C:\Users\brito\Documents\WindowsPowerShell\Microsoft.PowerShell_profile.ps1.

Example:

```
oh-my-posh init psh --config 'C:\Users\brito\AppData\Local\oh-my-posh\themes\jandedobbeleer.omp.json' | Invoke-Expression
```


```
brito
```

in psh at 19:17:16

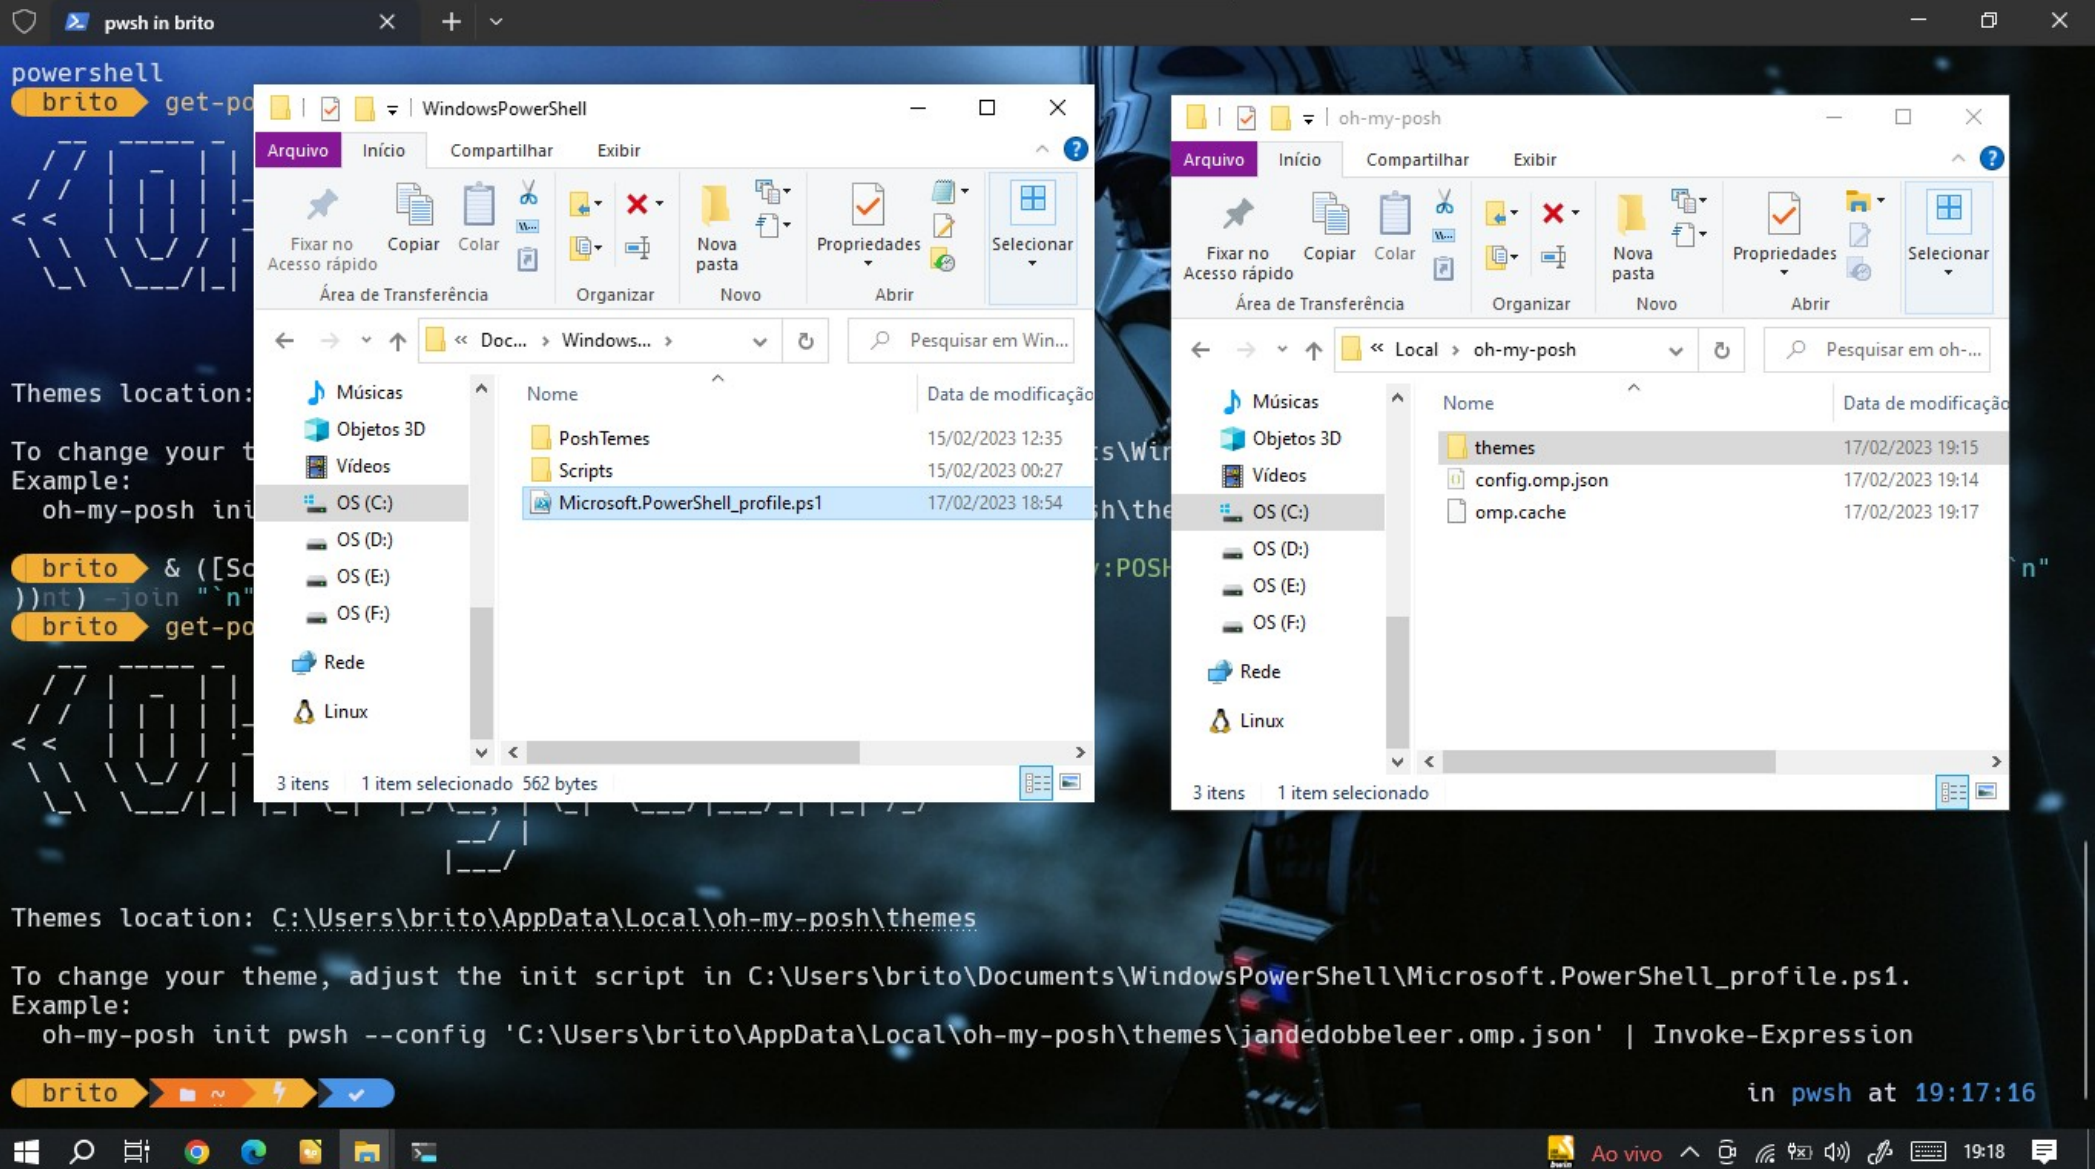

```
pwsh in brito
```

brito Get-PoshThemes




Themes location: C:\Users\brito\AppData\Local\oh-my-posh\themes

To change your theme, adjust the init script in C:\Users\brito\Documents\WindowsPowerShell\Microsoft.PowerShell_profile.ps1.
Example:
oh-my-posh init pwsh --config 'C:\Users\brito\AppData\Local\oh-my-posh\themes\jandedobbeleer.omp.json' | Invoke-Expression

brito & ([ScriptBlock]::Create((oh-my-posh init pwsh --config "\$env:POSH_THEMES_PATH\jandedobbeleer.omp.json" --print) -join "`n"))nt) -join "`n"))

brito Get-PoshThemes



Themes location: C:\Users\brito\AppData\Local\oh-my-posh\themes

To change your theme, adjust the init script in C:\Users\brito\Documents\WindowsPowerShell\Microsoft.PowerShell_profile.ps1.
Example:
oh-my-posh init pwsh --config 'C:\Users\brito\AppData\Local\oh-my-posh\themes\jandedobbeleer.omp.json' | Invoke-Expression

brito Import-Module -Name terminal-icons

brito ~ |

in pwsh at 19:41:17

Windows taskbar: Chovendo agora 19:41

d-----	01/05/2021	22:41	source
d-r---	17/01/2023	16:20	Videos
d-----	17/02/2023	17:47	vimfiles
-a----	12/07/2021	16:51	7144 -1.14-windows.xml
-a----	30/08/2021	17:48	90 {} .angular-config.json
-a----	16/02/2023	19:05	7136 .bash_history
-a----	29/07/2022	22:29	5078 .dbshell
-a----	10/07/2021	23:23	16 .emulator_console_auth_token
-a----	15/02/2023	11:19	124 .gitconfig
-a----	20/01/2023	20:16	2202 .h2.server.properties
-a----	26/01/2023	13:29	20 .lessht
-a----	18/01/2022	02:11	0 .mongorc.js
-a----	07/02/2023	19:42	353 .node_repl_history
-a----	14/02/2023	18:26	12373 .vimrc
-a----	08/12/2021	22:14	121 .yarnrc
-a----	10/02/2022	12:36	243 {} db.json
-a----	27/02/2022	12:30	0 nslookup
-a----	28/01/2023	02:31	0 ntuser.tmp
-a----	17/02/2023	18:20	21614 _viminfo

brito Get-module

ModuleType	Version	Name	ExportedCommands
Script	0.0	chocolateyProfile	{TabExpansion, Update-SessionEnvironment, refreshenv}
Manifest	3.1.0.0	Microsoft.PowerShell.Management	{Add-Computer, Add-Content, Checkpoint-Computer, Clear-Content...}
Manifest	3.1.0.0	Microsoft.PowerShell.Utility	{Add-Member, Add-Type, Clear-Variable, Compare-Object...}
Script	7.85.2	oh-my-posh	Set-PoshPrompt
Script	0.0	oh-my-posh-core	{Enable-PoshLineError, Enable-PoshTooltips, Enable-PoshTransientPrompt,...}
Script	1.1.0	posh-git	{Add-PoshGitToProfile, Expand-GitCommand, Format-GitBranchName, Get-Git...}
Script	2.2.6	PSReadline	{Get-PSReadLineKeyHandler, Get-PSReadLineOption, Remove-PSReadLineKeyHa...}
Script	0.10.0	Terminal-Icons	{Add-TerminalIconsColorTheme, Add-TerminalIconsIconTheme, Format-Termin...}

brito

in pwsh at 19:43:07


```
d----- 17/02/2023 17:47      vimfiles
-a----- 12/07/2021 16:51    7144 -1.14-windows.xml
-a----- 30/08/2021 17:48     90 {} .angular-config.json
-a----- 16/02/2023 19:05    7136 .bash_history
-a----- 29/07/2022 22:29    5078 .dbshell
-a----- 10/07/2021 23:23     16 .emulator_console_auth_token
-a----- 15/02/2023 11:19     124 .gitconfig
-a----- 20/01/2023 20:16    2202 .h2.server.properties
-a----- 26/01/2023 13:29     20 .lessht
-a----- 18/01/2022 02:11      0 js .mongorc.js
-a----- 07/02/2023 19:42    353 .node_repl_history
-a----- 14/02/2023 18:26   12373 .vimrc
-a----- 08/12/2021 22:14    121 .yarnrc
-a----- 10/02/2022 12:36    243 {} db.json
-a----- 27/02/2022 12:30      0 nslookup
-a----- 28/01/2023 02:31      0 ntuser.tmp
-a----- 17/02/2023 18:20  21614 _viminfo
```

brito Get-module

ModuleType	Version	Name	ExportedCommands
Script	0.0	chocolateyProfile	{TabExpansion, Update-SessionEnvironment, refreshenv}
Manifest	3.1.0.0	Microsoft.PowerShell.Management	{Add-Computer, Add-Content, Checkpoint-Computer, Clear-Content...
Manifest	3.1.0.0	Microsoft.PowerShell.Utility	{Add-Member, Add-Type, Clear-Variable, Compare-Object...
Script	7.85.2	oh-my-posh	Set-PoshPrompt
Script	0.0	oh-my-posh-core	{Enable-PoshLineError, Enable-PoshTooltips, Enable-PoshTransientPrompt,...
Script	1.1.0	posh-git	{Add-PoshGitToProfile, Expand-GitCommand, Format-GitBranchName, Get-Git...
Script	2.2.6	PSReadline	{Get-PSReadLineKeyHandler, Get-PSReadLineOption, Remove-PSReadLineKeyHa...
Script	0.10.0	Terminal-Icons	{Add-TerminalIconsColorTheme, Add-TerminalIconsIconTheme, Format-Termin...

brito Install-Module -Name psreadline -Force

AVISO: A versão '2.2.6' do módulo 'PSReadline' está em uso no momento. Tente novamente a operação depois de fechar os aplicativos.

brito in pwsh at 19:45:04









