

## Week 2

C. Kalinowski

3/1/2021

### Task 2 - Exploratory Data Analysis

#### Exploratory Analysis and Word Frequencies

Based on tokenization, we can explore the words in the corpus. A possible function would be to create a clean tokenized list of vectors, unlist the contents, and return a frequency table as a data frame.

```
getTokens<-function(x){  
  words<-cleanToken(x)  
  wordslist<-unlist(words)  
  as.data.frame(table(wordslist))  
}
```

```
sample1<-sampleReader("blogs",5)  
sample1[4]
```

```
[1] "so anyways, i am going to share some home decor inspiration that i have been storing in my folder"
```


```
tokens1<-getTokens(sample1)  
head(tokens1)
```

|   | wordslist | Freq |
|---|-----------|------|
| 1 | a         | 3    |
| 2 | after     | 2    |
| 3 | all       | 3    |
| 4 | almost    | 1    |
| 5 | also      | 1    |
| 6 | am        | 1    |

In each data set, a random sample of 200 lines has the following frequency distribution:


```
set.seed=322021  
twitter<-sampleReader("twitter")  
sampleTwitter<-sample(twitter,size=200,replace=F)  
rm(twitter)  
blog<-sampleReader("blogs")  
sampleBlog<-sample(blog,size=200,replace=F)  
rm(blog)  
news<-sampleReader("news")  
sampleNews<-sample(news,size=200,replace=F)  
rm(news)  
twitterToken<-getTokens(sampleTwitter)  
blogToken<-getTokens(sampleBlog)  
newsToken<-getTokens(sampleNews)
```

```
hist(log(twitterToken$Freq),main="Twitter Frequency Distribution",xlab="Frequencies",  
      ylab="Distribution",breaks=20)
```

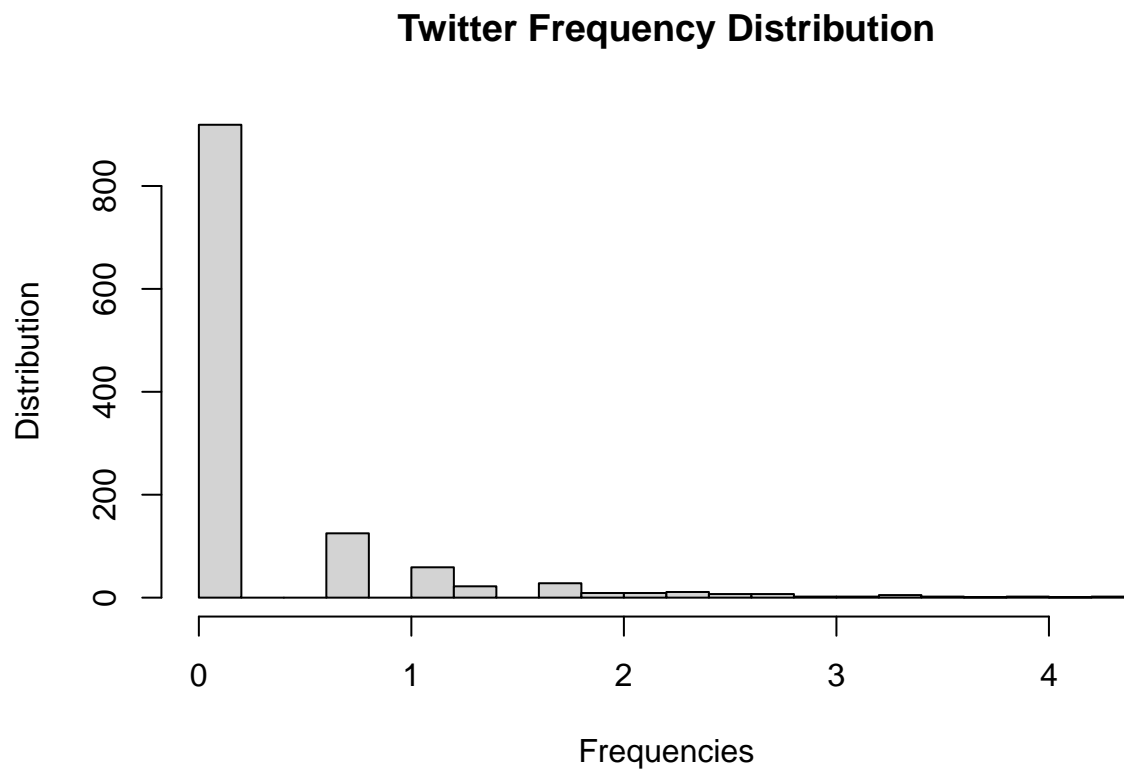

```
hist(log(subset(blogToken,Freq>2)$Freq),main="Twitter Frequency Distributions greater than 2",  
      xlab="Frequencies",ylab="Distribution",breaks=20)
```

## Twitter Frequency Distributions greater than 2

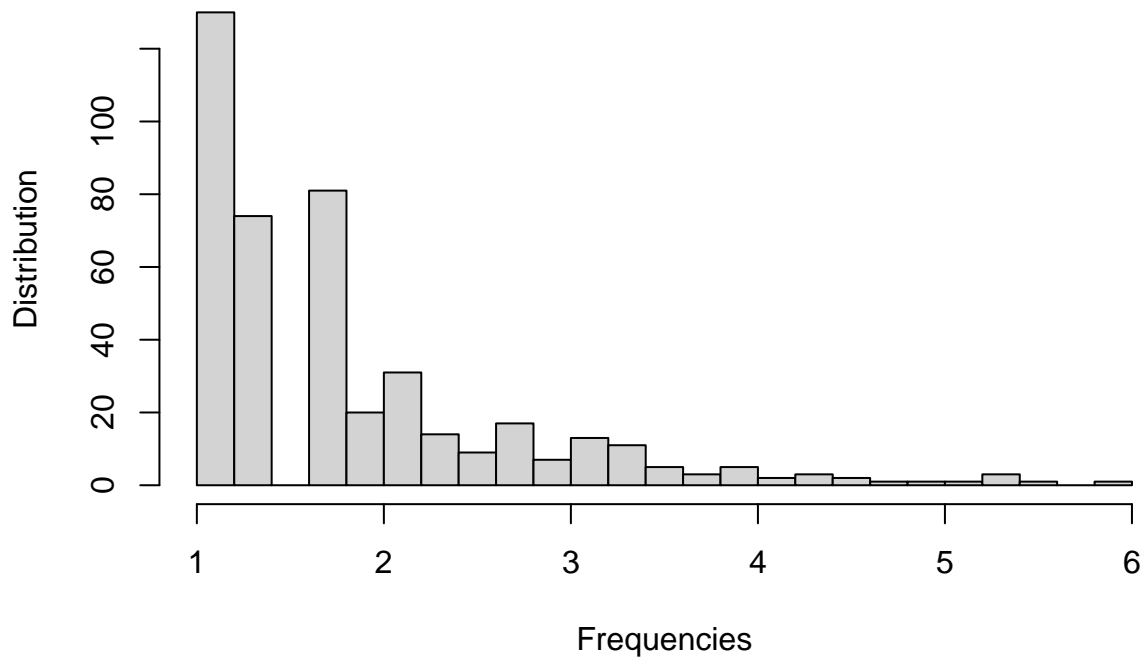

The words with the highest counts in each of the 3 English corpora are:

**# BLOGS:**

```
maxBlog<-subset(blogToken,Freq %in% head(sort(blogToken$Freq,decreasing=TRUE),10))
maxBlog[order(maxBlog$Freq,decreasing=TRUE),]
```

|      | wordslst | Freq |
|------|----------|------|
| 2441 | the      | 337  |
| 92   | and      | 228  |
| 2490 | to       | 209  |
| 1    | a        | 189  |
| 1700 | of       | 185  |
| 1178 | I        | 161  |
| 1205 | in       | 127  |
| 1250 | is       | 114  |
| 2439 | that     | 96   |
| 1255 | it       | 94   |

**# NEWS:**

```
maxNews<-subset(newsToken,Freq %in% head(sort(newsToken$Freq,decreasing=TRUE),10))
maxNews[order(maxNews$Freq,decreasing=TRUE),]
```

|      | wordslst | Freq |
|------|----------|------|
| 2349 | the      | 307  |
| 1    | a        | 162  |
| 2391 | to       | 156  |
| 1612 | of       | 147  |
| 101  | and      | 139  |

```

1166      in  123
2030      s   81
914      for 73
2347     that 61
1222     is  57

```

```
# TWITTER:
```

```

maxTwitter<-subset(twitterToken,Freq %in% head(sort(twitterToken$Freq,decreasing=TRUE),10))
maxTwitter[order(maxTwitter$Freq,decreasing=TRUE),]

```

```

      wordslist Freq
1014      the   71
505      I    67
1052     to   64
40      and   48
1      a    47
1206    you   40
376     for   30
515     in    30
529     is    29
723     of    29
735     on    29

```

## N-Gram Frequency

An easy way to create N-grams is to paste together token vectors.

```

ngrammer<-function(x,y){
  ngramMatrix<-NULL
  size<-length(x)
  ngramMatrix<-matrix(nrow=(size-y+1),ncol=0)
  for (i in (1:y)){
    tokenlist<-x[i:(size-y+i)]
    ngramMatrix<-cbind(ngramMatrix,tokenlist)
  }
  df_args <- c(as.data.frame(ngramMatrix), sep=" ")
  do.call(paste, df_args)
}

```

```
sample1[4]
```

```

[1] "so anyways, i am going to share some home decor inspiration that i have been storing in my folder c
head(ngrammer(cleanToken(sample1[4]),4),10)

```

```

[1] "so anyways i am"          "anyways i am going"
[3] "i am going to"           "am going to share"
[5] "going to share some"     "to share some home"
[7] "share some home decor"   "some home decor inspiration"
[9] "home decor inspiration that" "decor inspiration that i"

```

## Task3 - Modeling