

RECEIVING REPORT

Receiver No.: 19653301

Document Date: 10/07/2026
Posting Date: 10/07/2026
Expiration Date:

P.O.#: 5000706560
Item #: 1
Batch#: ACE0273331

Crit Code: Frac Crit Cat 1: Frac Crit Traceable:

Insp. Lot: 000001502572

Plant: ACE

Plant Description: Clearfield-Solumina

Vendor Name: HEXCEL CORPORATION

Vendor Addr: 6700 WEST 5400 SOUTH
WEST VALLEY CITY
UT 84118-7678

Quality Inspection

Unloading Point:

Vendor No.: 90028145

Buyer Name: Keith Larsen

SQAR Code:

Project ID: ROYCE

VAT-Req:

Test Lab:

WBS:

Inspection Lot/Type:

Rev No.: 01

Material: MSRR4040-VAFR

Received UOM: LB

Base UOM: LB

Base UOM Received Qty: 4661.040

Vendor Mtl. Number:

Mtl. Description: SATIN WEAVE CARBON FIBRE REINFORCED BISM

Mtl. Specification:

Alt. Material #:

Storage Condition:

Matl. Basic Data Text:

MSRR4040-VAFR:SATIN WEAVE CARBON FIBRE REINFORCED BISMALIMIDE
PREIMPREGN

Text

Bill of Lading: 92SPS062681

Delivery Note: 92SPS062681

Receipt Created by: N50973

Received Qty: 4661.040

Head text: 92M0114922

Receipt Delivered To: _____

WAREHOUSE INFORMATION



Plt: ACE



Part Number: MSRR4040-VAFR


Qty: 4661.04


Receiver No: 19653301

Storage Bin:

Order Number:

Warehouse: LIN1

Stock Type: Q



WBS Element: A-46Z01-NW.N46Z01000714

Inventory WBS: Y-ROLLS

Bin:

Storage Location: ACED

Qclauses:
Q125, SQAR M, 1-QUALITY_SYSTEM-AS9100_REGISTERED, I035

Qty. Insp.

Insp. Stamp No.

By Inspector

Qty. Rej.

Rej. No.

Stocked By

Date Stkd.

Stk. Loc.

Packaging
Schedule

Packaging
Schedule

RECEIVING REPORT

Receiver No.: 19653305

Document Date: 10/07/2026
Posting Date: 10/07/2026
Expiration Date:

P.O.#: 5000706560
Item #: 1
Batch#: ACE0273334

Crit Code: Frac Crit Cat 1: Frac Crit Traceable:

Insp. Lot: 000001502589

Plant: ACE

Plant Description: Clearfield-Solumina

Vendor Name: HEXCEL CORPORATION

Vendor Addr: 6700 WEST 5400 SOUTH
WEST VALLEY CITY
UT 84118-7678

Quality Inspection

Unloading Point:

Vendor No.: 90028145

Buyer Name: Keith Larsen

SQAR Code:

Project ID: ROYCE

VAT-Req:

Test Lab:

WBS:

Inspection Lot/Type:

Rev No.: 01

Material: MSRR4040-VAFR

Received UOM: LB

Base UOM: LB

Base UOM Received Qty: 373.090

Vendor Mtl. Number:

Mtl. Description: SATIN WEAVE CARBON FIBRE REINFORCED BISM

Mtl. Specification:

Alt. Material #:

Storage Condition:

Matl. Basic Data Text:

MSRR4040-VAFR:SATIN WEAVE CARBON FIBRE REINFORCED BISMALIMIDE

PREIMPREGN

Text

Bill of Lading: 92SPS062681

Delivery Note: 92SPS062681

Receipt Created by: N50973

Received Qty: 373.090

Head text: 92M0116197

Receipt Delivered To: _____

WAREHOUSE INFORMATION



Plt: ACE



Part Number: MSRR4040-VAFR



Qty: 373.09



Receiver No: 19653305

Storage Bin:



Order Number:

Warehouse: LIN1



Stock Type: Q



WBS Element: A-46Z01-NW.N46Z01000714

Inventory WBS: Y-ROLLS

Bin:

Storage Location: ACED

Qclauses:
Q125, SQAR M, 1-QUALITY_SYSTEM-AS9100_REGISTERED, I035

Qty. Insp.

Insp. Stamp No.

By Inspector

Qty. Rej.

Rej. No.

Stocked By

Date Stkd.

Stk. Loc.

Packaging
Schedule

--

Packaging
Schedule

--



Packing list

Document 92SPS062681
Date 07-Oct-2026
Printed date 07-Oct-2026

Customer P.O.



Customer P.O. Account 5000706560
C005128

Packing Slip ID



Hexcel order Account 92SO028001
C005128

Invoice address

Northrop Grumman Systems Corporation
1051 S. Industrial Pkwy
Clearfield, UT 84015
United States

Delivery address

Northrop Grumman Systems Corporation
1051 South Industrial Parkway
ACCE Building
South Dock
Clearfield, UT 84015
United States

Delivery contact

Keith Larsen

Line	Item	Description		Selling qty		
1	111545	HexPly® F3C 433/M65;38%;285AW;50"		5,034.13 lb		
Physical dimensions W = 50.00						
Customer part MSRR4040-VAFR						
Specification/Issue MSRR4040/Rev ISSUE 4						
Sales line LotId 9218805981						
Trade compliance						
Country of origin US		Commodity code 6815130000 / Other articles of carbon fiber				
ECCN 1C010		End user country US				
These items are controlled by the U.S. Government and authorized for export only to the country of ultimate destination for use by the ultimate consignee or end-user(s) herein identified. They may not be resold, transferred, or otherwise disposed of, to any other country or to any person other than the authorized ultimate consignee or end-user(s), either in their original form or after being incorporated into other items, without first obtaining approval from the U.S. government or as otherwise authorized by U.S. law and regulations.						
Pallet	Box	Batch	Serial	Selling qty	Net weight	Gross weight
		92M0114922	92M0114922001	116.91lb	116.91lb	116.91lb
		92M0114922	92M0114922002	45.12lb	45.11lb	45.11lb
		92M0114922	92M0114922003	117.69lb	117.69lb	117.69lb
		92M0114922	92M0114922004	57.67lb	57.67lb	57.67lb
		92M0114922	92M0114922005	100.04lb	100.04lb	100.04lb
		92M0114922	92M0114922006	68.26lb	68.26lb	68.26lb
		92M0114922	92M0114922007	115.34lb	115.34lb	115.34lb
		92M0114922	92M0114922008	57.28lb	57.28lb	57.28lb
		92M0114922	92M0114922009	117.69lb	117.69lb	117.69lb
		92M0114922	92M0114922010	58.06lb	58.06lb	58.06lb
		92M0114922	92M0114922011	117.30lb	117.30lb	117.30lb
		92M0114922	92M0114922012	56.89lb	56.88lb	56.88lb

QEE4NS1WJ0

QEE4NS68G0

Hexcel Corporation
6700 West 5400 South,
West Valley City, UT 84118
United States

UOM=Unit of measure P.O.=Purchase order



Packing list

Document 92SPS062681
Date 07-Oct-2026
Printed date 07-Oct-2026

Pallet	Box	Batch	Serial	Selling qty	Net weight	Gross weight
		92M0114922	92M0114922013	117.69lb	117.69lb	117.69lb
		92M0114922	92M0114922014	58.06lb	58.06lb	58.06lb
		92M0114922	92M0114922015	117.30lb	117.30lb	117.30lb
		92M0114922	92M0114922016	58.85lb	58.85lb	58.85lb
		92M0114922	92M0114922017	96.51lb	96.51lb	96.51lb
		92M0114922	92M0114922018	73.75lb	73.75lb	73.75lb
		92M0114922	92M0114922019	116.91lb	116.91lb	116.91lb
		92M0114922	92M0114922020	54.92lb	54.92lb	54.92lb
		92M0114922	92M0114922021	87.09lb	87.09lb	87.09lb
		92M0114922	92M0114922022	87.88lb	87.88lb	87.88lb
		92M0114922	92M0114922023	87.49lb	87.48lb	87.48lb
		92M0114922	92M0114922024	87.88lb	87.88lb	87.88lb
		92M0114922	92M0114922025	87.49lb	87.48lb	87.48lb
		92M0114922	92M0114922026	85.13lb	85.13lb	85.13lb
		92M0114922	92M0114922027	50.61lb	50.61lb	50.61lb
		92M0114922	92M0114922028	109.85lb	109.84lb	109.84lb
		92M0114922	92M0114922029	86.70lb	86.70lb	86.70lb
		92M0114922	92M0114922030	88.27lb	88.27lb	88.27lb
		92M0114922	92M0114922031	87.49lb	87.48lb	87.48lb
		92M0114922	92M0114922032	87.88lb	87.88lb	87.88lb
		92M0114922	92M0114922033	87.88lb	87.88lb	87.88lb
		92M0114922	92M0114922034	87.09lb	87.09lb	87.09lb
		92M0114922	92M0114922035	87.49lb	87.48lb	87.48lb
		92M0114922	92M0114922036	85.52lb	85.52lb	85.52lb
		92M0114922	92M0114922037	36.48lb	36.48lb	36.48lb
		92M0114922	92M0114922038	81.99lb	81.99lb	81.99lb
		92M0114922	92M0114922039	87.09lb	87.09lb	87.09lb
		92M0114922	92M0114922040	111.81lb	111.81lb	111.81lb
		92M0114922	92M0114922041	58.85lb	58.85lb	58.85lb
		92M0114922	92M0114922042	51.79lb	51.78lb	51.78lb
		92M0114922	92M0114922043	96.12lb	96.11lb	96.11lb
		92M0114922	92M0114922044	20.40lb	20.40lb	20.40lb
		92M0114922	92M0114922045	112.99lb	112.98lb	112.98lb
		92M0114922	92M0114922046	55.32lb	55.31lb	55.31lb
		92M0114922	92M0114922047	114.55lb	114.55lb	114.55lb
		92M0114922	92M0114922048	51.39lb	51.39lb	51.39lb
		92M0114922	92M0114922049	117.69lb	117.69lb	117.69lb
		92M0114922	92M0114922050	53.35lb	53.35lb	53.35lb
		92M0114922	92M0114922051	116.52lb	116.51lb	116.51lb

Hexcel Corporation
6700 West 5400 South,
West Valley City, UT 84118
United States

UOM=Unit of measure P.O.=Purchase order



Packing list

Document 92SPS062681
Date 07-Oct-2026
Printed date 07-Oct-2026

Pallet	Box	Batch	Serial	Selling qty	Net weight	Gross weight
		92M0114922	92M0114922052	53.35lb	53.35lb	53.35lb
		92M0114922	92M0114922053	98.08lb	98.07lb	98.07lb
		92M0114922	92M0114922054	73.75lb	73.75lb	73.75lb
		92M0114922	92M0114922055	87.49lb	87.48lb	87.48lb
		92M0114922	92M0114922056	78.07lb	78.07lb	78.07lb
		92M0116197	92M0116197001	109.06lb	109.06lb	109.06lb
		92M0116197	92M0116197002	92.19lb	92.19lb	92.19lb
		92M0116197	92M0116197003	117.30lb	117.30lb	117.30lb
		92M0116197	92M0116197004	54.53lb	54.53lb	54.53lb

Total per Batch 92M0114922	ACE0273331 19653301	4,661.04lb		
Total per Batch 92M0116197	ACE0273334 19653305	373.09lb		
Total per Item 111545	ACE0273334	5,034.13lb	5,033.96lb	5,033.96lb

Line	Item	Description	Selling qty
2	92TempRec-Ambient	92TempRec-Ambient	2.00 ea

Sales line LotId 9218805982

Trade compliance

Country of origin

RS

Commodity code

9025198085 / TEMPERATURE RECORDER

ECCN

EAR99

End user country

US

These items are controlled by the U.S. Government and authorized for export only to the country of ultimate destination for use by the ultimate consignee or end-user(s) herein identified. They may not be resold, transferred, or otherwise disposed of, to any other country or to any person other than the authorized ultimate consignee or end-user(s), either in their original form or after being incorporated into other items, without first obtaining approval from the U.S. government or as otherwise authorized by U.S. law and regulations.

Pallet	Box	Batch	Serial	Selling qty	Net weight	Gross weight
				2.00ea	0.00lb	
Total per Batch				2.00ea		
Total per Item 92TempRec-Ambient				2.00ea	0.00lb	

Shipping Instructions				Carrier		Ryder Systems	
Mode of Delivery		Ground		Delivery Terms		FCA, Salt Lake City, UT, USA - Incoterms®2010	
Pallet IDs	Box IDs	Batches	Serial Nos			Net weight	Gross weight
0	0	2	60			5,033.96lb	5,033.96lb
EU TMS Package details							
Line 1		0					
Line 2		0					

Hexcel Corporation
6700 West 5400 South,
West Valley City, UT 84118
United States

UOM=Unit of measure P.O.=Purchase order

Page 3 of 3

Ship From

HEXCEL CORPORATION (AS)

6700 W 5400 S

SALT LAKE CITY , UT , 84118-7678

Ship To

NORTHROP GRUMMAN CORPORATION

ACE-ACCED

1051 S FREEPORT INDUSTRIAL PKWY

CLEARFIELD , UT , 84015-4208

FROM: HEXCEL CORPORATION 6700 W 5400 S SALT LAKE CITY -UT -84118-7678 USA TOTAL WEIGHT: 9465 TO: NORTHROP GRUMMAN CORPORATION ACE-ACCED 1051 S FREEPORT INDUSTRIAL PKWY CLEARFIELD -UT -84015-4208 USA	No. of Container Items 1 / 15 NQ 
	Packing List No. SO028001 2K 
	Total Qty & UM 15 LB 7Q 
PO-Item No. 5000706560-00001 K 	
Part No. MSRR4040-VAFR P 	

Include the above label with the packing slip or inside container

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922001	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
293	50	24	8.3	FUZZBALL

Roll label - Hexcel Hexcel 8700 W 5400 S, SLC UI 84118
F3C 433/M65;38%;285AW;50"



HARRIS Rev 13 ISSUE 4

Product	Batch	Shelf life	COA
111545	92M0114922	365 days	15-Sep-2026
QTY:	Serial	Storage conditions	Expiration
298.00ft	92M0114922001	≤ 0 F	15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
300	298	A	0.667%	9/15/2026

Inspection Stamp	Date
	9/15/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922002	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
110	50	24	8.3	FUZZBALL

Roll label - Hexcel Hexcel 6700 W 5400 S SLC Ut 24118
 F3C 433/M65;38%;285AW;50"
 M38R4543 Rev 15 ISSUE 4
 P-03-01
 111545
 CTY.
 115.00ft



DOM
 Shelf life
 365 days
 Storage conditions
 ≤ 0 F
 15-Sep-2026
 Expiration
 15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
117	115	A	1.709%	9/15/2026

Inspection Stamp	Date
	9/15/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922003	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
--------------------	-----------------------------	------------------------------	-------------------------------	---------------------

Bag label - Hexcel Hexcel 6700 W 5403 S SLO UT 54116
 F3C 433/M65;38%;285AW;50"
 MSRR0043 Rev. ISSUE 4
 Product: 111545 Batch: 92M0114922 Shelf life: 365 days
 Qty: 300.00ft Serial: 92M0114922003 Storage conditions: ≤ 0 F
 DCM
 15-Sep-2026
 Expiration
 15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
300	300	A	0.000%	9/15/2026

Inspection Stamp	Date
	9/15/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922004	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
65	50	4	1.4	RESIN LEAN
125	50	24	8.3	CURED RESIN

Final Footage	Net Feet	Credit Method	Defect %	Date
150	147	A	1.556%	9/15/2026

Inspection Stamp	Date
	9/15/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922005	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
151	50	0	0.0	FUZZBALL
153	50	2	0.7	MISSING PICK
207	50	24	8.3	CURED RESIN

Final Footage	Net Feet	Credit Method	Defect %	Date
258	255	A	0.840%	9/15/2026

Roll label - Hexcel Hexcel 8700 W 5403 S, SLC Ut 84116
F3C 433/M65;38%;285AW;50"



MSR0002 Rev 15 SIZE 4

Product
111545

QTY:
255.00ft

Batch

92M0114922

Serial

92M0114922005

Shelf life

365 days

Storage conditions

≤ 0 F

DOM

15-Sep-2026

Expiration

15-Sep-2027

Inspection Stamp	Date
	9/15/2026

ROLL CONDITION LOG

Batch Number 92M0114922	Serial Number 92M0114922006	Fiber F3C 433	Resin M65	Prepreg Width 50
-----------------------------------	---------------------------------------	-------------------------	---------------------	----------------------------

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
64	50	0	0.0	FUZZBALL

Final Footage 174	Net Feet 174	Credit Method A	Defect % 0.000%	Date 9/15/2026
-----------------------------	------------------------	---------------------------	---------------------------	--------------------------

Inspection Stamp 	Date 9/15/2026
---	--------------------------

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922007	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
10	50	60	20.8	STREAKER
124	50	0	0.0	FUZZBALL
130	50	0	0.0	FUZZBALL
258	50	0	0.0	FUZZBALL
290	50	8	2.8	RESIN LEAN

Final Footage	Net Feet	Credit Method	Defect %	Date
300	294	A	1.889%	9/15/2026

Inspection Stamp	Date
	9/15/2026

ROLL CONDITION LOG

Batch Number 92M0114922	Serial Number 92M0114922008	Fiber F3C 433	Resin M65	Prepreg Width 50
-----------------------------------	---------------------------------------	-------------------------	---------------------	----------------------------

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
----------------------------	--------------------------------------	---------------------------------------	--	----------------------------

Final Footage 146	Net Feet 146	Credit Method A	Defect % 0.000%	Date 9/15/2026
-----------------------------	------------------------	---------------------------	---------------------------	--------------------------

Inspection Stamp 	Date 9/15/2026
---	--------------------------

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922009	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
28	50	0	0.0	FUZZBALL
249	50	0	0.0	FUZZBALL

Final Footage	Net Feet	Credit Method	Defect %	Date
300	300	A	0.000%	9/15/2026

Inspection Stamp	Date
	9/15/2026

ROLL CONDITION LOG

Batch Number 92M0114922	Serial Number 92M0114922010	Fiber F3C 433	Resin M65	Prepreg Width 50
-----------------------------------	---------------------------------------	-------------------------	---------------------	----------------------------

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
76	50	0	0.0	FUZZBALL
125	50	24	8.3	CURED RESIN
141	50	2	0.7	MISPICK

Final Footage 151	Net Feet 148	Credit Method A	Defect % 1.435%	Date 9/16/2026
-----------------------------	------------------------	---------------------------	---------------------------	--------------------------

Inspection Stamp 	Date 9/16/2026
---	--------------------------

ROLL CONDITION LOG

Batch Number 92M0114922	Serial Number 92M0114922011	Fiber F3C 433	Resin M65	Prepreg Width 50
-----------------------------------	---------------------------------------	-------------------------	---------------------	----------------------------

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
60	50	0	0.0	FUZZBALL
131	50	1	0.3	MISPICK
201	50	0	0.0	FUZZBALL

Final Footage 300	Net Feet 299	Credit Method A	Defect % 0.028%	Date 9/16/2026
-----------------------------	------------------------	---------------------------	---------------------------	--------------------------

Inspection Stamp 	Date 9/16/2026
---	--------------------------

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922013	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
--------------------	-----------------------------	------------------------------	-------------------------------	---------------------

Final Footage	Net Feet	Credit Method	Defect %	Date
300	300	A	0.000%	9/16/2026

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922014	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
45	50	0	0.0	FUZZBALL

Final Footage	Net Feet	Credit Method	Defect %	Date
148	148	A	0.000%	9/16/2026

Roll label - Hexcel Hexcel 6700 W 5400 S SLC Ut 64118
F3C 433/M65;38%;285AW;50"



MSRR4343 Rev 15JUE 4

Product	Batch	Shelf life	DDM
111545	92M0114922	365 days	15-Sep-2026
QTY	Serial	Storage conditions	Expiration
148.00ft	92M0114922014	≤ 0 F	15-Sep-2027

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922015	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
100	50	1	0.3	FUZZBALL

Final Footage	Net Feet	Credit Method	Defect %	Date
300	299	A	0.028%	9/16/2026

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922016	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
--------------------	-----------------------------	------------------------------	-------------------------------	---------------------

Final Footage	Net Feet	Credit Method	Defect %	Date
150	150	A	0.000%	9/16/2026

Roll label - Hexcel Hexcel 5700 W 5400 S SLC UT 24118
F3C 433/M65;38%;285AW;50"



MSRRR000 Rev. 15000 4

Product	Batch	Shelf life	DCM
111545	92M0114922	365 days	15-Sep-2026
QTY:	Serial	Storage conditions	Expiration
150.00ft	92M0114922016	≤ 0 F	15-Sep-2027

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922017	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
18	50	24	8.3	CURED RESIN
54	50	1	0.3	FUZZBALL
154	50	2	0.7	MISPICK

Bag label - Hexcel Hexcel 6700 W 5400 S SLC LT 54118
F3C 433/M65;38%;285AW;50"

MSR94243 Rev ISSUE 4

Product

111545

CTY:

251.00ft

Batch

92M0114922

Serial

92M0114922017

Shelf life

365 days

Storage conditions

≤ 0 F

COM.

15-Sep-2026

Expiration

15-Sep-2027



Final Footage	Net Feet	Credit Method	Defect %	Date
254	251	A	0.886%	9/16/2026

Inspection Stamp



Date

9/16/2026

ROLL CONDITION LOG

Batch Number 92M0114922	Serial Number 92M0114922018	Fiber F3C 433	Resin M65	Prepreg Width 50
-----------------------------------	---------------------------------------	-------------------------	---------------------	----------------------------

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
15	50	0	0.0	FUZZBALL
39	50	0	0.0	FUZZBALL

Final Footage 188	Net Feet 188	Credit Method A	Defect % 0.000%	Date 9/16/2026
-----------------------------	------------------------	---------------------------	---------------------------	--------------------------

Inspection Stamp 	Date 9/16/2026
---	--------------------------

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922019	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
275	50	24	8.3	CURED RESIN

Final Footage	Net Feet	Credit Method	Defect %	Date
300	298	A	0.667%	9/16/2026

Roll label - Hexcel Hexcel 5700 W 5400 S SLC LT 64116
F3C 433/M65;38%;285AW;50"



MSRR4043 Rev. 10/06/14

Product	Batch	Shelf life	DOM
111545	92M0114922	365 days	15-Sep-2026
QTY:	Serial	Storage conditions	Expiration
298.00ft	92M0114922019	≤ 0 F	15-Sep-2027

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922020	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
21	50	0	0.0	FUZZBALL

Bag label - Hexcel: Hexcel 2700 W 3400 S SLC Ut 24115
F3C 433/M65;38%;285AW;50"



MFR04013 Rev. ISSUE 4

Product	Batch	Shelf life	DOM.
111545	92M0114922	365 days	15-Sep-2026
QTY	Serial	Storage conditions	Expiration
140.00ft	92M0114922020	≤ 0 F	15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
140	140	A	0.000%	9/16/2026

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922021	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
150	50	1	0.3	MISPICK
170	50	0	0.0	FUZZBALL

Bag label - Hexcel Hexcel 5700 W 5400 S SLC UT 24112
 F3C 433/M65;38%;285AW;50"
 111545 92M0114922 365 days 15-Sep-2026
 222.00ft 92M0114922021 15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
223	222	A	0.037%	9/16/2026

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922022	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
29	50	0	0.0	FUZZBALL
53	50	0	0.0	FUZZBALL
110	50	0	0.0	FUZZBALL

Bag label - Hexcel Hexcel: 5700 W 5400 S . S.L.C Ut: 84118
F3C 433/M65;38%:285AW;50"



MSRRR440 Rev. ISSUE 4

Product:	Batch:	Shelf life:	DOM:
111545	92M0114922	365 days	15-Sep-2026
QTY:	Serial:	Storage conditions:	Expiration:
224.00ft	92M0114922022	≤ 0 F	15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
224	224	A	0.000%	9/16/2026

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922023	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
59	50	0	0.0	FUZZBALL

Bag label - Hexcel Hexcel 6700 W/ 5400 S, S.C. Ut: 84118
 F3C 433/M65;38%;285AW;50"



MSRR0622 Rev. ISSUE 4

Product	Batch	Shelf life	DCM
111545	92M0114922	365 days	15-Sep-2026
Qty	Serial	Storage conditions	Expiration
223.00ft	92M0114922023	≤ 0 F	15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
223	223	A	0.000%	9/16/2026

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922024	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
4	50	0	0.0	FUZZBALL
98	50	0	0.0	FUZZBALL

Roll label - Hexcel Hexcel 6700 W 5400 S SLC Ut 64118
F3C 433/M65;38%;285AW;50"

MSRRAGS Rev. ISSUE 4



Prod. Ct	Batch	Shelf life	DOM
111545	92M0114922	365 days	15-Sep-2026
Qty	Serial	Storage conditions	Expiration
224.00ft	92M0114922024	≤ 0 F	15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
224	224	A	0.000%	9/16/2026

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922025	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
53	50	0	0.0	FUZZBALL
108	50	0	0.0	FUZZBALL
176	50	0	0.0	FUZZBALL

Roll label - Hexcel Hexcel 6700 VV 5402 S, SLC Ut 34118
F3C 433/M65;38%;285AW;50"



MSRR4043 Rev 13 JUL 4

Product	Batch	Shelf life	DCM
111545	92M0114922	365 days	15-Sep-2026
QTY	Serial	Storage conditions	Expiration
223.00ft	92M0114922025	≤ 0 F	15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
223	223	A	0.000%	9/16/2026

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922026	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
84	50	0	0.0	FUZZBALL

Bag label - Hexcel Hexcel 3700 W 5400 S SLC UT 2411'S
F3C 433/M65;38%;285AW;50"



MSR00000 Rev 133000

Product

111545

QTY.

217.00ft

Batch

92M0114922

Sale

92M0114922026

Shelf life

365 days

Storage conditions

≤ 0 F

DOM

15-Sep-2026

Expiration

15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
217	217	A	0.000%	9/16/2026

Inspection Stamp



Date

9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922027	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
61	50	0	0.0	FUZZBALL
124	50	120	41.7	CURED RESIN

Roll label - Hexcel Hexcel 8700 5400 S. S.C. 01 24116
 F3C 433/M65;38%;285AW;50"
 MEMPHIS REL ISSUE A
 P-CD-01
 111545
 QTY
 129.00ft
 Batch
 92M0114922
 Serial
 92M0114922027
 Shelf life
 365 days
 Storage conditions
 ≤ 0 F
 JGM
 15-Sep-2026
 Exp-2027
 15-Sep-2027



Final Footage	Net Feet	Credit Method	Defect %	Date
139	129	A	7.194%	9/16/2026

Inspection Stamp	Date
	9/16/2026



16-SEP-2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922027	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
195	50	2	0.7	SLUB
215	50	0	0.0	FUZZBALL
245	50	0	0.0	FUZZBALL
250	50	0	0.0	FUZZBALL
257	50	1	0.3	RESIN LEAN
259	50	0	0.0	FUZZBALL
261	50	0	0.0	FUZZBALL
271	50	12	4.2	RESIN LEAN

Roll label - Hexcel Hexcel 6703 W 5400 S. SLC Ut 84118
F3C 433/M65;38%;285AW;50"



115970200 Rev. 18JUE 0

Product

Batch

Shelf life

DCM

111545

92M0114922

365 days

15-Sep-2026

QTY:

Serial

Storage conditions

Expiration

280.00ft

92M0114922028

≤ 0 F

15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
282	280	A	0.443%	9/16/2026

Inspection Stamp

Date



9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922029	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
--------------------	-----------------------------	------------------------------	-------------------------------	---------------------

Bag label - Hexcel Hexcel 6700W 5400 S SLC Ut 84118
F3C 433/M65;38%;285AW;50"



MSR04048 Rev 10SL2 1

Product:	Batch	Shelf life	DOM
111545	92M0114922	365 days	15-Sep-2026
Qty:	Serial	Storage conditions	Exp. date
221.00ft	92M0114922029	≤ 0 F	15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
221	221	A	0.000%	9/16/2026

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922030	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
54	50	1	0.3	MISPICK

Roll label - Hexcel Hexcel 6730 W. 5400 S. SLC UT 84118
F3C 433/M65;38%;285AW;50"

HSR0000 Rev 15506 4



Product	Batch	Shelf life	DCM
111545	92M0114922	365 days	15-Sep-2026
QTY:	Ser.:	Storage conditions	Expiration
225.00ft	92M0114922030	≤ 0 F	15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
226	225	A	0.037%	9/16/2026

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922031	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
26	50	0	0.0	FUZZBALL

Roll label - Hexcel Hexcel 6700 W 5400 S, SLC Lt 84118
F3C 433/M65;38%;285AW;50"



USRA443 Rev 15018 4

Product	Batch	Shed life	DOM
111545	92M0114922	365 days	15-Sep-2026
QTY	Serial	Storage conditions	Expiration
223.00ft	92M0114922031	≤ 0 F	15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
223	223	A	0.000%	9/16/2026

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922032	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
196	50	0	0.0	FUZZBALL
202	50	0	0.0	FUZZBALL

Roll label - Hexcel Hexcel 6700 W. 5400 S S.C. L1 24115
F3C 433/M65;38%;285AW:50"



MSR01042 Rev. 10/06/16

Product
111545
QTY.
224.00ft

Batch
92M0114922
Serial
92M0114922032

Shelf life
365 days
Storage cond. temp.
≤ 0 F

DOAT
15-Sep-2026
Expiration
15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
224	224	A	0.000%	9/16/2026

Inspection Stamp



Date

9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922033	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
88	50	0	0.0	FUZZBALL
90	50	0	0.0	FUZZBALL

Bag label - Hexcel Hexcel 6700 W 5400 S S.C. 1.1 54116
F3C 433/M65;38%;285AW;50"



MSRRA649 Rev 1 ISSUE 4

Product	Batch	Shelf life	DCM
111545	92M0114922	365 days	15-Sep-2026
Qty	Serial	Storage condition	Expiration
224.00ft	92M0114922033	≤ 0 F	15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
224	224	A	0.000%	9/16/2026

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922034	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
84	50	1	0.3	SLUB

Bag label - Hexcel Hexcel 8700W 5403 3 S.C. Lt 24118
 F3C 433/M65;38%;285AW;50"
 111545
 222.00ft
 Batch 92M0114922
 Serial 92M0114922034
 Shelf life 365 days
 Storage conditions ≤ 0 F
 15-Sep-2026
 15-Sep-2027


Final Footage	Net Feet	Credit Method	Defect %	Date
223	222	A	0.037%	9/16/2026

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number 92M0114922	Serial Number 92M0114922035	Fiber F3C433	Resin M65	Prepreg Width 50
-----------------------------------	---------------------------------------	------------------------	---------------------	----------------------------

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
--------------------	-----------------------------	------------------------------	-------------------------------	---------------------

Final Footage 223	Net Feet 223	Credit Method A	Defect % 0.000%	Date 9/16/2026
-----------------------------	------------------------	---------------------------	---------------------------	--------------------------

Inspection Stamp 	Date 9/16/2026
--	--------------------------

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922036	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
55	50	0	0.0	FUZZBALL

Bag label - Hexcel Hexcel E-00 W 5400 S S.C. U: 64112
 F3C 433/M65;38%;285AW;50"
 MERSA43 Rev 15 RUE 2
 P-CO: 111545
 CTY: 218.00ft
 Batch 92M0114922
 Serial 92M0114922036
 Shelf life 365 days
 Storage conditions ≤ 0 F
 DCM
 15-Sep-2026
 Exp date 15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
218	218	A	0.000%	9/16/2026

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922037	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
--------------------	-----------------------------	------------------------------	-------------------------------	---------------------

Roll label - Hexcel Hexcel, E700 V; 5433 S, SLC, Ut 84118
F3C 433/M65;38%;285AW;50"
NSRR4040 Rev 1908 4
Product: 111545
Batch: 92M0114922
QTY: 93.00ft
Serial: 92M0114922037
Shelf life: 365 days
Storage conditions: S O F
DCM: 15-Sep-2026
Expiration: 15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
93	93	A	0.000%	9/16/2026

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922038	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
35	50	0	0.0	FUZZBALL
110	50	2	0.7	RESIN LEAN

Final Footage	Net Feet	Credit Method	Defect %	Date
210	209	A	0.079%	9/16/2026

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922039	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
--------------------	-----------------------------	------------------------------	-------------------------------	---------------------

Final Footage	Net Feet	Credit Method	Defect %	Date
227	227	A	0.000%	9/16/2026

Bag label - Hexcel Hexcel 6700 W. 5400 S. SLC Ut 54118
F3C 433/M65;38%;285AW;50"



MSRRA040 Rev. ISSUE 4

Product:	Batch:	Shelf life:	DDM:
111545	92M0114922	365 days	15-Sep-2026
Qty:	Serial:	Storage conditions:	Expiration:
227.00ft	92M0114922039	≤ 0 F	15-Sep-2027

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922040	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
13	50	24	8.3	CURED RESIN
30	50	0	0.0	FUZZBALL

Final Footage	Net Feet	Credit Method	Defect %	Date
287	285	A	0.697%	9/16/2026



Bag label - Hexcel Hexcel, 6700 W. 5400 S., SLC, UT 84116
F3C 433/M65;38%;285AW;50"
MSRR4040Rev.ISSUE 4



Product:	Batch:	Shelf life	DOT:
2026 111545	92M0114922	365 days	15-Sep
City	Serial	Storage conditions	Expirat
2027 285.00 ft	92M0114922040	≤ 0 F	15-Sep

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number 92M0114922	Serial Number 92M0114922041	Fiber F3C 433	Resin M65	Prepreg Width 50
-----------------------------------	---------------------------------------	-------------------------	---------------------	----------------------------

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
--------------------	-----------------------------	------------------------------	-------------------------------	---------------------

Final Footage 150	Net Feet 150	Credit Method A	Defect % 0.000%	Date 9/16/2026
-----------------------------	------------------------	---------------------------	---------------------------	--------------------------

Inspection Stamp 	Date 9/16/2026
--	--------------------------

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922042	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
110	50	24	8.3	CURED RESIN
117	50	1	0.3	RESIN LEAN
130	50	2	0.7	FLOAT

Final Footage	Net Feet	Credit Method	Defect %	Date
135	132	A	1.667%	9/16/2026

Roll label - Hexcel hexcel 6700 W 540C S SLC U 94118
F3C 433/M65;38%;285AW;50"
MSRR4040Rev.ISSUE 4



Product	Batch	Shelf life	DCM
111545	92M0114922	365 days	15-Sep-2026
Qty	Serial	Storage conditions	Expiration
132.00 ft	92M0114922042	< 0 F	15-Sep-2027

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922043	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
73	50	72	25.0	float
133	50	24	8.3	resin lean
145	50	6	2.1	resin lean
237	50	12	4.2	resin lean

Final Footage	Net Feet	Credit Method	Defect %	Date
255	245	A	3.725%	9/27/2026

Inspection Stamp	Date
	9/27/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922044	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
--------------------	-----------------------------	------------------------------	-------------------------------	---------------------

Final Footage	Net Feet	Credit Method	Defect %	Date
52	52	A	0.000%	9/16/2026

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922045	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
230	50	0	0.0	FUZZBALL
255	50	96	33.3	WRINKLES
262	50	0	0.0	FUZZBALL
275	50	36	12.5	CURED RESIN
293	50	7	2.4	RESIN LEAN

Final Footage	Net Feet	Credit Method	Defect %	Date
300	288	A	3.861%	9/16/2026

Roll label - Hexcel Hexcel 6700 W 5400 S. SLC U. S4118
F3C 433/M65;38%;285AW;50"
MSRR4040Rev.ISSUE 4



Product:	Batch:	Shelf life:	DOM:
111545	92M0114922	365 days	15-Sep-2026
Qty:	Serial:	Storage conditions:	Expiration:
200 20 4	02110114922045	20 F	15-Sep-2027

Inspection Stamp	Date
	9/16/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922046	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
21	50	1	0.3	MISPICK

Final Footage	Net Feet	Credit Method	Defect %	Date
142	141	A	0.059%	9/17/2026

Bag label - Hexcel Hexcel: 6700 W. 5400 S. S.C. Ut 64116
F3C 433/M65;38%;285AW:50"



MSRR4040 Rev. ISSUE 4

Product	Batch	Shelf life	DOM
111545	92M0114922	365 days	15-Sep-2026
QTY:	Serial	Storage conditions	Expiration
141.00ft	92M0114922046	≤ 0 F	15-Sep-2027

Inspection Stamp	Date
	9/17/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922047	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
19	50	60	20.8	MISPICK
242	50	1	0.3	MISPICK
275	50	24	8.3	CURED RESIN

Final Footage	Net Feet	Credit Method	Defect %	Date
300	292	A	2.361%	9/17/2026

Inspection Stamp	Date
	9/17/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922048	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
1	50	6	2.1	RESIN LEAN
6	50	24	8.3	CURED RESIN

Final Footage	Net Feet	Credit Method	Defect %	Date
134	131	A	1.866%	9/17/2026

Inspection Stamp	Date
	9/17/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922049	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
--------------------	-----------------------------	------------------------------	-------------------------------	---------------------

Roll label - Hexcel Hexcel 6700 W 5400 S, SLO Ut 64119
F3C 433/M65;38%;285AW;50"



WARR040 Rev. ISSUE 4

Product	Batch	Shelf life	JOM
111545	92M0114922	365 days	15-Sep-2026
QTY	Serial	Storage conditions	Expiration
300.00ft	92M0114922049	≤ 0 F	15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
300	300	A	0.000%	9/17/2026

Inspection Stamp	Date
	9/17/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922050	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks

Final Footage	Net Feet	Credit Method	Defect %	Date
136	136	A	0.000%	9/17/2026

Inspection Stamp	Date
 	9/17/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922051	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
122	50	2	0.7	MISPICK
275	50	24	8.3	CURED RESIN

Roll label - Hexcel Hexcel 6700 W. 5400 S. SLO. LT 84118
F3C 433/M65;38%;285AW;50"



MSR01040 Rev. ISSUE 4

Product	Batch	Shelf life	DCM
111545	92M0114922	365 days	15-Sep-2026
QTY:	Serial	Storage conditions	Expiration
297.00ft	92M0114922051	≤ 0 F	15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
300	297	A	0.722%	9/17/2026

Inspection Stamp	Date
	9/17/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922052	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
--------------------	-----------------------------	------------------------------	-------------------------------	---------------------

Final Footage	Net Feet	Credit Method	Defect %	Date
136	136	A	0.000%	9/17/2026

Bag label - Hexcel Hexcel 6700 W 5401 S SLC UT 84118
F3C 433/M65;38%;285AW;50"



USPREGAS Rev. ISSUE 4

Product	Batch	Shelf life	DCM
111545	92M0114922	365 days	15-Sep-2026
Qty	Serial	Storage conditions	Expiration
136.00ft	92M0114922052	≤ 0 F	15-Sep-2027

Inspection Stamp	Date
	9/17/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922053	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
109	50	0	0.0	FUZZBALL

Roll label - Hexcel Hexcel 8700 W 5400 S SLO. U: 84118
F3C 433/M65;38%;285AW;50"



USP44043 Rev. ISSUE 4

Product	Batch	Shelf life	CCM
111545	92M0114922	365 days	15-Sep-2026
QTY	Serial	Storage conditions	Expiration
250.00ft	92M0114922053	≤ 0 F	15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
250	250	A	0.000%	9/17/2026

Inspection Stamp	Date
	9/17/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922054	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
164	50	24	8.3	CURED RESIN

Roll label - Hexcel Hexcel: 6700 W 6400 S SLO LE 54113
 F3C 433/M65;38%;285AW;50"
 USMRA445 Rev. ISSUE 3
 Product 111545
 Qty 188.00ft
 Batch 92M0114922
 Serial 92M0114922054
 Shelf life 365 days
 Storage conditions ≤ 0 F
 DCM
 15-Sep-2026
 Expiration 15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
190	188	A	1.053%	9/17/2026

Inspection Stamp	Date
	9/17/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922055	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
37	50	0	0.0	FUZZBALL

Bag label - Hexcel Hexcel: 6700 W. 5400 S. SLC Lt 64118
F3C 433/M65;38%;285AW;50"



US924240 Rev 13506 4

P count

111545

QTY

223.00ft

Batch

92M0114922

Serial

92M0114922055

Shelf life

365 days

Storage conditions

≤ 0 F

DCM

15-Sep-2026

Expiration

15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
223	223	A	0.000%	9/17/2026

Inspection Stamp

Date



9/17/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0114922	92M0114922056	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
--------------------	-----------------------------	------------------------------	-------------------------------	---------------------

Roll label - Hexcel mescel 8700 W 5400 G SLC Ut 84115
 F3C 433/M65;38%;285AW;50"
 USRR0403 Rev 1 ISSUE 1
 Product 111545 Batch 92M0114922
 QTY: 199.00ft Serial 92M0114922056
 Shelf life 365 days
 Storage conditions ≤ 0 F



DOM
 15-Sep-2026
 Expiration
 15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
199	199	A	0.000%	9/17/2026

Inspection Stamp	Date
	9/17/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0116197	92M0116197001	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
4	50	0	0.0	FUZZBALL
10	50	0	0.0	FUZZBALL
48	50	0	0.0	FUZZBALL
70	50	0	0.0	FUZZBALL
130	50	3	1.0	RESIN LEAN
237	50	0	0.0	FUZZBALL
267	50	12	4.2	RESIN LEAN

Roll label - Hexcel Hexcel 6700 N. 5400 S. S.C. Ut 64116
F3C 433/M65;38%;285AW;50"



USRA407 Rev. ISSUE 4

Product	Batch	Shelf life	DDM
111545	92M0116197	365 days	15-Sep-2026
Qty	Serial	Storage conditions	Expiration
278.00ft	92M0116197001	≤ 0 F	15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
280	278	A	0.446%	9/15/2026

Inspection Stamp	Date
	9/15/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0116197	92M0116197004	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
24	50	12	4.2	MISSING PICK
43	50	0	0.0	FUZZBALL
57	50	0	0.0	FUZZBALL
74	50	0	0.0	FUZZBALL

Roll label - Hexcel Hexcel 6700 W 5400 S SLC 101 24112
F3C 433/M65;38%;285AW:50"
MSR016197 ISSUE 4
Product: 111545
QTY: 139.00ft
Batch: 92M0116197
Serial: 92M0116197004
Shelf life: 365 days
Storage conditions: 50 F
DCM: 15-Sep-2026
Expiration: 15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
140	139	A	0.714%	9/15/2026

Inspection Stamp	Date
	9/15/2026



7 October 2026

CERTIFICATE OF ANALYSIS

Customer: Northrop Grumman Systems Corporation

Purchase Order No: 5000706560 Part Number: MSRR4040-VAFR

Material: F3C 433/M65: 38%; 285AW; 50"

Specification: MSRR4040, Issue 4, dated November 2012.

Certificate of Conformance: Hexcel lot 92M0114922 has been manufactured and tested in conformance with specification MSRR4040, Issue 4, dated November 2012.

Lot No: 92M0114922 Date of Manufacture: 15 September 2026

Storage Life: 12 months from date of manufacture when stored at 0°.

Resin Lot No: 92M0115957 Manufactured by: Hexcel

Glass Lot No: 31W0027641 Manufactured by: Hexcel

- I. Prepreg Physical, Chemical and Mechanical Properties
See Certificate of Analysis Report.
- II. Individual Spool Physical Properties
See In Process Control Acceptance Testing Data.

Note: See Packing List for date of shipment, actual quantity and spools shipped.

Brandi Bond 



Matrix Testing Laboratory
5400 S. 6700 W
West Valley City, Utah
84118

Certificate of Analysis Report

Specification: MSRR4040 Rev. Issue 4
Configuration Number: CN1301
Material Type: F3C 433/M65;38%;285AW;50"
Lot Number: 92M0114922
Order Number: 92M0114922

Report Printed: 07-Oct-2026 9:07:54AM

Status: **PASS**
Approval: **RODRIGJA**

1. Tensile, SBS, and TG Panel

ASTM D8336 Nottingham Tack

Roll/Panel	Test/Result:	Requirements:	Values:
92M0114922001/001	Tack Force (lbf)		15.700 - 14.900 - 16.100
	Tack Force Avg (lbf)		15.567
92M0114922017/002	Tack Force (lbf)		16.900 - 13.500 - 15.200
	Tack Force Avg (lbf)		15.200
92M0114922039/003	Tack Force (lbf)		7.800 - 10.300 - 9.000
	Tack Force Avg (lbf)		9.033
92M0114922056/004	Tack Force (lbf)		8.000 - 9.500 - 15.600
	Tack Force Avg (lbf)		11.033

Dimensional Fiber Volume

Roll/Panel	Test/Result:	Requirements:	Values:
92M0114922001/001	Laminate Density By Immersion Avg (g/cc)		1.5141
	Laminate Density By Immersion Std (g/cc)		0.0033
	Laminate Density By Immersion CoV		0.22
	Dimensional Fiber Volume (%)		54.35 - 54.11 - 53.42
	Dimensional Fiber Volume Avg (%)	50 - 56	54
	Dimensional Fiber Volume Std (%)		0.483
	Dimensional Fiber Volume CoV		0.89
	Void Volume (%)		0.8 - 1.0 - 1.0
	Void Volume Avg (%)	MAX= 2	1
	Void Volume Std (%)		0.076
92M0114922017/002	Void Volume CoV		8.08
	Laminate Density By Immersion Avg (g/cc)		1.5202
	Laminate Density By Immersion Std (g/cc)		0.0011
	Laminate Density By Immersion CoV		0.07
	Dimensional Fiber Volume (%)		56.22 - 56.06 - 55.95
	Dimensional Fiber Volume Avg (%)	50 - 56	56
	Dimensional Fiber Volume Std (%)		0.136
	Dimensional Fiber Volume CoV		0.24
	Void Volume (%)		1.3 - 1.4 - 1.3
	Void Volume Avg (%)	MAX= 2	1
92M0114922039/003	Void Volume Std (%)		0.070
	Void Volume CoV		5.34
	Laminate Density By Immersion Avg (g/cc)		1.5141



Matrix Testing Laboratory
5400 S. 6700 W
West Valley City, Utah
84118

Certificate of Analysis Report

Specification: **MSRR4040 Rev. Issue 4**
Configuration Number: **CN1301**
Material Type: **F3C 433/M65;38%;285AW;50"**
Lot Number: **92M0114922**
Order Number: **92M0114922**

Report Printed: 07-Oct-2026 9:07:54AM
Status: **PASS**
Approval: **RODRIGJA**

Dimensional Fiber Volume (Continued)

Roll/Panel	Test/Result:	Requirements:	Values:
92M0114922039/003	Laminate Density By Immersion Std (g/cc)		0.0008
	Laminate Density By Immersion CoV		0.05
	Dimensional Fiber Volume (%)		53.58 - 53.27 - 53.59
	Dimensional Fiber Volume Avg (%)	50 - 56	53
	Dimensional Fiber Volume Std (%)		0.182
	Dimensional Fiber Volume CoV		0.34
	Void Volume (%)		0.8 - 0.7 - 0.8
	Void Volume Avg (%)	MAX= 2	1
	Void Volume Std (%)		0.015
	Void Volume CoV		2.05
92M0114922056/004	Laminate Density By Immersion Avg (g/cc)		1.5134
	Laminate Density By Immersion Std (g/cc)		0.0004
	Laminate Density By Immersion CoV		0.03
	Dimensional Fiber Volume (%)		53.86 - 53.90 - 54.07
	Dimensional Fiber Volume Avg (%)	50 - 56	54
	Dimensional Fiber Volume Std (%)		0.112
	Dimensional Fiber Volume CoV		0.21
	Void Volume (%)		1.0 - 1.0 - 1.0
	Void Volume Avg (%)	MAX= 2	1
	Void Volume Std (%)		0.035
	Void Volume CoV		3.56

Short Beam Shear Stress-Warp-Ambient

Roll/Panel	Test/Result:	Requirements:	Values:
92M0114922001/001	SBS Strength (MPa)		90.1 - 89.7 - 92.5 - 89.5 - 84.8
	SBS Strength Avg (MPa)	MIN= 65	89
	SBS Strength Std (MPa)		2.81
	SBS Strength CoV		3.15
92M0114922017/002	SBS Strength (MPa)		88.5 - 91.1 - 94.5 - 91.4 - 91.5
	SBS Strength Avg (MPa)	MIN= 65	91
	SBS Strength Std (MPa)		2.16
	SBS Strength CoV		2.36
92M0114922039/003	SBS Strength (MPa)		95.7 - 93.9 - 92.1 - 101.2 - 88.4
	SBS Strength Avg (MPa)	MIN= 65	94
	SBS Strength Std (MPa)		4.73
	SBS Strength CoV		5.02
92M0114922056/004	SBS Strength (MPa)		91.3 - 88.0 - 87.7 - 89.3 - 95.5

Certificate of Analysis Report

Specification: **MSRR4040 Rev. Issue 4**
Configuration Number: **CN1301**
Material Type: **F3C 433/M65;38%;28SAW;50"**
Lot Number: **92M0114922**
Order Number: **92M0114922**

Report Printed: 07-Oct-2026 9:07:54AM

Status: **PASS**
Approval: **RODRIGJA**

Short Beam Shear Stress-Warp-Ambient (Continued)

Roll/Panel	Test/Result:	Requirements:	Values:
92M0114922056/004	SBS Strength Avg (MPa)	MIN= 65	90
	SBS Strength Std (MPa)		3.20
	SBS Strength CoV		3.54

Short Beam Shear Stress-Warp-150C(302F)

Roll/Panel	Test/Result:	Requirements:	Values:
92M0114922001/001	SBS Strength (MPa)		68.4 - 66.2 - 66.4 - 67.2 - 66.6
	SBS Strength Avg (MPa)	MIN= 50	67
	SBS Strength Std (MPa)		0.88
	SBS Strength CoV		1.32
92M0114922017/002	SBS Strength (MPa)		67.2 - 68.7 - 68.4 - 68.8 - 67.2
	SBS Strength Avg (MPa)	MIN= 50	68
	SBS Strength Std (MPa)		0.80
	SBS Strength CoV		1.17
92M0114922039/003	SBS Strength (MPa)		70.3 - 68.7 - 68.1 - 69.7 - 69.5
	SBS Strength Avg (MPa)	MIN= 50	69
	SBS Strength Std (MPa)		0.87
	SBS Strength CoV		1.26
92M0114922056/004	SBS Strength (MPa)		67.9 - 66.9 - 66.4 - 67.4 - 68.0
	SBS Strength Avg (MPa)	MIN= 50	67
	SBS Strength Std (MPa)		0.71
	SBS Strength CoV		1.05

Tg By DMA

Roll/Panel	Test/Result:	Requirements:	Values:
92M0114922001/001	Tg by DMA in °C (° C)		250.2
	Tg by DMA in °C Avg (° C)	MIN= 225.0	250.2
92M0114922017/002	Tg by DMA in °C (° C)		259.6
	Tg by DMA in °C Avg (° C)	MIN= 225.0	259.6
92M0114922039/003	Tg by DMA in °C (° C)		255.7
	Tg by DMA in °C Avg (° C)	MIN= 225.0	255.7
92M0114922056/004	Tg by DMA in °C (° C)		258.2
	Tg by DMA in °C Avg (° C)	MIN= 225.0	258.2

Calculated Thickness/Ply



Matrix Testing Laboratory
5400 S. 6700 W
West Valley City, Utah
84118

Certificate of Analysis Report

Specification: **MSRR4040 Rev. Issue 4**
Configuration Number: **CN1301**
Material Type: **F3C 433/M65;38%;285AW;50"**
Lot Number: **92M0114922**
Order Number: **92M0114922**

Report Printed: 07-Oct-2026 9:07:54AM
Status: **PASS**
Approval: **RODRIGJA**

Roll/Panel	Test/Result:	Requirements:	Values:
92M0114922001/001	Calculated Thickness/Ply Avg (mm)	0.28 - 0.32	0.30
	Calculated Thickness/Ply StDev (mm)		0.0025
	Calculated Thickness/Ply CoV		0.84
92M0114922017/002	Calculated Thickness/Ply Avg (mm)	0.28 - 0.32	0.29
	Calculated Thickness/Ply StDev (mm)		0.0025
	Calculated Thickness/Ply CoV		0.92
92M0114922039/003	Calculated Thickness/Ply Avg (mm)	0.28 - 0.32	0.30
	Calculated Thickness/Ply StDev (mm)		0.0025
	Calculated Thickness/Ply CoV		0.45
92M0114922056/004	Calculated Thickness/Ply Avg (mm)	0.28 - 0.32	0.30
	Calculated Thickness/Ply StDev (mm)		0.0025
	Calculated Thickness/Ply CoV		0.54

Tensile Stress, Modulus, and Elongation-Warp-Ambient

Roll/Panel	Test/Result:	Requirements:	Values:
92M0114922001/001	Norm Tensile Strength (MPa)		937.1 - 900.2 - 947.3 - 899.5 - 908.1
	Norm Tensile Strength Avg (MPa)	MIN= 700	918
	Norm Tensile Strength Std (MPa)		22.23
	Norm Tensile Strength CoV		2.42
	Norm Modulus (GPa)		62.2 - 61.7 - 62.6 - 61.2 - 61.3
	Norm Modulus Avg (GPa)	MIN= 55	62
	Norm Modulus Std (GPa)		0.572
	Norm Modulus CoV		0.93
92M0114922017/002	Norm Tensile Strength (MPa)		931.8 - 916.7 - 892.3 - 891.9 - 916.4
	Norm Tensile Strength Avg (MPa)	MIN= 700	910
	Norm Tensile Strength Std (MPa)		17.29
	Norm Tensile Strength CoV		1.90
	Norm Modulus (GPa)		62.0 - 61.3 - 62.1 - 63.1 - 63.5
	Norm Modulus Avg (GPa)	MIN= 55	62
	Norm Modulus Std (GPa)		0.869
	Norm Modulus CoV		1.40
92M0114922039/003	Norm Tensile Strength (MPa)		911.4 - 923.9 - 902.9 - 947.0 - 955.6
	Norm Tensile Strength Avg (MPa)	MIN= 700	928
	Norm Tensile Strength Std (MPa)		22.58
	Norm Tensile Strength CoV		2.43
	Norm Modulus (GPa)		61.2 - 61.2 - 62.1 - 61.5 - 60.6
	Norm Modulus Avg (GPa)	MIN= 55	61
	Norm Modulus Std (GPa)		0.531
	Norm Modulus CoV		0.86



Matrix Testing Laboratory
5400 S. 6700 W
West Valley City, Utah
84118

Certificate of Analysis Report

Specification: MSRR4040 Rev. Issue 4
Configuration Number: CN1301
Material Type: F3C 433/M65;38%;285AW;50"
Lot Number: 92M0114922
Order Number: 92M0114922

Report Printed: 07-Oct-2026 9:07:54AM

Status: **PASS**
Approval: **RODRIGJA**

Tensile Stress, Modulus, and Elongation-Warp-Ambient (Continued)

Roll/Panel	Test/Result:	Requirements:	Values:
92M0114922056/004	Norm Tensile Strength (MPa)		885.1 - 911.9 - 925.2 - 915.2 - 950.3
	Norm Tensile Strength Avg (MPa)	MIN= 700	918
	Norm Tensile Strength Std (MPa)		23.57
	Norm Tensile Strength CoV		2.57
	Norm Modulus (GPa)		62.8 - 62.7 - 62.6 - 62.2 - 62.7
	Norm Modulus Avg (GPa)	MIN= 55	63
	Norm Modulus Std (GPa)		0.228
	Norm Modulus CoV		0.36

2. PHYSICAL PROPERTIES

Volatile content @100°C in pan

Roll	Test/Result:	Requirements:	Values:
92M0114922001	Volatile content @100°C in a Pan (%)		0.9 - 0.9
	Volatile content @100°C in a Pan Avg (%)	MAX= 1	1
92M0114922056	Volatile content @100°C in a Pan (%)		0.4 - 0.4
	Volatile content @100°C in a Pan Avg (%)	MAX= 1	0

3. PHYSICAL TACK

Tack

Roll	Test/Result:	Requirements:	Values:
92M0114922001	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922003	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922005	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922007	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922009	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922011	Tack Time to Failure (min.)	MIN= 30	30 - 30



Matrix Testing Laboratory
5400 S. 6700 W
West Valley City, Utah
84118

Certificate of Analysis Report

Specification: MSRR4040 Rev. Issue 4
Configuration Number: CN1301
Material Type: F3C 433/M65;38%;285AW;50"
Lot Number: 92M0114922
Order Number: 92M0114922

Report Printed: 07-Oct-2026 9:07:54AM

Status: **PASS**
Approval: **RODRIGJA**

Tack (Continued)

Roll	Test/Result:	Requirements:	Values:
92M0114922011	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922013	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922015	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922017	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922019	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922021	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922023	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922025	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922027	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922029	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922031	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922033	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922035	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922037	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922039	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922041	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922043	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922045	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922047	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922049	Tack Time to Failure (min.)	MIN= 30	30 - 30



Matrix Testing Laboratory
5400 S. 6700 W
West Valley City, Utah
84118

Certificate of Analysis Report

Specification: MSRR4040 Rev. Issue 4
Configuration Number: CN1301
Material Type: F3C 433/M65;38%;285AW;50"
Lot Number: 92M0114922
Order Number: 92M0114922

Report Printed: 07-Oct-2026 9:07:54AM

Status: **PASS**
Approval: **RODRIGJA**

Tack (Continued)

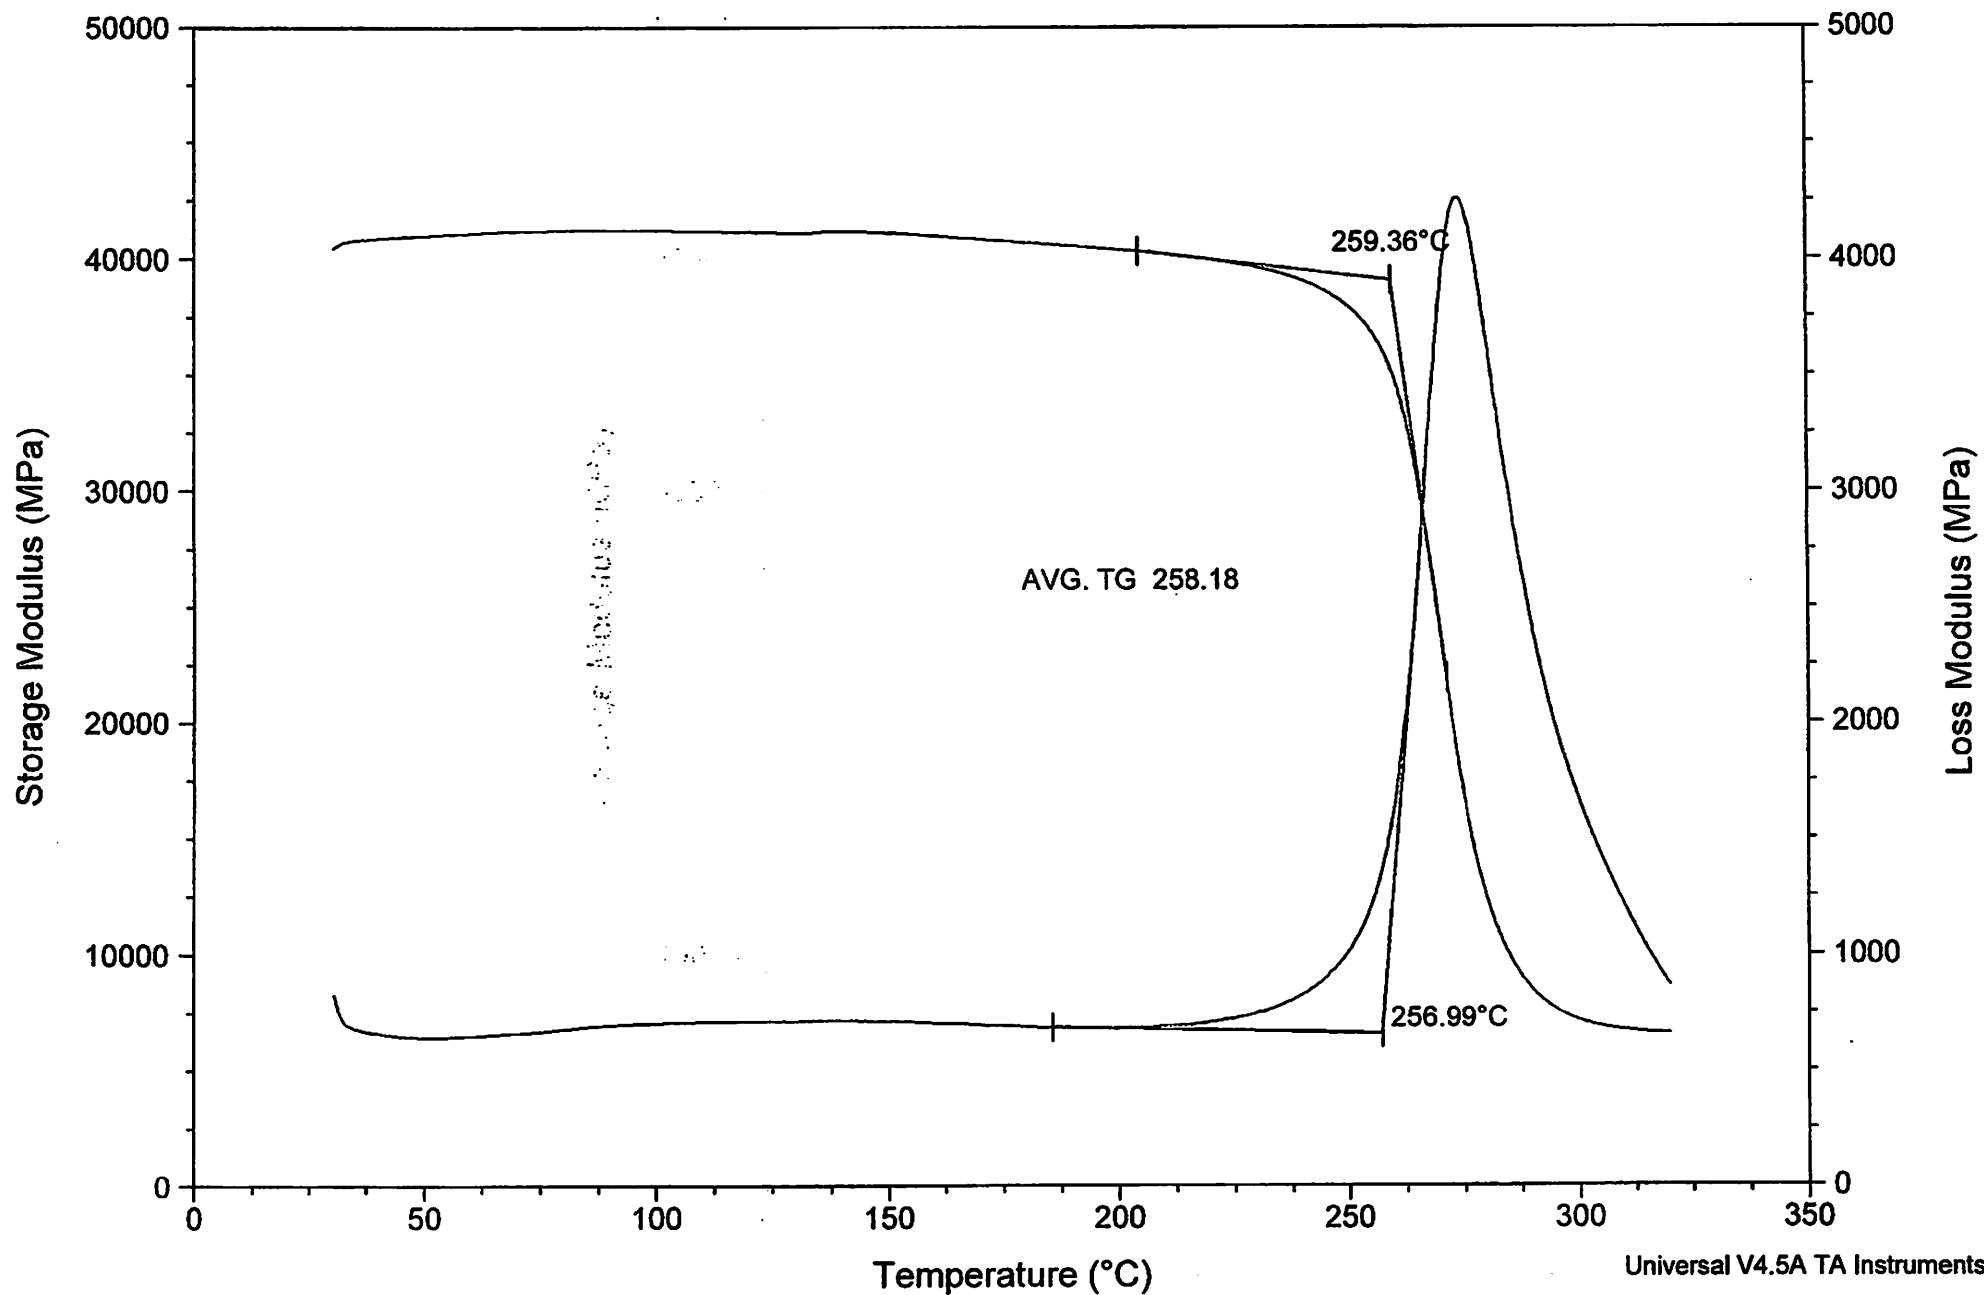
Roll	Test/Result:	Requirements:	Values:
92M0114922049	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922051	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922053	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0114922055	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30

End of report

Sample: 92M0114922-004 SP#056
Size: 34.9800 x 9.9400 x 2.4200 mm
Method: Temperature Ramp

DMA

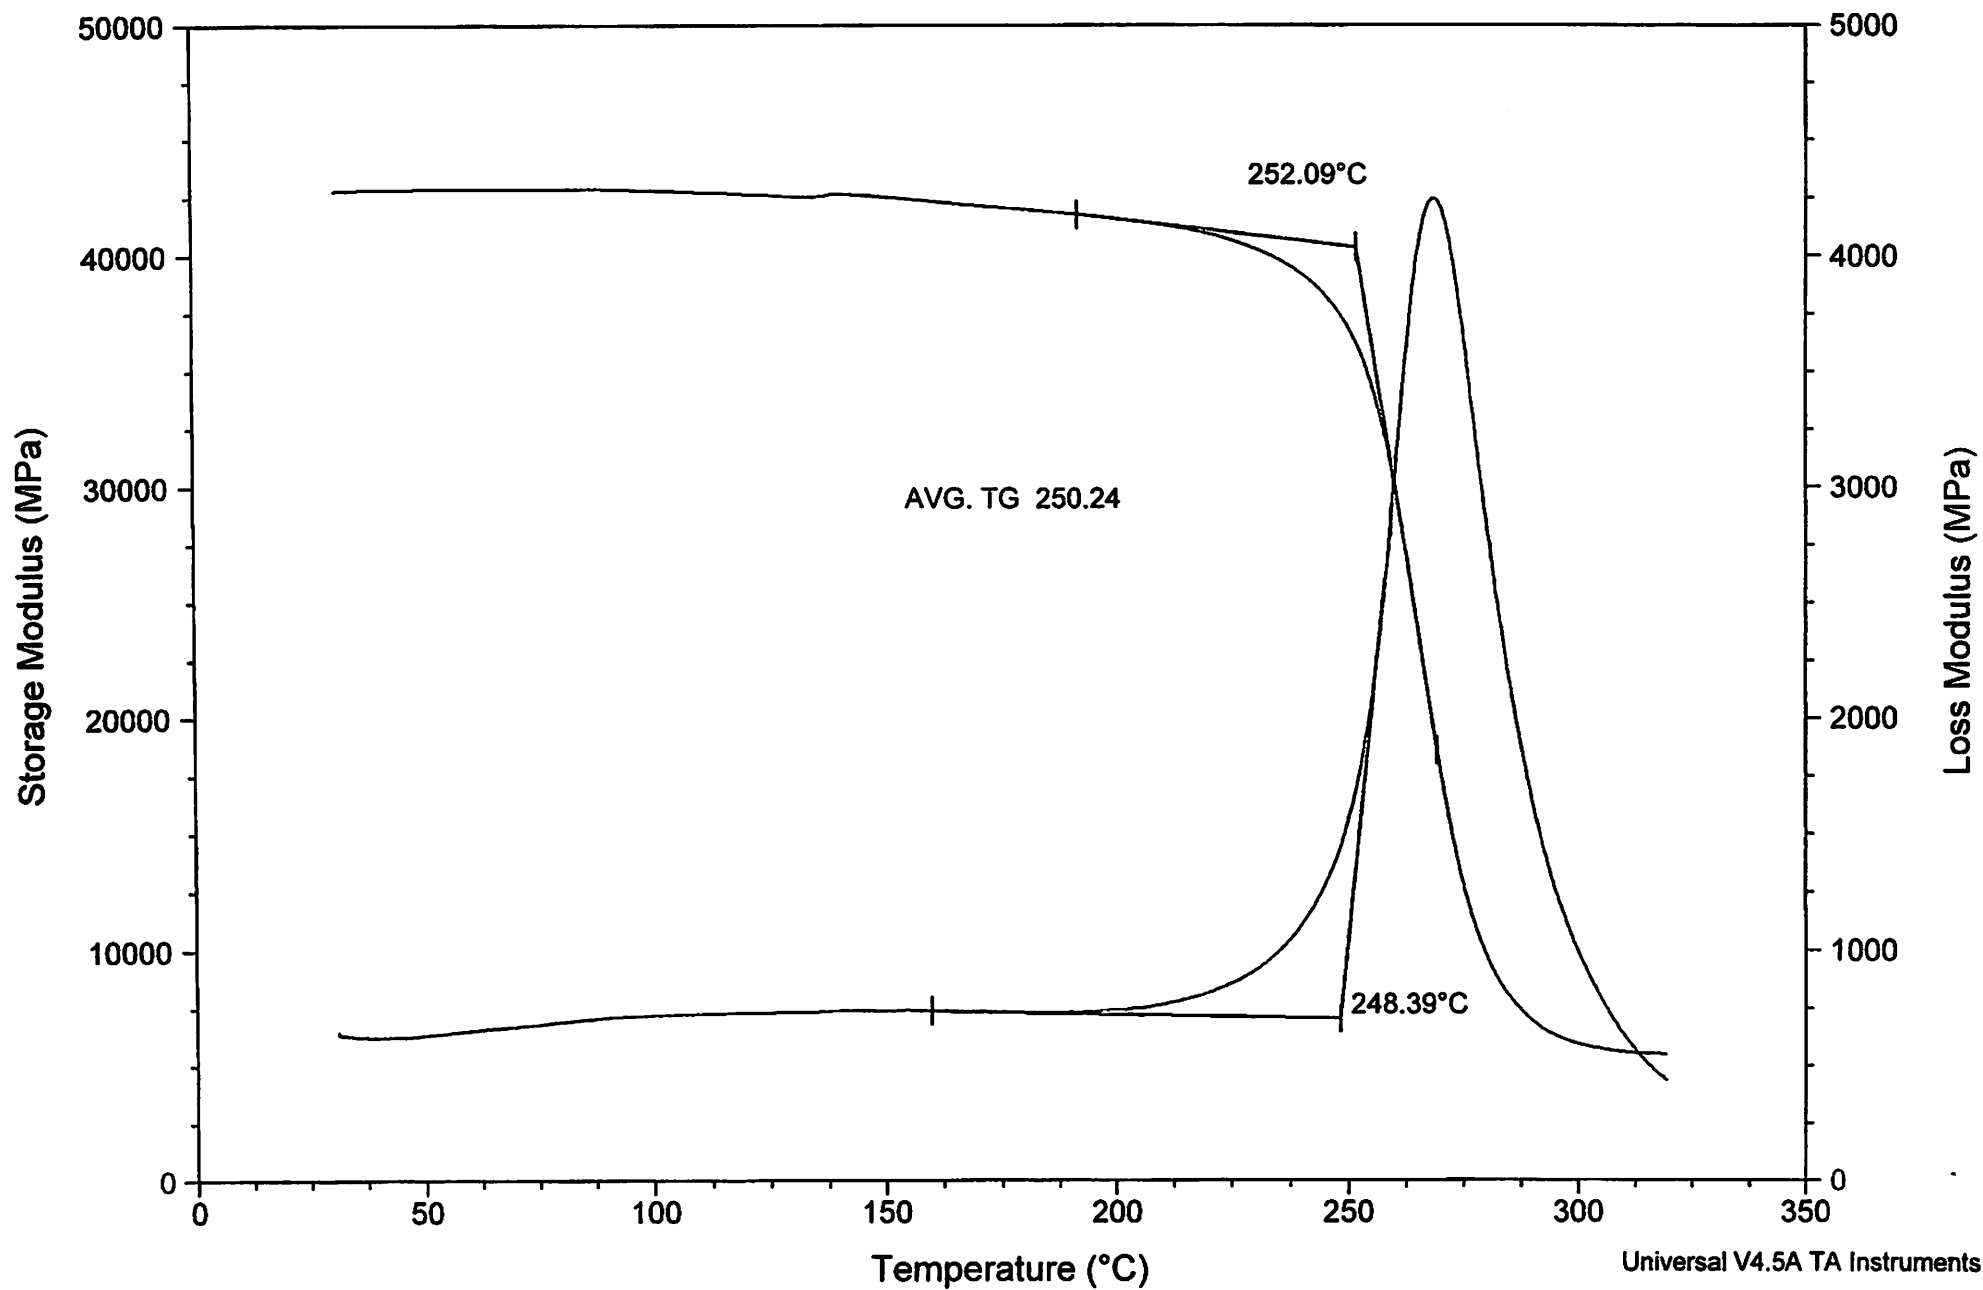
File: \\...M65\92M0114922-004.001
Operator: KV
Run Date: 04-Oct-2026 09:08
Instrument: DMA Q800 V21.3 Build 96



Sample: 92M0114922-001 SP#001
Size: 34.6700 x 9.9000 x 2.4200 mm
Method: Temperature Ramp

DMA

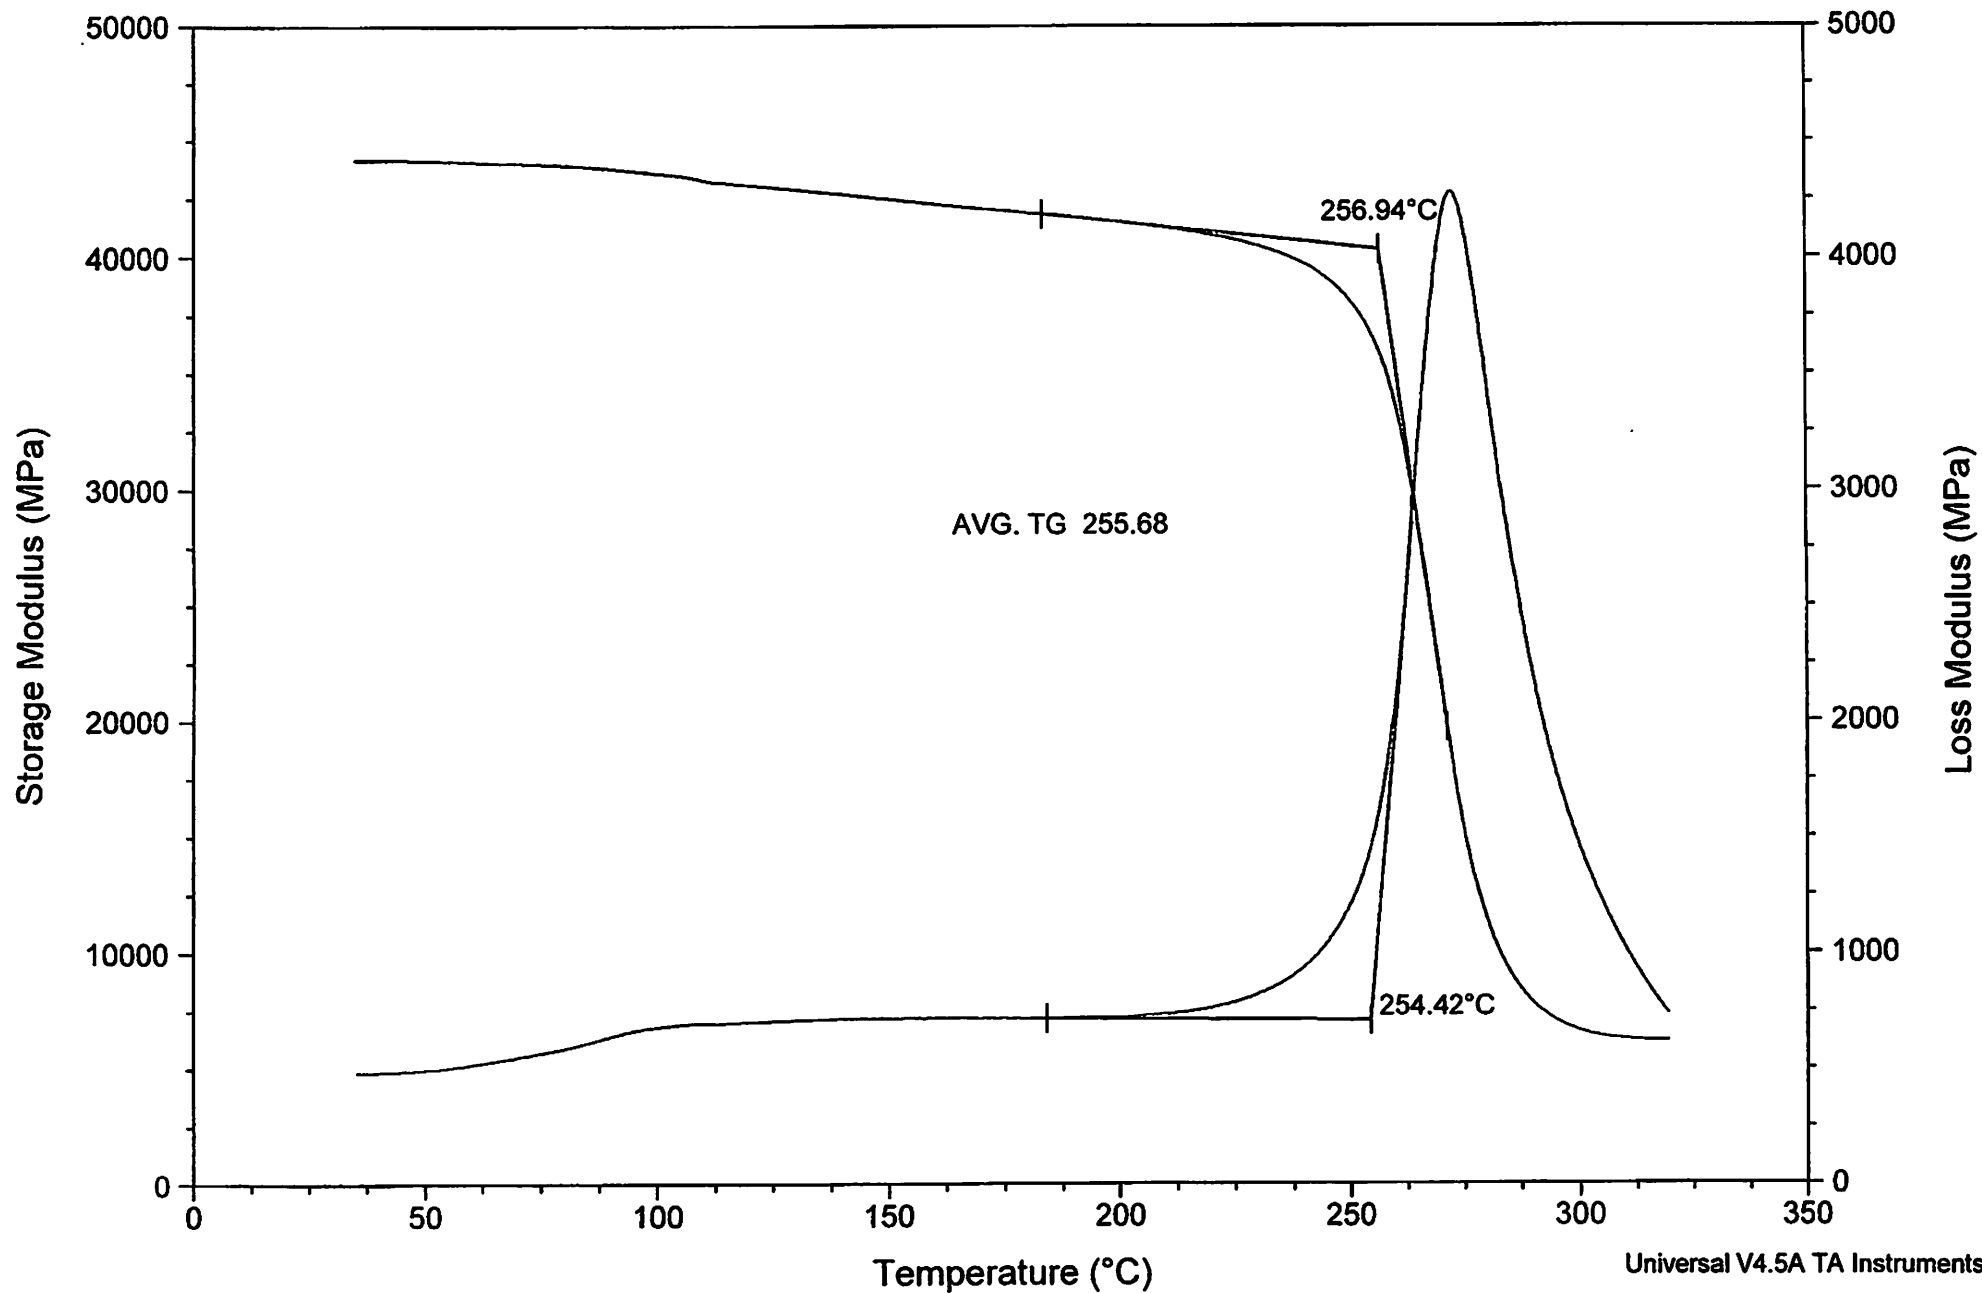
File: \\...\\M65\\92M0114922-001 SP#001.001
Operator: MS
Run Date: 03-Oct-2026 20:19
Instrument: DMA Q800 V21.3 Build 96



Sample: 92M0114922-003 SP#039
Size: 34.9800 x 9.9100 x 2.3900 mm
Method: Temperature Ramp

DMA

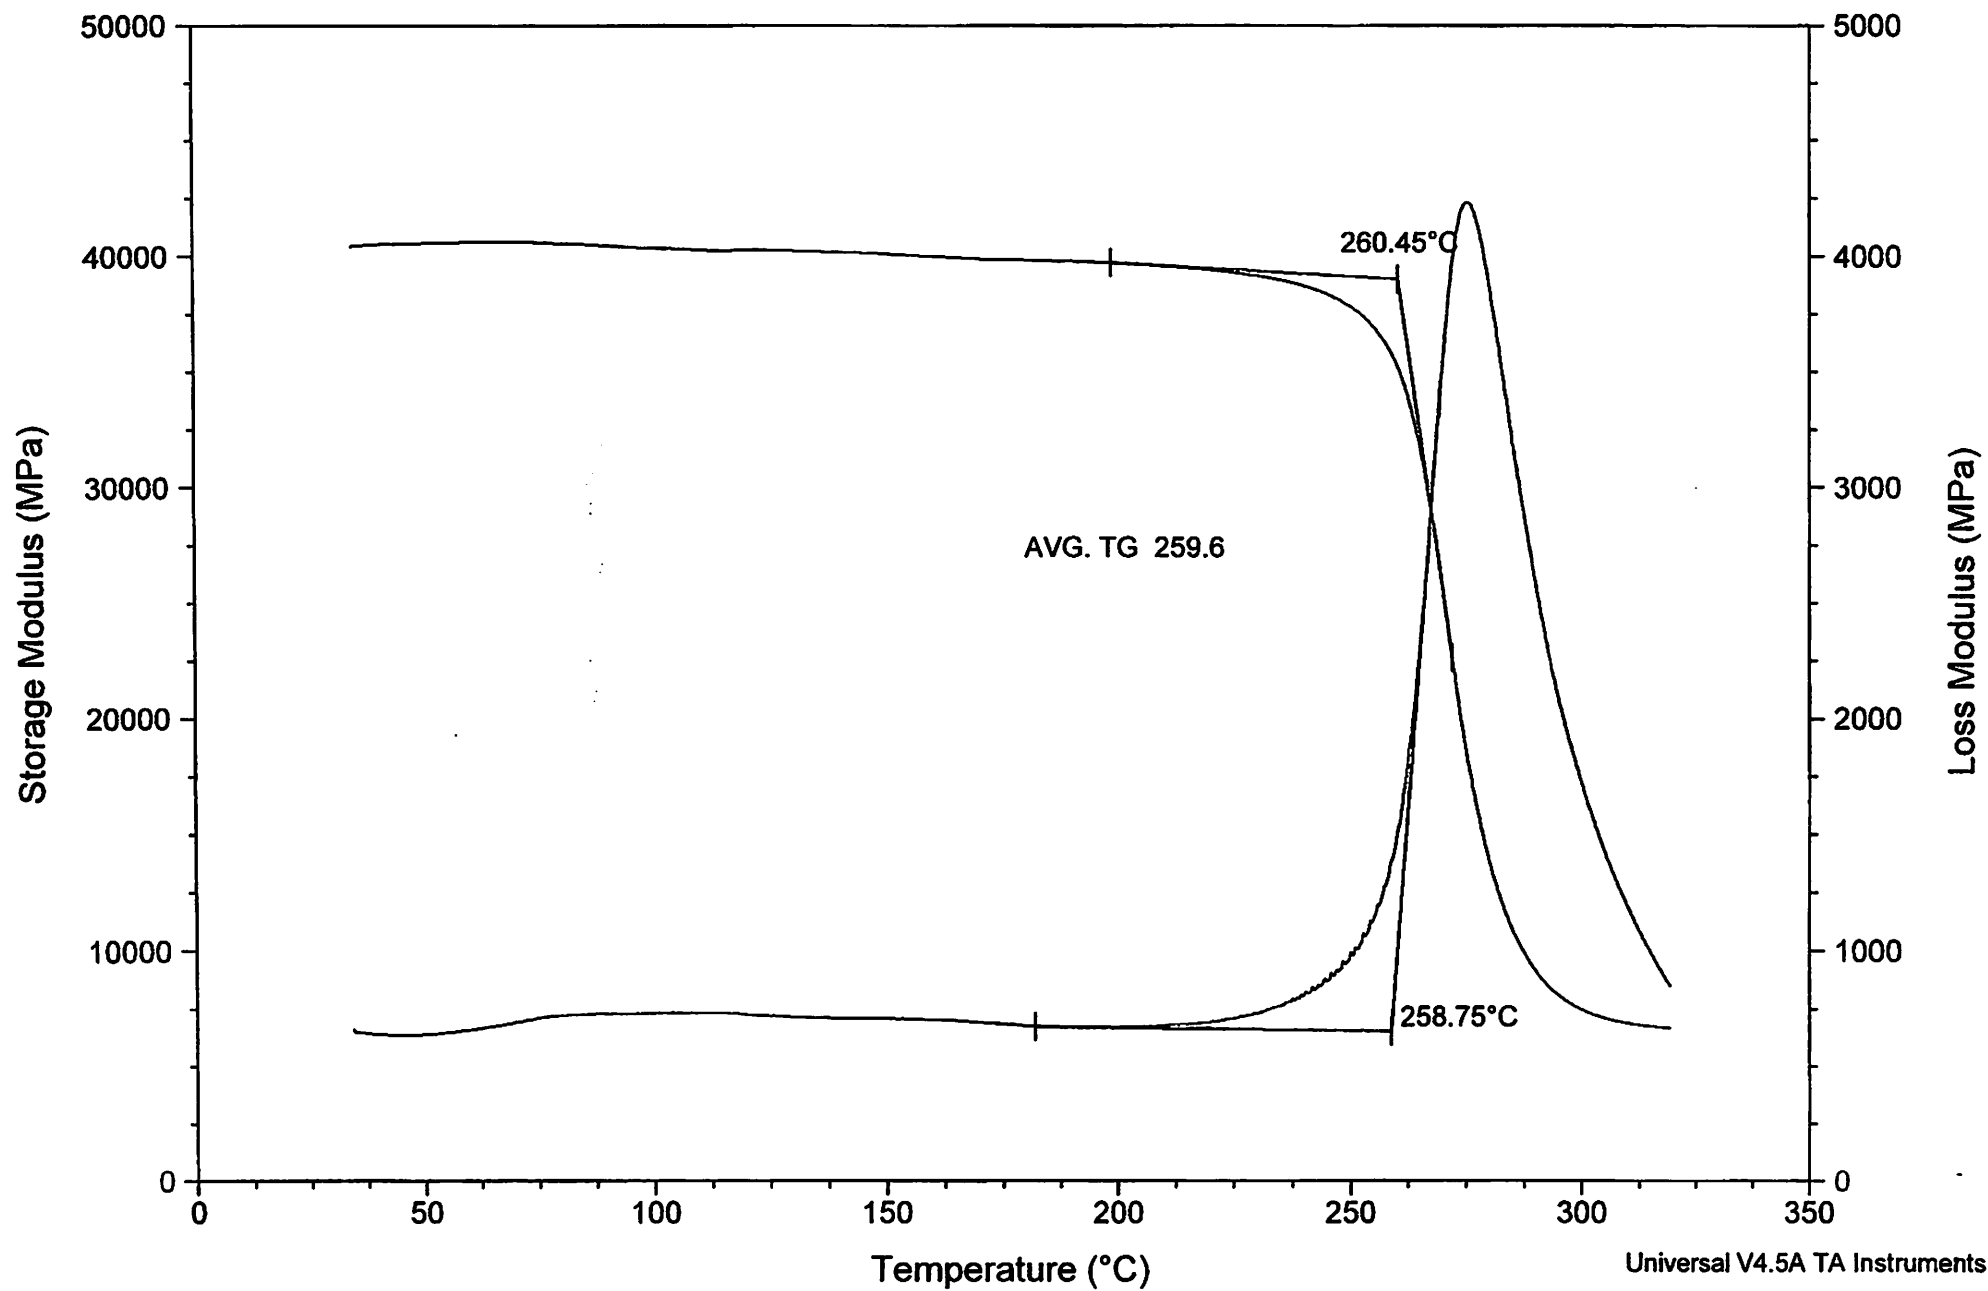
File: \\...\\M65\\92M0114922-003 SP#039.003
Operator: MS
Run Date: 04-Oct-2026 02:36
Instrument: DMA Q800 V21.3 Build 96



Sample: 92M0114922-002 SP#017
Size: 34.9700 x 9.9100 x 2.3700 mm
Method: Temperature Ramp

DMA

File: \\...\\M65\\92M0114922-002 SP#017.002
Operator: MS
Run Date: 04-Oct-2026 00:04
Instrument: DMA Q800 V21.3 Build 96



IN PROCESS CONTROL

ACCEPTANCE TESTING DATA

RC / AWT Report for lot: 92M0114922

10/5/2026

Page 1 of 8

Spool	Re - test	Rep	Init - Weight	Final Weight	RC	AWT	PAW	Width	Stat.	Tech	Date
92M 0114922001	0	1	4.5562	2.8316	37.9	283	455.6			MEKDARJX	09/15/2026
		2	4.5828	2.8219	38.4	282	458.3			MEKDARJX	09/15/2026
		3	4.5332	2.7988	38.3	280	453.3			MEKDARJX	09/15/2026
		Avg.	4.5574		38	282	456	50.30	A	MEKDARJX	09/15/2026
92M 0114922002	0	1	4.5879	2.8240	38.4	282	458.8			MEKDARJX	09/15/2026
		2	4.6007	2.8423	38.2	284	460.1			MEKDARJX	09/15/2026
		3	4.5937	2.8356	38.3	284	459.4			MEKDARJX	09/15/2026
		Avg.	4.5941		38	283	459	50.31	A	MEKDARJX	09/15/2026
92M 0114922003	0	1	4.5854	2.8189	38.5	282	458.5			MEKDARJX	09/15/2026
		2	4.6050	2.8275	38.6	283	460.5			MEKDARJX	09/15/2026
		3	4.5805	2.8222	38.4	282	458.0			MEKDARJX	09/15/2026
		Avg.	4.5903		38	282	459	50.30	A	MEKDARJX	09/15/2026
92M 0114922004	0	1	4.6353	2.8712	38.1	287	463.5			MEKDARJX	09/15/2026
		2	4.6509	2.8647	38.4	286	465.1			MEKDARJX	09/15/2026
		3	4.6274	2.8508	38.4	285	462.7			MEKDARJX	09/15/2026
		Avg.	4.6379		38	286	464	50.30	A	MEKDARJX	09/15/2026
92M 0114922005	0	1	4.6381	2.8495	38.6	285	463.8			MEKDARJX	09/15/2026
		2	4.6219	2.8655	38.0	287	462.2			MEKDARJX	09/15/2026
		3	4.5998	2.8791	37.4	288	460.0			MEKDARJX	09/15/2026
		Avg.	4.6199		38	286	462	50.30	A	MEKDARJX	09/15/2026
92M 0114922006	0	1	4.6010	2.8207	38.7	282	460.1			MEKDARJX	09/15/2026
		2	4.6148	2.8233	38.8	282	461.5			MEKDARJX	09/15/2026
		3	4.5947	2.8152	38.7	282	459.5			MEKDARJX	09/15/2026
		Avg.	4.6035		39	282	460	50.30	A	MEKDARJX	09/15/2026
92M 0114922007	0	1	4.6326	2.8732	38.0	287	463.3			MEKDARJX	09/15/2026
		2	4.6508	2.8823	38.0	288	465.1			MEKDARJX	09/15/2026
		3	4.6294	2.8545	38.3	285	462.9			MEKDARJX	09/15/2026
		Avg.	4.6376		38	287	464	50.26	A	MEKDARJX	09/15/2026
92M 0114922008	0	1	4.6254	2.8364	38.7	284	462.5			MEKDARJX	09/15/2026
		2	4.6374	2.8559	38.4	286	463.7			MEKDARJX	09/15/2026
		3	4.6233	2.8424	38.5	284	462.3			MEKDARJX	09/15/2026
		Avg.	4.6287		38	284	463	50.26	A	MEKDARJX	09/15/2026
92M 0114922009	0	1	4.5985	2.8352	38.3	284	459.8			MEKDARJX	09/15/2026
		2	4.6044	2.8328	38.5	283	460.4			MEKDARJX	09/15/2026
		3	4.5946	2.8319	38.4	283	459.5			MEKDARJX	09/15/2026
		Avg.	4.5992		38	283	460	50.30	A	MEKDARJX	09/15/2026
92M 0114922010	0	1	4.6167	2.8546	38.2	286	461.7			MEKDARJX	09/15/2026
		2	4.6272	2.9015	37.3	290	462.7			MEKDARJX	09/15/2026
		3	4.6284	2.9079	37.2	291	462.8			MEKDARJX	09/15/2026
		Avg.	4.6241		38	289	462	50.25	A	MEKDARJX	09/15/2026
92M 0114922011	0	1	4.6622	2.8323	39.2	283	466.2			MEKDARJX	09/15/2026
		2	4.6792	2.8380	39.3	284	467.9			MEKDARJX	09/15/2026
		3	4.6669	2.8332	39.3	283	466.7			MEKDARJX	09/15/2026

IN PROCESS CONTROL

ACCEPTANCE TESTING DATA

RC / AWT Report for lot: 92M0114922

10/5/2026

Page 2 of 8

Spool	Re - test	Rep	Init - Weight	Final Weight	RC	AWT	PAW	Width	Stat.	Tech	Date
Avg. 4.6694					39	283	467	50.30	A	MEKDARJX	09/15/2026
92M 0114922012	0	1	4.6717	2.8345	39.3	283	467.2			MEKDARJX	09/15/2026
		2	4.6676	2.8424	39.1	284	466.8			MEKDARJX	09/15/2026
		3	4.6605	2.8308	39.3	283	466.0			MEKDARJX	09/15/2026
Avg. 4.6666					39	284	467	50.25	A	MEKDARJX	09/15/2026
92M 0114922013	0	1	4.6703	2.8537	38.9	285	467.0			MEKDARJX	09/15/2026
		2	4.6752	2.8434	39.2	284	467.5			MEKDARJX	09/15/2026
		3	4.6606	2.8465	38.9	285	466.1			MEKDARJX	09/15/2026
Avg. 4.6687					39	285	467	50.25	A	MEKDARJX	09/15/2026
92M 0114922014	0	1	4.6238	2.8472	38.4	285	462.4			MEKDARJX	09/15/2026
		2	4.6329	2.8417	38.7	284	463.3			MEKDARJX	09/15/2026
		3	4.6640	2.8373	39.2	284	466.4			MEKDARJX	09/15/2026
Avg. 4.6402					39	284	464	50.25	A	MEKDARJX	09/15/2026
92M 0114922015	0	1	4.6236	2.8560	38.2	286	462.4			MEKDARJX	09/15/2026
		2	4.6295	2.8756	37.9	288	463.0			MEKDARJX	09/15/2026
		3	4.6467	2.8798	38.0	288	464.7			MEKDARJX	09/15/2026
Avg. 4.6333					38	287	463	50.25	A	MEKDARJX	09/15/2026
92M 0114922016	0	1	4.6574	2.8877	38.0	289	465.7			MEKDARJX	09/15/2026
		2	4.6344	2.9037	37.3	290	463.4			MEKDARJX	09/15/2026
		3	4.6273	2.8635	38.1	286	462.7			MEKDARJX	09/15/2026
Avg. 4.6397					38	288	464	50.30	A	MEKDARJX	09/15/2026
92M 0114922017	0	1	4.6269	2.8835	37.7	288	462.7			MEKDARJX	09/15/2026
		2	4.6747	2.8746	38.5	288	467.5			MEKDARJX	09/15/2026
		3	4.6342	2.8950	37.5	290	463.4			MEKDARJX	09/15/2026
Avg. 4.6453					38	288	464	50.26	A	MEKDARJX	09/15/2026
92M 0114922018	0	1	4.5873	2.8295	38.3	283	458.7			MEKDARJX	09/15/2026
		2	4.5922	2.8236	38.5	282	459.2			MEKDARJX	09/15/2026
		3	4.5886	2.8422	38.1	284	458.9			MEKDARJX	09/15/2026
Avg. 4.5894					38	283	459	50.28	A	MEKDARJX	09/15/2026
92M 0114922019	0	1	4.6492	2.8466	38.8	285	464.9			MEKDARJX	09/15/2026
		2	4.6317	2.8542	38.4	285	463.2			MEKDARJX	09/15/2026
		3	4.6445	2.8442	38.8	284	464.4			MEKDARJX	09/15/2026
Avg. 4.6418					39	285	464	50.30	A	MEKDARJX	09/15/2026
92M 0114922020	0	1	4.6530	2.8350	39.1	284	465.3			MEKDARJX	09/15/2026
		2	4.5659	2.8179	38.3	282	456.6			MEKDARJX	09/15/2026
		3	4.5631	2.8046	38.5	280	456.3			MEKDARJX	09/15/2026
Avg. 4.5940					39	282	459	50.30	A	MEKDARJX	09/15/2026
92M 0114922021	0	1	4.5940	2.8191	38.6	282	459.4			MEKDARJX	09/15/2026
		2	4.6396	2.7977	39.7	280	464.0			MEKDARJX	09/15/2026
		3	4.5914	2.8127	38.7	281	459.1			MEKDARJX	09/15/2026
Avg. 4.6083					39	281	461	50.30	A	MEKDARJX	09/15/2026
92M 0114922022	0	1	4.6417	2.8335	39.0	283	464.2			MEKDARJX	09/15/2026
		2	4.6713	2.8510	39.0	285	467.1			MEKDARJX	09/15/2026

IN PROCESS CONTROL

ACCEPTANCE TESTING DATA

RC / AWT Report for lot: 92M0114922

10/5/2026

Page 3 of 8

Spool	Re - test	Rep	Init - Weight	Final Weight	RC	AWT	PAW	Width	Stat.	Tech	Date
92M 0114922022	0	3	4.6660	2.8549	38.8	286	466.6			MEKDARJX	09/15/2026
		Avg. 4.6597			39	285	466	50.30	A	MEKDARJX	09/15/2026
92M 0114922023	0	1	4.6323	2.8538	38.4	285	463.2			MEKDARJX	09/15/2026
		2	4.6679	2.8449	39.1	284	466.8			MEKDARJX	09/15/2026
		3	4.6660	2.8467	39.0	285	466.6			MEKDARJX	09/15/2026
		Avg. 4.6554			39	285	466	50.30	A	MEKDARJX	09/15/2026
92M 0114922024	0	1	4.6313	2.8389	38.7	284	463.1			MEKDARJX	09/15/2026
		2	4.6155	2.8342	38.6	283	461.6			MEKDARJX	09/15/2026
		3	4.6099	2.8348	38.5	284	461.0			MEKDARJX	09/15/2026
		Avg. 4.6189			39	284	462	50.30	A	MEKDARJX	09/15/2026
92M 0114922025	0	1	4.6245	2.8189	39.0	282	462.4			MEKDARJX	09/15/2026
		2	4.5980	2.8133	38.8	281	459.8			MEKDARJX	09/15/2026
		3	4.6218	2.8228	38.9	282	462.2			MEKDARJX	09/15/2026
		Avg. 4.6148			39	282	462	50.30	A	MEKDARJX	09/15/2026
92M 0114922026	0	1	4.5627	2.8043	38.5	280	456.3			MEKDARJX	09/16/2026
		2	4.5453	2.7973	38.5	280	454.5			MEKDARJX	09/16/2026
		3	4.5725	2.8182	38.4	282	457.2			MEKDARJX	09/16/2026
		Avg. 4.5602			38	281	456	50.30	A	MEKDARJX	09/16/2026
92M 0114922027	0	1	4.6781	2.7987	40.2	280	467.8			MEKDARJX	09/16/2026
		2	4.6355	2.7992	39.6	280	463.6			MEKDARJX	09/16/2026
		3	4.6435	2.7999	39.7	280	464.4			MEKDARJX	09/16/2026
		Avg. 4.6524			40	280	465	50.30	A	MEKDARJX	09/16/2026
92M 0114922028	0	1	4.5909	2.8206	38.6	282	459.1			MEKDARJX	09/16/2026
		2	4.6093	2.8311	38.6	283	460.9			MEKDARJX	09/16/2026
		3	4.5953	2.8498	38.0	285	459.5			MEKDARJX	09/16/2026
		Avg. 4.5985			38	283	460	50.30	A	MEKDARJX	09/16/2026
92M 0114922029	0	1	4.6045	2.8334	38.5	283	460.4			MEKDARJX	09/16/2026
		2	4.6668	2.8462	39.0	285	466.7			MEKDARJX	09/16/2026
		3	4.6220	2.8463	38.4	285	462.2			MEKDARJX	09/16/2026
		Avg. 4.6311			39	284	463	50.30	A	MEKDARJX	09/16/2026
92M 0114922030	0	1	4.6163	2.8267	38.8	283	461.6			MEKDARJX	09/16/2026
		2	4.6527	2.8309	39.2	283	465.3			MEKDARJX	09/16/2026
		3	4.6318	2.8314	38.9	283	463.2			MEKDARJX	09/16/2026
		Avg. 4.6336			39	283	463	50.30	A	MEKDARJX	09/16/2026
92M 0114922031	0	1	4.6311	2.8406	38.7	284	463.1			MEKDARJX	09/16/2026
		2	4.6676	2.8728	38.5	287	466.8			MEKDARJX	09/16/2026
		3	4.6403	2.8556	38.5	286	464.0			MEKDARJX	09/16/2026
		Avg. 4.6463			39	286	465	50.30	A	MEKDARJX	09/16/2026
92M 0114922032	0	1	4.6289	2.8223	39.0	282	462.9			MEKDARJX	09/16/2026
		2	4.6607	2.8235	39.4	282	466.1			MEKDARJX	09/16/2026
		3	4.6225	2.8256	38.9	283	462.2			MEKDARJX	09/16/2026
		Avg. 4.6374			39	282	464	50.30	A	MEKDARJX	09/16/2026

IN PROCESS CONTROL

ACCEPTANCE TESTING DATA

RC / AWT Report for lot: 92M0114922

10/5/2026

Page 4 of 8

Spool	Re - test	Rep	Init - Weight	Final Weight	RC	AWT	PAW	Width	Stat.	Tech	Date
92M 0114922033	0	1	4.6215	2.8289	38.8	283	462.2			MEKDARJX	09/16/2026
		2	4.6557	2.8300	39.2	283	465.6			MEKDARJX	09/16/2026
		3	4.6078	2.8280	38.6	283	460.8			MEKDARJX	09/16/2026
		Avg.	4.6283		39	283	463	50.30	A	MEKDARJX	09/16/2026
92M 0114922034	0	1	4.6089	2.8268	38.7	283	460.9			MEKDARJX	09/16/2026
		2	4.6417	2.8246	39.1	282	464.2			MEKDARJX	09/16/2026
		3	4.6214	2.8290	38.8	283	462.1			MEKDARJX	09/16/2026
		Avg.	4.6240		39	283	462	50.30	A	MEKDARJX	09/16/2026
92M 0114922035	0	1	4.6437	2.8436	38.8	284	464.4			MEKDARJX	09/16/2026
		2	4.6667	2.8292	39.4	283	466.7			MEKDARJX	09/16/2026
		3	4.6092	2.8451	38.3	284	460.9			MEKDARJX	09/16/2026
		Avg.	4.6399		39	284	464	50.30	A	MEKDARJX	09/16/2026
92M 0114922036	0	1	4.5887	2.8552	37.8	286	458.9			MEKDARJX	09/16/2026
		2	4.6543	2.8356	39.1	284	465.4			MEKDARJX	09/16/2026
		3	4.6497	2.9480	36.6	295	465.0			MEKDARJX	09/16/2026
		Avg.	4.6309		38	288	463	50.30	A	MEKDARJX	09/16/2026
92M 0114922037	0	1	4.6404	2.8467	38.7	285	464.0			MEKDARJX	09/16/2026
		2	4.6507	2.8404	38.9	284	465.1			MEKDARJX	09/16/2026
		3	4.6374	2.8466	38.6	285	463.7			MEKDARJX	09/16/2026
		Avg.	4.6428		39	284	464	50.30	A	MEKDARJX	09/16/2026
92M 0114922038	0	1	4.6146	2.8147	39.0	282	461.5			MEKDARJX	09/16/2026
		2	4.6318	2.8145	39.2	281	463.2			MEKDARJX	09/16/2026
		3	4.6446	2.8248	39.2	282	464.5			MEKDARJX	09/16/2026
		Avg.	4.6303		39	282	463	50.30	A	MEKDARJX	09/16/2026
92M 0114922039	0	1	4.6026	2.8238	38.6	282	460.3			MEKDARJX	09/16/2026
		2	4.6072	2.8390	38.4	284	460.7			MEKDARJX	09/16/2026
		3	4.6109	2.8156	38.9	282	461.1			MEKDARJX	09/16/2026
		Avg.	4.6069		39	283	461	50.28	A	MEKDARJX	09/16/2026
92M 0114922040	0	1	4.5644	2.8239	38.1	282	456.4			MEKDARJX	09/16/2026
		2	4.4969	2.8479	36.7	285	449.7			MEKDARJX	09/16/2026
		3	4.5668	2.8261	38.1	283	456.7			MEKDARJX	09/16/2026
		Avg.	4.5427		38	283	454	50.25	A	MEKDARJX	09/16/2026
92M 0114922041	0	1	4.5785	2.8306	38.2	283	457.8			MEKDARJX	09/16/2026
		2	4.5543	2.8402	37.6	284	455.4			MEKDARJX	09/16/2026
		3	4.5234	2.8237	37.6	282	452.3			MEKDARJX	09/16/2026
		Avg.	4.5521		38	283	455	50.30	A	MEKDARJX	09/16/2026
92M 0114922042	0	1	4.6372	2.8112	39.4	281	463.7			MEKDARJX	09/16/2026
		2	4.6148	2.8338	38.6	283	461.5			MEKDARJX	09/16/2026
		3	4.6034	2.8258	38.6	283	460.3			MEKDARJX	09/16/2026
		Avg.	4.6185		39	282	462	50.26	A	MEKDARJX	09/16/2026
92M 0114922043	0	1	4.6353	2.8651	38.2	286	463.5			MEKDARJX	09/16/2026
		2	4.6430	2.8818	37.9	288	464.3			MEKDARJX	09/16/2026
		3	4.6229	2.8817	37.7	288	462.3			MEKDARJX	09/16/2026

IN PROCESS CONTROL

ACCEPTANCE TESTING DATA

RC / AWT Report for lot: 92M0114922

10/5/2026

Page 5 of 8

Spool	Re - test	Rep	Init - Weight	Final Weight	RC	AWT	PAW	Width	Stat.	Tech	Date
Avg. 4.6337					38	288	463	50.30	A	MEKDARJX	09/16/2026
92M 0114922044	0	1	4.6252	2.7990	39.5	280	462.5			MEKDARJX	09/16/2026
		2	4.6213	2.7947	39.5	280	462.1			MEKDARJX	09/16/2026
		3	4.5994	2.7907	39.3	279	459.9			MEKDARJX	09/16/2026
Avg. 4.6153					39	280	462	50.30	A	MEKDARJX	09/16/2026
92M 0114922045	0	1	4.7020	2.8399	39.6	284	470.2			MEKDARJX	09/16/2026
		2	4.6705	2.8359	39.3	284	467.0			MEKDARJX	09/16/2026
		3	4.6832	2.8338	39.5	283	468.3			MEKDARJX	09/16/2026
Avg. 4.6852					40	284	468	50.26	A	MEKDARJX	09/16/2026
92M 0114922046	0	1	4.6769	2.8424	39.2	284	467.7			MEKDARJX	09/16/2026
		2	4.6778	2.8674	38.7	287	467.8			MEKDARJX	09/16/2026
		3	4.6649	2.8487	38.9	285	466.5			MEKDARJX	09/16/2026
Avg. 4.6732					39	285	467	50.13	A	MEKDARJX	09/16/2026
92M 0114922047	0	1	4.6619	2.8259	39.4	283	466.2			MEKDARJX	09/16/2026
		2	4.6735	2.8338	39.4	283	467.4			MEKDARJX	09/16/2026
		3	4.6728	2.8413	39.2	284	467.3			MEKDARJX	09/16/2026
Avg. 4.6694					39	283	467	50.30	A	MEKDARJX	09/16/2026
92M 0114922048	0	1	4.6418	2.8307	39.0	283	464.2			MEKDARJX	09/16/2026
		2	4.6894	2.8438	39.4	284	468.9			MEKDARJX	09/16/2026
		3	4.6533	2.8375	39.0	284	465.3			MEKDARJX	09/16/2026
Avg. 4.6615					39	284	466	50.30	A	MEKDARJX	09/16/2026
92M 0114922049	0	1	4.6795	2.8647	38.8	286	468.0			MEKDARJX	09/16/2026
		2	4.6517	2.9060	37.5	291	465.2			MEKDARJX	09/16/2026
		3	4.6268	2.8763	37.8	288	462.7			MEKDARJX	09/16/2026
Avg. 4.6527					38	288	465	50.26	A	MEKDARJX	09/16/2026
92M 0114922050	0	1	4.6196	2.8536	38.2	285	462.0			MEKDARJX	09/16/2026
		2	4.6703	2.8468	39.0	285	467.0			MEKDARJX	09/16/2026
		3	4.6681	2.8502	38.9	285	466.8			MEKDARJX	09/16/2026
Avg. 4.6527					39	285	465	50.29	A	MEKDARJX	09/16/2026
92M 0114922051	0	1	4.6374	2.8461	38.6	285	463.7			DIAZRJX	09/17/2026
		2	4.6807	2.8460	39.2	285	468.1			DIAZRJX	09/17/2026
		3	4.6569	2.8469	38.9	285	465.7			DIAZRJX	09/17/2026
Avg. 4.6583					39	285	466	50.30	A	DIAZRJX	09/17/2026
92M 0114922052	0	1	4.6264	2.8255	38.9	283	462.6			DIAZRJX	09/17/2026
		2	4.6224	2.8555	38.2	286	462.2			DIAZRJX	09/17/2026
		3	4.6605	2.8577	38.7	286	466.0			DIAZRJX	09/17/2026
Avg. 4.6364					39	285	464	50.24	A	DIAZRJX	09/17/2026
92M 0114922053	0	1	4.6385	2.8386	38.8	284	463.8			DIAZRJX	09/17/2026
		2	4.6403	2.8370	38.9	284	464.0			DIAZRJX	09/17/2026
		3	4.6725	2.8281	39.5	283	467.2			DIAZRJX	09/17/2026
Avg. 4.6504					39	284	465	50.25	A	DIAZRJX	09/17/2026
92M 0114922054	0	1	4.6260	2.8431	38.5	284	462.6			DIAZRJX	09/17/2026
		2	4.6256	2.8370	38.7	284	462.6			DIAZRJX	09/17/2026

IN PROCESS CONTROL

ACCEPTANCE TESTING DATA

Lot Averages Report for Lot: 92M0114922

10/05/2026

Page 7 of 8

Spool	Retest:	RC	AWT	PAW	Stamp
92M0114922001	0	38	282	456	A
92M0114922002	0	38	283	459	A
92M0114922003	0	38	282	459	A
92M0114922004	0	38	286	464	A
92M0114922005	0	38	286	462	A
92M0114922006	0	39	282	460	A
92M0114922007	0	38	287	464	A
92M0114922008	0	38	284	463	A
92M0114922009	0	38	283	460	A
92M0114922010	0	38	289	462	A
92M0114922011	0	39	283	467	A
92M0114922012	0	39	284	467	A
92M0114922013	0	39	285	467	A
92M0114922014	0	39	284	464	A
92M0114922015	0	38	287	463	A
92M0114922016	0	38	288	464	A
92M0114922017	0	38	288	464	A
92M0114922018	0	38	283	459	A
92M0114922019	0	39	285	464	A
92M0114922020	0	39	282	459	A
92M0114922021	0	39	281	461	A
92M0114922022	0	39	285	466	A
92M0114922023	0	39	285	466	A
92M0114922024	0	39	284	462	A
92M0114922025	0	39	282	462	A
92M0114922026	0	38	281	456	A
92M0114922027	0	40	280	465	A
92M0114922028	0	38	283	460	A
92M0114922029	0	39	284	463	A
92M0114922030	0	39	283	463	A
92M0114922031	0	39	286	465	A
92M0114922032	0	39	282	464	A
92M0114922033	0	39	283	463	A
92M0114922034	0	39	283	462	A
92M0114922035	0	39	284	464	A
92M0114922036	0	38	288	463	A
92M0114922037	0	39	284	464	A
92M0114922038	0	39	282	463	A
92M0114922039	0	39	283	461	A
92M0114922040	0	38	283	454	A
92M0114922041	0	38	283	455	A
92M0114922042	0	39	282	462	A
92M0114922043	0	38	288	463	A
92M0114922044	0	39	280	462	A
92M0114922045	0	40	284	468	A
92M0114922046	0	39	285	467	A
92M0114922047	0	39	283	467	A
92M0114922048	0	39	284	466	A

IN PROCESS CONTROL

ACCEPTANCE TESTING DATA

Lot Averages Report for Lot: 92M0114922

10/05/2026

Page 8 of 8

Spool	Retest:	RC	AWT	PAW	Stamp
92M0114922049	0	38	288	465	A
92M0114922050	0	39	285	465	A
92M0114922051	0	39	285	466	A
92M0114922052	0	39	285	464	A
92M0114922053	0	39	284	465	A
92M0114922054	0	39	284	464	A
92M0114922055	0	38	284	460	A
92M0114922056	0	38	284	455	A
Averages:		38.6	284.1	462.0	



Product Certification

Page 1 of 4

COA Number: SEG-COA-29673 Prod Order: DOM: Description:
Version: 1 31W0027641 27-Sep-2025 F3C433(FBL2)-50"
Issue Date: 29-Jul-2026 Weave Pattern: 5 Harness Satin

Specifications

F3C433(FBL2) - GREIGE - 50Inch - HRMS 111546 Rev. 6 Warp Yarn HTA40 E13 3K 200tex Fill Yarn HTA40 E13 3K 200tex

F3C433(FBL2) - GREIGE - 50Inch - MSRR4040 Issue 4 Warp Yarn HTA40 E13 3K 200tex Fill Yarn HTA40 E13 3K 200tex

F3C433(FBL2) - GREIGE - 50Inch - MSRR9992 Issue 12 Warp Yarn HTA40 E13 3K 200tex Fill Yarn HTA40 E13 3K 200tex


Rolls Tested

Fabric Testing Results

Serial#:	Prod Order:	Property:	Specification:	Result:
31G0000367032	31W0027641	Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.6
		Dried FAW Avg	278 - 292 g/m ²	283
31G0000367033		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	283
31G0000367034		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.6
		Dried FAW Avg	278 - 292 g/m ²	284
31G0000367035		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.6
		Dried FAW Avg	278 - 292 g/m ²	284
31G0000367036		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7

This is to certify that material shipped against this order meets the specification(s) listed above.

This report should only be reproduced in its entirety
1913 N. King Street, Seguin, TX 78155
Telephone (830) 379-1580 Fax (830) 379-3814
www.hexcel.com


Michael Galvan
Certification Technician



Product Certification

Page 2 of 4

31G0000367036 31W0027641	Dried FAW Avg	278 - 292 g/m ²	285
31G0000367037	Width	49.5 - 50.5 in	50.2
	Ends per inch	17.0 - 18.5 Yarns Per Inch	17.9
	Picks per inch	17.0 - 18.5 Yarns Per Inch	17.6
	Dried FAW Avg	278 - 292 g/m ²	284
31G0000367038	Width	49.5 - 50.5 in	50.2
	Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
	Picks per inch	17.0 - 18.5 Yarns Per Inch	17.6
	Dried FAW Avg	278 - 292 g/m ²	285
31G0000367039	Width	49.5 - 50.5 in	50.2
	Ends per inch	17.0 - 18.5 Yarns Per Inch	17.9
	Picks per inch	17.0 - 18.5 Yarns Per Inch	17.6
	Dried FAW Avg	278 - 292 g/m ²	284
31G0000367040	Width	49.5 - 50.5 in	50.2
	Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
	Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7
	Dried FAW Avg	278 - 292 g/m ²	284
31G0000367057	Width	49.5 - 50.5 in	50.2
	Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
	Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7
	Dried FAW Avg	278 - 292 g/m ²	282
31G0000367058	Width	49.5 - 50.5 in	50.2
	Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
	Picks per inch	17.0 - 18.5 Yarns Per Inch	17.6
	Dried FAW Avg	278 - 292 g/m ²	282
31G0000367068	Width	49.5 - 50.5 in	50.2
	Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
	Picks per inch	17.0 - 18.5 Yarns Per Inch	17.6
	Dried FAW Avg	278 - 292 g/m ²	281
31G0000367069	Width	49.5 - 50.5 in	50.2
	Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
	Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7

This is to certify that material shipped against this order meets the specification(s) listed above.

This report should only be reproduced in its entirety
1913 N. King Street, Seguin, TX 78155
Telephone (830) 379-1580 Fax (830) 379-3814
www.hexcel.com


Michael Galvan
Certification Technician




Product Certification

Page 3 of 4

31G0000367069	31W0027641	Dried FAW Avg	278 - 292 g/m ²	282
31G0000367070		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	282
31G0000367071		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Dried FAW Avg	278 - 292 g/m ²	282
31G0000367072		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.9
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	282
31G0000367073		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	282
31G0000367074		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	283
31G0000367075		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	284
31G0000367076		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.6
		Dried FAW Avg	278 - 292 g/m ²	284
31G0000367077		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7

This is to certify that material shipped against this order meets the specification(s) listed above.

This report should only be reproduced in its entirety
1913 N. King Street, Seguin, TX 78155
Telephone (830) 379-1580 Fax (830) 379-3814
www.hexcel.com


Michael Galvan
Certification Technician



Product Certification

Page 4 of 4

31G0000367077	31W0027641	Dried FAW Avg	278 - 292 g/m ²	282
31G0000367078		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.6
		Dried FAW Avg	278 - 292 g/m ²	283
31G0000367079		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	282
31G0000381481		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.7
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	283

Certification Exceptions/Additional Information


QMS07045, REV. 1, SEC. 5E

WARP: 250120210

FILL: 250120210

This is to certify that material shipped against this order meets the specification(s) listed above.

This report should only be reproduced in its entirety
1913 N. King Street, Seguin, TX 78155
Telephone (830) 379-1580 Fax (830) 379-3814
www.hexcel.com


Michael Galvan
Certification Technician

TEIJIN CARBON AMERICA, INC.

121 Cardiff Valley Road
Rockwood, TN 37854
Tel. (888) 354-8408
Fax (888) 354-8409

Certificate of Analysis

(JAP 104 F2 Rev M)

Customer: Haxcal Reinforcement Corp (TX)

CustomerPO#: 31P00018708

Order: SHC03012

Ship Date: 8/28/2028

Customer P/N: C1905820N1

Product: Tenax™-E HTA40 E13 3K 200tex

Part Number: G309303

Quantity: 1872.000 kg

Certifies To: MS-X-CTC-105 Rev B; MSRR831711
Issue 1

Lot Number: 250120210

4127.01

We are pleased to advise that the product (s) listed above has been released for shipment. We certify that this lot of Carbon Fiber has been tested by standard test methods and determined to have the following properties:

	<u>Average</u>	<u>av%</u>
Tensile Strength, MPA (ksi):	4145.8 (601)	4.2
Tensile Modulus, GPa (msi):	238.4 (34.6)	0.8
Elongation, %:	1.64	4.0
Linear Density (without size), g/m:	0.1694	1.0
Size, %:	1.27	7.3
Fiber Density, g/cc:	1.77	
Filament Diameter, µM:	7	
Twist, turn/m:	Never Twisted	
Date of Manufacture:	January 2025	
Manufacturing Location:	Obertruch, Heinsberg, Germany	

Quality Assurance

8/27/2028

These commodities, technology or software are controlled by U. S. Export Administration Regulation. Diversion contrary to U. S. Law is prohibited.

If goods are not received in a reasonable time or if there are any questions, please call 1-800-252-3001 (or (888) 354-8408).
Teijin Carbon America, Inc. 121 Cardiff Valley Road, Rockwood, TN 37854



Product Certification

Page 1 of 4

COA Number:	SEG-COA-29673	Prod Order:	DOM:	Description:
Version:	1	31W0027641	27-Sep-2025	F3C433(FBL2)-50"
Issue Date:	09-Feb-2026	Weave Pattern:	5 Harness Satin	

Specifications

F3C433(FBL2) - GREIGE - 50inch - HRMS 111546 Rev. 6 Warp Yarn HTA40 E13 3K 200tex Fill Yarn HTA40 E13 3K 200tex

F3C433(FBL2) - GREIGE - 50inch - MSRR4040 Issue 4 Warp Yarn HTA40 E13 3K 200tex Fill Yarn HTA40 E13 3K 200tex

F3C433(FBL2) - GREIGE - 50inch - MSRR9992 Issue 12 Warp Yarn HTA40 E13 3K 200tex Fill Yarn HTA40 E13 3K 200tex

Rolls Tested

Fabric Testing Results

Serial#:	Prod Order:	Property:	Specification:	Result:
31G0000367014	31W0027641	Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	285
31G0000367015		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	283
31G0000367016		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Dried FAW Avg	278 - 292 g/m ²	285
31G0000367017		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	283
31G0000367018		Width	49.5 - 50.5 in	50.1
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7

This is to certify that material shipped against this order meets the specification(s) listed above.

This report should only be reproduced in its entirety
1913 N. King Street, Seguin, TX 78155
Telephone (830) 379-1580 Fax (830) 379-3814
www.hexcel.com


Michael Galvan
Certification Technician




Product Certification

Page 2 of 4

31G0000367018	31W0027641	Dried FAW Avg	278 - 292 g/m ²	283
31G0000367019		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.6
		Dried FAW Avg	278 - 292 g/m ²	282
31G0000367020		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Dried FAW Avg	278 - 292 g/m ²	284
31G0000367021		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	285
31G0000367022		Width	49.5 - 50.5 in	50.1
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	283
31G0000367023		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	284
31G0000367024		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	283
31G0000367025		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	284
31G0000367026		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.8

This is to certify that material shipped against this order meets the specification(s) listed above.

This report should only be reproduced in its entirety
1913 N. King Street, Seguin, TX 78155
Telephone (830) 379-1580 Fax (830) 379-3814
www.hexcel.com


Michael Galvan
Certification Technician



Product Certification

Page 3 of 4

31G0000367026	31W0027641	Dried FAW Avg	278 - 292 g/m ²	284
31G0000367027		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.6
		Dried FAW Avg	278 - 292 g/m ²	283
31G0000367028		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	284
31G0000367029		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.9
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	284
31G0000367030		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Dried FAW Avg	278 - 292 g/m ²	285
31G0000367031		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.9
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.6
		Dried FAW Avg	278 - 292 g/m ²	284
31G0000367059		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	281
31G0000367060		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	282
31G0000367061		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.9
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7

This is to certify that material shipped against this order meets the specification(s) listed above.

This report should only be reproduced in its entirety
1913 N. King Street, Seguin, TX 78155
Telephone (830) 379-1580 Fax (830) 379-3814
www.hexcel.com


Michael Galvan
Certification Technician



Product Certification

Page 4 of 4

31G0000367061	31W0027641	Dried FAW Avg	278 - 292 g/m ²	282
31G0000367062		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.6
		Dried FAW Avg	278 - 292 g/m ²	282
31G0000367063		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	282
31G0000367064		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	282
31G0000367065		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.6
		Dried FAW Avg	278 - 292 g/m ²	282

Certification Exceptions/Additional Information


QMS07045, REV. 1, SEC. 5E

WARP: 250120210

FILL: 250120210

This is to certify that material shipped against this order meets the specification(s) listed above.

This report should only be reproduced in its entirety
1913 N. King Street, Seguin, TX 78155
Telephone (830) 379-1580 Fax (830) 379-3814
www.hexcel.com


Michael Galvan
Certification Technician



Product Certification

Page 1 of 3

COA Number:	SEG-COA-29673	Prod Order:	DOM:	Description:
Version:	1	31W0027641	27-Sep-2025	F3C433(FBL2)-50"
Issue Date:	09-Feb-2026	Weave Pattern:	5 Harness Satin	

Specifications

F3C433(FBL2) - GREIGE - 50inch - HRMS 111546 Rev. 6 Warp Yarn HTA40 E13 3K 200tex Fill Yarn HTA40 E13 3K 200tex

F3C433(FBL2) - GREIGE - 50inch - MSRR4040 Issue 4 Warp Yarn HTA40 E13 3K 200tex Fill Yarn HTA40 E13 3K 200tex

F3C433(FBL2) - GREIGE - 50inch - MSRR9992 Issue 12 Warp Yarn HTA40 E13 3K 200tex Fill Yarn HTA40 E13 3K 200tex

Rolls Tested

Fabric Testing Results

Serial#:	Prod Order:	Property:	Specification:	Result:
31G0000367041	31W0027641	Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.6
		Dried FAW Avg	278 - 292 g/m ²	284
31G0000367042		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	284
31G0000367043		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	286
31G0000367044		Width	49.5 - 50.5 in	50.1
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	284
31G0000367045		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.7

This is to certify that material shipped against this order meets the specification(s) listed above.

This report should only be reproduced in its entirety
1913 N. King Street, Seguin, TX 78155
Telephone (830) 379-1580 Fax (830) 379-3814
www.hexcel.com


Michael Galvan
Certification Technician



Product Certification

Page 2 of 3

31G0000367045	31W0027641	Dried FAW Avg	278 - 292 g/m ²	283
31G0000367046		Width	49.5 - 50.5 In	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.6
		Dried FAW Avg	278 - 292 g/m ²	282
31G0000367047		Width	49.5 - 50.5 In	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	284
31G0000367048		Width	49.5 - 50.5 In	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	282
31G0000367049		Width	49.5 - 50.5 In	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.7
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	282
31G0000367050		Width	49.5 - 50.5 In	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.6
		Dried FAW Avg	278 - 292 g/m ²	284
31G0000367051		Width	49.5 - 50.5 In	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	282
31G0000367052		Width	49.5 - 50.5 In	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.9
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.6
		Dried FAW Avg	278 - 292 g/m ²	284
31G0000367053		Width	49.5 - 50.5 In	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.7

This is to certify that material shipped against this order meets the specification(s) listed above.

This report should only be reproduced in its entirety
1913 N. King Street, Seguin, TX 78155
Telephone (830) 379-1580 Fax (830) 379-3814
www.hexcel.com


Michael Galvan
Certification Technician



Product Certification

Page 3 of 3

31G0000367053	31W0027641	Dried FAW Avg	278 - 292 g/m ²	283
31G0000367054		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.6
		Dried FAW Avg	278 - 292 g/m ²	284
31G0000367055		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	282
31G0000367056		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	282
31G0000367066		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	282
31G0000367067		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	281

Certification Exceptions/Additional Information

QMS07045, REV. 1, SEC. 5E

WARP: 250120210
FILL: 250120210

This is to certify that material shipped against this order meets the specification(s) listed above.

This report should only be reproduced in its entirety
1913 N. King Street, Seguin, TX 78155
Telephone (830) 379-1580 Fax (830) 379-3814
www.hexcel.com


Michael Galvan
Certification Technician



7 October 2026

CERTIFICATE OF ANALYSIS

Customer: Northrop Grumman Systems Corporation

Purchase Order No: 5000706560 Part Number: MSRR4040-VAFR

Material: F3C 433/M65: 38%; 285AW; 50"

Specification: MSRR4040, Issue 4, dated November 2012.

Certificate of Conformance: Hexcel lot 92M0116197 has been manufactured and tested in conformance with specification MSRR4040, Issue 4, dated November 2012.

Lot No: 92M0116197 Date of Manufacture: 15 September 2026

Storage Life: 12 months from date of manufacture when stored at 0°.

Resin Lot No: 92M0115957 Manufactured by: Hexcel

Glass Lot No: 31W0028240 Manufactured by: Hexcel

- I. Prepreg Physical, Chemical and Mechanical Properties
See Certificate of Analysis Report.
- II. Individual Spool Physical Properties
See In Process Control Acceptance Testing Data.

Note: See Packing List for date of shipment, actual quantity and spools shipped.

Brandt Bond 



Matrix Testing Laboratory
5400 S. 6700 W
West Valley City, Utah
84118

Certificate of Analysis Report

Specification: **MSRR4040 Rev. Issue 4**
Configuration Number: **CN1301**
Material Type: **F3C 433/M65;38%;285AW;50"**
Lot Number: **92M0116197**
Order Number: **92M0116197**

Report Printed: 06-Oct-2026 4:58:07PM

Status: **PASS**
Approval: **RODRIGJA**

1. Tensile, SBS, and TG Panel

ASTM D8336 Nottingham Tack

Roll/Panel	Test/Result:	Requirements:	Values:
92M0116197001/001	Tack Force (lbf)		15.300 - 11.100 - 11.700
	Tack Force Avg (lbf)		12.700

Dimensional Fiber Volume

Roll/Panel	Test/Result:	Requirements:	Values:
92M0116197001/001	Laminate Density By Immersion Avg (g/cc)		1.5303
	Laminate Density By Immersion Std (g/cc)		0.0031
	Laminate Density By Immersion CoV		0.21
	Dimensional Fiber Volume (%)		56.18 - 55.94 - 57.38
	Dimensional Fiber Volume Avg (%)	50 - 56	56
	Dimensional Fiber Volume Std (%)		0.771
	Dimensional Fiber Volume CoV		1.37
	Void Volume (%)		0.6 - 0.6 - 0.8
	Void Volume Avg (%)	MAX= 2	1
	Void Volume Std (%)		0.061
	Void Volume CoV		8.95

Short Beam Shear Stress-Warp-Ambient

Roll/Panel	Test/Result:	Requirements:	Values:
92M0116197001/001	SBS Strength (MPa)		95.9 - 93.1 - 97.0 - 94.5 - 91.5
	SBS Strength Avg (MPa)	MIN= 65	94
	SBS Strength Std (MPa)		2.21
	SBS Strength CoV		2.34

Short Beam Shear Stress-Warp-150C(302F)

Roll/Panel	Test/Result:	Requirements:	Values:
92M0116197001/001	SBS Strength (MPa)		67.6 - 65.4 - 65.1 - 65.0 - 66.7
	SBS Strength Avg (MPa)	MIN= 50	66
	SBS Strength Std (MPa)		1.16
	SBS Strength CoV		1.75



Matrix Testing Laboratory
5400 S. 6700 W
West Valley City, Utah
84118

Certificate of Analysis Report

Specification: **MSRR4040 Rev. Issue 4**
Configuration Number: **CN1301**
Material Type: **F3C 433/M65;38%;285AW;50"**
Lot Number: **92M0116197**
Order Number: **92M0116197**

Report Printed: 06-Oct-2026 4:58:07PM
Status: **PASS**
Approval: **RODRIGJA**

Tg By DMA

Roll/Panel	Test/Result:	Requirements:	Values:
92M0116197001/001	Tg by DMA in °C (° C)		253.3
	Tg by DMA in °C Avg (° C)	MIN= 225.0	253.3

Calculated Thickness/Ply

Roll/Panel	Test/Result:	Requirements:	Values:
92M0116197001/001	Calculated Thickness/Ply Avg (mm)	0.28 - 0.32	0.29
	Calculated Thickness/Ply StDev (mm)		0.0051
	Calculated Thickness/Ply CoV		1.60

Tensile Stress, Modulus, and Elongation-Warp-Ambient

Roll/Panel	Test/Result:	Requirements:	Values:
92M0116197001/001	Norm Tensile Strength (MPa)		844.2 - 921.7 - 889.9 - 909.8 - 834.9
	Norm Tensile Strength Avg (MPa)	MIN= 700	880
	Norm Tensile Strength Std (MPa)		38.83
	Norm Tensile Strength CoV		4.41
	Norm Modulus (GPa)		60.5 - 61.3 - 60.4 - 60.1 - 61.3
	Norm Modulus Avg (GPa)	MIN= 55	61
	Norm Modulus Std (GPa)		0.538
	Norm Modulus CoV		0.88

2. PHYSICAL PROPERTIES

Volatile content @100°C in pan

Roll	Test/Result:	Requirements:	Values:
92M0116197001	Volatile content @100°C in a Pan (%)		0.8 - 0.8
	Volatile content @100°C in a Pan Avg (%)	MAX= 1	1
92M0116197004	Volatile content @100°C in a Pan (%)		0.8 - 0.9
	Volatile content @100°C in a Pan Avg (%)	MAX= 1	1

3. PHYSICAL TACK

Tack



Matrix Testing Laboratory
5400 S. 6700 W
West Valley City, Utah
84118

Certificate of Analysis Report

Specification: **MSRR4040 Rev. Issue 4**
Configuration Number: **CN1301**
Material Type: **F3C 433/M65;38%;28SAW;50"**
Lot Number: **92M0116197**
Order Number: **92M0116197**

Report Printed: 06-Oct-2026 4:58:07PM

Status: **PASS**
Approval: **RODRIGJA**

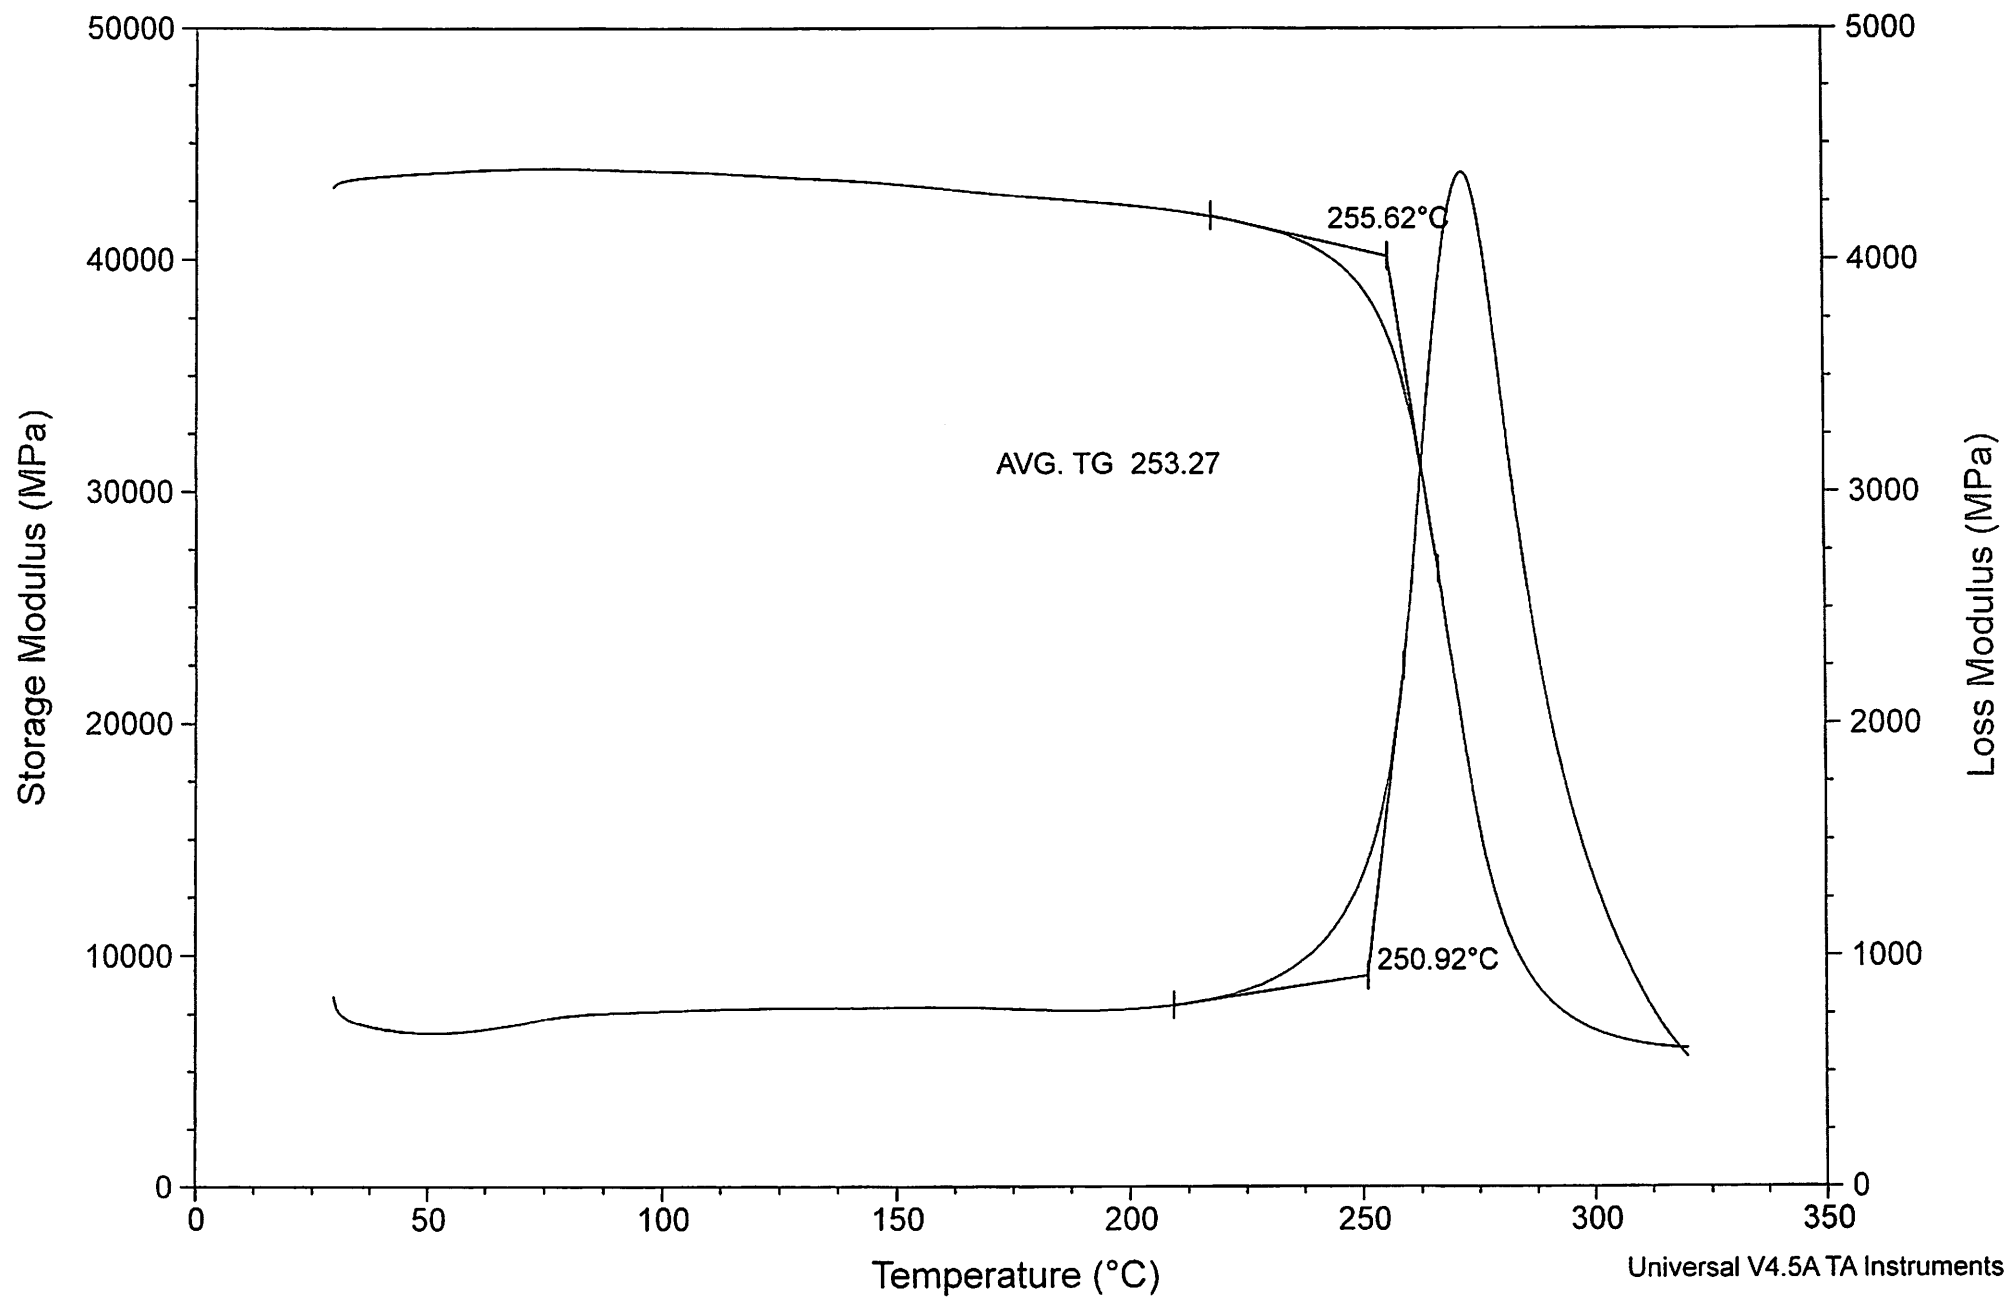
Roll	Test/Result:	Requirements:	Values:
92M0116197001	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0116197003	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30

End of report

Sample: 92M0116197-001 SP#001
Size: 35.0100 x 9.9200 x 2.2800 mm
Method: Temperature Ramp

DMA

File: \\...\\M65\\92M0116197-001 SP#001.001
Operator: VS
Run Date: 03-Oct-2026 16:34
Instrument: DMA Q800 V21.3 Build 96



IN PROCESS CONTROL

ACCEPTANCE TESTING DATA

RC / AWT Report for lot: 92M0116197

10/6/2026

Page 1 of 2

Spool	Re - test	Rep	Init - Weight	Final Weight	RC	AWT	PAW	Width	Stat.	Tech	Date
92M 0116197001	0	1	4.6013	2.8305	38.5	283	460.1			ROENSCTX	09/15/2026
		2	4.6516	2.8131	39.5	281	465.2			ROENSCTX	09/15/2026
		3	4.7039	2.8418	39.6	284	470.4			ROENSCTX	09/15/2026
		Avg.	4.6523		39	283	465	50.40	A	ROENSCTX	09/15/2026
92M 0116197002	0	1	4.6105	2.8589	38.0	286	461.0			ROENSCTX	09/15/2026
		2	4.6663	2.8500	38.9	285	466.6			ROENSCTX	09/15/2026
		3	4.6119	2.8398	38.4	284	461.2			ROENSCTX	09/15/2026
		Avg.	4.6296		38	285	463	50.40	A	ROENSCTX	09/15/2026
92M 0116197003	0	1	4.6361	2.9147	37.1	292	463.6			ROENSCTX	09/15/2026
		2	4.6744	2.8493	39.0	285	467.4			ROENSCTX	09/15/2026
		3	4.6316	2.8295	38.9	283	463.2			ROENSCTX	09/15/2026
		Avg.	4.6474		38	286	465	50.30	A	ROENSCTX	09/15/2026
92M 0116197004	0	1	4.6499	2.8465	38.8	285	465.0			ROENSCTX	09/15/2026
		2	4.6683	2.8670	38.6	287	466.8			ROENSCTX	09/15/2026
		3	4.6622	2.8603	38.6	286	466.2			ROENSCTX	09/15/2026
		Avg.	4.6601		39	286	466	50.10	A	ROENSCTX	09/15/2026

IN PROCESS CONTROL

ACCEPTANCE TESTING DATA

Lot Averages Report for Lot: 92M0116197

10/06/2026

Page 2 of 2

Spool	Retest:	RC	AWT	PAW	Stamp
92M0116197001	0	39	283	465	A
92M0116197002	0	38	285	463	A
92M0116197003	0	38	286	465	A
92M0116197004	0	39	286	466	A
Averages:		38.7	285.0	464.0	



Product Certification

Page 1 of 1

COA Number:	SEG-COA-29672	Prod Order:	DOM:	Description:
Version:	1	31W0028240	10-Jul-2025	F3C433(FBL2)-50"
Issue Date:	09-Feb-2026	Weave Pattern:	5 Harness Satin	

Specifications

F3C433(FBL2) - GREIGE - 50Inch - HRMS 111546 Rev. 6 Warp Yarn HTA40 E13 3K 200tex Fill Yarn HTA40 E13 3K 200tex

F3C433(FBL2) - GREIGE - 50Inch - MSRR4040 Issue 4 Warp Yarn HTA40 E13 3K 200tex Fill Yarn HTA40 E13 3K 200tex

F3C433(FBL2) - GREIGE - 50Inch - MSRR9992 Issue 12 Warp Yarn HTA40 E13 3K 200tex Fill Yarn HTA40 E13 3K 200tex

Rolls Tested

Fabric Testing Results

Serial#:	Prod Order:	Property:	Specification:	Result:
31G0000374632	31W0028240	Width	49.5 - 50.5 In	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	286
31G0000374633		Width	49.5 - 50.5 In	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.7
		Dried FAW Avg	278 - 292 g/m ²	285

Certification Exceptions/Additional Information

QMS07045, REV. 1, SEC. 5E

WARP: 250120210
FILL: 230920210

This is to certify that material shipped against this order meets the specification(s) listed above.

This report should only be reproduced in its entirety
1913 N. King Street, Seguin, TX 78155
Telephone (830) 379-1580 Fax (830) 379-3814
www.hexcel.com


Michael Galvan
Certification Technician

TEIJIN

TEIJIN CARBON AMERICA, INC.

121 Cardiff Valley Road
Rockwood, TN 37854
Tel. (865) 354-8408
Fax (865) 354-8408

Certificate of Analysis

QAP 004.P2 Rev M

Customer:	Hexcel Reinforcement Corp (TX)	Contact:	Patrick Spieckermann; Amy Shahane; Jerry Tschoeps; Greg Early	Email/Fax:	Patrick.Spieckermann@hexcel.com; amy.shahane@hexcel.com; jerry.tschoeps@; Greg.Early@
Customer PO#:	31PO0012514-2	Order:	55972	Ship Date:	12/8/2023
Customer P/N:	C1805820N1 (R)	Product:	Tanax™-E HTA40 E13 3K 200tex		
Part Number:	G305303	Quantity:	745.8 lb	Certifies To:	MS-X-CTC-105 Rev B; MSRR9317/11 Issue 1
Lot Number:	230920210				

We are pleased to advise that the product (s) listed above has been released for shipment. We certify that this lot of Carbon Fiber has been tested by standard test methods and determined to have the following properties:

	Average	σC%
Tensile Strength, MPA (ksi):	4234.7 (614)	3.4
Tensile Modulus, GPa (msi):	238.4 (34.8)	1.0
Elongation, %:	1.88	3.3
Linear Density (without size), g/m:	0.2007	0.7
Size, %:	1.23	7.3
Fiber Density, g/cc:	1.77	
Filament Diameter, μm:	7	
Twist, turn/m:	Never Twisted	
Date of Manufacture:	September 2023	
Manufacturing Location:	Oberbruch, Heinsberg, Germany	


Quality Assurance 12/7/2023

These commodities, technology or software are controlled by U. S. Export Administration Regulation. Diversion contrary to U. S. Law is prohibited.

If goods are not received in a reasonable time or if there are any questions, please call 1-800-252-3001 (or (865) 354-8408).
Teijin Carbon America, Inc. 121 Cardiff Valley Road, Rockwood, TN 37854.



TEIJIN CARBON AMERICA, INC.

121 Cardiff Valley Road
Rockwood, TN 37854
Tel. (865) 354-8408
Fax (865) 354-8409


Certificate of Analysis

QAP 004 F2 Rev M

Customer:	Haxcel Reinforcement Corp (TX)	Contact:	Patrick Spieckermann; Amy Shehane; Jerry Tschoepe; Greg Early	Email/Fax:	Patrick.Spieckermann@haxcel.com; amy.shehane@haxcel.com; jerry.tschoepe@; Greg.Early@
Customer PO#:	31PO0014263	Order:	SH001734	Ship Date:	7/1/2025
Customer P/N:	n/a	Product:	Tenax™-E HTA40 E13 3K 200tex		
Part Number:	G305303	Quantity:	10000.066 lb	Certifies To:	MS-X-CTC-105 Rev B; MSRR9317/11 Issue 1
Lot Number:	250120210				

We are pleased to advise that the product (s) listed above has been released for shipment. We certify that this lot of Carbon Fiber has been tested by standard test methods and determined to have the following properties:

	<u>Average</u>	<u>CV%</u>
Tensile Strength, MPA (ksi):	4145.8 (601)	4.2
Tensile Modulus, GPa (msi):	238.4 (34.6)	0.8
Elongation, %:	1.64	4.0
Linear Density (without size), g/m:	0.1994	1.0
Size, %:	1.27	7.3
Fiber Density, g/cc:	1.77	
Filament Diameter, µm:	7	
Twist, turn/m:	Never Twisted	
Date of Manufacture:	January 2025	
Manufacturing Location:	Oberbruch, Heinsberg, Germany	


Quality Assurance 6/30/2025

These commodities, technology or software are controlled by U. S. Export Administration Regulation. Diversion contrary to U. S. Law is prohibited.

If goods are not received in a reasonable time or if there are any questions, please call 1-800-252-3001 (or (865) 354-8408).
Teijin Carbon America, Inc. 121 Cardiff Valley Road, Rockwood, TN 37854.

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0116197	92M0116197001	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
4	50	0	0.0	FUZZBALL
10	50	0	0.0	FUZZBALL
48	50	0	0.0	FUZZBALL
70	50	0	0.0	FUZZBALL
130	50	3	1.0	RESIN LEAN
237	50	0	0.0	FUZZBALL
267	50	12	4.2	RESIN LEAN

Roll label - Hexcel - Hexcel 6700 JV 6400 S SLO 64116
F3C 433/M65;38%;285AW;50"



US9946242 Rev. 11/01/2016

Product	Batch	Shelf life	DDM
111545	92M0116197	365 days	15-Sep-2026
Qty	Serial	Storage conditions	Expiration
278.00ft	92M0116197001	≤ 0 F	15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
280	278	A	0.446%	9/15/2026

Inspection Stamp	Date
	9/15/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0116197	92M0116197002	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
67	50	0	0.0	FUZZBALL
72	50	0	0.0	FUZZBALL
114	50	0	0.0	FUZZBALL
130	50	3	1.0	RESIN LEAN
180	50	168	58.3	WRINKLES
213	50	0	0.0	FUZZBALL
219	50	0	0.0	FUZZBALL

Roll label - Hexcel - Hexcel 4700 A 5400 S 5.0 11 64116
 F3C 433/M65;38%:285AW;50"
 111545
 235.00ft
 Batch 92M0116197
 Serial 92M0116197002
 365 days
 15-Sep-2026
 15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
250	235	A	5.700%	9/15/2026

Inspection Stamp	Date
	9/15/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0116197	92M0116197003	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
93	50	0	0.0	FUZZBALL
136	50	0	0.0	FUZZBALL
202	50	8	2.8	FLOAT
236	50	0	0.0	FUZZBALL
282	50	0	0.0	FUZZBALL

Roll label - Hexcel Hexcel 570314 54015 S.C. 41 44115
 F3C 433/M65;38%;285AW.50"
 111545
 299 00h
 92M0116197
 92M0116197003
 365 days
 15-Sep-2026
 15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
300	299	A	0.222%	9/15/2026

Inspection Stamp	Date
	9/15/2026

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0116197	92M0116197004	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
24	50	12	4.2	MISSING PICK
43	50	0	0.0	FUZZBALL
57	50	0	0.0	FUZZBALL
74	50	0	0.0	FUZZBALL

Roll label - Hexcel Hexcel 6710 A 5400 B SLO 101 54116
F3C 433/M65:38%;285AW:50"
ISSUED BY: ISSUE 1
PICK: 111545
QTY: 139.00ft
Serial: 92M0116197
Serial: 92M0116197004
Storage time: 365 days
Storage conditions: ≤ 0 F
QC: 15-Sep-2026
Exp: 15-Sep-2027

Final Footage	Net Feet	Credit Method	Defect %	Date
140	139	A	0.714%	9/15/2026

Inspection Stamp	Date
	9/15/2026